

z/OS



MVS System Management Facilities (SMF)

Version 2 Release 2

Note

Before using this information and the product it supports, read the information in "Notices" on page 957.

This edition applies to Version 2 Release 2 of z/OS (5650-ZOS) and to all subsequent releases and modifications until otherwise indicated in new editions.

© **Copyright IBM Corporation 1988, 2016.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Figures xi

Tables xiii

About this document xv

Who should use this document. xv
How this document is organized xv
Highlighting xvi
z/OS information xvi

How to send your comments to IBM xvii

If you have a technical problem xvii

Summary of changes xix

Summary of changes for z/OS Version 2 Release 2,
as updated June, 2016. xix
Summary of changes for z/OS Version 2 Release 2,
as updated December, 2015 xix
Summary of changes for z/OS Version 2 Release 2 xx
Summary of changes for z/OS Version 2 Release 1,
as updated February 2015 xxi
Summary of changes for z/OS Version 2 Release 1,
as updated March 2014 xxii
Summary of changes for z/OS Version 2 Release
1, as updated December 2013. xxiv
z/OS Version 2 Release 1 summary of changes xxv

Chapter 1. Introduction to SMF 1

Using SMF data 4
Billing users 4
Reporting reliability 8
Analyzing the configuration 9
Scheduling jobs 10
Summarizing direct access volume activity 11
Evaluating data set activity 12
Profiling system resource use 14
Maintaining system security. 16

Chapter 2. Setting up and managing SMF 17

Switching between SMF logging and SMF data set
recording 18
Setting up and managing SMF recording to
logstreams. 18
Requirements for using SMF logging 19
Planning your SMF logging configuration 19
Define authorization to SMF logging resources 21
Define SMF logging resources in the LOGR and
CFRM policy couple data sets 21
Managing log streams and SMF log stream data 21
Sharing an SMFPRMxx parmlib member in an
SMF logging environment 22
Using SMF log streams 22
Dumping SMF data from log streams. 26

Flushing the logstream buffer 26
Setting Up and Managing SMF Recording to Data
Sets 26
Creating SMF Data Sets 26
Switching the SMF Data Sets 31
Dumping SMF Data Sets 31
Preserving SMF Data 31
SMF Halt Processing 33
Special considerations for DB2, JES3, and RMF 33

Chapter 3. Using the SMF dump programs 35

Using IFASMF DL — the SMF log stream dump
program 35
Specifying parameters for the SMF log stream
dump program 36
Running the SMF log stream dump program 45
Return codes from the SMF log stream dump
program 49
Serialization of the SMF logstream dump
program 49
Using IFASMF DP — the SMF data set dump
program 50
Specifying parameters for the SMF data set
dump program 50
Running the SMF data set dump program 55
Return codes from the SMF data set dump
program 58
Reports produced by the SMF dump programs 58
Summary activity report 59
Flood statistics report 61
IFASMF DP record validation report 63
Reading SMF data sets directly without using the
dump programs 64

Chapter 4. Customizing SMF 67

Using SMFPRMxx parameters 67
PROMPT — Recording status changes 68
RECORDING — Specifying whether to write
SMF records to data sets or log streams 68
DEFAULTLSNAME and LSNAME — Specifying
SMF log stream names 68
DSNAME — Specifying SMF data set names 69
SUBPARM — Passing data to a subsystem 69
TYPE and NOTYPE — Selecting and directing
SMF records 70
SYS and SUBSYS with TYPE and NOTYPE —
Selecting subtypes for SMF recording. 70
SID — Specifying the system identifier 71
INTVAL and SYNCVAL — Performing interval
accounting. 71
STATUS — Collecting SMF statistics 75
DETAIL or NODETAIL — Performing TSO/E
command accounting 75

SYS and SUBSYS — Performing started task accounting	77
BUFSIZMAX, BUFUSEWARN, DSPSIZMAX, PERMFIIX, and NOBUFFS — Specifying SMF buffer options	78
FLOOD and FLOODPOL — Specifying SMF record flood options	80
SMFDLEXIT and SMFDPEXIT — Specifying the dump program exit.	80
RECSIGN — Digitally signing SMF records.	81
Entering SMFPRMxx in SYS1.PARMLIB	81
Adding SMFPRMxx to SYS1.PARMLIB	81
Using installation exit routines	82
Deciding which exits to use	82
Using operator commands	85
Using the SET command	85
Using the SETSMF command	86
Using the DISPLAY command	86
Chapter 5. Using SMF macros.	87
SMF macros	87
Using a macro to write records	87
IFASMFR — Addressing SMF record fields.	88
SMFCHSUB — Changing subsystem parameters	88
Return codes	89
SMFDETAL — Testing detail recording	89
Return codes	90
SMFEWTM — Writing SMF records	90
Return codes	91
SMFEXIT — Branching to the SMF exits.	92
Register use	93
SMFINTVL — Determining interval time	93
Return codes	94
Environment	94
Register information	94
SMFRTEST — Testing record recording	95
Return codes	96
Register use	96
SMFSubP — Determining subsystem parameters.	96
Return codes	97
SMFWTM — Writing SMF records.	97
Return codes	98
Chapter 6. User-written report programs	99
Sorting SMF Records	99
Sample Sort/Merge Exit Routines	99
Designing a Report Program	102
Converting binary fields to time of day format	102
Self-defining data	107
Chapter 7. APPC/MVS accounting	109
Transaction Programs (TPs).	109
Standard TP Processing	110
Multi-trans TP Processing	110
APPC/MVS Server Processing.	112
Recording SMF Information for APPC/MVS Work	113
Record Type 30.	114
Record Type 33, Subtype 1	114
Record Type 33, Subtype 2	114

Chapter 8. z/OS UNIX System Services accounting	117
The common address space work record (type 30)	117
Process accounting data	117
Accounting for fork().	117
Accounting for attach_exec	118
Accounting for exec functions	118
Address space accounting for z/OS UNIX file system activity	119
Sample SMF job flows	119
DFSMS statistics and configuration record (type 42)	123
RMF record support (types 70–79)	123
File system activity record (type 92)	123
Accounting for open() and close()	124
Chapter 9. System Logger accounting	125
Capacity planning	125
Record Type 88.	125
IXGRPT1 SAMPLIB program	127
Chapter 10. EXCP count.	131
DD Level.	131
Address Space Level	132
Chapter 11. CPU time	133
CPU Time Under TCBS	133
Vector Facility Time	133
Included/Excluded TCB Times	133
CPU Time Under SRBs	134
Included/Excluded SRB Times	134
CPU-Time Variation	134
Chapter 12. IFAUSAGE — Collecting usage data	137
Collecting Your Own Data Using the IFAUSAGE Macro	137
Collecting Usage Data	137
IFAUSAGE macro	139
Environment	140
REQUEST=REGISTER	141
REQUEST=DEREGISTER	143
REQUEST=FUNCTIONBEGIN	145
REQUEST=FUNCTIONDATA	146
REQUEST=FUNCTIONEND	148
REQUEST=STATUS	149
IFAUSAGE – List Form	153
IFAUSAGE – Execute Form.	154
Chapter 13. Signing and validating SMF records.	155
Overview of digital signatures and SMF	155
Setting up and using digitally signed SMF records	156
Creating the keys	156
Updating SMFPRMxx to sign SMF records	157
Using IFASMF DL to carry signatures to data sets.	157
Using IFASMF DP to validate records	158

Chapter 14. SMF record general information and best practices 161

Standard SMF record header	162
Best practices for designing SMF records	164

Chapter 15. SMF records 165

Record type 0 (00) — IPL	165
Record environment	165
Record mapping	165
Record type 2 (02) — Dump header	167
Record environment	167
Record mapping	167
Subtype 1	167
Subtype 2	169
Record Type 3 (03) — Dump Trailer	170
Record Environment	170
Record Mapping	170
Record Type 4 (04) — Step Termination	171
Record Environment	172
Record Mapping	172
Record Type 5 (05) — Job Termination	176
Record Environment	177
Record Mapping	177
Record Type 6 (06) — External Writer	180
Record Mapping	181
Record Type 6 (06) — JES2 Output Writer	184
Record Mapping	184
Record Type 6 (06) — JES3 Output Writer	189
Record Environment	189
Record Mapping	190
Record Type 6 (06) — Print Services Facility (PSF)	194
Record Environment	195
Record Mapping	195
Record Type 6 (06) — IP PrintWay	201
Record Environment	202
Record Mapping	202
Record Type 7 (07) — Data Lost	207
Record Environment	207
Record Mapping	207
Record Type 8 (08) — I/O Configuration	208
Record Environment	208
Record Mapping	209
Record Type 9 (09) — VARY Device ONLINE	210
Record Environment	210
Record Mapping	210
Record Type 10 (0A) — Allocation Recovery	211
Record Environment	212
Record Mapping	212
Record Type 11 (0B) — VARY Device OFFLINE	213
Record Environment	213
Record Mapping	213
Record Type 14 (0E) — INPUT or RDBACK Data Set Activity	215
Record Mapping	216
Extended Information Segment Descriptor	222
Extended Information Section Descriptor Word	223
Compressed format data set section (Type 1)	223
SMS Class Section (Type 2)	224
Step Information Section (Type 3)	224

ISO/ANSI Version 4 CCSID Information Section (Type 4)	224
Additional data set characteristics section (Type 5)	225
PDSE Statistics Section (Type6)	226
Tape Encryption Data Section (Type 7)	226
RAS Section (Type 8)	227
Record Type 15 (0F) — OUTPUT, UPDAT, INOUT, or OUTIN Data Set Activity	228
Record Type 16 (10) — DFSORT Statistics	228
Record Type 17 (11) — Scratch Data Set Status	228
Record Mapping	229
Record Type 18 (12) — Rename Non-VSAM Data Set Status	230
Record Mapping	230
Record Type 19 (13) — Direct Access Volume	231
Record Mapping	232
Record type 20 (14) — Job initiation	234
Record Environment	234
Record Mapping	234
Record Type 21 (15) — Error Statistics by Volume	235
Record Mapping	236
Record Type 22 (16) — Configuration	238
Record Environment	238
Record Mapping	239
I/O Configuration Change Element	244
Record Type 23 (17) — SMF Status	249
Record environment	249
Record mapping	249
Record Type 24 (18) — JES2 Spool Offload	256
Record Mapping	256
Record Type 25 (19) — JES3 Device Allocation	261
Record Environment	261
Record Mapping	261
Record Type 26 (1A) — JES2 Job Purge	263
Record Mapping	264
Record Type 26 (1A) — JES3 Job Purge	270
Record Environment	270
Record Mapping	271
Record Type 28 (1C) — NPM Statistics	275
Record Type 30 (1E) — Common address space work	276
Record Environment	281
Record Mapping	281
Record Type 31 (1F) — TIOC Initialization	313
Record Mapping	313
Record Type 32 (20) — TSO/E User Work Accounting	314
Record Environment	315
Record Mapping	315
Record Type 33 (21) — APPC/MVS TP Accounting	318
Record Environment	318
Record Mapping	319
Subtype 1	320
Subtype 2	323
Record type 34 (22) — TS-Step termination	325
Record Environment	326
Record Mapping	326
Record type 35 (23) — LOGOFF	332
Record Environment	332
Record Mapping	332

Record Type 36 (24) — Integrated Catalog Facility Catalog	335	Record Environment	453
Record Mapping	335	Record Mapping	453
Record Type 37 (25) — NetView Hardware Monitor	337	Record Type 48 (30) — JES2 SIGNOFF/Stop Line (BSC only)	454
Record Type 38 (26) — NetView Health Check and User Authorization Monitor	337	Record Mapping	455
Record Type 39 (27) — NetView (NLDM) Response Time	338	Record Type 48 (30) — JES3 SIGNOFF/Stop Line/LOGOFF	456
Record type 40 (28) — Dynamic DD.	338	Record Environment	456
Record Environment	338	Record Mapping	456
Record Mapping	338	Record Type 49 (31) — JES2 Integrity (BSC only)	457
Record type 41 (29) — DIV objects and VLF statistics	340	Record Mapping	458
Record Environment	341	Record Type 49 (31) — JES3 Integrity	459
Record Mapping	341	Record Environment	459
Record type 42 (2A) — DFSMS statistics and configuration	343	Record Mapping	459
Record environment	346	Record Type 50 (32) — VTAM Tuning Statistics .	460
Record mapping	346	Record Type 52 (34) — JES2 LOGON/Start Line (SNA only)	460
Subtype 1	352	Record Mapping	460
Subtype 2	353	Record Type 53 (35) — JES2 LOGOFF/Stop Line (SNA only)	461
Subtype 3	356	Record Mapping	462
Subtype 4	357	Record Type 54 (36) — JES2 Integrity (SNA only)	463
Subtype 5	359	Record Mapping	463
Subtype 6	362	Record Type 55 (37) — JES2 Network SIGNON .	464
Subtype 9	366	Record Mapping	464
Subtype 10	367	Record Type 56 (38) — JES2 Network Integrity .	465
Subtype 11	367	Record Mapping	465
Subtype 14	368	Record Type 57 (39) — JES2 Network SYSOUT Transmission	466
Subtype 15 — VSAM RLS Storage Class		Record Mapping	466
Response Time Summary	369	Record Type 57 (39) — JES3 Networking Transmission	467
Subtype 16 — VSAM RLS Data Set Response Time Summary	396	Record Environment	467
Subtype 17 — VSAM RLS Coupling Facility Lock Structure Usage.	423	Record Mapping	468
Subtype 18 — VSAM RLS CF cache partition usage	426	Record Type 58 (3A) — JES2 Network SIGNOFF	469
Subtype 19 — VSAM RLS local buffer manager LRU statistics summary	429	Record Mapping	469
Subtype 20 — STOW initialize.	441	Record Type 59 (3B) — MVS/BDT File-to-File Transmission	470
Subtype 21 — Member delete	441	Record Environment	470
Subtype 22 — DFSMSrmm audit records	442	Record Mapping	470
Subtype 23 — DFSMSrmm security records	443	Record type 60 (3C) — VSAM volume data set updated	474
Subtype 24 — Member Add/Replace	444	Record Mapping	475
Subtype 25 — Member rename	445	Record Type 61 (3D) — Integrated Catalog Facility Define Activity	477
Subtype 27 — VTOC audit log	445	Record Mapping	477
Record Type 43 (2B) — JES2 Start	446	Record Type 62 (3E) — VSAM Component or Cluster Opened	478
Record Mapping	446	Record Environment	479
Record Type 43 (2B) — JES3 Start	448	Record Mapping	479
Record Environment	448	Record Type 63 (3F) — VSAM Catalog Entry Defined	481
Record Mapping	448	Record Mapping	482
Record Type 45 (2D) — JES2 Withdrawal	449	Record Type 64 (40) — VSAM Component or Cluster Status	483
Record Mapping	449	Record Environment	484
Record Type 45 (2D) — JES3 Stop	450	Record Mapping	484
Record Environment	450	Record Type 65 (41) — Integrated Catalog Facility Delete Activity	491
Record Mapping	450	Record Mapping	492
Record Type 47 (2F) — JES2 SIGNON/Start Line (BSC only)	451		
Record Mapping	452		
Record Type 47 (2F) — JES3 SIGNON/Start Line/LOGON	453		

Record Type 66 (42) — Integrated Catalog Facility	Record type 79 (4F) — RMF Monitor II activity . . . 655
Alter Activity 493	Record Environment 656
Record Mapping 494	Record Mapping 656
Record Type 67 (43) — VSAM Catalog Entry	Subtype 1 — Address Space State Data 661
Deleted 495	Subtype 2 — Address Space Resource Data . . . 665
Record Mapping 496	Subtype 3 — Storage/Processor Data 668
Record Type 68 (44) — VSAM Catalog Entry	Subtype 4 — Paging Activity 670
Renamed 497	Subtype 5 — Address Space SRM Data 670
Record Mapping 498	Subtype 6 — Reserve Data 672
Record Type 69 (45) — VSAM Data Space Defined,	Subtype 7 — Enqueue Contention Data 672
Extended, or Deleted 499	Subtype 9 — Device Activity 673
Record Mapping 499	Subtype 11 — Page Data Set Activity 675
Record Type 70 (46) — RMF Processor Activity . . 500	Subtype 12 — Channel Path Activity 676
Record Environment 501	Subtype 14 — I/O Queuing Activity 680
Record Mapping 501	Subtype 15 — IRLM Long Lock Detection . . . 683
Subtype 1 — CPU, PR/SM, and ICF Activity . . . 505	Record Type 80 (50) — Security Product Processing . 683
Subtype 2 — Cryptographic Hardware Activity . . 520	Record Type 81 (51) — RACF Initialization . . . 683
Record Type 71 (47) — RMF Paging Activity . . . 524	Record Type 82 (52) — CUSP Record 683
Record Environment 525	Record Mapping 685
Record Mapping 525	Record type 82 (52) — ICSF record 688
Record Type 72 (48) — Workload Activity, Storage	Record Type 82 (52) — PCF Record 688
Data, and Serialization Delay 538	Record Mapping 689
Record Environment 540	Record Type 83 (53) — RACF Audit Record For
Record Mapping 540	Data Sets 692
Subtype 3: Workload Activity 545	Record type 84 (54) — JES3 monitoring facility
Subtype 4: Storage Data 557	(JMF) data 693
Subtype 5: Serialization Delay 559	Record Environment 693
Record Type 73 (49) — RMF Channel Path Activity . 565	Record Mapping 694
Record Environment 566	Subtype 1 — FCT Analysis 696
Record Mapping 566	Subtype 2 — FCT Summary and Highlight . . . 702
Record Type 74 (4A) — RMF Activity of Several	Subtype 3 — Spool Data Management (SDM) . . . 706
Resources 574	Subtype 4 — Resqueue Cellpool and Control
Record Environment 577	Block Utilization 709
Record Mapping 577	Subtype 5 — Job Analysis 715
Subtype 1 — Device Activity 583	Subtype 6 — JES3 Hot Spot Analysis 722
Subtype 2 — XCF Activity 587	Subtype 7 — JES3 Internal Reader DSP Analysis . 723
Subtype 3 — OMVS Kernel Activity 591	Subtype 8 — JES3 Subsystem Interface (SSI)
Subtype 4 — Coupling Facility Activity 595	Response Time Analysis 723
Subtype 5 — Cache Subsystem Device Activity . . 604	Subtype 9 — JES3 Subsystem Interface (SSI)
Subtype 6 — Hierarchical File System Statistics . 613	Destination Queue Analysis 724
Subtype 7 — FICON Director Statistics 616	Subtype 10 — Workload Manager Analysis . . . 725
Subtype 8 — Enterprise Disk System Statistics . 618	Record Type 85 (55) — Measuring OAM
Subtype 9 — PCI Express Based Function	Transaction Performance Using SMF. 727
Activity 623	Record type 86 (56) — CIM server audit 727
Subtype 10 — Storage Class Memory (SCM)	Subtype Description 728
Statistics 626	Record Mapping 728
Record Type 75 (4B) — RMF Page Data Set Activity . 627	Record Type 87 (57) - GRS Monitoring 735
Record Environment 627	Record Type 88 (58) — System Logger Data . . . 735
Record Mapping 627	Record Mapping 736
Record Type 76 (4C) — RMF Trace Activity . . . 631	Subtype 1 737
Record Environment 631	Subtype 11 740
Record Mapping 632	Record Type 89 (59) — Usage Data 741
Record type 77 (4D) — RMF enqueue activity . . . 636	Record environment 742
Record Environment 636	Record mapping 743
Record Mapping 637	Record type 90 (5A) — System status 751
Record Type 78 (4E) — RMF Virtual Storage and	Record environment 752
I/O Queuing Activity 642	Record mapping 752
Record Environment 642	Subtypes 1 or 2. 754
Record Mapping 643	Subtypes 5, 9, 13, and 15 only 755
Subtype 2 Virtual Storage Activity 646	Subtypes 6 or 7. 757
Subtype 3 I/O Queuing Activity 651	Subtype 8 only 758

Subtype 10	758	Subtype 3	858
Subtype 11	759	Subtype 4	863
Subtype 14	759	Subtype 5	864
Subtype 16	760	Subtypes 1, 3, and 5	865
Subtype 17	760	Subtype 5	865
Subtype 18	760	Subtype 6	866
Subtype 19	760	Subtype 7	867
Subtype 20	761	Subtype 8	868
Subtype 21	761	Subtypes 2 and 8	873
Subtype 22	761	Subtype 9	873
Subtype 23	761	Subtype 10	876
Subtype 24	761	Subtype 11	876
Subtype 25	763	Subtype 12	877
Subtype 26	763	Subtype 13	882
Subtypes 27 and 28	764	Subtype 14	882
Subtype 29	764	Record Type 100 (64) — DB2 Statistics	886
Subtype 30	764	Record Type 101 (65) — DB2 Accounting	886
Subtype 31	765	Record Type 102 (66) — DB2 Performance.	886
Subtype 32	765	Record Type 103 (67) — IBM HTTP Server	886
Subtype 33	766	Record Type 104 (68) — RMF Distributed Platform Performance Data	886
Subtype 34	767	Subtype descriptions	886
Subtype 35	767	Record Environment	890
Subtype 36	768	Record Mappings	890
Subtype 37	768	Subtypes 1 - 12 for AIX on System p	892
Subtype 38	769	Subtypes 20 - 31 for Linux on System x	902
Subtype 39	770	Subtypes 40 - 53 for Linux on z Systems	910
Record Type 91 (5B) — BatchPipes/MVS Statistics	771	Subtypes 60 - 64 for Windows on System x	919
Record type 92 (5C) — File system activity	771	Record type 105 (69) — GDPS/Global Mirror.	921
Record Environment	772	Record type 106 (6A) — BCPii activity	921
Record Mapping	772	Record environment	922
Subtype 1	773	Record mapping	922
Subtype 2	774	Subtype 1	923
Subtype 4	775	Subtype 2	924
Subtypes 5 and 6	775	Record Type 108 (6C) — Domino Server Statistics	924
Subtype 7	776	Subtype Descriptions	924
Subtype 10	777	Record Environment	925
Subtype 11	777	Record Mappings	925
Subtype 12	778	Constants: Transaction types	930
Subtype 13	778	Record Type 109 (6D) — TCP/IP Statistics.	935
Subtype 14	778	Record Type 110 (6E) — CICS TS for z/OS Statistics	935
Subtype 15	779	Record Type 111 (6F) — CICS TS for z/OS Statistics	935
Subtype 16	780	Record type 113 (71) — Hardware capacity, reporting, and statistics	935
Subtype 17	780	Record Mapping	936
Record Type 94 (5E) — IBM Tape Library		Subtype 1	937
Dataserver Statistics	780	Subtype 2	939
Record Mapping	781	Record Type 115 (73) — MQSeries Statistics	941
Subtype 2	818	Record Type 116 (74) — MQ Accounting	941
Record Type 96 (60) — Cross Memory Service		Record Type 117 — Data Persistence.	941
Provider Charge Back	827	Record mapping	941
Provider's Information Section.	828	Record Type 118 (76) — TCP/IP Statistics	943
Record Type 97 (61) — Foreign Enclave Resource		Record Type 119 (77) — TCP/IP Statistics	943
Data	829	Record Type 120 (78) — WebSphere Application Server for z/OS Performance Statistics	943
Header/Self-defining Section	829	Record type 121 (79) — Java runtime performance statistics	943
Product Section.	830	Record mapping	943
Foreign Enclave Data Section	830		
Record Type 99 (63) — System Resource Manager			
Decisions.	831		
Starting SMF Record Type 99	832		
Record Mapping	832		
Subtype 1	834		
Subtype 2	844		

	Record type 124 (7C) — I/O Supervisor (IOS)	
	information	946
	Record environment	946
	Record mapping	947
	Subtype 1	948
	Appendix. Accessibility	953
	Accessibility features	953
	Consult assistive technologies	953
	Keyboard navigation of the user interface	953

	Dotted decimal syntax diagrams	953
	Notices	957
	Policy for unsupported hardware.	958
	Minimum supported hardware	959
	Trademarks	961
	Index	963

Figures

1.	SMF overview	2	18.	SMF selects records during the period (START(2000),END(0800))	55
2.	Sample degradation billing for ADDRSPC=REAL storage	7	19.	Sample JCL for running the SMF data set dump program	56
3.	Syntax of SUBSYS JCL for IFASEXIT	24	20.	Sample Job for Dumping SMF Data Sets	56
4.	Sample JCL to invoke the IFASEXIT LOGR interface	25	21.	Example output listed in SYSPRINT data set	57
5.	Sample JCL Statements for Allocating the SMF Data Sets	28	22.	Sample procedures for dumping the SMF data sets	57
6.	Sample JCL Statements for Preformatting the SMF Data Sets	28	23.	Sample JCL for dumping a SMF log stream with the FLDSTATS option	58
7.	Showing how SMF selects records (START(0800),END(2000))	43	24.	Sample job for dumping SMF data sets with digital signature validation	58
8.	Showing how SMF selects records (START(2000),END(0800))	43	25.	Example of a Record in Error	61
9.	Sample JCL for dumping an SMF log stream to a data set	45	26.	Sample IFASMFDP record validation report	63
10.	Sample JCL for dumping multiple SMF log streams to multiple output data sets	46	27.	SMF Dump Program Input Parameter Structure	64
11.	Sample information included in SYSPRINT data set	47	28.	Sample JCL for Entering SMFPRM01 into SYS1.PARMLIB Using IEBUPDTE	81
12.	Sample JCL for dumping a SMF log stream with the RELATIVEDATE option	47	29.	Sample JCL for Obtaining a Listing of Sample Sort Exit Routines	100
13.	Sample JCL for dumping a SMF log stream with the RELATIVEDATE and WEEKSTART options	48	30.	Sample JCL for Running a Sort Procedure	101
14.	Sample JCL for dumping a SMF log stream with the RELATIVEDATE option	48	31.	Sample JCL for Running SMFFRMT	102
15.	Sample JCL for dumping a SMF log stream with the FLDSTATS option	48	32.	Example of standard TP processing	110
16.	Sample JCL for dumping a SMF log stream with the NOSIGSTRIP option	49	33.	Example of multi-trans shell processing	111
17.	SMF selects records during the period (START(0800),END(2000))	54	34.	Example of APPC/MVS server processing	113
			35.	SMF job flow examples - key	119
			36.	SMF record type 30: Example 1	120
			37.	SMF record type 30: Example 2	120
			38.	SMF record type 30: Example 3	121
			39.	SMF record type 30: Example 4	122
			40.	Example of how the I/O subsystem could collect CPU time on a function basis	138

Tables

1. SMF process descriptions with references	3	10. Standard SMF record header for records with subtypes	163
2. Examples of valid user CI-size choices and physical-record sizes VSAM chooses for DASD	29	11. Byte structure for data collected below 16 megabytes - Mixed(1)	650
3. How mode is obtained, depending on request and logstream type	49	12. Byte structure for data collected above 16 megabytes - Mixed(1)	650
4. Summary activity report	59	13. Byte structure for Mixed(2)	650
5. Flood statistics report	62	14. Byte structure for Mixed(3)	650
6. Number of hundredths of a second in each full hour of a day	104	15. VTS enhanced library statistics	790
7. Number of hundredths of a second in each full minute of an hour	105	16. Mapping of CIM Metric Categories to RMF XP Resource Types	887
8. Return codes for the IFAUSAGE macro	150	17. Transaction types	930
9. Standard SMF record header for records without subtypes	162	18. Record 117 mapping header/self-defining section	941

About this document

This information supports z/OS® (5650-ZOS) and describes the system management facilities (SMF) component of a z/OS system. This document can be used to aid in planning, installing, and using SMF in a z/OS environment.

Who should use this document

This document is primarily intended for system programmers who support accounting and billing services for an installation. It can be used by installation managers and system programmers who are responsible for problem resolution, system tuning, and capacity planning for a z/OS system. This document assumes that the reader has extensive experience with z/OS, is familiar with its basic concepts, and can code JCL statements to run programs or cataloged procedures, can code in assembler language, and can read assembler, loader, and linkage editor output.

How this document is organized

This document is organized as follows:

- Chapter 1, "Introduction to SMF," on page 1 introduces SMF and describes how installations use SMF.
- Chapter 2, "Setting up and managing SMF," on page 17 describes what must be done to run SMF on your system.
- Chapter 3, "Using the SMF dump programs," on page 35 describes the SMF dump program, how to switch and dump the SMF data sets.
- Chapter 4, "Customizing SMF," on page 67 describes methods of tailoring SMF to meet the specific needs of the installation.
- Chapter 5, "Using SMF macros," on page 87 includes SMF macros and how to use them.
- Chapter 6, "User-written report programs," on page 99 describes how to design and produce SMF reports.
- Chapter 7, "APPC/MVS accounting," on page 109 describes recording information for APPC/MVS work.
- Chapter 8, "z/OS UNIX System Services accounting," on page 117 describes z/OS UNIX information in various SMF records.
- Chapter 9, "System Logger accounting," on page 125 describes recording information for system logger.
- Chapter 10, "EXCP count," on page 131 includes information on how EXCP counts are included in SMF records.
- Chapter 11, "CPU time," on page 133 describes CPU time under TCBS and SRBs and possible variations.
- Chapter 12, "IFAUSAGE — Collecting usage data," on page 137 describes the IFAUSAGE macro that MVS™ provides for collecting data related to CPU time usage and other resource usage.
- Chapter 15, "SMF records," on page 165 includes the formats of SMF records and describes SMF header standards.

Highlighting

This document uses different type styles to identify certain kinds of information. General information is printed in the standard type style (the type style used for this sentence). The following type styles indicate special information:

New terms

Each time a new term is introduced, its first occurrence is printed in bold italic type (for example, "***racfbname*** specifies the name of a RACF® data base").

SYSTEM PARTS

The names for commands, subcommands, keywords, utilities, and other parts of the system are printed in uppercase type (for example, "the ALTER command").

Variable information

The names for information that you must provide are printed in italic type (for example, "type *yourname*").

Variable information that appears in system messages is also printed in this type style, for example, "LOCATE *entryname*". In this case, the italicized word (*entryname*) that is used in this document is replaced by the actual entry name when the system displays the message.

When numerical variables appear in the system messages, this document uses the following convention: *nnn*. In this case, what the system supplies on the screen is an actual number that you can use to determine the cause of the problem. Similarly, in the case of alphabetic variables, this document uses the characters *xxx*, *yyy*, or *zzz*.

Information that you are to type or that appears on your screen

Information that you should type (in response to a message) is printed in monospace type (for example, "type yes and press Enter"). Also, when this document refers directly to a message that appears on the screen, this type style is used. An example of such a message is "Enter password."

z/OS information

This information explains how z/OS references information in other documents and on the web.

When possible, this information uses cross document links that go directly to the topic in reference using shortened versions of the document title. For complete titles and order numbers of the documents for all products that are part of z/OS, see *z/OS V2R2 Information Roadmap*.

To find the complete z/OS library, go to IBM Knowledge Center (<http://www.ibm.com/support/knowledgecenter/SSLTBW/welcome>).

How to send your comments to IBM

We appreciate your input on this documentation. Please provide us with any feedback that you have, including comments on the clarity, accuracy, or completeness of the information.

Use one of the following methods to send your comments:

Important: If your comment regards a technical problem, see instead “If you have a technical problem.”

- Send an email to mhvrcfs@us.ibm.com.
- Send an email from the "Contact us" web page for z/OS (<http://www.ibm.com/systems/z/os/zos/webqs.html>).

Include the following information:

- Your name and address
- Your email address
- Your phone or fax number
- The publication title and order number:
 - z/OS MVS System Management Facilities (SMF)
 - SA38-0667-06
- The topic and page number or URL of the specific information to which your comment relates
- The text of your comment.

When you send comments to IBM®, you grant IBM a nonexclusive right to use or distribute the comments in any way appropriate without incurring any obligation to you.

IBM or any other organizations use the personal information that you supply to contact you only about the issues that you submit.

If you have a technical problem

Do not use the feedback methods that are listed for sending comments. Instead, take one or more of the following actions:

- Visit the IBM Support Portal (support.ibm.com).
- Contact your IBM service representative.
- Call IBM technical support.

Summary of changes

This information includes terminology, maintenance, and editorial changes. Technical changes or additions to the text and illustrations for the current edition are indicated by a vertical line to the left of the change.

Summary of changes for z/OS Version 2 Release 2, as updated June, 2016

The following changes are made for z/OS Version 2 Release 2 (V2R2), as updated June, 2016.

New

- The NSI parameter has been added to the IFASEXIT interface in “Obtaining records from SMF log streams” on page 23.
- SMF record type 99 has new fields in “Software licensing information” on page 842.
- “Record type 124 (7C) — I/O Supervisor (IOS) information” on page 946 has been added.

Changed

- For SMF record type 14:
 - The meaning of the bits in the SMF14DSVER field have been updated in “Additional data set characteristics section (Type 5)” on page 225.

Summary of changes for z/OS Version 2 Release 2, as updated December, 2015

The following changes are made for z/OS Version 2 Release 2 (V2R2), as updated December, 2015.

New

- For SMF record type 30, the SMF30SLM field has been added in “Storage and Paging Section” on page 296.
- For SMF record type 90, the following subtypes have been added:
 - “Subtype 38” on page 769
 - “Subtype 39” on page 770
- For SMF record type 99, subtype 12, the SMF99C_VCM_DiagCapDecr_Cont field was added in “Capacity data section” on page 879.

Changed

- For SMF record type 30, the description of the SMF30SCC field has been updated in “Completion Section” on page 288.
- For SMF record type 99, subtype 2, these sections have been enhanced: “Period Data Section” on page 844 and “Address space expanded storage access policy section” on page 856.

Summary of changes for z/OS Version 2 Release 2

The following changes are made for z/OS Version 2 Release 2 (V2R2).

New

The following new information is added in this publication:

- Information about SMF support for the JES2 EVENTLOG data set has been added in “SMF data in the JES2 EVENTLOG data set” on page 4 and “Record Type 30 (1E) — Common address space work” on page 276.
- Support has been added for digitally signed SMF records:
 - The IFASMFDDL utility has new parameters described in “Specifying parameters for the SMF log stream dump program” on page 36.
 - The IFASMFDP utility has new parameters described in “Specifying parameters for the SMF data set dump program” on page 50.
 - The RECSIGN parameter is introduced in “RECSIGN — Digitally signing SMF records” on page 81.
 - Information about setting up and using digitally signed SMF records has been added in Chapter 13, “Signing and validating SMF records,” on page 155.
 - For SMF record type 2, new subtypes 1 and 2 have been added in “Subtype 1” on page 167 and “Subtype 2” on page 169.
- For SMF record type 14 (and 15), new fields have been added in “Step Information Section (Type 3)” on page 224.
- For SMF record type 42, new fields have been added to report local true and false contention in:
 - “Subtype 15 — VSAM RLS Storage Class Response Time Summary” on page 369
 - “Subtype 16 — VSAM RLS Data Set Response Time Summary” on page 396
 - “Subtype 17 — VSAM RLS Coupling Facility Lock Structure Usage” on page 423
- For SMF record type 42, a new subtype 27 record has been added in “Subtype 27 — VTOC audit log” on page 445.
- SMF record types 70-72, 74, and 77-79 have several new fields.
- For SMF record type 74, a new subtype 10 was added in “Subtype 10 — Storage Class Memory (SCM) Statistics” on page 626.
- For SMF record type 90, a new subtype 37 has been added in “Subtype 37” on page 768.
- For SMF record type 92, information about subtype 16 was added in “Subtype 16” on page 780.
- For SMF record type 99 — System resource manager decisions, new fields have been added to the records in:
 - “Subtype 1” on page 834
 - “Subtype 12” on page 877
 - “Subtype 14” on page 882
- Information about SMF record type 105 has been added in “Record type 105 (69) — GDPS/Global Mirror” on page 921.
- SMF record type 106 has been added in “Record type 106 (6A) — BCPii activity” on page 921.
- SMF record type 117 has been added in “Record Type 117 — Data Persistence” on page 941.

- SMF record type 121 has been added in “Record type 121 (79) — Java runtime performance statistics” on page 943.

Changed

The following information is changed in this publication:

- For SMF record type 30:
 - The overview has been updated in “Record Type 30 (1E) — Common address space work” on page 276.
 - The description of the SMF30STI field has been updated in “Completion Section” on page 288.
- For SMF record type 42, subtype 17 — VSAM RLS coupling facility lock structure usage, changes have been made to some record descriptions in:
 - “Lock structure summary section” on page 425
 - “MVS system CF lock structure activity totals section” on page 423
- SMF record types 75 and 79 have updated fields.
- For SMF record type 99 — System resource manager decisions, changes have been made to some record descriptions in:
 - “Subtype 12” on page 877
 - “Subtype 14” on page 882
- For SMF record type 104 — RMF Distributed Platform Performance Data, changes have been made to some record descriptions in “RMF XP product section” on page 891.

Summary of changes for z/OS Version 2 Release 1, as updated February 2015

The following changes have been made in z/OS Version 2 Release 1 (V2R1), as updated February 2015.

New

The following new information is added in this publication:

- Fields have been added to and changed in SMF record type 22 in “Storage Control Section” on page 241.
- For SMF record type 23, new fields have been added in “Logstream statistics section” on page 254.
- For SMF record type 30, a new section has been added to the record, as described in “zEDC usage statistics section” on page 313.
- New fields have been added to SMF record type 42:
 - In subtype 5, new fields have been added in:
 - “Storage class response time section” on page 359
 - “Volume header section - VTOC data component I/O statistics” on page 360
 - “Volume header section - VTOC index component I/O statistics” on page 361
 - “Volume header section - VVDS component I/O statistics” on page 362
 - In subtype 6, new fields have been added in “Data set I/O statistics section” on page 364.
- For SMF record type 70 subtype 1, a new section has been added to the record, as described in “Logical Core Data Section” on page 520.

Changed

The following information is changed in this publication:

- For SMF record type 41, updated the subtype information in “Record Environment” on page 341.
- For SMF record type 70 subtype 2 (RMF Processor Activity), changes have been made to some record and field descriptions:
 - “Cryptographic CCA Coprocessor Data Section” on page 520 has been updated.
 - “Cryptographic Accelerator Data Section” on page 521 has been updated.
 - “ICSF Services Data Section” on page 522 has been updated.
 - “Cryptographic PKCS11 Coprocessor Data Section” on page 523 has been updated.
- For SMF record type 71 (RMF Paging Activity), changes have been made to some record and field descriptions:
 - “Record Type 71 (47) — RMF Paging Activity” on page 524 has been updated.
- For SMF record type 72 (Workload Activity, Storage, and Serialization Delay Data), changes have been made to some record and field descriptions:
 - “Workload Manager Control Section” on page 545 has been updated.
- For SMF record type 74 subtype 4 (Coupling Facility Activity), changes have been made to some record and field descriptions:
 - “Local Coupling Facility Data Section” on page 595 has been updated.
- For SMF record type 74 subtype 9 (PCI Express Based Function Activity), changes have been made to some record and field descriptions:
 - “Subtype 9 — PCI Express Based Function Activity” on page 623 has been updated.
- For SMF record type 78 (RMF Virtual Storage and I/O Queuing Activity), changes have been made to some record and field descriptions:
 - “I/O Queuing Configuration Control Section” on page 652 has been updated.
 - “I/O Queuing Configuration Data Section” on page 653 has been updated.
 - “I/O Queuing Configuration Control Section” on page 680 has been updated.
 - “I/O Queuing Configuration Data Section” on page 681 has been updated.
- For SMF record type 99 subtype 2, the offset values for several fields have been corrected in “Remote Queue Server Data Entry Section” on page 855.
- For SMF record type 113 — Hardware capacity, reporting, and statistics, changes have been made to some record and field descriptions:
 - In “Header section” on page 936, field SMF113STP has been updated.
 - The description of “Subtype 1” on page 937 has been updated.
 - In “Header/self-defining section, based on the address of SMF record type 113 + the offset value in SMF113DOF” on page 937, fields SMF113_1_CtrVersion2 and SMF113_1_Flags2 have been updated, and field SMF113_1_CoreID has been added.
 - In “Counter set section, based on the address of SMF record type 113 + the offset value in field SMF113_1_CSOF” on page 938, field SMF113_1_CSType has been updated.
 - The description of “Subtype 2” on page 939 has been updated.

Summary of changes for z/OS Version 2 Release 1, as updated March 2014

The following changes are made for z/OS Version 2 Release 1 (V2R1), as updated March 2014.

New

The following new information is added in this publication:

- For SMF record type 14 — INPUT or RDBACK Data Set Activity:
 - “Compressed format data set section (Type 1)” on page 223 has a new field: SMF14CMPTYPE.
- For SMF record type 42, subtype 15 — VSAM RLS Storage Class Response Time Summary:
 - “Sysplex-wide storage class summary data section for below the bar” on page 369 has new fields: SMF42FSA, SMF42FSB, SMF42FSC, and SMF42FY3.
 - “SC, CF, SYS summary section for below the bar” on page 376 has new fields: SMF42FTA and SMF42FTB.
 - “Sysplex-wide storage class summary data section for above the bar” on page 382 has new fields: SMF42FSAA and SMF42FSBA.
 - “SC, CF, SYS summary section for above the bar” on page 389 has new fields: SMF42FTAA and SMF42FTBA.
- For SMF record type 42, subtype 16 — VSAM RLS Data Set Response Time Summary:
 - “Sysplex-wide data set summary section for below the bar” on page 396 has new fields: SMF42GSA and SMF42GSB.
 - “Data Set, CF, SYS summary section for below the bar” on page 403 has new fields: SMF42GTA and SMF42GTB.
 - “Sysplex-wide data set summary section for above the bar” on page 410 has new fields: SMF42GSAA and SMF42GSBA.
 - “Data Set, CF, SYS summary section for above the bar” on page 417 has new fields: SMF42GTAA and SMF42GTBA.

Changed

The following information is changed in this publication:

- For SMF record type 14 — INPUT or RDBACK Data Set Activity:
 - The SMF14XF1 field is changed in “Compressed format data set section (Type 1)” on page 223.
- For SMF record type 42, subtype 15 — VSAM RLS Storage Class Response Time Summary:
 - The SMF42FAH field is changed in “Sysplex-wide storage class summary data section for below the bar” on page 369.
 - The SMF42FBL field is changed in “SC, CF, SYS summary section for below the bar” on page 376.
 - The SMF2AFAH field is changed in “Sysplex-wide storage class summary data section for above the bar” on page 382.
 - The SMF2AFBL field is changed in “SC, CF, SYS summary section for above the bar” on page 389.
- For SMF record type 42, subtype 16 — VSAM RLS Data Set Response Time Summary:
 - The SMF42GRK field is changed in “Sysplex-wide data set summary section for below the bar” on page 396.
 - The SMF42GRV field is changed in “Data Set, CF, SYS summary section for below the bar” on page 403.
 - The SMF2AGRK field is changed in “Sysplex-wide data set summary section for above the bar” on page 410.

- The SMF2AGRV field is changed in “Data Set, CF, SYS summary section for above the bar” on page 417.

Summary of changes for z/OS Version 2 Release 1, as updated December 2013

This following changes have been made in z/OS Version 2 Release 1 (V2R1), as updated December 2013.

New

The following new information is added in this publication:

SMF record type 30 has new fields: SMF30_RMCTADJN_Nominal, SMF30_Highest_Task_CPU_Percent, and SMF30_Highest_Task_CPU_Program.

SMF record type 30 has a new section. For details, see “Counter data section” on page 312.

SMF record type 87 is added.

SMF record type 90 has new fields: SMF90T34_RMCTADJN_Nominal, SMF90ESWT, SMF90ETWT, and SMF90 bit for SMF30COUNT, and new subtype 35.

SMF record type 99 has new subtypes 12 and 14.

Changed

The following SMF records are updated in this publication.

SMF record type 6
SMF record type 14
SMF record type 22
SMF record type 23
SMF record type 26
SMF record type 30
SMF record type 42
SMF record type 60
SMF record type 62
SMF record type 64
SMF record type 70
SMF record type 71
SMF record type 72
SMF record type 73
SMF record type 74
SMF record type 75
SMF record type 76
SMF record type 77
SMF record type 78
SMF record type 79
SMF record type 89
SMF record type 90
SMF record type 92

SMF record type 99
SMF record type 104
SMF record type 111
SMF record type 113

z/OS Version 2 Release 1 summary of changes

See the following publications for all enhancements to z/OS Version 2 Release 1 (V2R1):

- *z/OS Migration*
- *z/OS Planning for Installation*
- *z/OS Summary of Message and Interface Changes*
- *z/OS Introduction and Release Guide*

Chapter 1. Introduction to SMF

System management facilities (SMF) collects and records system and job-related information that your installation can use in:

- Billing users
- Reporting reliability
- Analyzing the configuration
- Scheduling jobs
- Summarizing direct access volume activity
- Evaluating data set activity
- Profiling system resource use
- Maintaining system security

These examples show the types of reports that can be created by using the information that SMF collects. “Using SMF data” on page 4 describes each of these in more detail.

SMF formats the information that it gathers into system-related records (or job-related records). System-related SMF records include information about the configuration, paging activity, and workload. Job-related records include information on the CPU time, SYSOUT activity, and data set activity of each job step, job, APPC/MVS transaction program, and TSO/E session. (Chapter 15, “SMF records,” on page 165 includes the formats of the SMF records.)

Chapter 3, “Using the SMF dump programs,” on page 35 describes the dump program and how to dump SMF data sets and explains how to code and use them.

An installation can provide its own routines as part of SMF. These routines will receive control either at a particular point as a job moves through the system, or when a specific event occurs. For example, an installation written routine can receive control when the CPU time limit for a job expires or when an initiator selects the job for processing. The routine can collect additional information, or enforce installation standards. Chapter 4, “Customizing SMF,” on page 67, summarizes the available installation-written exits. *z/OS MVS Installation Exits* describes each SMF installation exit. Chapter 3, “Using the SMF dump programs,” on page 35 describes the SMF dump program exits.

Because SMF data-collection and exit routines are independent of each other, the installation can use them separately or in combination. After analyzing the information that the SMF data-collection routines obtained, for example, the installation might choose to set a time limit for all jobs running on the system and then terminate any job that exceeds this limit. However, to allow certain jobs to bypass this restriction, the installation could add a routine at the SMF time limit exit (IEFUTL) to extend the time limit for those selected jobs.

Figure 1 on page 2 illustrates the functional overview of SMF; it also contains references to Table 1 on page 3, which explains where you can find more information.

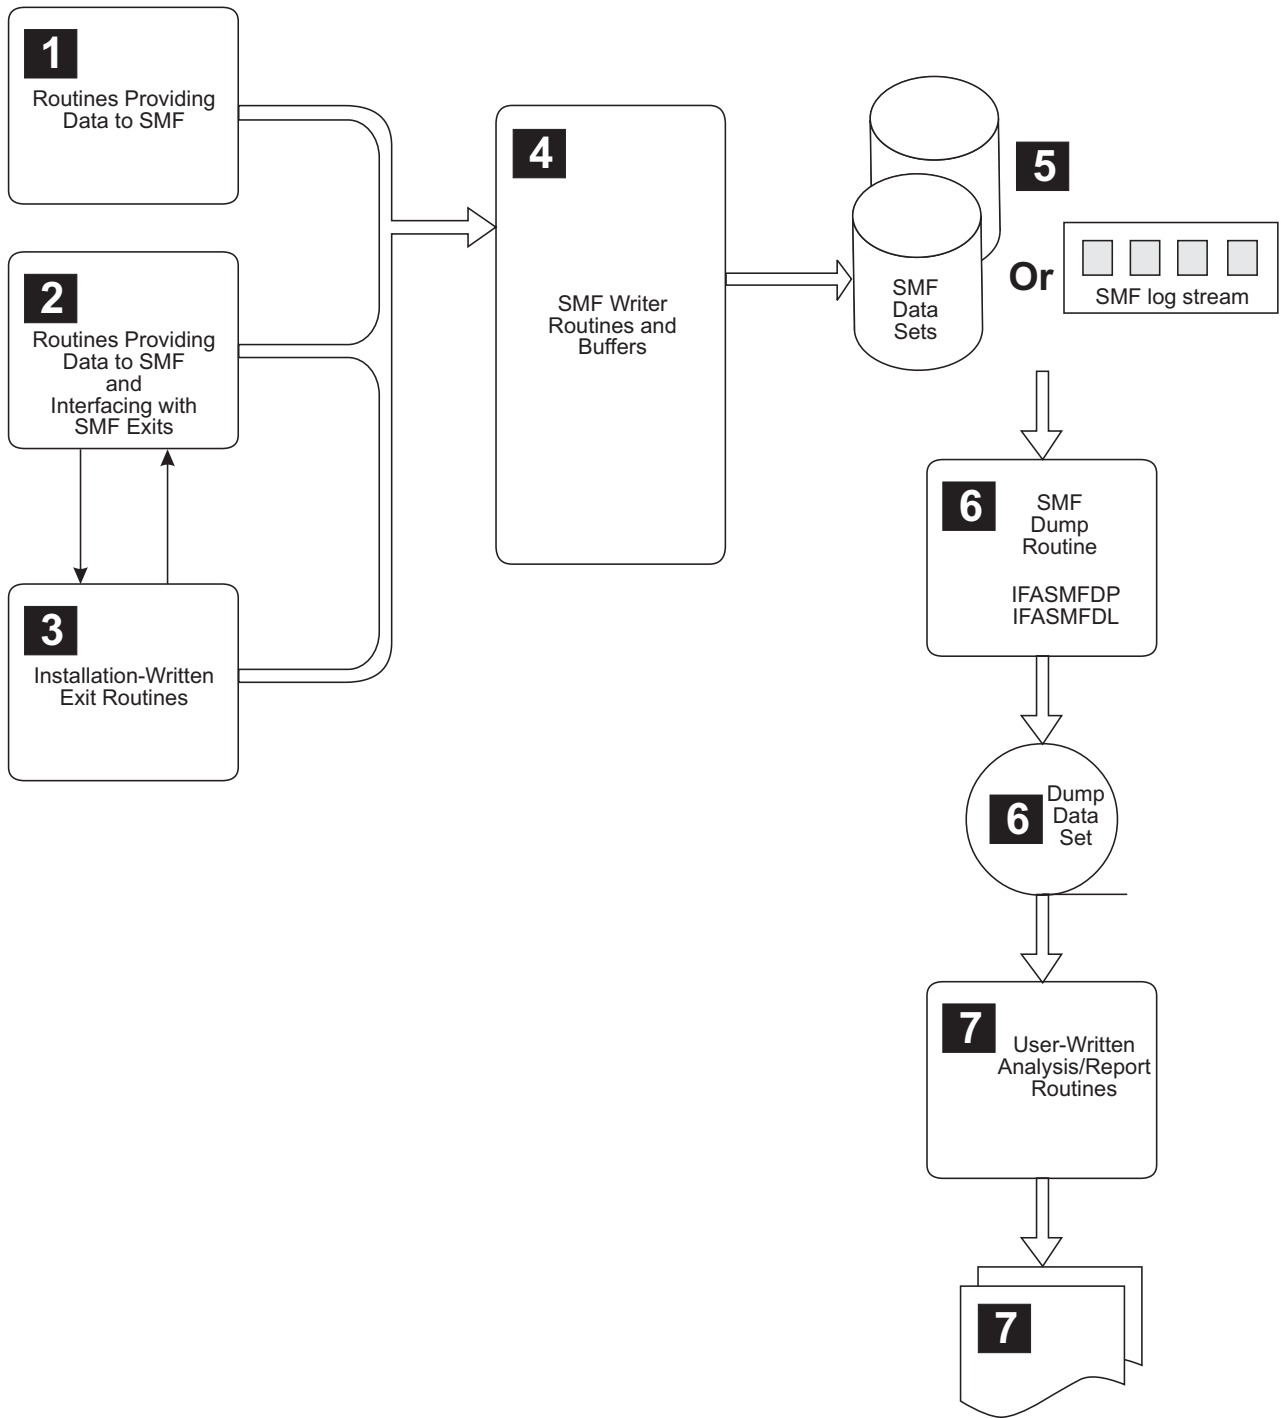


Figure 1. SMF overview

Table 1. SMF process descriptions with references

Description of process	Reference
<p>1 — Routines (SMF, system, program-product, installation-written) collect and format data into records and then pass the records to the SMF writer.</p>	<p>Chapter 4, “Customizing SMF,” on page 67 lists the macros used to interface with the SMF writer. <i>z/OS MVS Programming: Authorized Assembler Services Reference EDT-IXG</i> and <i>z/OS MVS Programming: Authorized Assembler Services Reference SET-WTO</i> contain the detailed description of the macros.</p> <p>Chapter 15, “SMF records,” on page 165 provides information about the records that includes:</p> <ul style="list-style-type: none"> • The specific events that cause SMF to write records. • The contents of each record.
<p>2 — In addition to collecting data for SMF, some routines interface with the SMF exits, passing control to them at several points during job (and job step) processing.</p>	<p>Chapter 4, “Customizing SMF,” on page 67 describes how SMF exits are controlled and how these routines interact with the SMF exits.</p>
<p>3 — The SMF exits get control when specific events occur, such as when a data set exceeds the output limit or at designated points during job processing.</p>	<p>Chapter 4, “Customizing SMF,” on page 67 describes the installation exits that are available. The <i>z/OS MVS Installation Exits</i> book describes each SMF installation exit and explains how to code them. Chapter 3, “Using the SMF dump programs,” on page 35 describes the dump program exits.</p>
<p>4 — SMF routines copy records to SMF buffers and then transfer records from the SMF buffers to either:</p> <ul style="list-style-type: none"> • SMF data sets • SMF log streams <p>SMF routines then issue messages to the operator indicating the successful or unsuccessful completion of specific SMF-related events.</p>	<p>Chapter 2, “Setting up and managing SMF,” on page 17 describes the requirements for running SMF and several SMF performance considerations.</p> <p>Chapter 4, “Customizing SMF,” on page 67 describes how an installation can use SMF parameters to vary the amount of information SMF routines collect and record. The information referenced includes the formats, uses, and default values of these parameters.</p>
<p>5</p> <ul style="list-style-type: none"> • If you write your SMF data to SMF data sets, the data sets are filled one at a time; while SMF writes records on one data set, other SMF data sets can be dumped or cleared. • If you write your SMF data to a log stream, you can keep writing data to your log stream. The log stream will offload to DASD data sets when the log stream coupling facility structure (or the local storage buffers for a DASD only log stream) fills. You define the thresholds in the log stream definition for how much data is held before offload. 	<ul style="list-style-type: none"> • “Setting Up and Managing SMF Recording to Data Sets” on page 26 describes creating and switching of SMF data sets. • “Setting up and managing SMF recording to logstreams” on page 18 describes setting up and using SMF log streams.
<p>6 — The SMF dump programs copy data from either SMF data sets or log streams to tape or direct access data sets for permanent storage.</p> <p>You can also use the SMF log stream dump program may to dump to a temporary data set for immediate use</p>	<p>Chapter 3, “Using the SMF dump programs,” on page 35 describes the dump program for SMF data sets and log streams.</p>

Table 1. SMF process descriptions with references (continued)

Description of process	Reference
<p>7 — Analysis and report routines, either user-written or those such as the Tivoli® Decision Support for z/OS program product, process information records. Analysis routines read the SMF data set, list the dumped SMF data set, use a sort/merge program to order the SMF-recorded information, or perform a detailed investigation of one particular SMF data item, such as job CPU time under TCBS. Report routines usually format and print the statistics and/or results of the analysis routines.</p>	<p>Chapter 6, “User-written report programs,” on page 99 describes sort/merge routines and includes a sample report program.</p>

SMF data in the JES2 EVENTLOG data set

While a job is executing, SMF writes the type 30, subtype 1, 4, and 5 records associated with each job step to the job’s EVENTLOG data set. You can use the Job Step panel of the Spool Display and Search Facility (SDSF) to view these records. To control access to this information, the EVENTLOG is protected with two SAF resources in the JESSPOOL class: *nodeid.userid.jobname.jobid.EVENTLOG.SMFSTEP* and *nodeid.userid.jobname.jobid.EVENTLOG.STEPDATA*. See Jobs, job groups, output groups, and SYSIN/SYSOUT data sets in *z/OS SDSF Operation and Customization* for more information.

Using SMF data

SMF data examples:

Most of the examples in this topic were taken from the *GUIDE 35 Proceedings, “What To Do With SMF Data,”* published by GUIDE International Corporation. These examples are based on the experience of the speakers at that session, Mr. Brian Currah and Mr. Mario Morino. As such, they have not been submitted to any formal IBM test; SMF users should evaluate the applicability of these examples in their environment before implementing them.

The volume and variety of information in the SMF records enables installations to produce many types of analysis reports and summary reports. For example, by keeping historical SMF data and studying its trends, an installation can evaluate changes in the configuration, workload, or job scheduling procedures. Similarly, an installation can use SMF data to determine system resources wasted because of problems, such as inefficient operational procedures or programming conventions.

The following examples show the types of reports that can be created from SMF data. The examples should be viewed primarily as suggestions to assist you in beginning to plan SMF reports.

Billing users

SMF reports data that installations can use as a basis for billing algorithms and reports. The following sample procedure briefly summarizes one approach installations might follow in creating algorithms and reports from SMF data:

1. Establish the primary goal(s) that the installation wants to achieve from billing its users for computer services.
2. Break down these goals into specific billing objectives.

3. Review the SMF-recorded data items to determine the data items that best satisfy the installation's billing objectives.
4. Create billing algorithms using the appropriate SMF-recorded data items.
5. Generate billing reports for the installation's users (or for management review).

The following scenarios show ways that an installation might implement this procedure.

Scenario 1

An installation whose primary goal is to recover its total cost, including such items as personnel, equipment, and supplies, might set the following billing objectives:

- The billing algorithms and reports must not require expensive programming to control.
- The users must easily understand the charges.
- The charges must be repeatable; that is, the charge for a job must be the same each time the user runs the job.

Given these objectives, the installation might want to create a billing algorithm that is based on one specific SMF-recorded data item such as the, "number of cards read/punched," or "number of lines/pages printed".

Scenario 2

An installation that has a limited variety of computer applications might have the following billing objectives:

- The charges must accurately represent the amount of time required for each application.
- The charges must be consistent for the same types of applications. (For example, all payroll applications must have the same base cost.)

To fulfill these objectives, the installation might take the following steps to create its billing algorithms:

1. Using SMF, establish an average-run time (through actual running or simulation) for each type of computer application.
2. Estimate the average-run-time cost for each type of application.
3. Set a cost-per-hour rate (using steps 1 and 2).
4. Multiply this rate times the "job elapsed time" recorded by SMF for each application.

Scenario 3

An installation that is operating at or near full system capacity might want to encourage better use of its limited resources through billing. The major billing objectives of such an installation might include:

- The users must pay only for the system resources they use.
- The rates for abundant resources must be lower than the rates for scarce ones.
- The charges for each system resource must fluctuate with the demand for that resource.

Assuming that it has cost-conscious users, the installation might use degradation and/or efficiency billing, as described in other topics, to satisfy these objectives.

Scenario 4

An installation that uses TSO/E heavily might set these specific objectives:

- TSO/E billing must be understandable to its users in the terms of the work they do.
- The billing must be predictable; TSO/E users should be able to estimate the charge for a given terminal session.
- The billing must recover TSO/E costs.

The installation can use transaction billing, described in other topics, to satisfy these objectives.

Degradation billing

Installations can use degradation billing to enforce standards created to balance system resource use. Degradation billing allows a job to run even though it has violated a specified resource-use standard. However, because of the violation, the installation will charge the user an additional “punitive” cost for the job.

For example, one installation standard might state that a single job step should not allocate more than six tape units out of the system's available ten. For each of the first six tape units allocated, the installation charges a base cost; for each unit allocated over the allowed six, however, it might charge a progressively higher rate.

Another installation standard might state that programs using the ADDRSPC=REAL facility should not allocate more than 100K bytes, and that any program allocating more than 300K bytes is not only violating the standard but is totally degrading the system. This installation might charge its users for ADDRSPC=REAL storage by establishing a price per K-storage hour used as follows (shown in Figure 2 on page 7):

- For an allocation of 100K bytes or less, the charge is a minimum base rate per K-storage hour.
- For an allocation greater than 100K bytes but less than the critical level of 300K bytes, the charge is a higher base rate per K-storage hour plus a small “punitive” rate based on hour of tie-up.
- For an allocation of 300K bytes or more, the charge is a very large “punitive” rate based on hour of tie-up.

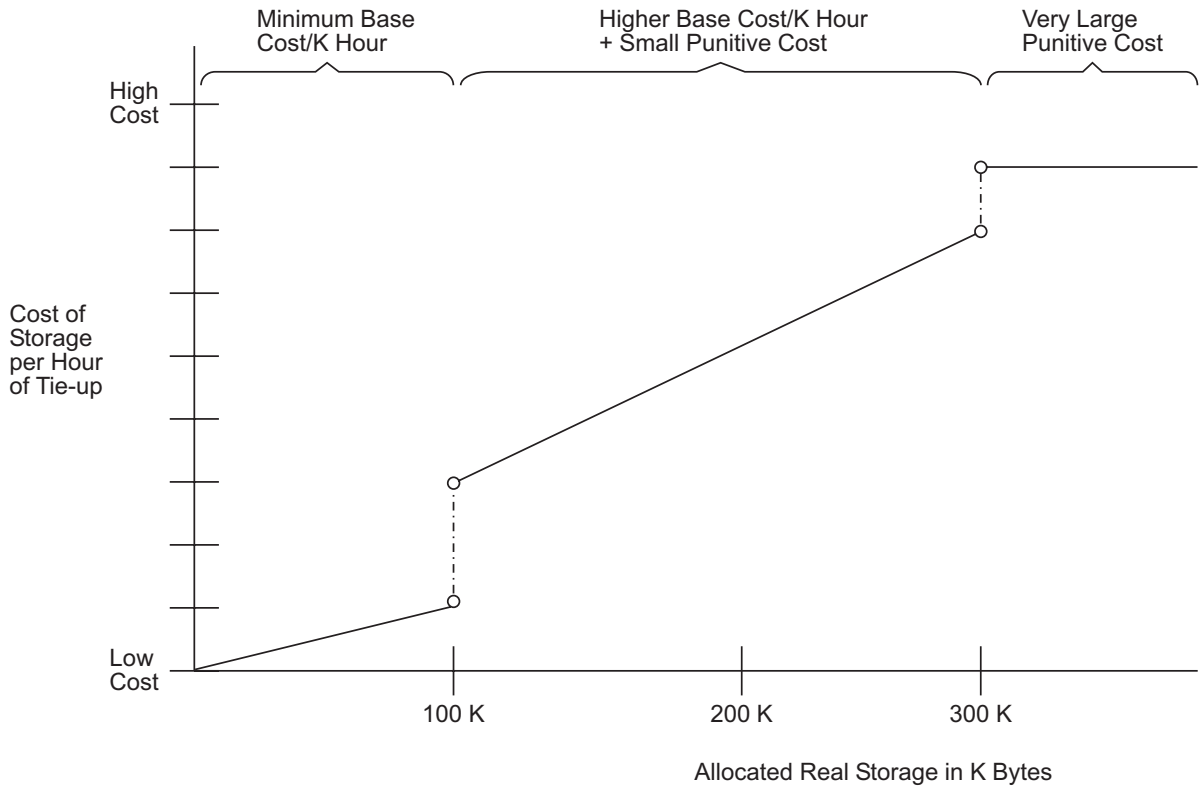


Figure 2. Sample degradation billing for ADDRSPC=REAL storage

Efficiency Billing

Efficiency billing is very similar to degradation billing in that it encourages the conservative use of system resources. Efficiency billing, however, *reduces* the charge for those who use the system efficiently. For example, by evaluating the “date” information in each SMF job initiation record, an installation might charge less for those jobs submitted for Sunday or holiday processing. Likewise, an installation might use the SMF-recorded “time” information to charge less for jobs started during the second or third shifts. Another example of efficiency billing is to give special reduced rates for jobs that represent low-priority background work.

Transaction billing

Transaction billing charges for work in units that are meaningful to the user. Transaction units can include runs of a particular program, online invocations of a defined function, or records read or printed by a standard application. Bills based on transaction units show a clear relationship between the service requested and the payment due, a relationship that, for TSO/E and IMS™, is not apparent from a list of resources actually consumed.

Techniques of specifying storage allocation, for instance, are not visible to many terminal users, who therefore have trouble relating their actions to a charge for storage hours. However, charging in terms of commands used is clear to the terminal user.

Transaction billing helps users to see the correlation between what they do and what they pay. With this information, they can develop cost-effective operating

standards. If transaction prices incorporate the average cost of resources consumed, the users can evaluate alternatives and make decisions based on their own operations.

Transaction billing might include billing for the use of some TSO/E commands. To be suitable as a billing unit, a transaction should involve processing costs that are consistent enough over time for the average to be meaningful. The transactional billing data collected for TSO/E is how many times each TSO/E command is issued. Note that a TSO/E command does not relate to the system resources manager (SRM) definition of a TSO/E transaction as described in *z/OS MVS Initialization and Tuning Guide*.

The following steps can be used to develop a method of transaction billing for the use of TSO/E commands:

1. Determine the TSO/E costs you want to recover. To determine the TSO/E cost, summarize the total installation cost and then allocate part of it to TSO/E. You can obtain a gross allocation ratio from the data in type 30 records by comparing the resource consumption for TSO/E with the overall resource consumption.
2. For each type of TSO/E command, measure the average resource consumption and the number of times the command is used over a representative time period. You can obtain this data from SMF record type 32 (with the DETAIL option). For further discrimination, you can break down the calculations to the specific user ID.
3. Based on the number of commands issued (obtained during step 2) and any other relevant information, predict the command use by type (for a billing period).
4. Set rates for the resources measured in SMF record type 32, so that the use predicted in step 3 recovers the TSO/E costs from step one. That is, the resources used multiplied by the rates set for the resources should equal the cost you recover.
5. Set prices for each type of TSO/E command, based on the use of the command as determined in step 2, at the rates established in step 4. That is, divide the cost of the resources by the number of times the command was issued to determine the price for each command type.
6. For the duration of each billing period, you can use the date in SMF record type 32 to count the commands being issued by type and user ID. Use the prices determined in step 5 to bill each user ID for the commands used.
7. Repeat step 6 for each billing period until you recalculate the prices. (Deciding how often to recalculate the prices represents a trade off between accuracy and stability.) If costs have changed, start with step 1, otherwise start with step 2.

Reporting reliability

The following examples describe a few ways of using SMF to report the reliability of the system.

Approximate system availability

SMF produces records at IPL time and when the operator enters a HALT EOD command preceding the scheduled shutdown of the system. By examining these records and the last SMF record recorded before shutdown of the system, an installation can establish the following information for a given time period:

- Reporting interval

- Number of IPLs
- System up time and system down time
- Number of scheduled stoppages and the approximate amount of scheduled down time
- Number of unscheduled stoppages and the approximate amount of unscheduled down time
- Reasons for system failure
- Operator name

In addition, JES2 and JES3 produce the SMF subsystem start (type 43) and subsystem stop (type 45) records. From these records, an installation can further analyze the system's availability by checking the start time, stop times, and circumstances under which JES2 or JES3 was started (for example, a cold start versus a warm start).

Abend code summary

SMF reports a system or user abend (abnormal end of task) code for each job (and job step) that abends. By tracking those codes issued by operational procedures (such as codes 122 and 222 for operator cancels), an installation can account for any loss of CPU time due to job reruns. More generally, a summary of the abend codes by program name or code allows an installation to determine which programs are abending frequently and which codes are occurring most often. This information might show the need for software error corrections, JCL revisions, or better operating instructions.

Direct access VTOC errors

The SMF record type 19 has a VTOC indicator bit that the system sets if there is a failure while updating a VTOC (volume table of contents). By checking the setting of this bit, operations personnel can identify any VTOCs that might have missing tracks or overlapping data sets.

Tape error statistics

SMF record type 21 provides tape error statistics such as the number of temporary read and write errors, permanent read and write errors, noise blocks, erase gaps, and cleaner actions. By sorting and summarizing these error statistics by tape volume (or tape unit), operations personnel can identify volumes that might need reconditioning or replacement, or point out tape drives that might require cleaning or maintenance.

Analyzing the configuration

SMF generates records that describe changes in the system configuration:

- At IPL for online devices (types 0, 8, 19, and 22)
- When a device is added to the configuration (types 9 and 10)
- When a device is removed from the configuration (type 11)
- When a processor, channel path, storage device moves online or offline (type 22)

In addition to these records, operations management can use specific information in other SMF records to report configuration statistics. The examples that follow show this use of SMF.

Device and channel loading

From SMF records, an installation can obtain the total problem program EXCP counts by device and by channel over a given reporting period. (See Chapter 10, “EXCP count,” on page 131 for a detailed explanation of EXCP counts and their use in SMF records.) While this summary does not provide a true picture of the I/O load distribution, it might be helpful in identifying a gross loading imbalance among various devices or channels.

Concurrent device use

An installation can combine the data in the SMF step termination records to report the number of devices per device type that problem programs used during specified intervals. By using this report with the RMF™ device activity records (type 74), an installation can identify periods of the day when the percentage of problem program device use was exceptionally high or low. Further evaluation might show the cause of concurrent device use. If, for example, no more than 12 of the available 16 tape drives are ever in use at the same time, one of the following situations might be responsible:

- Job classes are conflicting.
- Too few initiators are started.

Note: You would find it very difficult to perform tape-allocation analysis for long-running started tasks that dynamically allocate and deallocate tape drives. SMF does not record such information. HSM and DB2® are examples of such started tasks.

Scheduling jobs

Using SMF collected data, it is possible to identify specific intervals when the problem program use of system resources is at an extremely high or low level. By studying the trends in this SMF data, and the relationships among the trends, operations management can establish and enforce its job scheduling procedures. The following examples describe a few potentially useful SMF data-trend analyses for scheduling jobs.

Concurrent job activity

The SMF job initiation and termination records contain the start and stop times of each batch job, job step, TSO/E session, APPC/MVS transaction program, and started task. Using these times, an installation can determine the jobs that are running during the same interval. From a scheduling point of view, a low number of concurrent jobs might indicate the need for establishing more job classes or using more initiators.

Job wait time in initiation and SYSIN/SYSOUT queues

The SMF step termination records have the following three time stamps: step initiation time, device allocation start time, and problem program start time. By calculating the differences in these three times, an installation can identify any abnormally long job step initiation.

In addition, an installation can use the SMF output writer and job purge records to track job wait times in both the SYSIN and SYSOUT queues over a given period of time. If the resulting pattern of wait times shows any significant variances, the installation might want to further investigate the problem areas and perhaps

alleviate them by rescheduling manpower or changing hardware.

Job throughput and turnaround time

By examining the SMF-recorded job accounting fields (such as department number, project number, and user ID), and the SMF-recorded job initiation time and date fields, an installation can create a fairly accurate picture of its job throughput and turnaround time. For instance, one installation might analyze its throughput by calculating the total number of jobs initiated within each 15-minute interval and categorizing its jobs into test and production jobs.

Such an installation could use SMF to determine the time of day when the largest number of production jobs were going through the system. Then, by limiting the number of test jobs during that time, the installation might improve its production turnaround time.

Workload characteristics

SMF provides job and job step information, such as:

- Job/step name
- CPU time
- Elapsed (turnaround) time
- Address space dispatching priority
- JES2/JES3 job selection priority
- JES3 deadline type
- Service units
- Workload name
- Service class name and goal
- Resource group name.

By summarizing this type of SMF information for all jobs and job steps over a given period of time, an installation can establish its workload characteristics and set specific standards for each job class and priority. An installation can use this information to determine whether it is meeting its service goals.

Summarizing direct access volume activity

SMF reports information about problem-program use of direct access volumes. The examples that follow show how operations personnel can use this SMF information to examine problem-program use of direct access storage.

Allocated but unused direct access storage

There are many times when users make allocation requests for direct access storage that exceed the actual requirement. This misuse can be a significant drain on the direct access resource pool. To determine the number of tracks allocated for sequential data sets but not used, an installation can compare the following two fields in the SMF type 15 records:

- The relative track of the last record written in the DASD extension of the DCB/DEB section
- The total number of tracks allocated in the DASD extension of the UCB section

Volume mounting

SMF writes a type 19 record whenever a volume that is defined by a DD statement is demounted. Summarizing these records by volume can give an installation some indication of its direct access volume mounting activity for problem programs.

In addition, an installation can use the SMF type 25 records to summarize the JES3 volume mounting for problem programs. JES3 produces a type 25 record for each job that main device scheduling (MDS) processes. These records show both the number of tape volumes and the number of disk volumes mounted for a job.

Fragmented volumes

Periodic analysis of the SMF type 19 records can be useful in identifying direct access volumes whose unallocated space is fragmented. An installation can identify the volumes that might need reorganization by examining the relationship of the following SMF fields:

- The number of unallocated cylinders and tracks
- The number of cylinders and tracks in the largest unallocated extent
- The number of unallocated extents

An installation can further analyze the unallocated space on direct access volumes by comparing the number of unallocated tracks with the number of available data set control blocks (DSCB). For example, such a comparison might show that even though a given volume still has 50 free tracks, its amount of additional space is limited because there is only one available DSCB.

Evaluating data set activity

SMF produces several records that contain information on data set activity. These records, which include types 4, 14, 15, 17, 18, 30, and 34 can help the installation to answer the following questions:

- What is the average data set size for both tape and direct access devices?
- Is the number of multi-volume data sets significantly large?
- What percentage of all data sets are permanent? What percentage are temporary?
- What percentage of all temporary data sets does VIO (virtual input output) control?
- Which data sets do applications use most frequently?
- How often do applications re-use permanent data sets?
- What is the average block size, block count, and EXCP count for each tape data set?
- How are problem programs using chained scheduling?

The following examples show different ways of evaluating problem-program data set activity from SMF records.

Multiple extents

By checking the “number of extents” field in the UCB section of SMF type 14 and 15 records, an installation can identify direct access data sets that have exceeded their primary allocation and have used secondary allocation. Although useful, secondary allocation might affect system performance and fragment the space on direct access volumes.

One reason to check for data sets that are going into multiple extents is to avoid an X37 abend in a production job the next time it runs. While the job may get the space it needs this time, the next allocation may be on a volume that only has enough space for the primary allocation. The attempt at secondary allocation will fail and waste resources in reruns.

Data set modifications

SMF generates a record each time a user:

- Scratches a non-VSAM data set (type 17).
- Renames a non-VSAM data set (type 18).
- Updates a VSAM data set (type 60).
- Defines a catalog entry for the integrated catalog facility (type 61).
- Alters or renames a catalog entry for the integrated catalog facility (type 66).
- Defines or alters a VSAM catalog entry (type 63).
- Deletes a catalog entry for the integrated catalog facility (type 65).
- Deletes a VSAM catalog entry (type 67).
- Renames a VSAM catalog entry (type 68).

By sorting these records by job name or user ID, an installation can produce a report of the data sets that were defined, modified, or deleted by problem programs during a specified interval. Such a report might be useful in a backup situation, especially when critical data sets have been unintentionally altered or destroyed.

Open/close activity

SMF writes a type 14 or 15 record whenever a data set is closed or processed by EOV. The installation can determine how many times EOV closed or processed a given data set by counting the number of type 14 and 15 records. (For this kind of report, an installation might want to exclude any SMF records for programs such as sorts, where it is known in advance that the open/close activity is significant.)

Blocking factors

By examining the “block size” and “logical record length” fields recorded in the SMF type 14 and 15 records, an installation can identify those data sets that the system is processing with ineffective blocking factors. For instance, assume a data set having 10,000 records is processed unblocked with a logical record length of 80 using a 3380 device. An installation discovering such a data set through SMF might increase its block size to 6160 (77 records) to minimize I/O processing overhead and reduce direct access storage requirements.

Optional services

Although useful, some optional services might hinder system performance if not used appropriately. For example, the write validity check (OPTCD=W) service requires an additional disk rotation to reread the data written for each output block. Similarly, a data set that over uses the chained scheduling (OPTCD=C) service might monopolize the available time on a channel. An installation can use the SMF type 14 and 15 records to ensure that each application that uses an optional service is authorized or justified in using it.

Profiling system resource use

Most SMF records contain general identification fields such as the job name, step name, programmer name, reader start time, and reader start date. By sorting and summarizing SMF data according to these types of fields, an installation can create reports or profiles that show each batch job, job step, and TSO/E session's use of system resources such as:

- CPU time
- Storage
- Paging facilities
- I/O devices
- Service units
- Programming languages

CPU time use

SMF accumulates the job/step CPU time in two separate fields of each job/step termination record: processing time under TCBs and processing time under SRBs. (Chapter 11, "CPU time," on page 133 includes a list of the different times that are included and those that are excluded for these CPU time fields). An installation might want to summarize these time fields by program name over a given interval to compare each program's SRB time with its total CPU time. This summary might identify programs that have excessive interrupt processing.

In addition to CPU time, SMF reports many different times relating to job, job step, APPC/MVS transaction program, and TSO/E session processing including:

- Job/step/TSO/E session/ APPC/MVS work start and stop times
- Job/step/TSO/E session elapsed (turnaround) time
- Device allocation start time
- Problem program start time
- Initiator selection time
- TSO/E logon enqueue time
- Reader start and stop times
- Converter start and stop times
- Run processor start and stop times
- Output processor start and stop times

By examining these time fields, an installation can profile each job's flow through the system. Such a profile might identify jobs that have abnormally long wait times. These jobs are usually good candidates for further detailed examination. An installation might want to use these time fields to determine which jobs are running on the system at the same time.

Storage use and paging activity

The RMF paging activity record (type 71) is written for specified measurement intervals. It contains information about the demands made on the system paging facilities and the use of real and auxiliary storage including. For example: the number of:

- Non-VIO page-ins and page-outs
- Swap-ins and swap-outs
- Address space swap sequences

- VIO page-ins and page-outs

An installation can calculate the system paging rate for each specified interval by dividing the number of page-ins and page-outs by the interval's CPU time. By plotting several paging rates over time, an installation can correlate its workload with its real storage capacity.

SMF reports the following information on storage use and paging activity for each job step and TSO/E session:

- Amount of contiguous real storage reserved for a program specifying ADDRSPC=REAL
- Storage used from the top of the private area (includes the LSQA and the SWA)
- Storage used from the bottom of the private area (includes subpools 0-127, 129-132, 244, 251, and 252)
- Number of non-VIO page-ins and page-outs
- Number of swap-ins and swap-outs
- Number of address space swap sequences
- Number of VIO page-ins and page-outs

An installation can use the SMF field “storage used from the bottom of the private area”, along with the paging statistics for the address space, to estimate a job's use of real storage.

I/O activity

Several SMF records contain useful information about a job, job step, or TSO/E session's I/O activity. For example, the step termination records contain device entries that include the device class, unit type, channel/unit address, and EXCP count. An installation might want to use these SMF fields to isolate those job steps whose I/O activity exceeded certain limits, for example:

- More than a given percentage of the I/O activity was on a certain unit
- More than a given percentage of the I/O activity was on a certain channel path
- More than a given number of data sets on the same direct access volume each had a significantly large number of EXCPs

Service activity

An installation can use the SMF termination records to report the number of service units, transaction active time, and performance group number for each job step and TSO/E session. By comparing this information with the information reported in the RMF workload records (type 72), an installation can calculate the percentage of the total system services that it gives to particular performance groups. Such a comparison might be helpful in determining whether service is being distributed according to the goals of the installation. (See *z/OS MVS Initialization and Tuning Guide* for more information on service, transaction active time, and performance group numbers.)

Programming language use

SMF type 4, 30, and 34 records contain the name of the program used (taken from the PGM= parameter on the EXEC statement). By sorting these records by program name, an installation can determine to what extent users are compiling in various programming languages, such as PL/1, COBOL, and FORTRAN.

Similarly, an installation can produce reports for specific job categories or installation departments by using key program names such as SORTJOBS, PAYROLL, and STANDRDS. By assigning unique step names and evaluating the SMF step termination records (which report those names), an installation can produce reports for each step in a cataloged procedure.

Maintaining system security

An installation can use Resource Access Control Facility (RACF) SMF record types (80, 81 and 83) to:

- Track the total use of a resource.
- Identify the resources that are repeated targets of detected unauthorized attempts to access them.
- Identify the users who make detected unauthorized requests.
- Track the activity of a particular user.
- Perform operator command auditing.

z/OS Security Server RACF Auditor's Guide describes how the installation can request that records be written, and how to use the RACF report writer to look at the results.

RACF provides options that allow your installation to control access to resources and, through SMF records, audit your security controls. Note that many of these options significantly increase the number of SMF records your system generates.

Chapter 2. Setting up and managing SMF

Setting up SMF requires your installation to decide what kind of records it wants SMF to produce or what information it wants SMF to gather. Then you can make decisions about how to set SMF up to meet these requirements. You'll also want to consider the following points in planning your SMF configuration:

1. What records must SMF produce to give you the information your installation wants?
2. What is the environment SMF will run in and how many jobs run through the system? (The number of records generated by SMF depends on the number of jobs.)
3. Are you running program products (such as RMF or DB2) that might require special considerations for SMF? (See "Special considerations for DB2, JES3, and RMF" on page 33.)
4. What is the impact of the system configuration, particularly the type and degree of multiprogramming?
5. How much contention is there for the resources that SMF needs?

Once you've considered some of the basics about what you want SMF to do in your installation, your next decision is whether you want to write your SMF records to log streams or to SMF data sets, or both.

- If you use *SMF data sets*, SMF will write records to the SMF data sets you allocate. The size of the data that the system can write to SMF data sets is constrained by the VSAM control interval size - SMF can only write one control interval at a time. See "Setting Up and Managing SMF Recording to Data Sets" on page 26.
- If you use *SMF logging*, SMF will write records to the system logger managed log streams you set up. SMF can write much larger chunks of data to the log stream than it can to SMF data sets. This has the potential to make writing SMF records faster, which could mean collecting more data.

SMF logging also allows you to group different SMF record types into different log streams defined for different purposes. For example, you might want a log stream for job-related SMF data and one for performance SMF data. What's more, you can write a single record to multiple log streams. Record 30, the common address space work record, for example, might well fit into both the job-related log stream and the performance log stream.

You can set up either:

- Coupling facility log streams, where data is stored in a coupling facility structure and then offloaded to DASD.
- DASD-only log streams, where data is stored in local storage buffers and then offloaded to DASD.

See "Setting up and managing SMF recording to logstreams" on page 18

Now that you've made some basic decisions, use the following topics to set up SMF to meet your installation's requirements:

- "Switching between SMF logging and SMF data set recording" on page 18
- "Setting up and managing SMF recording to logstreams" on page 18
- "Setting Up and Managing SMF Recording to Data Sets" on page 26
- Chapter 3, "Using the SMF dump programs," on page 35

- Chapter 4, “Customizing SMF,” on page 67 for information on how to customize your SMF configuration using the parameters of the SMFPRMxx parmlib member.
- Chapter 4, “Customizing SMF,” on page 67 if you need additional processing from installation-written routines you provide to the SMF installation exits.

Switching between SMF logging and SMF data set recording

It is quite easy to dynamically switch between SMF data set recording and SMF logging:

- First, set up your SMF configuration in SMFPRMxx for both SMF data set recording and SMF logging by defining both SMF data sets (DSNAME parameter) and SMF log streams (LSNAME and DEFAULTLSNAME parameters).
- Now you can toggle between the two methods using the RECORDING(DATASET | LOGSTREAM) SMFPRMxx parameter. There are two ways to do this:
 - Change the RECORDING parameter in a new SMFPRMxx parameter, and then use the SET SMF=xx command to switch the system to using that SMFPRMxx parmlib member.
 - Issue the SETSMF RECORDING(DATASET | LOGSTREAM) command to switch to the method you wish. Note that this method requires that PROMPT(LIST) or PROMPT(ALL) be specified in the active SMFPRMxx parmlib member to allow use of the SETSMF command.

Setting up and managing SMF recording to logstreams

If you choose to record your SMF records in log streams, you must define log streams, coupling facility structure space (for coupling facility log streams) and DASD space for offloading the log stream data. You will also need to define authorization for your log streams. The following topics guide you through the set-up process:

- “Requirements for using SMF logging” on page 19
- “Planning your SMF logging configuration” on page 19
- “Define authorization to SMF logging resources” on page 21
- “Define SMF logging resources in the LOGR and CFRM policy couple data sets” on page 21
- “Managing log streams and SMF log stream data” on page 21
- “Sharing an SMFPRMxx parmlib member in an SMF logging environment” on page 22
- “Using SMF log streams” on page 22
- “Dumping SMF data from log streams” on page 26

Tip: Wait—don’t delete those SYSx.MANx data sets!

If you intend to switch from SMF data sets to SMF logging, *do not delete* any of your SMF data sets. You should retain these as a fallback option. You can add SMF logging to your SMF data set configuration in an SMFPRMxx member and dynamically switch between recording to data sets and log streams. See “Switching between SMF logging and SMF data set recording.”

Requirements for using SMF logging

- Using SMF logging requires a sysplex in monoplex or multisystem mode. This is true for either coupling facility or DASD-only log streams.
- Coupling facility log streams require a coupling facility running coupling facility control code at one of the following levels:
 - CFLEVEL 1 with service level 4.03 or higher.
 - CFLEVEL 2 or higher.
- For either a coupling facility or a DASD-only log stream, system logger requires that you have SMS installed and active at your installation. This is true even if you do not use SMS to manage the DASD log data sets and staging data sets, because system logger uses SMS to allocate data sets, such as the DASD log stream and staging data sets.

For complete information, see "Understand the Requirements for System Logger" in *z/OS MVS Setting Up a Sysplex*.

Planning your SMF logging configuration

The basic decisions for an SMF logging configuration include:

- "Coupling facility or DASD-only log streams?"
- "How many log streams?"
- "Which log streams map to which structures?" on page 20
- "Determine a naming convention for SMF logging resources" on page 20
- "Planning the structure and DASD space you need for SMF logging" on page 20

Coupling facility or DASD-only log streams?

There are two types of log streams, and SMF logging supports both of them:

- Coupling facility log streams, where data is stored in a coupling facility structure and then offloaded to DASD. A coupling facility log stream is ideal for merging SMF data from multiple systems. Note that a systems' SMF id, or "SID", should be unique within the sysplex.
- DASD-only log streams, where data is stored in local storage buffers and then offloaded to DASD. Note the following about DASD-only log streams:
 - DASD-only log streams can only be single-system in scope and only one system can write data to any given DASD-only log stream.
 - DASD-only log streams may experience delays in connecting at IPL because system logger's recovery processing involves offloading data from its interim storage to the offload data sets. These delays do not affect coupling facility log streams.

For complete information, see "Determine the Right Kind of Log Stream" in *z/OS MVS Setting Up a Sysplex*.

How many log streams?

The number of log streams you'll need to define for SMF logging is primarily a matter of how you want to log data at your installation. For example:

- Do you want one log stream per system? You can define either coupling facility or DASD-only log streams for this purpose.
- Do you want to create different log streams that merge specific SMF record types from different systems? For example, you could create a coupling facility log stream for job related data and collect record type 30 data from all the systems in your sysplex.

Basically, this particular decision is up to your installation, but you can also see "Plan the System Logger Configuration" in *z/OS MVS Setting Up a Sysplex*.

Which log streams map to which structures?

For coupling facility log streams, you can assign which log streams write to which coupling facility structures in a variety of ways. For example, you can have multiple log streams sharing one structure, one structure for each log stream, related log streams using a structure, and so forth. Just make sure that you use an approach consistent with other system logger applications and one that makes it easier to recover data in the event of a system, sysplex, or coupling facility failure. For complete information, see "Determine Which Log Streams Map to Which Coupling Facility Structures" in *z/OS MVS Setting Up a Sysplex*.

Planning for log data recovery: When you are deciding which coupling facility structures to associate with each coupling facility log stream, you can plan it so that system logger can easily recover coupling facility data in the case of a system failure, by making sure that each log stream structure has a peer connector, which is a system in the sysplex that can connect to the same structure as the failing system. This step applies to coupling facility log streams only. See "Plan Your Configuration for Log Data Recovery" in *z/OS MVS Setting Up a Sysplex*.

Determine a naming convention for SMF logging resources

- **Log stream names:** A log stream name should be a unique descriptive identifier, made up of one or more qualifiers (each 1 to 8 characters in length) separated by periods, up to the maximum length of 26 characters. For an SMF log stream, the first 7 characters must be 'IFASMF.'

Use the following rules in naming a log stream:

- Each qualifier can contain up to eight numeric, alphabetic, or national (\$, #, or @) characters.
- The first character of each qualifier must be an alphabetic or national character.
- Each qualifier must be separated by periods, which you must count as characters.

If there is an error in the log stream name (for example, if the first 6 characters are not 'IFASMF'), the system issues an error message.

For more guidance on log stream naming conventions, see "Naming Conventions for the Log Stream and DASD Data Sets" in *z/OS MVS Setting Up a Sysplex*.

- **DASD data sets, staging data sets, and coupling facility names:** See "Develop a Naming Convention for System Logger Resources" in *z/OS MVS Setting Up a Sysplex*.

Planning the structure and DASD space you need for SMF logging

For coupling facility structure sizing: See "Determine the Size of Each Coupling Facility Structure" in *z/OS MVS Setting Up a Sysplex*.

For DASD resources: Both coupling facility log streams and DASD-only log streams require DASD space for:

- DASD data sets, where data is offloaded from either the coupling facility or the local storage buffers (for DASD-only log streams).
- Staging data sets, which hold a duplicate of the data from either the coupling facility or local storage buffers in case of data loss or system failures.

To plan DASD resources for both coupling facility and DASD-only log streams, see "Plan DASD Space for System Logger" in *z/OS MVS Setting Up a Sysplex*.

Define authorization to SMF logging resources

IBM suggests that installations use System Authorization Facility (SAF) to control access to system logger resources, such as log streams or coupling facility structures associated with log streams. See "Define Authorization to System Logger Resources" in *z/OS MVS Setting Up a Sysplex*.

Define SMF logging resources in the LOGR and CFRM policy couple data sets

When you define log streams to system logger, you must put information into the LOGR and CFRM couple data sets. Do the following:

- Ensure that you have a formatted LOGR couple data set available. If you use other system logger applications, such as OPERLOG or Logrec, the LOGR couple data set will already be available. See "Format the LOGR Couple Data Set and Make it Available to the Sysplex" in *z/OS MVS Setting Up a Sysplex*.
- Define the log streams and coupling facility structures (for coupling facility log streams) in the LOGR policy couple data set using the administrative data utility (IXCMIAPU) utility. See "Add Information about Log Streams and Coupling Facility Structures to the LOGR Policy" and "LOGR Parameters for Administrative Data Utility" in *z/OS MVS Setting Up a Sysplex*.
 - For a DASD-only SMF log stream, you must specify the LOGR policy MAXBUFSIZE parameter to define the maximum log block size, in bytes, that the system can write to the DASD-only log stream. IBM suggests a MAXBUFSIZE for a DASD-only log stream of 65532. You are required to define a MAXBUFSIZE of at least 33024.
 - For a coupling facility log stream, you must specify the LOGR policy MAXBUFSIZE parameter to define the maximum log block size, in bytes, that the system can write to the log stream assigned to the structure you are defining. IBM suggests that you define a MAXBUFSIZE value between 33024 and 65532. SMF will issue an error message if the MAXBUFSIZE value specified is too small.
- Define the coupling facility structures in the CFRM policy couple data set using the IXCMIAPU utility. See "Define the Coupling Facility Structures Attributes in the CFRM Policy Couple Data Set" and "CFRM Parameters for Administrative Data Utility" in *z/OS MVS Setting Up a Sysplex*.

Managing log streams and SMF log stream data

Once you've set up your SMF log streams, there are a few things you need to know about managing them:

- **How much data and for how long?** System logger can help you manage data retention and archiving of your SMF data in log streams, so that you might not need to dump SMF data from log streams for archiving. Use the RETPD and AUTODELETE parameters in a LOGR couple data set to manage:
 - How much SMF data you keep in a log stream
 - How long you keep SMF data in the log stream
 - How you archive log data

See "Managing Log Data: How Much? For How Long?" in *z/OS MVS Setting Up a Sysplex*.

- **Deleting log streams:** Do you want to remove a log stream from use for SMF logging, or do you want to actually delete the log stream itself?
 - To remove a log stream from use in your SMF logging configuration, create a new SMFPRMxx parmlib member and remove the log stream you no longer wish to use. Then issue the SET SMF=xx command to switch to using that SMFPRMxx parmlib member.
 - To delete a log stream from your installation, you must delete it from the LOGR policy. To accomplish this you can use either:
 - The IXCMIAPU utility for system logger, with DELETE LOGSTREAM NAME(log_stream_name) parameters
 - The IXGINVNT service, with the REQUEST=DELETE TYPE=LOGSTREAM parameters
 - The SETLOGR FORCE,DELETE command with the LSN=name parameter
 See "Deleting Log Streams from the LOGR Policy" in *z/OS MVS Setting Up a Sysplex*.
- **Update a log stream:** You can update certain attributes of a DASD-only or structure-based log stream using either the IXGINVNT macro with REQUEST=UPDATE or the IXCMIAPU utility. See "Updating a Log Stream's Attributes" in *z/OS MVS Setting Up a Sysplex*.
 To add or delete log streams and record types from use in your SMF logging configuration, see "Changing the log streams or record types used for SMF logging" on page 23.

Sharing an SMFPRMxx parmlib member in an SMF logging environment

When you set up SMF logging in a multisystem environment, you specify a log stream for each system. If two or more systems share an SMFPRMxx parmlib member, you can specify symbols in the log stream name (LSNAME parameter) in SMFPRMxx to allow the systems to specify unique values based on the system IDs. For example, suppose two systems share an SMFPRMxx parmlib member that specifies the following:

```
LSNAME(IFASMF&SID..PERF,IFASMF.&SID..JOB,)
```

Suppose the substitution text for the &SID symbol is SYSA on one system and SYSB on the other. When you IPL system SYSA, the log stream names are:

- IFASMF.SYSA.PERF
- IFASMF.SYSA.JOB

When you IPL system SYSB, the log stream names are:

- IFASMF.SYSB.PERF
- IFASMF.SYSB.JOB

For more information about symbols and how to specify them in SMFPRMxx, see the topic on sharing parmlib members and the description of SMFPRMxx in *z/OS MVS Initialization and Tuning Reference*.

Using SMF log streams

During initialization, SMF searches the SMFPRMxx parmlib member to see whether the system is using log streams or SMF data sets to record SMF data. If the member specifies RECORDING(LOGSTREAM), SMF will write the SMF data to the log streams specified on the DEFAULTLSNAME and LSNAME parameters of

the SMFPRMxx member. You can define a default log stream name on DEFAULTLSNAME, and request particular record types go to particular log streams using the TYPE subparameter on the LSNAME parameter.

To use SMF logging, you must specify the following parameters in SMFPRMxx:

- RECORDING(LOGSTREAM) to specify that you wish to write SMF data to log streams rather than SMF data sets.
- LSNAME, to specify a log stream in which you want to write particular SMF record types, specified on the TYPE subparameter, as follows:

```
LSNAME(logstreamname,TYPE({aa,bb}|{aa,bb:zz}|{aa,bb:zz,...}),NOBUFFS(MSG|HALT),
BUFUSEWARN(nn),DSPSIZMAX(nnnnM|nG),COMPRESS(PERMFIX(nnnnM)))
```

- DEFAULTLSNAME, to specify a default log stream to which all SMF data not otherwise specified on LSNAME parameters will be written.

```
DEFAULTLSNAME(logstreamname,NOBUFFS(MSG|HALT),BUFUSEWARN(nn),DSPSIZMAX(nnnnM|nG),
COMPRESS(PERMFIX(nnnnM)))
```

Note that you do not have to specify both DEFAULTLSNAME and LSNAME, but you must specify log streams on one or the other for SMF logging to take place.

If you specify duplicate record types to different log streams, the system will record and dump the duplicate records.

Removing an SMF log stream from use

To stop recording to a particular SMF log stream, create a new SMFPRMxx parmlib member and remove the log stream you no longer wish to use. Then issue the SET SMF=xx command to switch to using that SMFPRMxx parmlib member.

Changing the log streams or record types used for SMF logging

You can dynamically change, add, or remove the log streams you want to use or the record types that you want for your SMF logging configuration by doing one of the following:

- Use the SETSMF LSNAME or SETSMF DEFAULTLSNAME to temporarily add, delete, or edit log streams or record types. Because the change is not in the SMFPRMxx parmlib member, the next IPL will not reflect this change.

Note that this method requires that PROMPT(LIST) or PROMPT(ALL) be specified in the active SMFPRMxx parmlib member to allow use of the SETSMF command.

- Create a new SMFPRMxx member with the changes to the log streams or record types you want. Then use the SET SMF=xx command to begin using that parmlib member. This change will remain in effect across IPLs.

Obtaining records from SMF log streams

You can use either of the following interfaces to extract data from the SMF log stream:

- IFASMF DL, which is the SMF dump utility
- IFASEXIT, which is the SMF Logstream Subsystem Exit

With IFASMF DL, you can dump the data from one or more specified log streams into one or more data sets. For detailed information, see “Using IFASMF DL — the SMF log stream dump program” on page 35.

Using IFASEXIT, you can obtain records from one SMF logstream at a time. IFASEXIT is executed as a logstream exit routine that is invoked in JCL using the SUBSYS DD statement parameter. Figure 3 shows the syntax of this statement.

Notes:

- IBM does not support using IFASEXIT to retrieve records from a logstream under multiple tasks in the same address space.
- If obtaining records from a logstream that contains zEDC compressed data, ensure that the system is properly configured to use zlib. For more information on using zlib, see the "Invoking Unauthorized Interfaces for zEnterprise Data Compression" topic in *z/OS MVS Programming: Callable Services for High-Level Languages*.

```
//ddname DD DSN=log.stream.name,  
// SUBSYS=(LOGR,IFASEXIT,['SUBSYS-options1']  
//      [, 'SUBSYS-options2'])
```

Figure 3. Syntax of SUBSYS JCL for IFASEXIT

log.stream.name

Specifies the name of the log stream to read. The name can be 1 to 26 characters in a data-set-name format.

SUBSYS-options1

Specifies options that are meaningful to all exit routines. For detailed information, see "JCL for the LOGR Subsystem" in *z/OS MVS Programming: Assembler Services Guide*.

SUBSYS-options2

Specifies unique exit routine options. For IFASEXIT, the following parameters are accepted:

SID(*xxxx*)

This is an optional parameter used to indicate that only records written by the operating system with the specified system identifier are to be written to the output data set. The *xxxx* value indicates the system identifier and can be 1 to 4 alphanumeric characters. There is no default value. Only one SID parameter can be specified for each invocation of IFASEXIT. If SID is not specified, records pertaining to all SIDs found in the logstream are written.

SMEP(*hhmm*)

This is an optional parameter used to designate a "smart end point" value. The smart end point value, specified as *hhmm*, results in a calculated time that designates when to discontinue browsing the SMF logstream. By default, if this parameter is not specified, IFASEXIT reads records all the way to the end of the logstream before completing. However, by specifying a Smart End Point value, you can choose to stop reading logstream data at a designated point before the actual end of the logstream. This can shorten the IFASEXIT processing time.

The *hhmm* value describes the number of hours and minutes to use to calculate the smart end point. The total value cannot exceed 2 hours (designated as 0200).

hh A number between 00–02

mm When *hh* is less than 2, this is a number between 00–59; when *hh* is 2, the *mm* value must be 00.

The smart end point value is calculated by adding the value specified by *hmmm* to the time specified in the *T0=ending-time* value of the *SUBSYS-options1* parameter. The smart end point is satisfied when it has been determined that records for all known SIDs, or records for only the SID specified with the *SID(xxxx)* parameter, contain a date and time that is past the calculated smart end point.

Note: It is possible that data is buffered on a z/OS image, and writes to this logstream are delayed. In this case, IFASEXIT may not dynamically detect the image that was buffering data, and may assign a smart end point that is actually prior to when some of these records were actually written ("hardened") to the logstream. These records would remain unselected for output, and would be candidates for selection on the subsequent run of the job that invokes the IFASEXIT exit.

If the following *SUBSYS-options1* parameters are specified, the SMEP parameter is not allowed

- TO=YOUNGEST
- DURATION

NSI

This is an optional parameter used to indicate that SMF records that are compressed with zEDC cannot be decompressed using software decompression. This option results in an error when SMF records compressed with zEDC are found and the zEDC Express feature is unavailable.

Example of using the IFASEXIT LOGR interface exit: Figure 4 shows sample JCL for invoking the IFASEXIT LOGR interface exit. In this example, the IFASEXIT exit is invoked by the IEBGENER utility to extract SMF records from the logstream named IFASMF.MULTISYS.DEFAULT. SMF records selected for output must have been written to the logstream between 1:00 AM on July 19, 2010 to 10:00 PM on October 25, 2010. Only records that were generated on the system with the ID SY1 are selected for output. Browsing of the logstream is discontinued when a record that was generated on the SY1 system is found to have a date and time that is past 11:00 PM on October 25, 2010.

```
//STEP1 EXEC PGM=IEBGENER
//SYSUT1 DD DSNAME=IFASMF.MULTISYS.DEFAULT,
//        LRECL=32756,RECFM=VB,
//        BLKSIZE=32760,
// SUBSYS=(LOGR,IFASEXIT,'FROM=(2010/200,01:00),TO=(2010/298,22:00)',
//        'SID(SY1),SMEP(0100)')
//SYSUT2 DD DSN=BORDONE.SMF.DATA,
//        UNIT=SYSALLDA,
//        DISP=(NEW,CATLG,DELETE),
//        LRECL=32756,RECFM=VB,
//        BLKSIZE=32760,
//        SPACE=(CYL,(90,1),RLSE)
//SYSIN DD DUMMY
//SYSPRINT DD SYSOUT=*
```

Figure 4. Sample JCL to invoke the IFASEXIT LOGR interface

You can obtain records from the SMF logstream by writing a program that uses the IXGCONN and IXGBRWSE system logger services to return SMF data. The data

returned by the IXGBRWSE service for the SMF log stream is mapped by the IFAQUAA mapping macro. For information about the IFAQUAA mapping macro, see *z/OS MVS Data Areas* in *z/OS Internet library* (<http://www.ibm.com/systems/z/os/zos/bkserv/>). See *z/OS MVS Programming: Assembler Services Guide* for information about using system logger services.

Dumping SMF data from log streams

See “Using IFASMF DL — the SMF log stream dump program” on page 35 for a discussion about the SMF dump program, and how to dump SMF data sets.

Flushing the logstream buffer

SMF data is maintained in a buffer area before it's written to the logstream. SMF will be triggered to flush the buffer and "harden" the data to the logstream if any of the following scenarios occur:

- At least a single buffer block is full.
- The time that is coded on the MAXDORM parameter expires.
- In response to a SWITCH SMF, command (see *z/OS MVS System Commands* for more information on the SWITCH command).
- During halt processing (following a Z EOD).

Setting Up and Managing SMF Recording to Data Sets

To record SMF records in SMF data sets, an installation must allocate direct access space and catalog the SMF data sets. **IBM recommends** that you catalog the SMF data sets in the master catalog.

SMF should have a minimum of two data sets for its use, and **IBM recommends** that you run with a minimum of three SMF data sets to ensure availability.

Select DASDs that can handle the volume of data that SMF generates at your installation. If the I/O rate for a device is too slow, SMF places the data it generates in buffers. The buffers will eventually fill, which could result in lost data. Several factors, such as the specific system configuration, the amount of SMF data to be written, the size of SMF buffers (the control interval size), and your installation's report program requirements, determine which device type is most efficient for a particular installation.

Creating SMF Data Sets

You should create at least two SMF data sets to store the system and job-related information that SMF collects. SMF data sets should be RACF-protected. Each one is identified by a 1-44 character data set name.

SMF data-gathering routines fill the data sets one at a time. While the gathering routines write records on one data set, SMF can write out or clear the others. SMF continues to write records while it can find an empty inactive data set when the active data set becomes full (see “Using SMFPRMxx parameters” on page 67).

You can use the DEFINE command of the access methods services utility to create the data sets after system installation (see “Using DEFINE to Create SMF Data Sets” on page 27). Allocate each SMF data set as a single-extent VSAM cluster on a single volume and catalog it in the master catalog. Do not specify secondary space for any of the cluster's components. Specify the same control interval size for all SMF data sets that a particular system will use.

You can specify the data sets to be used for SMF recording on the DSNNAME parameter in the SMFPRMxx parmlib member. In a multisystem environment, you can use system symbols to allow each system to generate unique SMF data set names from a single definition, as explained in the other topics.

Sharing an SMFPRMxx Parmlib Member in a SMF data sets environment

When you set up SMF in a multisystem environment, you might need to specify a recording data set for each system. If two or more systems share an SMFPRMxx parmlib member, you can specify symbols in the recording data set name in SMFPRMxx to allow the systems to specify unique values. For example, suppose two systems share an SMFPRMxx parmlib member that specifies the following:

```
DSNAME(&SID..MAN1,&SID..MAN2,&SID..MAN3)
```

Suppose the substitution text for the &SID symbol is SYSA on one system and SYSB on the other. When you IPL system SYSA, the recording data sets are:

- SYSA.MAN1
- SYSA.MAN2
- SYSA.MAN3

When you IPL system SYSB, the recording data sets are:

- SYSB.MAN1
- SYSB.MAN2
- SYSB.MAN3

If system A and system B are sharing the same catalog, you can easily identify the systems to which the SMF data sets are associated.

For more information about symbols and how to specify them in SMFPRMxx, see the topic on sharing parmlib members and the description of SMFPRMxx in *z/OS MVS Initialization and Tuning Reference*.

Using DEFINE to Create SMF Data Sets

Before you can use an SMF data set, you must both define the data set and pre-format the data set. To define the data set, use the DEFINE access methods services utility. To preformat the data set with dummy records, use the IFASMFDP program. If you do not pre-format an SMF data set, SMF pre-formats it during initialization, which increases the time needed to IPL the system or to switch to a new, previously unused, SMF data set.

Defining an SMF data set: When you define an SMF data set, specify the following options for DEFINE:

- REUSE indicates that the data set can be cleared by the dump program.
- CONTROLINTERVALSIZE indicates the size of the SMF buffer. For the SMF data sets, you can specify ANY value between 0.5 (512 bytes) and 26K (26624 bytes), with certain restrictions. See “Selecting the SMF Data Set Control Interval” on page 29 for more details.
- SHAREOPTIONS has two sub-options (values) that define the level of sharing. The cross-region value must be 2. This indicates that sharing occurs with reading and serialization occurs with writing. The cross-system value is allowed to default.
- NONINDEXED indicates that the entries are entry-sequenced.
- SPANNED indicates that the records can span control intervals.

- SPEED indicates that the data set will not be preformatted by VSAM while IFASMFDP is preformatting. (If SPEED is not selected, VSAM and SMF preformat concurrently.)

Note: SMF does not support extended-addressability VSAM data sets. Thus, the largest SMF data set cannot be larger than 4 gigabytes. For example, you must limit the number of cylinders you request to a maximum of 5800 for a data set on a 3390 device type.

If DATABASE 2 (DB2) performance, serviceability, or audit data is sent to SMF, see “Special considerations for DB2, JES3, and RMF” on page 33.

Figure 5 shows the JCL statements needed to use the DEFINE utility to allocate one SMF data set on a direct access device and catalog it in the system catalog. This figure assumes that an IPL with the NOACTIVE SMF parameter was performed. Each SMF data set must be created according to this example before the first IPL that starts SMF recording.

```
//CREATE EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=A
//SYSIN DD *
    DEFINE CLUSTER (NAME(SYS1.MANX)           +
                  VOLUME(xxxxxx)            +
                  NONINDEXED                  +
                  CYLINDERS(nn)              +
                  REUSE                       +
                  RECORDSIZE(4086,32767)     +
                  SPANNED                     +
                  SPEED                       +
                  CONTROLINTERVALSIZE(nnnn)  +
                  SHAREOPTIONS(2))
/*
```

Figure 5. Sample JCL Statements for Allocating the SMF Data Sets

Preformatting an SMF data set: When you use the IFASMFDP SMF dump program to preformat an SMF data set, use the BUFFERSPACE(81920) AMP=BUFND=nn option parameter on the DD statement specified in the INDD(ddname,OPTIONS(CLEAR)) parameter to improve the performance of the preformatting processing. (The number of data buffers desired is specified by nn, e.g., 10. Note that 10 buffers with a CISIZE of 26K will require 260K of memory.)

The step in Figure 6 preformats the data set. Using IFASMFDP to preformat the data set during the definition process avoids increasing the time required to IPL the system.

```
//FORMAT EXEC PGM=IFASMFDP
//SYSPRINT DD SYSOUT=A
//NEWDS DD DSN=SYS1.MANX,DISP=SHR
//SYSIN DD *
    INDD(NEWDS,OPTIONS(CLEAR))
/*
```

Figure 6. Sample JCL Statements for Preformatting the SMF Data Sets

Regardless of how the SMF data sets are created, the amount of DASD space they require depends on the amount of data generated and how often the data sets are

dumped. The amount of data generated depends on the system work load and the record types selected for writing to the SMF data set.

If SMF data is available from a system similar to your own, you can use the report produced by the SMF dump program to estimate the amount of data generated. Otherwise, you might select a trial size for the data sets and adjust it as necessary. For example, you might start with two SMF data sets, each with 25 cylinders of space on a 3390. If the data sets fill up too quickly and data is lost, you can allocate more space for each data set, or create additional data sets.

Selecting the SMF Data Set Control Interval: The control-interval (CI) size of SMF data sets can range from 0.5K (512 bytes) to 26K (26624 bytes) in size, with certain restrictions. The user specifies the CI size of the SMF data set and the device type when the VSAM data set is defined. Then, VSAM chooses the physical record size of the data set based on the specified CI size and the track size of the specified device type. SMF requires the CI size to equal the physical record size; otherwise, SMF cannot open the data set. Instead, SMF issues an error message to the console in addition to displaying the 'feedback' code.

The default CI size is 4K. Choose a larger value only if the default is so small that it makes the I/O rate too high.

When you choose a CI size, verify that the physical record size that VSAM selects for the DASD you specify equals that CI size. Table 2 shows some examples of valid user CI-size choices and the physical-record sizes that VSAM chooses for specific DASD.

Table 2. Examples of valid user CI-size choices and physical-record sizes VSAM chooses for DASD

Control Interval (CI) Size	Physical Record Size	DASD
16K (16384 bytes)	16K (16384 bytes)	3350
22K (22528 bytes)	22K (22528 bytes)	3380
26K (26624 bytes)	26K (26624 bytes)	3390

Before choosing a CI size, determine the size of your typical SMF record. To avoid wasting DASD storage, select a value that is either an integral multiple or an even divisor of that record size because records that cross a CI boundary when copied to DASD waste DASD storage. For example, if you specify a CI of 26K for a 30K SMF record, the record requires two 26K intervals (or 52K of storage) when copied to DASD, wasting 22K of DASD storage.

The CI size of the first SMF data set that the system opens during an IPL will be the CI size for all SMF data sets for that IPL. If SMF encounters a data set with a different CI size, then the data set is not used, and the system displays a message on the console informing the operator of the problem. A data set that has any error does not go on the list of active data sets. If all data sets fail to be successfully opened and allocated, then 4K (4096 bytes) is chosen as the default CI size for the IPL, and SMF buffers the data.

If you define a new group of SMF data sets with a different CI size, you must re-IPL to use these data sets. When you define an SMF data set, the logical record size must be 10 less than the CI size.

Using SMF data sets

During initialization, SMF searches the SMFPRMxx parmlib member to see whether the system is using log streams or SMF data sets to record SMF data. If the member specifies or defaults to RECORDING(DATASET), SMF searches the list of data sets specified on the DSNNAME parameter of the SMFPRMxx member for the first non-full data set. The search proceeds in the order that the data sets were defined. If a data set is found, that one becomes the ACTIVE data set. The remaining data sets are processed such that any non-empty data set will be set to status of DUMP REQUIRED, and any empty data set will be set to status of ALTERNATE.

If no non-full data set is found, SMF stores the records in its buffers until a data set is made available. To make a data set available, or to empty it, you must run the SMF dump program. For more information, see Chapter 3, "Using the SMF dump programs," on page 35.

The first data set specified on the DSNNAME parameter of the SMFPRMxx parmlib member is called the primary data set and should be allocated on a high performance device; the rest are secondary data sets.

The following examples show the result of a D SMF command issued under different SMF initialization environments.

Example 1: This example shows the results of initialization when there is 1 non-full and 2 empty data sets.

```
d smf
IEE949I 11.05.21 SMF DATA SETS 728
      NAME          VOLSER SIZE(BLKS) %FULL STATUS
P-SYS1.MANA SMFVL1      15000   15  ACTIVE
S-SYS1.MANB SMFVL2         300    0  ALTERNATE
S-SYS1.MANC SMFVL2         300    0  ALTERNATE
```

Example 2: The following example shows the results of initialization when the first data set is full (contains data left over from the previous system IPL) and the second one is non-full.

```
d smf
IEE949I 11.05.21 SMF DATA SETS 728
      NAME          VOLSER SIZE(BLKS) %FULL STATUS
P-SYS1.MANA SMFVL1      15000  100  DUMP REQUIRED
S-SYS1.MANB SMFVL2         300    1  ACTIVE
S-SYS1.MANC SMFVL2         300    0  ALTERNATE
```

Example 3: The following example shows the result when the first data set is non-full, and the second and third data sets contain data left over from previous system IPL.

```
d smf
IEE949I 11.05.21 SMF DATA SETS 728
      NAME          VOLSER SIZE(BLKS) %FULL STATUS
P-SYS1.MANA SMFVL1      15000   20  ACTIVE
S-SYS1.MANB SMFVL2         300    1  DUMP REQUIRED
S-SYS1.MANC SMFVL2         300  100  DUMP REQUIRED
```

Note that SMF will not switch to a partially used data set. In this example, even though SYS1.MANB is only 1% full, SMF will not be able to switch to and record on it until it is dumped and cleared.

Switching the SMF Data Sets

When the SMF data set that is currently being recording on becomes full, SMF does the following:

- Automatically closes the full data set, making it available for dumping.
- Locates the new data set to open by starting at the **top** of the list of data sets specified on the DSNNAME parameter of the SMFPRMxx member and looking for the first completely empty data set.

For example, suppose an installation defined three data sets, DS1, DS2, and DS3, in that order on the DSNNAME parameter of SMFPRMxx. Now, lets say that SMF is writing to DS2, while DS1 and DS3 are empty. When DS2 fills, the installation issues I SMF to switch to an empty data set, SMF will use data set DS1 because it is at the top of the list in SMFPRMxx.

If the first available data set is not completely empty, SMF will begin to store the records in its buffers, even though there might be enough room in that data set for the records it is trying to write, and even though others of the SMF data sets might be completely empty.

Full means that the record which SMF is currently preparing to write out will not fit into the space left on the current SMF data set. It is possible that a data set might become “full” when it is less than 100% filled.

To prepare an SMF data set for dumping *before* it becomes full, the operator uses the SWITCH SMF command. When switching the SMF data sets, an inactive data set cannot become active unless it is empty. Therefore, before issuing the SWITCH command, the operator should use the DISPLAY SMF command to verify that there is at least one alternate data set. If the operator does not make this check, data might be lost.

The HALT EOD command causes a switch of SMF data sets but should be used only if the operator intends to quiesce the system in preparation to shut down. The HALT command should never be used if you intend to keep running, because it closes the system log.

When the operator issues either the HALT EOD or the SWITCH SMF command, the following actions occur:

- A type 19 record is created for each online direct access device (if a type 19 record was specified)
- For a SWITCH SMF command, a type 90 record is created to show the old and new data set names
- The SMF buffer is written to the active SMF data set
- The SMF data sets are switched so that the operator can dump the previously active data set.

Dumping SMF Data Sets

See Chapter 3, “Using the SMF dump programs,” on page 35 for a discussion about the SMF dump program, and how to dump SMF data sets.

Preserving SMF Data

SMF records may be created by SMF itself or by other components of the operating system or certain application programs (such as CICS® and DB2). These records are then passed to SMF, which copies them to buffers and then asynchronously writes

them to the SMF data sets. The control interval size you select for the SMF data sets determines the size of each SMF buffer. To keep real storage use to a minimum, SMF automatically obtains and releases more buffers as SMF activity increases and decreases.

When no output data sets are available for use or when SMF collects data more quickly than it can write records, SMF holds the data in its address space. You must correct the condition causing the problem before SMF uses all of the available storage, or data will be lost.

SMF writes message IEE986E to the console when the percentage of buffers in use in the SMF address space reaches or exceeds the buffer usage warning percentage for all available storage. The buffer usage warning percentage is specified with the BUFUSEWARN parameter (the default value is 25 percent, see "Using SMFPRMxx parameters" on page 67 for more information). The maximum amount of storage available to SMF is set with the BUFSIZMAX parameter (the default is 128M, see "Using SMFPRMxx parameters" on page 67). Until the percentage of buffers in use decreases below the specified BUFUSEWARN value, message IEE986E is redisplayed with updated percentage values as each additional SMF buffer is made ready for use or becomes available. When the percentage of buffers in use decreases below the specified BUFUSEWARN value, the message is deleted. If the percentage of use does not decrease the following possible operator actions can be taken:

1. Use the DISPLAY SMF command to check on the status of the SMF data sets. If no data sets are active or available, use the SMF dump program (IFASMFDP) to clear one and make it available for use."
2. The DISPLAY SMF, O command can be used to determine the maximum amount of buffer space available for SMF to use. If the percentage of buffer space in use is approaching or has reached the 100 percent level of all available storage for SMF buffering, then consider increasing the BUFSIZMAX value to allow for additional SMF record buffering. This action can aid in reducing the loss of SMF record data when there is a spike in SMF recording activity or there is a temporary inhibitor to making the SMF data set available for use. Since the BUFSIZMAX value can also be reduced from its current setting, if an increase is put into effect to handle a temporary constraint condition, then the BUFSIZMAX value can be reduced when the constraint clears.
3. In addition, use the DISPLAY SMF,O command to check the record types that are being collected. Reducing the number of records being collected will slow the allocation and use of the buffers.

After taking the possible actions, if the percentage of use does not decrease SMF will eventually run out of storage for its buffers and stop recording data resulting in lost SMF records. Use the SMF NOBUFFS parameter (see "Using SMFPRMxx parameters" on page 67), to specify what the system is to do in this situation. The possible system actions are:

1. continue processing with the loss of SMF data or
2. enter a restartable wait state.

In the same way, you can control system action when the last available SMF data set is filled using the SMF LASTDS parameter.

Use the MAXDORM parameter to minimize the amount of data lost because of system failure. By specifying MAXDORM, your installation specifies the period of real time that data is permitted to remain in the SMF buffer before it is written. (See "Using SMFPRMxx parameters" on page 67.)

When there is a system failure, data in the SMF address space is lost, because it has not yet been written to a data set. If the events recorded in SMF records are very important to your installation, you should take a system dump that includes the SMF address space. You can then use the Interactive Problem Control System (IPCS) subcommand SMFDATA to read the dump, extract the data in the SMF buffers, and write it to an SMF data set. For more information on SMFDATA, see *z/OS MVS IPCS Commands*.

SMF Halt Processing

Use the HALT command to record statistics before stopping the operating system. After you have stopped all subsystem processing (through the use of the appropriate subsystem command) and the system notifies you that all system activity has completed, you can issue the HALT EOD command to ensure that important job and system statistics and data records in storage are recorded. For more information on the Halt command, see *z/OS MVS System Commands*.

When the operator issues the HALT EOD command, the following actions occur:

- Data in the SMF buffer is written to the active SMF data set or logstream.
- For SMF data set recording, a type 19 record is created for each online direct access device (if a type 19 record was selected to be recorded in the SMFPRMxx parmlib member).
- For SMF data set recording, the SMF data sets are switched so that the operator can dump the previously active data set.

Special considerations for DB2, JES3, and RMF

If your environment includes programs like RMF, JES3, or DB2, you may have to take their requirements into consideration when setting up SMF.

If SMF is processing records for DB2, the volume of data can be quite large. You must ensure an adequate number of VSAM buffers at initialization and sufficiently large SMF data sets.

If you are running a JES3 complex or using RMF, you might need to allocate larger data sets. If DASD space is severely limited in your installation, you might have to dump the data sets more frequently. The same considerations apply if you are using RACF and auditing many security-related events.

For more information, see *Systems Programmer's Guide to: z/OS System Logger* on the following Web site:

<http://www.redbooks.ibm.com/abstracts/sg246898.html?open>

Chapter 3. Using the SMF dump programs

The way you dump SMF data depends on whether you use log stream recording or SMF data set recording. See:

- “Using IFASMF DL — the SMF log stream dump program”
- “Using IFASMF DP — the SMF data set dump program” on page 50

Note that both the dump program for SMF log streams (IFASMF DL) and for SMF data sets (IFASMF DP) support the same exits. See “Parameters for the SMF log stream dump program (IFASMF DL)” on page 36 for IFASMF DL and “Parameters for the SMF data set dump program (IFASMF DP)” on page 51 for IFASMF DP.

See also:

- “Summary activity report” on page 59
- “Reading SMF data sets directly without using the dump programs” on page 64
- “SMFDLEXIT and SMFDPEXIT — Specifying the dump program exit” on page 80

Using IFASMF DL — the SMF log stream dump program

When you wish to dump an SMF log stream to archive the data to a permanent medium such as tape, or so that existing user written analysis routines can run against the dump data sets, you can dump SMF log stream data by issuing the SWITCH SMF command, which first dumps the SMF data in the buffers out to the log streams, and then passes control to the IEFU29L SMF log stream dump exit. The operator can use the SMF log stream dump program, IFASMF DL, to dump the specified log stream data to dump data sets. For more information about the IEFU29L exit, see *z/OS MVS Installation Exits*.

Unlike the SMF data set dump program, there is no CLEAR option on the log stream dump program to delete data. When you use log streams to record SMF data, you can use the ARCHIVE and DELETE options to delete data from the log stream. System logger also allows you to manage log data retention using options on the log stream definition in the LOGR couple data set (specified using the administrative data utility, IXCMIAPU). See “Managing log streams and SMF log stream data” on page 21.

The SMF log stream dump program dumps the contents of one or more log streams to sequential data sets on either tape or direct access devices. The SMF log stream dump program allows the installation to route different records to separate files and produce a summary activity report. This report is described in “Summary activity report” on page 59. The job control language (JCL) to execute the SMF log stream dump program is described in “Running the SMF log stream dump program” on page 45.

During the dump process, the SMF log stream dump program creates two SMF records and writes them to every output data set: a dump header (record type 2) at the beginning of the data set and a dump trailer (record type 3) at the end of the data set.

If problems are encountered, the SMF log stream dump program writes messages, as required, to the SYS PRINT data set. The messages describe the following problems:

- If the SMF log stream dump program is unable to read a log stream, it writes an error message indicating which log stream it could not read.
- If the SMF log stream dump program is unable to open an output data set, it writes an error message indicating which data set it could not open.
- If the SMF buffers become full or the log stream is full or not available, SMF will be in a data lost condition and will be unable to record data. All data created after this condition is encountered will be lost. When this condition occurs, SMF tracks the number of lost records in record type 7 and the operator receives a message stating that data is being lost.

You can use the SET SMF or SETSMF command to have new records issued to an available log stream.

When you use SMF logging, you can write individual record types to multiple log streams if you wish to, producing duplicate records. If you are dumping several log streams that contain the same record types, the dump may contain duplicate records. In addition, if you dump a log stream that contains data from multiple systems, you should coordinate the timezone of the recording system(s) and the dumping system.

The SMF log stream dump program writes a message to the SYS PRINT data set for all input log streams and output data sets and includes the names of the data sets in the message.

When reading SMF records from a log stream that has been compressed with zEDC, IBM recommends that you run the IFASMF DL utility on a system running with z/OS V2R1 or higher that has access to a zEDC Express[®] feature. If the IFASMF DL utility is run with the default NOSOFTINFLATE option and the system does not currently have access to a zEDC Express feature, IFASMF DL halts processing log streams containing zEDC compressed SMF records and generates a return code of 4. When SOFTINFLATE is specified, the IFASMF DL utility uses software decompression to read the records when hardware is unavailable. Note that the SOFTINFLATE option may cause the IFASMF DL utility to use additional time and CPU resources.

Specifying parameters for the SMF log stream dump program

“Parameters for the SMF log stream dump program (IFASMF DL)” lists the parameters that control the processing of the SMF log stream dump program. When you specify the parameters as input to the program, the following syntax rules apply:

- Specify data in columns 1 to 71 of the input statement.
- Blanks are allowed anywhere in the statement except within a keyword or value.
- You can specify comments by enclosing them with /* */ delimiters, but you should start comments at least in column 2. However, the comments do not appear in the SYS PRINT listing.

Parameters for the SMF log stream dump program (IFASMF DL)

LSNAME(*lsname* [, OPTIONS(*data*)])

Specifies the log stream, where *lsname* is the name of the log stream. You can specify the following to specify that you want a log stream to be dumped:

LSNAME(*lsname*)

The OPTIONS subparameter is optional; the *data* value can be:

ARCHIVE

IFASMF DL dumps the data to a data set and then deletes the data from the log stream.

DELETE

IFASMF DL only deletes the data from the log stream without dumping the data.

DUMP

Indicates that the log stream is to be dumped, as does no OPTIONS specification at all. The OPTIONS statement is allowed for easier migration from the data set dump utility.

You can specify any number of LSNAME parameters. If you do not specify the LSNAME parameter, the default is:

```
LSNAME(IFASMF.DEFAULT)
```

The system generates a summary activity report if at least one record was read and written. For more information, see “Summary activity report” on page 59.

OUTDD(*ddname*,*filters*)

Describes the output data set, where *ddname* is the data definition name (DDNAME) of the output data set. If a syntax error occurs in the OUTDD parameter, the job is terminated.

You can specify *filters* to filter the records written to the output data set by record type or subtype, date, start time, or end time. The *filters* value can be any of the following:

TYPE(*list*)

NOTYPE(*list*)

Required parameter that indicates the record types and subtypes to be selected for (TYPE) or excluded from (NOTYPE) dumping. If you specify both TYPE and NOTYPE for the same data set, the first valid specification is used.

The *list* value specifies any record type and subtype or combination of records and subtypes. The record types and subtypes can be specified individually or as a range.

Examples:

- TYPE(2,4:7,9,30(2,4:6)) indicates that record types 2, 4, 5, 6, 7, 9, and subtypes 2, 4, 5, and 6 of record type 30 are to be included in the output data set.
- NOTYPE(30(1,3:5)) indicates that subtypes 1, 3, 4, and 5 of record type 30 are to be excluded from the output data set.

DATE({*yyddd*|*yyyddd*},{*yyddd*|*yyyddd*})

Specifies a date range by which to filter the records written to the output data set. The values for the OUTDD DATE subparameter must equate to a matching set or subset of the corresponding IFASMF DL DATE parameters. The OUTDD start date must be greater than or equal to the global start date, and the OUTDD end date must be less than or equal to the global end date.

Examples: Given that data for the date of 2008342 exists in the logstream:

- The following combination of DATE parameters results in an error because the dates specified in the OUTDD DATE parameter are outside the range of the global dates:

```
LSNAME (IFASMF.MULTSYS.STREAM1)
OUTDD (OUTDD2, ..., DATE(2008342,2008342))
DATE(2008340,2008341)
```

- The following combination of DATE parameters results in records for 2008342 being selected for OUTDD2:

```
LSNAME (IFASMF.MULTSYS.STREAM1)
OUTDD (OUTDD2, ..., DATE(2008342,2008342))
DATE(2008340,2008342)
```

START (hhmm)

Specifies the start time by which to filter the records written to the output data set, where *hh* is the hours and *mm* is the minutes (based on a 24-hour clock). The START value must fall within the range of the IFASMF DL (global) START and END values.

END (hhmm)

Specifies the end time by which to filter the records written to the output data set, where *hh* is the hours and *mm* is the minutes (based on a 24-hour clock). The END value must fall within the range of the IFASMF DL (global) START and END values.

You may specify any number of OUTDD parameters.

See “Running the SMF log stream dump program” on page 45 for examples of specifying various subparameters on the OUTDD statement.

DATE ({yyddd|yyyddd}, {yyddd|yyyddd})

Specifies the start and end date for the period for which records are to be written, where *yy* is the last two digits of the year, *yyyy* is all four digits of the year, and *ddd* is the Julian date. If only the last two digits of the year is specified, the first two digits defaults to 19. For example, DATE(92001,92366) indicates only records from January 1, 1992 to December 31, 1992 are to be written. The value for *ddd* cannot exceed 366. If DATE is specified, values for both the start date and the end date must be included.

If DATE is not specified, the default is: DATE(1900000,2099366)

You can specify DATE in the following ways:

- On a separate input line, as an IFASMF DL global parameter affecting all of the OUTDD statements
- As a subparameter on the OUTDD parameter to customize a specific output data set

Note that dates and times specified are based on the local time on the system running the IFASMF DL program. Use caution when dumping data from a system in a different timezone to ensure the proper data is dumped.

START (hhmm)

Specifies that only those records that were recorded at and after the START time and before the END time are to be written, where *hh* is the hours and *mm* is the minutes (based on a 24-hour clock).

If START is not specified, the default is: START(0000)

You can specify START in the following ways:

- On a separate input line, as an IFASMF DL global parameter affecting all the OUTDD statements.

- As a subparameter on the OUTDD parameter to customize a specific output data set. Specifying START on the OUTDD statements allows you to filter the records read and write different sets to different OUTDDs. In other words, you can create several data sets with different contents from one read of the log stream.

END(*hhmm*)

Specifies that only those records that were recorded after the START time and before the END time are to be written, where *hh* is the hours and *mm* is the minutes (based on a 24-hour clock).

If END is not specified, the default is: END(2400)

You can specify END in the following ways:

- On a separate input line, as an IFASMF DL global parameter affecting all the OUTDD statements.
- As a subparameter on the OUTDD parameter to customize a specific output data set. Specifying END on the OUTDD statements allows you to filter the records read and write different sets to different OUTDDs. In other words, you can create several data sets with different contents from one read of the log stream.

RELATIVEDATE(*unit,n,x*)

Specifies a date range based on the current day to be selected by the IFASMF DL program. The start date of the date range is calculated by going backward *n* time units measured by day, week, or month from the current day, week, or month. The end date of the date range is calculated by moving *x* time units forward from the start date. You can use the RELATIVEDATE option instead of the DATE option. The RELATIVEDATE parameter is not compatible with the DATE parameter.

unit

Indicates the unit used to calculate the start date and end date of the range. The value of *unit* can be BYDAY, BYWEEK, or BYMONTH.

BYDAY

Indicates that the unit is a day.

BYWEEK

Indicates that the unit is a week.

WEEKSTART is an optional parameter that specifies whether the first day of a week in the calculation is Sunday or Monday. If WEEKSTART is not specified, the default is Sunday.

BYMONTH

Indicates that the unit is a month.

- n*** A required parameter that specifies the number of the unit to go backward to calculate the beginning of the range.

Value range:

- When BYDAY is specified: 0-31
- When BYWEEK is specified: 0-26
- When BYMONTH is specified: 0-12

- x*** A required parameter that specifies the number of unit to go forward from the calculated beginning of the range to calculate the ending month of the range.

Value range:

- When BYDAY is specified: 1-31
- When BYWEEK is specified: 1-26
- When BYMONTH is specified: 1-12

WEEKSTART(y)

When the *unit* is specified as BYWEEK, you can use **WEEKSTART(y)** to specify if the first day of the week is Sunday or Monday, where:

y A required parameter that specifies the first day of the week. The value can be either of the following:

SUN A week is defined as the days Sunday through Saturday.

MON A week is defined as the days Monday through Sunday.

This parameter is meaningless in either of the following situations:

- The RELATIVEDATE parameter is not used.
- The *unit* option on the RELATIVEDATE parameter is not BYWEEK.

SID(yyyy)

Specifies that only records written by the operating system with the specified system identifier are written to the output data set, where *yyyy*, which indicates the system identifier, can be any one to four alphanumeric characters. A separate SID parameter can be specified for each system the SMF dump program is expected to handle. If SID is not specified, records pertaining to any operating system are written.

You can only specify SID on a separate input line as a IFASMF DL global parameter affecting all the OUTDD statements. You cannot use it as a subparameter on the OUTDD parameter.

ABEND(RETRY|NORETRY)

Specifies whether the SMF log stream dump program attempts to recover from an abend (abnormal end of task). When specified, this option overrides the SMF parmlib option (DUMPABND).

If you specify RETRY, then the SMF log stream dump program attempts to recover from the abend.

If you specify the NORETRY, then the SMF log stream dump program terminates after the abend has occurred.

You can only specify ABEND on a separate input line as a IFASMF DL global parameter affecting all the OUTDD statements.

USER1(name)

Specifies the *name* of an installation-written exit routine that is given control after each record is read and the counters incremented. The parameter list pointed to by register 1 contains the address of the three-word user work area in word 1, the address of the SMF record in word 2, and the address of the log stream name in word 3. See Figure 27 on page 64.

You can only specify USER1 on a separate input line as a IFASMF DL global parameter.

The exit routine must set a return code in register 15 before passing control back to the SMF log stream dump program. The return codes are as follows:

Code Meaning

00 Normal processing should continue

04 The record should not be written to the output data set.

Any other return code indicates that a problem was encountered and that the SMF log stream dump program is not to invoke the exit again.

USER2 (*name*)

Specifies the *name* of the installation-written exit routine that is given control when the SMF log stream dump program selects a record to be written. The parameter list pointed to by register 1 contains the address of the three-word user work area in word 1, the address of the SMF record in word 2, and the address of the OUTDD *ddname* in word 3. See Figure 27 on page 64.

You can only specify USER2 on a separate input line as a IFASMF DL global parameter.

The return codes are the same as those for USER1.

USER3 (*name*)

Specifies the *name* of the installation-written exit routine that is given control after the output data set is closed. This routine is invoked for each output data set. The parameter list pointed to by register 1 contains the address of the three-word user work area in word 1, the address of the output DCB in word 2, and the address of the OUTDD *ddname* in word 3. See Figure 27 on page 64.

You can only specify USER3 on a separate input line as a IFASMF DL global parameter.

The exit routine must set a return code in register 15 before passing control back to the SMF log stream dump program. The return codes for USER3 are as follows:

Code Meaning

0 Normal processing should continue

Non-0 A problem was encountered and the SMF log stream dump program is not to invoke the exit again.

User records must include a standard record header; the SMF log stream dump program might not flag an error in a record that does not have a standard header.

SMARTENDPOINT

Specifies that processing of input records in the logstream should discontinue after it has been determined that records for all known SIDs contain a date and time that is past the IFASMF DL specified date and time plus the SMARTEPOVER value. The SMARTENDPOINT option will be ignored if no records are found that match the specified search criteria within the logstream.

The default behavior is that IFASMF DL continues to read records all the way to the end of the logstream.

In z/OS V1R9 through z/OS V1R12, this keyword only applies to the DUMP option. Beginning with z/OS V1R13, this keyword applies to all the OPTIONS subparameter (ARCHIVE, DELETE, and DUMP).

SMARTEPOVER (*hhmm*)

This keyword only applies when SMARTENDPOINT is specified; it specifies the amount of time that is added to the end date and time to determine the SMARTENDPOINT time. The value specified in *hhmm* can range from zero (0000) to two hours (0200). The default value is two hours (0200).

To determine which value to specify, take into account the following considerations:

- If no SIDs are specified, you can set this value to double the maximum MAXDORM value of any image recording into the logstream. This allows for the best results from SID auto-detection.
- If all SIDs are specified, this value can be minimized down to zero.
- If only a single SID is recorded into this logstream (for example, in a DASD-only logstream), this value can be minimized down to zero.

For more information about the MAXDORM option, see parmlib member SMFPRMxx in *z/OS MVS Initialization and Tuning Reference*.

FLDSTATS(xxxx)

Prints out a table with statistics related to record flooding. The output table includes statistics for the records that matched the output filters. Each line of the report is for a given record type. Statistics are gathered based on the xxxx value. This value indicates the number of records that make a single interval for the statistical calculations. See Figure 15 on page 48.

SOFTINFLATE|NOSOFTINFLATE

Specifies whether the SMF log stream dump program can decompress SMF records that were compressed with zEDC using software decompression.

NOSOFTINFLATE

The default. Specifies that SMF records compressed with zEDC cannot be decompressed using software decompression. This option results in an error when SMF records compressed with zEDC are found and either the zEDC Express feature is unavailable or the system is running a pre-z/OS V2R1 release.

SOFTINFLATE

Specifies that SMF records compressed with zEDC can be decompressed using software decompression. When a zEDC Express feature is unavailable and at pre-z/OS V2R1 releases, software algorithms are used to decompress SMF records. Note that this may result in greater CPU utilization or a longer job time than expected.

SIGSTRIP|NOSIGSTRIP

Specifies whether or not the log stream dump program includes the signature records in the dump data sets. If no signature records are present in the input logstream, there will be no impact on processing. IFASMF DL will output SMF type 2 subtype 1 and 2 records from a logstream when the logstream contains signature data, unless SIGSTRIP is specified. These records will be in the IFASMF DL statistics as SMF type 2 records that bare being written.

SIGSTRIP

The default. Do not include the signature records in the dump data sets.

NOSIGSTRIP

Include the signature records in the dump data sets.

Notes on the IFASMF DL parameters:

1. If a syntax error occurs in the processing of a parameter, SMF does not process the parameter and sends a message to the SYS PRINT data set. If a parameter is not specified, the default is used. The valid dump parameters specified or used by default are listed in the SYS PRINT data set on completion of the SMF log stream dump program.
2. **START and END parameters:** If the start time is less than the end time, the records selected for any particular day are those records produced after the start time and before the end time. For example, if you specify START(0800),END(2000), SMF selects records during the period indicated by the

shaded area in Figure 7.

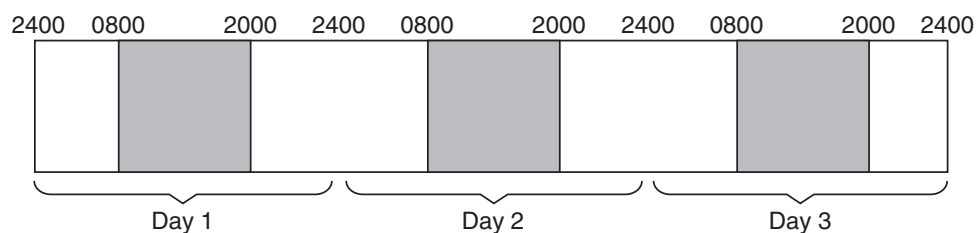


Figure 7. Showing how SMF selects records (START(0800),END(2000))

If the start time is greater than the end time, all records produced between the start time on one day and the end time on the following day are selected. For example, if you specify START(2000),END(0800), SMF selects records during the time period indicated by the shaded area in Figure 8.

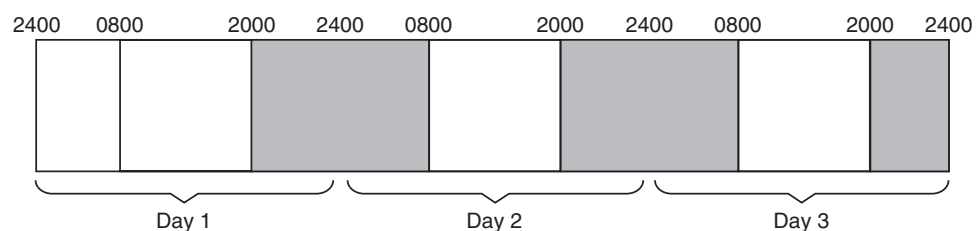


Figure 8. Showing how SMF selects records (START(2000),END(0800))

SMF does not select the records produced between 0800 hours and 2000 hours in any day.

3. **ARCHIVE and DELETE options:** When you specify the ARCHIVE or DELETE option in LSNAME, pay attention to these items:
 - The start date and time of the IFASMF DL is always the start date and time of the log stream. The start time that is specified by the START parameter is ignored. The start date that is specified by DATE or RELATIVEDATE parameter will also be ignored.
 - When using the ARCHIVE option, you can use any combinations of the OUTDD filters except for START and END.
 - For an ARCHIVE request, you must write each record in the log stream up until the end date and time to at least one OUTDD. Ensure that all the types and subtypes and all SIDs are being written to a data set or are specified on the OUTDD parameters. If any record fails to match any specified OUTDD, the request fails.
 - If you specify the DELETE option, everything in the specified log stream is removed, from the start of the log stream up until the end date that is specified by the DATE or RELATIVEDATE parameter and the end time that is specified by the END parameter. The OUTDD statements are not permitted when the DELETE option is used.
 - ARCHIVE and DELETE requests are performed on logger block boundaries. If the logger block timestamp matches the criteria that is specified on the ARCHIVE or DELETE request, all of the records in that block are included in the ARCHIVE or DELETE request. For an ARCHIVE or DELETE request, you might not get data in the time range that is written past the point of your end date and time.

For example, consider the following series of logger blocks where the time shown for each block is the time the block was written:

Block 1	Block 2	Block 3	Block 4
2008.150 2300	2008.151 0100	2008.151 0300	2008.151 0400

and each logger block has SMF records at the following times:

Block 1: 2008.150 2200 to 2008.150 2259

Block 2: 2008.150 2300 to 2008.151 0059

Block 3: 2008.151 0100 to 2008.151 0259

Block 4: 2008.151 0300 to 2008.151 0359

When you specify an ARCHIVE or DELETE option on this log stream where the end date is 2008.150 and the end time is 2400, only the data from Block 1 is dumped and deleted for an ARCHIVE request, and only the data from Block 1 is deleted for a DELETE request.

The MAXDORM option in SMFPRMxx can be used to align the logger block boundaries with the date and time selection criteria of the ARCHIVE and DELETE options. For more information about the MAXDORM option, see parmlib member SMFPRMxx in *z/OS MVS Initialization and Tuning Reference*.

- When using the DELETE and ARCHIVE options, you must ensure that only one instance of the IFASMF DL program is running at a time for a given log stream. Running multiple instances of the dump program against the same log stream leads to unexpected results.
4. **SMARTENDPOINT parameter:** The IFASMF DL SMARTENDPOINT processing can dynamically detect the z/OS images while reading the logstream or use the SID(xxxx) statement to specify the images. If there is the possibility that buffering occurred on an z/OS image that writes to this logstream, IFASMF DL might not dynamically detect the image that was buffering data. To ensure all systems writing to a logstream are accounted for, despite any buffering that has occurred, use the SID(xxxx) option to specify each system of interest.
 5. **RELATIVEDATE parameters:**
 - The date range specified through the RELATIVEDATE parameter is calculated starting at the previous full unit. For example, if you use the RELATIVEDATE parameter with the BYMONTH option on May 15th, the calculation of the time range starts at counting backwards from April, because April is the first previous full month.
 - To get RELATIVEDATE parameter to resolve to the current date, you can use RELATIVEDATE(unit,0,1).
 - If the date range calculated by the RELATIVEDATE parameters exceeds the date and time that the job was submitted, the end date and time in use are set to the date and time that the job was submitted. In this case, a return code X'04' is returned and message IFA834I is issued, indicating the end date and time for the dump.
 - If the date range calculated through the RELATIVEDATE parameter exceeds the year that the job was submitted, the calculated end date is undefined.
 6. **USERx parameters:** The name fields in USER1, USER2, or USER3 specify the name of a load module that the SMF log stream dump program loads and calls at the indicated times. You can either link-edit each exit into an APF-authorized library in LINKLIST (but do not use the AC=1 attribute) or use a //STEPLIB DD card. You must define all the exits you specify to the system in the SMFPRMxx member with the SMFDPEXIT parameter.

Running the SMF log stream dump program

Use the IEFU29L SMF dump exit to initiate the SMF log stream dump program. See *z/OS MVS Installation Exits* for more information about the IEFU29L dump exit.

Sample JCL to execute the SMF log stream dump program is shown in Figure 9. The output is a non-temporary data set on a standard-labeled tape. In this example, the DCB= keyword is not specified, so the SMF log stream dump program assigns the following DCB attributes.

- BLKSIZE=0 (allows the system to determine the optimum block size)
- LRECL=32767
- RECFM=VBS

SMF records created by IBM components never exceed 32,756 bytes. If the data required in a record would cause the record to exceed that length, the component responsible for creating the record would, instead, create multiple (continuation) records, none of which would exceed 32,756 bytes. (See “Record Type 30 (1E) — Common address space work” on page 276 for an example.) SMF records are written as spanned (VBS) in order to conserve storage space by ensuring that each block of data is as full as possible. If you specify DCB parameters on any of the input or output DD statements for IFASMF DL, you must specify RECFM=VBS. You should not specify LRECL=X for reading or writing SMF dump data, because LRECL=X signifies that a single record may be larger than 32,756 bytes, which is not the case for SMF data.

You can specify LRECL=32760 instead of 32767. You can also specify any block size from 4096 to the maximum allowed for the chosen device.

Specify a region size of 0M to avoid abend X'878' reason code 10 or other related abends.

```
//DUMPX   JOB   MSGLEVEL=1
//STEP1   EXEC  PGM=IFASMF DL,REGION=0M
//OUTDD1 DD DSN=BASCAR.LSDEF LT.RECOR66,DISP=(NEW,CATLG,DELETE),
//          UNIT=3390,
//          SPACE=(CYL,(1,1),RLSE),DCB=(LRECL=32760,RECFM=VBS,BLKSIZE=0)
//SYSPRINT DD SYSOUT=A
//SYSIN   DD   *
           LSNAME(IFASMF.MULTSYS.STREAM1,OPTIONS(DUMP))
           OUTDD(OUTDD1,TYPE(0:255),START(0000),END(2400))
           DATE(2007011,2007011)
           SID(SY1)
/*
```

Figure 9. Sample JCL for dumping an SMF log stream to a data set

Dumping multiple SMF log streams

Figure 10 on page 46 shows a sample job using the SMF log stream dump program to dump two SMF log streams to three output data sets.

```

//IFASMF DL JOB accounting information
//STEP EXEC PGM=IFASMF DL,REGION=0M
//OUTDD1 DD DSN=SMFREC.FEWTYPES,DISP=(NEW,CATLG,DELETE)
//OUTDD2 DD DSN=SMF.TYPE10.TYPE255,DISP=(NEW,CATLG,DELETE),DCB=BLKSIZE=32000
//OUTDD3 DD DSN=SMF.TYPE10.TYPE255B,DISP=(NEW,CATLG,DELETE),DCB=LRECL=32760
//SYSPRINT DD SYSOUT=A
//SYSIN DD *
LSNAME(IFASMF.ACCNT1)
LSNAME(IFASMF.ACCNT2)
OUTDD(OUTDD1,TYPE(0,2,10,15:30,33(1)),START(0730),END(1850))
OUTDD(OUTDD2,TYPE(10:255),DATE(2006274,2006334))
OUTDD(OUTDD3,TYPE(10:255))
DATE(2006001,2006366)
SID(308A)
SID(308B)
/*

```

Figure 10. Sample JCL for dumping multiple SMF log streams to multiple output data sets

Figure 10 illustrates the following:

- The DCB= keyword has been coded for the output data set defined by OUTDD2. Any block size 4096 or greater may be specified. Choosing a block size suitable for the device type being used will improve storage resource use. For this job, the data set specified by OUTDD1 will have a system determined block size while the data set specified by OUTDD2 will have a block size of 32000.
- The LRECL= keyword has been coded for an output data set defined as OUTDD3. For this job, the data set specified by OUTDD3 will have an LRECL of 32760. For OUTDD1 and OUTDD2, the LRECL will default to 32767.
- The LSNAME parameters contain the names of two log streams to be dumped.
- The OUTDD parameters contain filters selecting the SMF record types to be dumped:
 - OUTDD1 specifies that you want to dump record types 0, 2, 10, 15-30, and subtype 1 of record type 33 starting with those issued at 7:30 am and ending at 6:50 pm.
 - OUTDD2 specifies that you want to dump record types 10 through 255 from dates 1 October 2006 through 30 November 2006.
 - OUTDD3 specifies that you want to dump record types 10 through 255.
- The DATE parameter specifies that for those OUTDD statements that do not include the DATE subparameter, data from 1 January 2006 through 31 December 2006 is to be written.
- The SID parameters specify that data will be dumped for systems 308A and 308B.

There can be any number of input (LSNAME) or output (OUTDD) parameters in the SMF log stream dump program. The log streams are dumped in reverse order. For example, in Figure 10, two log streams are specified. After the SMF log stream dump program is processed, the output files contain the records from log stream IFASMF.ACCNT2 first, followed by the records from IFASMF.ACCNT1.

After the SMF log stream dump program job shown in Figure 10 runs, information is listed in the SYSPRINT data set, as shown in Figure 11 on page 47.


```

SMF DUMP PARAMETERS
END(2400) -- DEFAULT
START(0000) -- DEFAULT
SID(308B) -- SYSIN
SID(308A) -- SYSIN
DATE(2006001,2006366) -- SYSIN
OUTDD(OUTDD3,TYPE(10:255)) -- SYSIN
OUTDD(OUTDD2,DATE(2006274,2006334),TYPE(10:255)) -- SYSIN
OUTDD(OUTDD1,END(1850),START(0730),TYPE(0,2,10,15:30,33(1))) -- SYSIN
LSNAME(IFASMF.ACCNT2) -- SYSIN
LSNAME(IFASMF.ACCNT1) -- SYSIN

```

Figure 11. Sample information included in SYSPRINT data set

More IFASMF DL examples

Example 1: Figure 12 requests records to be selected from the log stream that were recorded starting from three days before the current date, and ending at the third day, counting from that starting day. To illustrate further, if the JCL in Figure 12 executes on Monday, 28 July 2008 (Julian date 2008.210), the data in the log stream from Friday, 25 July 2008 (Julian date 2008.207) to Sunday, 27 July (Julian date 2008.209) will be dumped.

```

//DUMPX JOB MSGLEVEL=1
//STEP1 EXEC PGM=IFASMF DL,REGION=0M
//OUTDD1 DD DSN=BASCAR.LSDEFLT.RECOR66,DISP=(NEW,CATLG,DELETE),
// UNIT=3390,
// SPACE=(CYL,(1,1),RLSE),DCB=(LRECL=32760,RECFM=VBS,BLKSIZE=0)
//SYSPRINT DD SYSOUT=A
//SYSIN DD *
LSNAME(IFASMF.MULTSYS.STREAM1,OPTIONS(DUMP))
OUTDD(OUTDD1,TYPE(0:255))
RELATIVEDATE(BYDAY,3,3)
SID(SY1)
/*

```

Figure 12. Sample JCL for dumping a SMF log stream with the RELATIVEDATE option

The SMF log stream dump program requires APF-authorization. Running the SMF log stream dump program, as shown in the above JCL examples, preserves the APF-authorization assigned to the SMF log stream dump program. Invoking the SMF log stream dump program in any way other than as shown above (for example, if you invoke the SMF log stream dump program from another program or invoke it as a TSO/E command), might cause it to lose its authorization.

For more information on APF-authorization, see *z/OS MVS Programming: Authorized Assembler Services Guide*. For more information on running authorized programs under TSO/E, see *z/OS TSO/E Customization*.

Example 2: Figure 13 on page 48 illustrates the following:

- The RELATIVEDATE parameter requests records to be selected from the log stream in a date range beginning three weeks before the current week and ending at the second week counting from the starting week.
- The WEEKSTART(MON) parameter specifies that weeks are defined as running from Monday through Sunday, as opposed to Sunday through Saturday (which would be specified as WEEKSTART(SUN)).

```
//DUMPX    JOB    MSGLEVEL=1
//STEP1    EXEC   PGM=IFASMF DL,REGION=0M
//OUTDD1   DD     DSN=BASCAR.LSDEFLT.RECOR66,DISP=(NEW,CATLG,DELETE),
//          UNIT=3390,
//          SPACE=(CYL,(1,1),RLSE),DCB=(LRECL=32760,RECFM=VBS,BLKSIZE=0)
//SYSPRINT DD     SYSOUT=A
//SYSIN    DD     *
LSNAME( IFASMF.MULTSYS.STREAM1,OPTIONS(DUMP))
OUTDD(OUTDD1,TYPE(0:255))
RELATIVEDATE(BYWEEK,3,2)
WEEKSTART(MON)
SID(SY1)
/*
```

Figure 13. Sample JCL for dumping a SMF log stream with the *RELATIVEDATE* and *WEEKSTART* options

If we run the job in Figure 13 on the following days,

- On Sunday, 27 July 2008 (Julian date 2008.209), the calculated range for the output is Monday, 30 June 2008 (2008.182) to Sunday, 13 July (Julian date 2008.195).
- On Monday, 28 July 2008 (Julian date 2008.210), the calculated range for the output is Monday, 7 July 2008 (2008.189) to Sunday, 20 July (Julian date 2008.202).

Example 3: Figure 14 illustrates the following:

- The *RELATIVEDATE* option requests that yesterday's records be selected.
- The *OPTIONS(ARCHIVE)* overrides the start date produced by the *RELATIVEDATE* option, and starts at the beginning of the logstream. All records will then be dumped and deleted until the end of yesterday.
- If such a job is run nightly, the start of the logstream continues to "move" with each subsequent run, because the data that is dumped is also being deleted.

```
//DUMPX    JOB    MSGLEVEL=1
//STEP1    EXEC   PGM=IFASMF DL,REGION=0M
//OUTDD1   DD     DSN=BASCAR.LSDEFLT.RECOR66,DISP=(NEW,CATLG,DELETE),
//          UNIT=3390,
//          SPACE=(CYL,(1,1),RLSE),DCB=(LRECL=32760,RECFM=VBS,BLKSIZE=0)
//SYSPRINT DD     SYSOUT=A
//SYSIN    DD     *
LSNAME( IFASMF.MULTSYS.STREAM1,OPTIONS(ARCHIVE))
OUTDD(OUTDD1,TYPE(0:255))
RELATIVEDATE(BYDAY,1,1)
/*
```

Figure 14. Sample JCL for dumping a SMF log stream with the *RELATIVEDATE* option

Example 4: Figure 15 shows an example to get statistics information for type 90 and 101 records with the *FLDSTATS* parameter. This job will gather statistics individually for type 90 and 101 and also for them combined. Each interval will consist of 1000 records.

```
//RUNSMFDL JOB    MSGLEVEL=(1,1),NOTIFY=&SYSUID
//SMFDMP   EXEC   PGM=IFASMF DL,REGION=0M
//DUMP04   DD     DUMMY
//SYSPRINT DD     SYSOUT=*
//SYSIN    DD     *
LSNAME( IFASMF.SOME.LOGSTREAM,OPTIONS(DUMP))
OUTDD(DUMP04,TYPE(90,101))
FLDSTATS(1000)
```

Figure 15. Sample JCL for dumping a SMF log stream with the *FLDSTATS* option

Example 5: Figure 16 shows an example of retaining signature records with the NOSIGSTRIP parameter.

```
//IFASMF DL JOB MSGLEVEL=(1,1),NOTIFY=&SYSUID
//STEP1 EXEC PGM=IFASMF DL,REGION=0M
//OUTDD1 DD DSN=SMFREC.FEWTPES,DISP=(NEW,CATLG,DELETE),
//SYSPRINT DD SYSOUT=A
//SYSIN DD *
LSNAME(IFASMF.ACNT1)
OUTDD(OUTDD1,TYPE(10:255))
DATE(2014001,2014365)
SID(308A)
NOSIGSTRIP
/*
```

Figure 16. Sample JCL for dumping a SMF log stream with the NOSIGSTRIP option

Return codes from the SMF log stream dump program

The dump utility of the SMF log stream dump program issues the following return codes:

Code Meaning

- 00 The dump was successful; no errors were encountered.
- 04 The dump was unsuccessful for one or more logstreams being processed. Processing continues for subsequent logstreams, if any.
- 08 The dump was unsuccessful; an error terminated processing.

Serialization of the SMF logstream dump program

IFASMF DL obtains an enqueue for each logstream that is being processed. The major name is SYSZSMFL; the minor name is the name of the logstream. Table 3 describes the mode in which the enqueue is obtained depending on the type of request and the type of logstream.

Table 3. How mode is obtained, depending on request and logstream type

LS Type Header	REQUEST TYPE		
	DELETE	ARCHIVE	DUMP
DASD Only	SYSTEM EXCLUSIVE	SYSTEM EXCLUSIVE	SYSTEM SHARED
CF Based	SYSTEMS EXCLUSIVE	SYSTEMS EXCLUSIVE	SYSTEMS SHARED

During initialization, IFASMF DL attempts to obtain all the required enqueues. If any enqueues cannot be obtained, the obtained enqueues up to that point are released and message IFA838I is issued. IFASMF DL retries every 30 seconds to obtain the enqueues and reissues message IFA838I every 5 minutes when it is waiting.

Because IFASMF DL is not waiting on the enqueues, the contention is not shown with a D GRS,C command. Also because IFASMF DL is releasing and attempting to re-obtain the enqueues, the order of execution of two IFASMF DL jobs may change from the order in which they were submitted.

Using IFASMFDP — the SMF data set dump program

When the current recording data set cannot accommodate any more records, the SMF writer routine automatically switches recording from the active SMF data set to an empty SMF data set, and then passes control to the IEFU29 SMF dump exit. The operator is then informed that the data set needs to be dumped. For more information about the IEFU29 exit, see *z/OS MVS Installation Exits*.

SMF data sets cannot be shared across systems. IBM does not recommend that the SMF data set dump program be run from one system in an attempt to clear a SMF data set used by another system.

When notified by the system that a full data set needs to be dumped, the operator uses the SMF data set dump program (IFASMFDP) to transfer the contents of the full SMF data set to another data set, and to reset the status of the dumped data set to empty so that SMF can use it again for recording data.

The SMF data set dump program dumps the contents of multiple VSAM or QSAM data sets to sequential data sets on either tape or direct access devices. The SMF data set dump program allows the installation to route different records to separate files and produce a summary activity report. This report is described in “Summary activity report” on page 59. The job control language (JCL) to execute the SMF data set dump program is described in “Running the SMF data set dump program” on page 55.

The SMF data set dump program copies the input data sets to the output data sets. During the copy process, the SMF data set dump program creates two SMF records and writes them to every output data set: a dump header (record type 2) at the beginning of the data set and a dump trailer (record type 3) at the end of the data set.

If problems are encountered, the SMF data set dump program writes messages, as required, to the SYSOUT data set. The messages describe the following problems:

- The operator must not clear a data set that is being filled. If the operator attempts to clear the active SMF data set, the SMF data set dump program returns a code of X'08' in register 15. The operator can, however, dump the active or alternate data set without clearing it.
- If the SMF data set dump program is unable to open either the input or output data sets, it writes an error message indicating which data set was not successfully opened.
- If all SMF data sets and the SMF buffers become full, SMF will be in a data lost condition (unable to record) until dumping takes place. When this condition occurs, SMF tracks the number of lost records in record type 7 and the operator receives a message stating that data is being lost.

The SMF data set dump program writes a message to the SYSPRINT data set for all input and output data sets and includes the names of the data sets in the message.

Specifying parameters for the SMF data set dump program

Parameters control the processing of the SMF data set dump program. When you specify the parameters as input to the program, the following syntax rules apply:

- Specify data in columns 1 to 71 of the input statement.
- Blanks are allowed anywhere in the statement except within a keyword or value.

- You can specify comments by enclosing them with /* */ delimiters. However, the comments do not appear in the SYSPRINT listing.

“Parameters for the SMF data set dump program (IFASMFDP)” describes the parameters that control IFASMFDP processing.

Parameters for the SMF data set dump program (IFASMFDP)

INDD(ddname,OPTIONS(data))

Describes the input data set, where *ddname* is the data definition name (DDNAME) of the data set and *data* can be any one of the following:

ddname

Specifies the data definition name (DDNAME) of the input data set.

data

Specifies one of the following processing options:

DUMP

Indicates that the input data set is to be read or copied without being reset.

CLEAR

Indicates that the input data set is to be reset and preformatted. The information on the data set is not copied and therefore lost.

ALL

Indicates both the DUMP and CLEAR options.

If INDD is not specified, the default is: INDD(DUMPIN,OPTIONS(ALL))

If DUMP or ALL is specified, a summary activity report is written if at least one record was read or written. For more information, see “Summary activity report” on page 59.

OUTDD(ddname,TYPE(list))

OUTDD(ddname,NOTYPE(list))

Describes the output data set, where *ddname* is the data definition name (DDNAME) of the output data set. TYPE indicates that the record types and subtypes specified in *list* are to be included in the output data set. NOTYPE indicates that the record types and subtypes specified in *list* are to be excluded from the output data set. The *list* variable can be any record type and subtype or combination of records; the record types and subtypes can be specified individually or as a range. For example, TYPE(2,4:7,9,30(2,4:6)) indicates that record types 2, 4, 5, 6, 7, 9, and subtypes 2, 4, 5, and 6 of record type 30 record are to be included in the output data set. NOTYPE(30(1,3:5)) indicates that subtypes 1, 3, 4, and 5 of record type 30 are to be excluded from the output data set.

If OUTDD is not specified, the default is OUTDD(DUMPOUT,TYPE(000:255)), which specifies that all record types and subtypes are to be included in the output data set.

If both TYPE and NOTYPE are specified for the same data set, the first valid specification is used. If a syntax error occurs in the OUTDD option and any INDD option specified ALL, DUMP, or CLEAR, the job is terminated.

DATE({yyddd|yyyyddd},{yyddd|yyyyddd})

Specifies the start and end date for the period for which records are to be written, where *yy* is the last two digits of the year, *yyyy* is the year digits of the year, and *ddd* is the Julian date. If only the last two digits of the year are specified, the first two digits defaults to 19. For example, DATE(92001,92366) indicates only records from January 1, 1992 to December 31, 1992 are to be

written. The value for *ddd* cannot exceed 366. If DATE is specified, both a start value and an end value must be specified.

If DATE is not specified, the default is: DATE(1900000,2099366)

START(*hhmm*)

Specifies that only those records that were recorded at and after the START time and before the END time are to be written, where *hh* is the hours and *mm* is the minutes (based on a 24-hour clock).

If START is not specified, the default is: START(0000)

END(*hhmm*)

Specifies that only those records that were recorded after the START time and before the END time are to be written, where *hh* is the hours and *mm* is the minutes (based on a 24-hour clock). If END is not specified, the default is: END(2400)

SID(*xxxx*)

Specifies that only records written by the operating system with the specified system identifier can be written to the output data set, where *xxxx*, which indicates the system identifier, can be any one to four alphanumeric characters. SID can be specified for each system the SMF data set dump program is expected to handle. If SID is not specified, records pertaining to any operating system are written.

ABEND(RETRY|NORETRY)

Specifies whether the SMF data set dump program attempts to recover from an abend (abnormal end of task). When specified, this option overrides the SMF parmlib option (DUMPABND).

If the RETRY parameter is issued, then the SMF data set dump program attempts to recover from the abend.

If the NORETRY parameter is issued, then the SMF data set dump program terminates after the abend has occurred. The SMF data set dump program overrides NORETRY when, while SMF dump is dumping and clearing the input data set, an ABEND occurs after the input data set has been cleared. In this case, the SMF data set dump program tries to recover from the ABEND to prevent the deletion of the output data set and the loss of SMF data when the SMF data set dump program abnormally ends.

USER1(*name*)

Specifies the *name* of a installation-written exit routine that is given control after each record is read and the counters incremented. The parameter list pointed to by register 1 contains the address of the three-word user work area in word 1, the address of the SMF record in word 2, and the address of the INDD *ddname* in word 3.

The exit routine must set a return code in register 15 before passing control back to the SMF data set dump program. The return codes are as follows:

Code Meaning

00 Normal processing should continue

04 The record should not be written to the output data set.

Any other return code indicates that a problem was encountered and that the SMF data set dump program is not to invoke the exit again.

USER2(*name*)

Specifies the *name* of the installation-written exit routine that is given control

only when the SMF data set dump program selects a record to be written. The parameter list pointed to by register 1 contains the address of the three-word user work area in word 1, the address of the SMF record in word 2, and the address of the OUTDD *ddname* in word 3. This exit is always called by the SMF data set dump program before any records are written.

The return codes are the same as those for USER1.

USER3 (*name*)

Specifies the *name* of the installation-written exit routine that is given control after the output data set is closed. This routine is invoked for each output data set. The parameter list pointed to by register 1 contains the address of the three-word user work area in word 1, the address of the output DCB in word 2, and the address of the OUTDD *ddname* in word 3.

The exit routine must set a return code in register 15 before passing control back to the SMF data set dump program. The return codes for USER3 are as follows:

Code Meaning

0 Normal processing should continue

Non-0 A problem was encountered and the SMF data set dump program is not to invoke the exit again.

FLDSTATS (*xxxx*)

Prints out a table with statistics related to record flooding. The output table includes statistics for the records that matched the output filters. Each line of the report is for a given record type. Statistics are gathered based on the *xxxx* value. This value indicates the number of records that make a single interval for the statistical calculations. See Figure 23 on page 58.

SIGSTRIP | NOSIGSTRIP

Specifies whether or not the SMF data set dump program includes the signature records in the dump data sets. If no signature records are present in the input data set, there will be no impact on processing.

SIGSTRIP

The default. Do not include the signature records in the dump data sets.

NOSIGSTRIP

Include the signature records in the dump data sets. You must specify NOSIGSTRIP in order to use the SIGVALIDATE parameter.

NOSIGVALIDATE | SIGVALIDATE (HASH (*hashmethod*), TOKENNAME (*tokenname*))

Specifies whether or not to validate the digital signature data in the signature records in the input data sets. If no signature records are present in the input data sets, IFASMFDP will fail with return code 8.

NOSIGVALIDATE

The default. Do not validate the digital signature data.

SIGVALIDATE (HASH (*hashmethod*), TOKENNAME (*tokenname*))

Allow the SMF data set dump program to validate the signature records in the input data sets. You must specify a cryptographic public key token name (*tokenname*) and hash method (*hashmethod*) that match the signature data to be verified.

Restrictions:

- If the INDD specifies a VSAM data set, no validation processing is done, IFASMFDP fails with return code 8, and the IFA745I message is issued.

- If the data set being validated contains records from multiple systems and the SID parameter is unspecified or multiple SIDs are specified, IFASMFDP fails with return code 8 and the IFA747I message is issued.

HASH(hashmethod)

Specify the same *hashmethod* as was specified on the RECSIGN parameter in the SMFPRMxx parmlib member that was in use at the time the records were generated. See *z/OS MVS Initialization and Tuning Reference* for more information about the valid hash values.

TOKENNAME(tokenname)

Specify the same token name to be used with the specified hashing technique as was specified on the RECSIGN parameter in the SMFPRMxx parmlib member that was in use at the time the records were generated. See *z/OS MVS Initialization and Tuning Reference* for more information about the token name value.

The SIGVALIDATE parameter also causes the SMF data set dump program to generate a record validation report. For more information, see “IFASMFDP record validation report” on page 63.

If the IFASMFDP program is run in a non-authorized environment, the user ID under which the program runs must have access to both the PKCS #11 callable services (CSFSERV class) and the public key (appropriate User.xxxxxxx resource in the CRYPTOZ class). Errors related to ICSF authorization will be written to the JOBLOG.

Notes on the IFASMFDP parameters:

1. If a syntax error occurs in the processing of a parameter, SMF does not process the parameter and sends a message to the SYSPRINT data set. If a parameter is not specified, the default is used. The valid dump parameters specified or used by default are listed in the SYSPRINT data set on completion of the SMF data set dump program.
2. **START and END parameters:** If the start time is less than the end time, the records selected for any particular day are those records produced after the start time and before the end time. For example, if you specify START(0800),END(2000), SMF selects records during the period indicated by the shaded area shown in Figure 17.

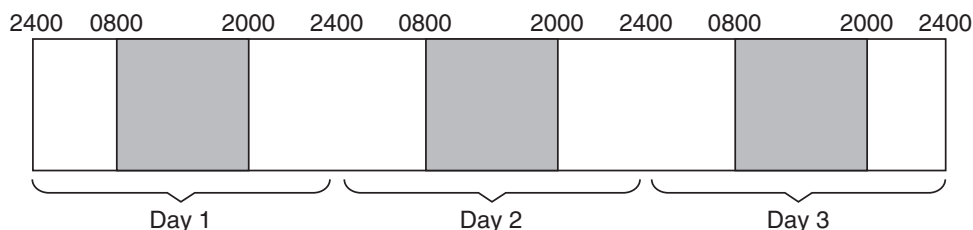


Figure 17. SMF selects records during the period (START(0800),END(2000))

If the start time is greater than the end time, all records produced between the start time and the end time on the following day are selected. For example, if you specify START(2000),END(0800), SMF selects records during the time period indicated by the shaded area shown in Figure 18 on page 55.

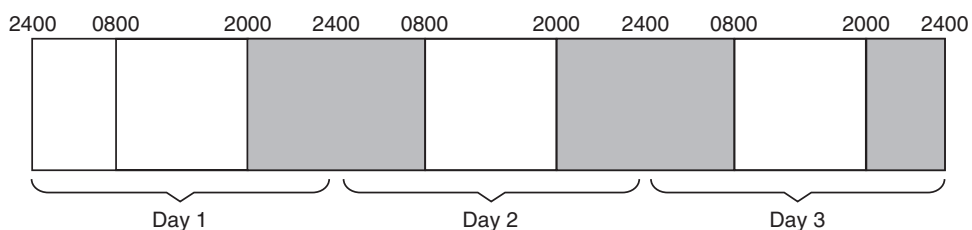


Figure 18. SMF selects records during the period (START(2000),END(0800))

Note that SMF does not select the records produced between 0800 hours and 2000 hours in any day.

3. User records must include a standard record header; the SMF data set dump program might not flag an error in a record that does not have a standard header.
4. **USERx parameters:** The name field in USER1, USER2, or USER3 specifies the name of a load module that the SMF data set dump program loads and calls at the indicated times. You can either link-edit each exit into an APF-authorized library in LINKLIST (but do not use the AC=1 attribute) or use a //STEPLIB DD card. All exits specified must be defined to the system in the SMFPRMxx member with the SMFDPEXIT parameter if the program is being executed in an authorized environment. When IFASMFDP is run in an unauthorized environment, the exits specified with USER1, USER2 and USER3 are not verified against what is in the SMFPRMxx member.

Running the SMF data set dump program

IBM recommends that you use the IEFU29 SMF dump exit to run the SMF data set dump program. When the current recording data set cannot hold any more records, the SMF writer routine automatically switches recording from the active SMF data set to an empty SMF data set, and passes control to the IEFU29 dump exit. This avoids the need for operator intervention. See *z/OS MVS Installation Exits* for more information about the IEFU29 dump exit.

Another method to run the SMF data set dump program is shown (sample JCL) in Figure 19 on page 56. The output is a non-temporary data set on a standard-labeled tape. The operator should record the volume serial number of the output data set so that other jobs can reference it. In this example, the DCB= keyword is not specified, so the SMF data set dump program assigns the following DCB attributes.

- BLKSIZE=0 (allows the system to determine the optimum block size)
- LRECL=32767
- RECFM=VBS

SMF records created by IBM components never exceed 32,756 bytes. If the data required in a record would cause the record to exceed that length, the component responsible for creating the record would, instead, create multiple (continuation) records, none of which would exceed 32,756 bytes. (See “Record Type 30 (1E) — Common address space work” on page 276 for an example.) SMF records are written as spanned (VBS) in order to conserve storage space by ensuring that each block of data is as full as possible. If you specify DCB parameters on any of the input or output DD statements for IFASMFDP, you must specify RECFM=VBS. You should not specify LRECL=X for reading or writing SMF dump data, because LRECL=X signifies that a single record may be larger than 32,756 bytes, which is not the case for SMF data.

You can specify LRECL=32760 instead of 32767. You can also specify any block size from 4096 to the maximum allowed for the chosen device.

```
//DUMPX    JOB    MSGLEVEL=1
//STEP1    EXEC   PGM=IFASMFDP
//DUMPIN   DD     DSN=data set name, DISP=SHR
//DUMPOUT  DD     DSN=SMFDATA,UNIT=tapeaddr,
//          DISP=(NEW,KEEP),LABEL=(,SL),VOL=SER=serial
//SYSPRINT DD     SYSOUT=A
```

Figure 19. Sample JCL for running the SMF data set dump program

Authorization requirements

The CLEAR function of the SMF data set dump program requires APF-authorization. Running the SMF data set dump program shown in the JCL samples in “IFASMFDP examples” preserves the APF-authorization assigned to the SMF data set dump program. Invoking the SMF data set dump program in any way other than as shown in the JCL samples (for example, invoking the SMF data set dump program from another program or invoking it as a TSO/E command) might cause it to lose its authorization.

The DUMP function is permitted in an unauthorized environment. If the CLEAR function is attempted in an unauthorized environment, a message is written indicating the request was denied.

For more information on APF-authorization, see *z/OS MVS Programming: Authorized Assembler Services Guide*. For more information on running authorized programs under TSO/E, see *z/OS TSO/E Customization*.

IFASMFDP examples

Example 1: Figure 20 shows a sample job using the SMF data set dump program to dump and clear an SMF data set (INDD1) and to combine its records with those in an old dumped data set (INDD2) to three data sets.

```
//IFASMFDP JOB    accounting information
//STEP     EXEC   PGM=IFASMFDP
//INDD1    DD     DSN=SYS1.MANB,DISP=SHR
//INDD2    DD     DSN=SMFDATA,UNIT=TAPE,DISP=SHR,VOL=SER=SMFTAP
//OUTDD1   DD     DSN=ALLSMF.TYPE0.TYPE40,DISP=SHR
//OUTDD2   DD     DSN=ALLSMF.TYPE10.TYPE255,DISP=SHR,DCB=BLKSIZE=32000
//OUTDD3   DD     DSN=ALLSMF.TYPE10.TYPE255B,DISP=SHR,DCB=LRECL=32760
//SYSPRINT DD     SYSOUT=A
//SYSIN    DD     *
                INDD(INDD1,OPTIONS(ALL))
                INDD(INDD2,OPTIONS(DUMP))
                OUTDD(OUTDD1,TYPE(0,2,10,15:40))
                OUTDD(OUTDD2,TYPE(10:255))
                OUTDD(OUTDD3,TYPE(10:255))
                DATE(92002,92366)
                SID(308A)
                SID(308B)
/*
```

Figure 20. Sample Job for Dumping SMF Data Sets

Figure 20 illustrates the following:

- The DCB= keyword has been coded for the output data set defined by OUTDD2. Any block size 4096 or greater may be specified. Choosing a block size suitable for the device type being used will improve storage resource use.

For this job, the data set specified by OUTDD1 will have a system determined block size while the data set specified by OUTDD2 will have a block size of 32000.

- The LRECL= keyword has been coded for an output data set defined as OUTDD3. For this job, the data set specified by OUTDD3 will have an LRECL of 32760. For OUTDD2, the LRECL will default to 32767.

There can be any number of input (INDD) or output (OUTDD) files in the SMF data set dump program. The input files are dumped in reverse order unless concatenated under one input file. For example, in Figure 20 on page 56, two input files are specified. After the SMF data set dump program is processed, the output file contains the records from INDD2 first, followed by the records from INDD1.

After the SMF data set dump program job shown in Figure 20 on page 56 runs, the information shown in Figure 21 is listed in the SYSPRINT data set.

```
SMF DUMP PARAMETERS
SID(308A) - SYSIN
SID(308B) - SYSIN
END(2400) - DEFAULT
START(0000) - DEFAULT
DATE(92002,92366) - SYSIN
OUTDD(OUTDD3,TYPE(10:255)) - SYSIN
OUTDD(OUTDD2,TYPE(10:255)) - SYSIN
OUTDD(OUTDD1,TYPE(0,2,10,15:40)) - SYSIN
INDD(INDD2,,OPTIONS(DUMP)) - SYSIN
INDD(INDD1,OPTIONS(ALL)) - SYSIN
```

Figure 21. Example output listed in SYSPRINT data set

Example 2: One method of running the SMF data set dump program is to enter jobs that specify the SMF data set dump program into the system, and hold them on the job queue until a dump is required. Another method is to start a reader to an input stream containing the JCL for the SMF data set dump program. Figure 22 shows two sample procedures (DUMPX and DUMPY) for dumping the SMF data sets to a standard-labeled tape (VOL=SER=SMFTAP) with the operator START command. In both procedures, the default tape specified on the PROC statements is 192. Figure 22 shows sample JCL for adding these procedures to SYS1.PROCLIB.

```
//UPDATE JOB MSGLEVEL=1
//UPDATE EXEC PGM=IEBUPDTE,PARM=NEW
//SYSUT1 DD DSN=SYS1.PROCLIB,DISP=SHR
//SYSUT2 DD DSN=SYS1.PROCLIB,DISP=SHR
//SYSPRINT DD SYSOUT=A
//SYSIN DD DATA
./ ADD NAME=DUMPX,LIST=ALL
//DUMPX PROC TAPE=192
//SMFDMP EXEC PGM=IFASMFDP
//DUMPIN DD DSNNAME=SMFDATA,UNIT=&TAPE,DISP=(MOD,KEEP),
// LABEL=(,SL),VOL=SER=SMFTAP
//SYSPRINT DD SYSOUT=A
./ ADD NAME=DUMPY,LIST=ALL
//DUMPY PROC TAPE=192
//SMFDMP EXEC PGM=IFASMFDP
//DUMPIN DD DSNNAME=SYS1.MANY,DISP=SHR
//DUMPOUT DD DSNNAME=SMFDATA,UNIT=&TAPE,DISP=(MOD,KEEP),
// LABEL=(,SL),VOL=SER=SMFTAP
//SYSPRINT DD SYSOUT=A
./ENDUP
/*
```

Figure 22. Sample procedures for dumping the SMF data sets

Example 3: Figure 23 on page 58 shows an example to get statistics information for type 90 and 101 records with the FLDSTATS parameter. This job will gather

statistics individually for type 90 and 101 and also for them combined. Each interval will consist of 1000 records.

```
//RUNSMFDP JOB MSGLEVEL=(1,1),NOTIFY=&SYSUID
//SMFDP EXEC PGM=IFASMFDP
//DUMP03 DD DSN=SYS1.MANQ,DISP=SHR,VOL=SER=183PAK,UNIT=3390
//DUMP04 DD DUMMY
//SYSPRINT DD SYSOUT=*
//SYSIN DD *
          INDD(DUMP03,OPTIONS(DUMP))
          OUTDD(DUMP04,TYPE(90,101))
          FLDSTATS(1000)
```

Figure 23. Sample JCL for dumping a SMF log stream with the FLDSTATS option

Example 4: Figure 24 shows an example of using the NOSIGSTRIP and SIGVALIDATE parameters to retain and validate the signature records.

```
//IFASMFDP JOB MSGLEVEL=(1,1),NOTIFY=&SYSUID
//STEP EXEC PGM=IFASMFDP
//INDD1 DD DSN=SMFDATA,UNIT=TAPE,DISP=SHR,VOL=SER=SMFTAP
//OUTDD1 DD DSN=ALLSMF.TYPE10.TYPE255,DISP=SHR
//SYSPRINT DD SYSOUT=A
//SYSIN DD *
          INDD(INDD1,OPTIONS(DUMP))
          OUTDD(OUTDD1,TYPE(10:255))
          DATE(14001,14365)
          SID(308A)
          NOSIGSTRIP
          SIGVALIDATE(HASH(hash),TOKENNAME(tokenname))
/*
```

Figure 24. Sample job for dumping SMF data sets with digital signature validation

Return codes from the SMF data set dump program

The dump utility of the SMF data set dump program issues the following return codes:

Code	Meaning
------	---------

- | | |
|----|--|
| 00 | The dump was successful; no errors were encountered. |
| 04 | The dump was successful; one or more errors were detected but processing continued. |
| 08 | The dump was not successful; an error terminated processing. Possible reasons include: <ul style="list-style-type: none"> • Bad return code from an ICSF service • Bad environment (such as lack of authorization for ICSF services) • Bad record found |

Action: Check the SMF record report and signature reports in the JOBLOG.

Reports produced by the SMF dump programs

Depending on the parameters you specify, the SMF dump programs may produce one or more reports.

- “Summary activity report” on page 59
- “Flood statistics report” on page 61
- “IFASMFDP record validation report” on page 63

Summary activity report

The SMF data set dump program creates a summary activity report when the DUMP option was specified for any of the input data sets and at least one record was read or written.

Table 4 shows an example of the summary activity report.

Table 4. Summary activity report

START DATE-TIME 12/28/1992				END DATE-TIME 12/28/1992—23:29:02		
RECORD TYPE	RECORDS READ	PERCENT OF TOTAL	AVG. RECORD LENGTH	MIN. RECORD LENGTH	MAX. RECORD LENGTH	RECORDS WRITTEN
0	13	.01%	35.00	35	35	13
2	0					1
3	0					1
4	25,399	12.90%	265.93	183	935	25,399
5	5,084	2.58%	161.92	130	186	5,084
6	11,526	5.86%	90.80	88	94	11,526
9	60	.03%	24.40	24	32	60
10	368	.19%	48.00	48	48	368
11	331	.17%	24.00	24	24	331
19	2,483	1.26%	68.00	68	68	2,483
20	7,953	4.04%	94.75	74	130	7,953
21	3,115	1.58%	48.00	48	48	3,115
26	10,394	5.28%	236.00	236	236	10,394
31	23	.01%	58.00	58	58	23
34	2,604	1.32%	436.64	183	1,055	2,604
35	2,602	1.32%	130.00	130	130	2,602
40	107,178	54.45%	84.36	74	882	107,178
43	17	.01%	32.00	32	32	17
45	4	.00%	28.00	28	28	4
47	75	.04%	54.53	52	90	75
48	16	.01%	74.53	73	75	16
70	360	.18%	500.00	500	500	360
71	359	.18%	344.00	344	344	359
72	4,308	2.19%	158.05	136	312	4,308
73	360	.18%	795.30	660	926	360
74	1,083	.55%	5,662.60	148	8,128	1,083
75	2,513	1.28%	160.00	160	160	2,513
170	7,689	3.92%	95.00	95	95	7,689
248	790	.40%	86.00	86	86	790
249	108	.05%	86.00	86	86	208
TOTAL	196,825	100%	159.00	24	8,128	196,825
NUMBER OF RECORDS IN ERROR: 3						

The meaning of each heading is:

- **START DATE-TIME** indicates the date and time of the earliest record read, excluding record types 2, 3, and those greater than 127. Under most circumstances this date and time will not equal the date and time of the first record written.
- **END DATE-TIME** indicates the date and time of the latest record read, excluding record types 2, 3, and those greater than 127. Under most circumstances this date and time will not equal the date and time of the last record written.
- **RECORD TYPE** indicates the identifying number of each record type read by the SMF data set dump program.
- **RECORDS READ** indicates the number of input records read for each record type.
- **PERCENT OF TOTAL** indicates the number of records read for each type divided by total number of records read.
- **AVG RECORD LENGTH, MIN RECORD LENGTH, and MAX RECORD LENGTH** indicate, respectively, the average, minimum, and maximum lengths of the records read for each record type.
- **RECORDS WRITTEN** indicates the number of output records written to the output data sets as specified by the SYSIN parameters.
- **TOTAL** indicates the total activity for each column.
- **NUMBER OF RECORDS IN ERROR** indicates the number of records that were not dumped because of errors. There are two types of errors:
 1. Incorrectly-spanned records cannot be read. (A spanned record is larger than the control-interval size of the SMF data set.) These records may be encountered if a physical I/O error occurred on a recording data set while a spanned record was being written. The SMF data set dump program is unable to read incorrectly-spanned records.
 2. Incorrectly-formatted time or date values in record-header fields prevent processing of the record. The record is read but not written or processed. If your installation writes user records (record types ranging from 128 through 255), see “Standard SMF record header” on page 162 for a description of the proper header format.

If there are any records in error, the INDD-name or LSNAME-name, type of error (INVALID TIME OR DATE or INCONSISTENT SPANNED RECORD), record sequence number, and the first 32 bytes of the record (in error) are printed. This processing is performed only for the first 500 records in error of each SMF recording data set. When more than 500 records in error are found, the SMF data set dump program writes message IFA024I to the SYSPRINT data set. Subsequent records in error are not printed, but are counted in the total number of records in error. The record sequence number is the sequential number of the record in the INDD.

Figure 25 on page 61 shows an example of a record in error.

INDD: INDD1

ERROR TYPE: INCONSISTENT SPANNED RECORD
RECORD SEQUENCE NUMBER: 5
005B0000 1E140056 51510092 060FF3F0 F9F0D4E2 E3D1C3D3 F0F00056 4D840092 * j 3090MSTJCL00 *

ERROR TYPE: INVALID TIME OR DATE
RECORD SEQUENCE NUMBER: 1,555,988
021D0000 1E3C0000 00000000 000003F0 F9F04040 4040E4D7 00000028 000A0001 * j 3090 UP *

INDD: INDD2

ERROR TYPE: INCONSISTENT SPANNED RECORD
RECORD SEQUENCE NUMBER: 8
010A0000 DE1E0056 51510092 060FF3F0 F9F0E2E3 C3400001 00000070 00160001 * j 3090STC *

Figure 25. Example of a Record in Error

Flood statistics report

The SMF dump programs create a flood statistics report to display statistics for each record type that matched the specified filters. This report is generated using the FLDSTATS(*xxxx*) keyword.

- Considerations for running the flood statistics report from IFASMFDP:
 - The input SMF records must contain data that is mapped in conformance with the standard SMF header description. IBM record types 0 through 127 will contain standard header data; however, user defined SMF record types 128 through 255 may not contain standard SMF headers. SMF records with header data that do not conform to the standard header layout will not be processed correctly by IFASMFDP for producing the Flood Statistics Report. See the Standard SMF record header section of this manual for details of the SMF record header.
 - The SMF input data must be sorted by the date and time fields in the SMF standard header section. The IBM DFSORT utility parameter for sorting the data in this way would be: SORT FIELDS=(11,4,BI,A,7,4,BI,A)
- Considerations for running the flood statistics report from IFASMFDL:

If multiple logstreams being dumped contain the same data, such as if the same record type was collected into multiple logstreams, interval statistical data will be calculated multiple times for the same data.

Table 5 on page 62 shows an example of the flood statistics report the SMF data set dump program creates.

- The detail lines in the report are generated for record types that contain at least one interval worth of data, as specified by the FLDSTATS parameter.
- The total line reflects “overall,” rather than cumulative, data. These values are aggregated to show interval statistics against all record types, rather than against individual record types, as is shown in the detail lines. As such, the statistics in this line are not directly related to the statistics that are shown in the detail lines.

Table 5. Flood statistics report

START DATE-TIME 05/28/2009-10:45:57				END DATE-TIME 05/28/2009-11:16:47	
RECORD TYPE	TOTAL INTERVALS	LOW INTERVAL	HIGH INTERVAL	AVERAGE INTERVAL	STANDARD DEVIATION
4	11	50	5,286	642	1,404
5	1350	50	5,236	546	1,308
6	14	50	5,176	506	1,263
7	15	40	5,116	383	1,226
8	17	40	5,055	340	1,146
9	19	40	5,015	307	1,082
10	2	40	5,452	2,746	2,706
11	2	40	5,453	2,746	2,706
12	2	40	5,447	2,743	2,703
13	2	40	5,438	2,739	2,699
14	2	1385	5,444	3,415	2,029
15	3	40	5,438	1,842	2,291
16	3	40	5,419	1,836	2,283
17	3	40	5,420	1,837	2,283
20	4	50	5,416	1,745	2,083
26	5	50	5,389	1,402	1,917
30	6	50	5,361	1,181	1,842
TOTAL	130	3	4,737	58	415

The meaning of each heading is:

- **START DATE-TIME** indicates the date and time of the earliest record read, excluding record types 2, 3, and those greater than 127. Under most circumstances this date and time will not equal the date and time of the first record written.
- **END DATE-TIME** indicates the date and time of the latest record read, excluding record types 2, 3, and those greater than 127. Under most circumstances this date and time will not equal the date and time of the last record written.
- **RECORD TYPE** indicates the record type for this record.
- **TOTAL INTERVALS** indicates the number of complete intervals for all record types read, as specified by the FLDSTATS option.
- **LOW INTERVAL** indicates the lowest time it took for a complete interval. This is the interval with the fastest velocity. This value is in tenths of a second.
- **HIGH INTERVAL** indicates the highest time it took for a complete interval. This is the interval with the slowest velocity. This is in tenths of a second.
- **AVERAGE INTERVAL** indicates the average of all the intervals. This value is in tenths of a second.
- **STANDARD DEVIATION** indicates the standard deviation for the set of complete intervals. This value is given in tenths of a second.

Note: If two log streams are dumped and they both include the same data, the intervals are double calculated into the statistics.

IFASMFDP record validation report

When you specify the SIGVALIDATE parameter, the SMF data set dump program (IFASMFDP) creates a record validation report to summarize the validation results. This information can also assist with diagnosis in the event of a validation failure. If a validation failure occurs, a message indicating the reason will also appear in the JOBLOG.

The record validation report displays a line for each SMF record type and subtype processed, by system ID (SID), and indicates whether any validation failures were detected. Each report line includes the time span and counts for records that were verified. Counts include the number of records, groups, and intervals that were processed.

The report also indicates the overall validation success or failure. A signature failure is the highest level of failure. Additional checking is performed to see if the error could be due to a missing or added record, or an entire missing interval of records. Manual examination will be required to determine the root cause of the validation failure.

Figure 26 shows an example of a record validation report.

```
RECORD VALIDATION REPORT FOR SY1
RECORD RECORD VALIDATION VALIDATION START VALIDATION END RECORDS GROUPS INTERVALS
TYPE SUBTYPE FAILURE DATE-TIME DATE-TIME VALIDATED VALIDATED VALIDATED
128 * N 10/23/2014-11:00:00 10/23/2014-13:00:00 60 10 2
145 1 N 10/23/2014-11:00:00 10/23/2014-13:00:00 3 3 2
160 * N 10/23/2014-11:00:00 10/23/2014-13:00:00 10 2 2
VALIDATION SUCCEEDED
```

Figure 26. Sample IFASMFDP record validation report

The fields shown in the record validation report are:

Record type

The SMF record types that were validated.

Record subtype

The SMF record subtypes that were validated.

Validation failure

The validation results for the record type and subtype.

N Validation of this record type and subtype was successful (no failures occurred).

Y Validation of this record type and subtype was unsuccessful (failures occurred).

Validation start date-time

The starting date and time of the time span that was validated.

Validation end date-time

The ending date and time of the time span that was validated.

Records validated

The number of records that were validated.

Groups validated

The number of groups that were validated. A group is a subset of records that were signed together.

Intervals validated

The number of intervals that were validated. An interval is the signature generated on the SMF-configured interval time.

Validation succeeded

This message indicates that all data was successfully validated.

In the event of a validation failure, this message would instead provide more information about the failure.

Reading SMF data sets directly without using the dump programs

Installations that choose to read the SMF data sets directly rather than using the SMF data set dump program, should note that SMF preformats its data sets with dummy records. A dummy record is shorter than any valid SMF record and is easily identified because it contains the characters "SMFEOFMARK". The SMF data set dump program terminates processing when it encounters a dummy record, thereby improving data set processing performance.

Cancelling the SMF data set dump program is not advised, as it can leave the SMF data sets in an unpredictable state.

Programs that access the output of the SMF data set dump program are required to specify the correct logical record length (LRECL) value. Failure to specify a large enough LRECL value might result in an 002 abend. The LRECL value must equal the length of the longest SMF record being created plus four bytes for the record descriptor word (RDW). The LRECL value can be larger than the BLKSIZE value because the records can be segmented.

Your installation can give control during dump processing to three 24-bit addressable installation exit routines. By doing this, you can examine or modify the record before it is written. When each exit is invoked, register 1 contains the address of a three-word parameter list (Figure 27).

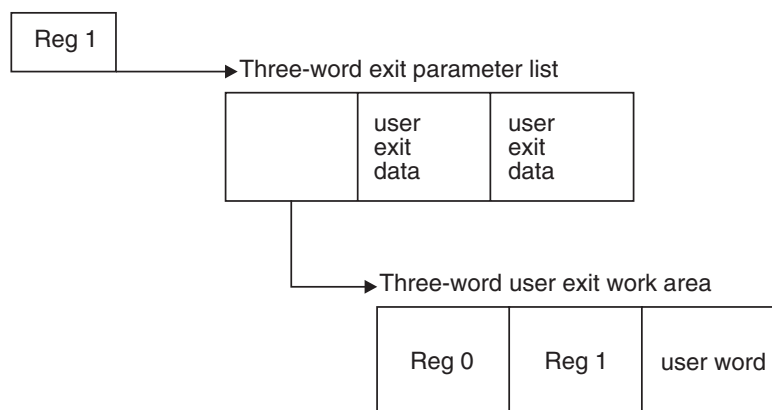


Figure 27. SMF Dump Program Input Parameter Structure

The first word is the address of a three word user work area. The contents of the user work area are:

word 1

register 0 on entry to the SMF data set dump program

word 2

register 1 on entry to the SMF data set dump program

word 3

reserved for user. This word is initialized to zero before the first installation exit is invoked.

The contents of the second and third words depend on the installation exit being invoked. The installation exits are described in "Specifying parameters for the SMF data set dump program" on page 50.

Chapter 4. Customizing SMF

An installation has several ways to customize SMF to meet its needs:

SMF parameters in the SMFPRMxx parmlib member

The SMF parameters are discussed in “Using SMFPRMxx parameters” and are further described in *z/OS MVS Initialization and Tuning Reference*.

Installation-written exit routines

SMF installation exits are discussed in “Using installation exit routines” on page 82 and are further described in *z/OS MVS Installation Exits*. (SMF dump program exits are discussed in Chapter 3, “Using the SMF dump programs,” on page 35.)

Operator commands

These operator commands are discussed in “Using operator commands” on page 85 and are further described in *z/OS MVS System Commands*.

Using SMFPRMxx parameters

For the complete definition of the SMFPRMxx parmlib member including its use, values, and syntax, see *z/OS MVS Initialization and Tuning Reference*.

You can use SMF parameters as follows:

- “PROMPT — Recording status changes” on page 68
- “RECORDING — Specifying whether to write SMF records to data sets or log streams” on page 68
- “DEFAULTLSNAME and LSNAME — Specifying SMF log stream names” on page 68
- “DSNAME — Specifying SMF data set names” on page 69
- “SUBPARM — Passing data to a subsystem” on page 69
- “TYPE and NOTYPE — Selecting and directing SMF records” on page 70
- “SYS and SUBSYS with TYPE and NOTYPE — Selecting subtypes for SMF recording” on page 70
- “SID — Specifying the system identifier” on page 71
- “INTVAL and SYNCVAL — Performing interval accounting” on page 71
- “STATUS — Collecting SMF statistics” on page 75
- “DETAIL or NODETAIL — Performing TSO/E command accounting” on page 75
- “SYS and SUBSYS — Performing started task accounting” on page 77
- “BUFSIZMAX, BUFUSEWARN, DSPSIZMAX, PERMFX, and NOBUFFS — Specifying SMF buffer options” on page 78
- “FLOOD and FLOODPOL — Specifying SMF record flood options” on page 80
- “SMFDLEXIT and SMFDPEXIT — Specifying the dump program exit” on page 80
- “RECSIGN — Digitally signing SMF records” on page 81

PROMPT — Recording status changes

Record type 90 describes changes in SMF and system status. The type 90 record allows the installation to track operator changes (such as the use of the SET SMF or SETSMF command), and with the PROMPT option, to establish availability and reliability statistics for the processor.

If PROMPT (IPLR or ALL) is specified, the system issues a message when an IPL occurs. This message prompts the operator to reply with the time when the failure occurred, the name of the operator, and the reason for the IPL. This information is recorded in a type 90 record.

The installation can set up standard operator replies to the prompt message and then use a post processing program to summarize the reliability data contained in the type 90 record. For example, an operator reply of FTIME=00.00.00 might indicate a scheduled IPL while any other reply indicates a system failure. A standard set of IPL reasons might be provided to the operator, such as scheduled production, processor failure, channel failure, JES failure code *xxxx*, or scheduled test.

Unless otherwise indicated, the SMFPRMxx parameters apply to both SMF log stream recording and data set recording.

RECORDING — Specifying whether to write SMF records to data sets or log streams

To specify whether you want to write SMF records to SMF data sets or to an SMF log stream, use the RECORDING parameter. Specify RECORDING(DATASET), which is the default to write SMF records to SMF data sets specified on the DSNNAME parameter. Specify RECORDING(LOGSTREAM) to write SMF records to log streams specified on the DEFAULTLSNAME or LSNAME parameters.

You can set up your SMFPRMxx parmlib member so that you can switch dynamically between SMF data set recording and SMF logging:

1. First, set up your SMF configuration in SMFPRMxx for both SMF data set recording and SMF logging by defining both SMF data sets (DSNAME parameter) and SMF log streams (LSNAME and DEFAULTLSNAME parameters).
2. Now you can toggle between the two methods using the RECORDING(DATASET | LOGSTREAM) SMFPRMxx parameter in one of the following ways:
 - Change the RECORDING parameter in a new SMFPRMxx parameter, and then use the SET SMF=*xx* command to switch the system to using that SMFPRMxx parmlib member.
 - Issue the SETSMF RECORDING(DATASET | LOGSTREAM) command to switch to the method you wish. Note that this method requires that PROMPT(LIST) or PROMPT(ALL) be specified in the active SMFPRMxx parmlib member to allow use of the SETSMF command.

DEFAULTLSNAME and LSNAME — Specifying SMF log stream names

To specify the log stream names for recording SMF data to log streams, use the DEFAULTLSNAME and LSNAME parameters in the SMFPRMxx parmlib member.

- **LSNAME** allows you to specify a log stream where you want to record particular record types (on the TYPE subparameter). You can specify the same

record type on multiple LSNAMES parameters to specify that the system write the record to all specified log streams. For example, you might have an SMFPRMxx parmlib member containing the following:

```
DEFAULTLSNAME(IFASMF.DEFAULT)
LSNAME(IFASMF.PERF,TYPE(30,89))
LSNAME(IFASMF.JOB,TYPE(30))
RECORDING(LOGSTREAM)
```

This allows you to collect job-related SMF data in the JOB log stream, and performance related SMF data in the PERF log stream. And because record type 30 fits into both categories, you can specify that it is written to both log streams. Note that this arrangement can result in duplicate records being dumped if both log streams are dumped to the same OUTDD output data set by IFASMFDDL.

- **DEFAULTLSNAME** allows you to specify a default log stream name where you want the system to write SMF records if they are not already specified on LSNAMES parameters. When you specify DEFAULTLSNAME (and do not override it with the LSNAMES parameter), records will be queued and written to the default log stream name specified. For example, if SMFPRMxx parmlib member contained the following:

```
DEFAULTLSNAME(IFASMF.DEFAULT)
LSNAME(IFASMF.PERF,TYPE(30,89))
RECORDING(LOGSTREAM)
```

This results in record types 30 and 89 going to log stream IFASMF.PERF, while all other record types will go to default log stream IFASMF.DEFAULT.

DSNAME — Specifying SMF data set names

To specify an SMF data set name, use the DSNAME parameter in the SMFPRMxx parmlib member. This parameter allows the installation to specify the set of data sets to be used for SMF data set recording.

Note that this parameter does not apply to SMF log stream recording, but can be specified as a fallback option when recording to logstreams..

For more information on the DSNAME parameter see *z/OS MVS Initialization and Tuning Reference*.

SUBPARM — Passing data to a subsystem

SMF allows an installation to pass up to 60 characters of information (such as accounting information) to a user-defined subsystem. A user-defined subsystem is any subsystem other than TSO/E, ASCH, STC, JES2, or JES3. You specify the information to be passed in the SUBPARM parameter of the SMFPRMxx parmlib member, and it can be changed by an IPL or by the SET or SETSMF operator command.

To use the information, the subsystem issues the SMFSUBP macro during its initialization to determine if any SUBPARM information is present or if the values have been changed by a subsequent IPL. (See *z/OS MVS Programming: Authorized Assembler Services Reference SET-WTO* for more information.)

In response to a SET command, SMF issues a subsystem interface (SSI) call to all user-defined subsystems that have a SUBSYS or SUBPARM option specified. In response to a SETSMF command, SMF issues an SSI call only to the subsystem specified in the SETSMF command.

SMFPRMxx parameters

When each subsystem receives the SSI call, it must issue the SMFSUBP macro instruction to determine if any values that affect its operation have been changed. If the subsystem determines that the information string passed to it is incorrect, it uses the SMFCHSUB macro instruction to change the information. (See *z/OS MVS Programming: Authorized Assembler Services Reference SET-WTO* for more information.)

TYPE and NOTYPE — Selecting and directing SMF records

Selecting records: You can select the SMF records you want to write by specifying either the type desired (or the types not desired) with the TYPE or NOTYPE option of the SYS or SUBSYS parmlib parameter. If any one of record types 14, 15, 17, 62, 63, 64, 67, or 68 is specified with the TYPE option, data is collected for all of those record types. However, only those records that are selected by a TYPE or NOTYPE request are written to the SMF data set.

Installation-written exit routines IEFU83, IEFU84, and IEFU85 (SMF writer) and IEFACTRT (termination) can control which records are to be written to a SMF data set. After inspecting an SMF record, these routines return a code to the system indicating whether the record is to be written to a SMF data set.

Directing records to a log stream: For SMF log stream recording, you can direct record types to particular log streams using the TYPE subparameter on LSNAME. You still select the records you want to write with the TYPE/NOTYPE option of SYS or SUBSYS. Note that this means that it's possible to specify record types on the TYPE subparameter of LSNAME that the system is not actually recording, because they are not specified on SYS or SUBSYS.

SYS and SUBSYS with TYPE and NOTYPE — Selecting subtypes for SMF recording

Subtype selectivity for SMF records is an option of the TYPE or NOTYPE option on the SYS and SUBSYS parameters used for SMF recording. Subtype selectivity allows more flexibility in post-processing records and helps control the amount of data stored in SMF data sets.

The subtype selectivity function supports only those records which use the standard SMF record header. The header requires the subtype field is at offset 22 (decimal) and the 'subtypes used' bit (bit position 1), of the system indicator byte at offset 4 (decimal), is set to X'1'. SMF processes the record for subtype selectivity when both conditions are met. To see if subtypes are used, check the individual records in Chapter 15, "SMF records," on page 165.

The TYPE option of the SYS and SUBSYS parameter provides inner parentheses to indicate the subtypes to be collected. If subtype selection is not used, the default is all subtypes. The following is an example of how the TYPE option should be used to record subtypes 1, 2, 3, 5, 6, 7, and 8 for the type 30.

```
SYS(TYPE(30(1:3,5:8))) or SUBSYS(STC,TYPE(30(1:3,5:8)))
```

The NOTYPE option provides inner parentheses to indicate the subtypes **not** to be collected. If subtype selection is used, all subtypes except the ones specified are collected. The following is an example of how the NOTYPE option should be used to record all subtypes except subtype 4 for the type 30 record. If subtype selection is not used, the default is to exclude all subtypes of the specified record type.

```
SYS(NOTYPE(30(4))) or SUBSYS(STC,NOTYPE(30(4)))
```


When using the NOTYPE keyword, data is collected for all records **except** those specified. In the preceding example, data is collected for record types 0 through 29; all record 30 subtypes except subtype 4; and records 31 through 255.

Note:

1. If subtype selectivity is specified for a record type for which subtypes are not supported, the specification of the subtype(s) is ignored and the record type is recorded. No warning message is used.
2. The specification of a subtype more than once is accepted. No warning message is issued.
3. If an incorrect range is specified (that is, the first value of the range is greater than the second value) a message IEE948I is issued (for more information, see *z/OS MVS System Messages, Vol 7 (IEB-IEE)*). The operator must then re-enter the valid range.

SID — Specifying the system identifier

The SID parameter specifies the system identifier that is used in all SMF records. For more information on the SID parameter see *z/OS MVS Initialization and Tuning Reference*.

INTVAL and SYNCVAL — Performing interval accounting

With interval accounting, you specify an interval of time called a **recording interval**. This interval repeats continuously, starting when a unit of work begins to run. Interval accounting allows you to periodically save resource data for the work unit so that, if a system failure occurs, not all of this data is lost.

A work unit (such as a job or job step) uses system resources to accomplish its tasks. As the work unit runs, the system saves data about the resources that it uses at the end of each recording interval. If the system fails during an interval, you do not lose the resource data generated through the end of the previous interval. Only the data accumulated since the end of the last interval is lost.

Example: Assume that you specify an interval of 30 minutes, that a job starts at 9:10 and runs for an hour and 42 minutes, and that the job uses resources as follows:

Time	Action	Resources Used Since Job Start	Resources Used During Interval
9:10 AM	job starts	—	—
9:40 AM	30 minute interval ends	7	7
10:10 AM	30 minute interval ends	12	5
10:40 AM	30 minute interval ends	21	9
10:52 AM	job ends	23	2

Interval accounting allows you to see how many resources the work unit used during a specified interval of time. In this example, the job used 5 resources between 9:40 and 10:10 AM (a 30-minute interval) and used a total of 12 resources since the job started.

SMF global recording interval

The SMF global recording interval is a recording interval that is available globally to SMF, RMF, and other requestors. The installation can specify the length of the

SMFPRMxx parameters

SMF global recording interval which can be from 1 through 60 minutes; the system default is 30. Specify the length using the INTVAL parameter.

The SMF global recording interval is always synchronized with some part of the hour. The installation can specify that the SMF global recording interval be synchronized with the beginning of the hour (00 minutes past the hour) or any number of minutes past the hour up to 59; the system default is 00. Specify the synchronization value using the SYNCVAL parameter.

Example: Assume the installation wants the SMF global recording interval to have a length of 15 minutes and to be synchronized with 15 minutes past the hour, which means that the SMF global recording interval ends at 15, 30, 45, and 60 minutes past the hour. To establish this interval, code the following statements in the SMFPRMxx parmlib member:

```
INTVAL(15)
SYNCVAL(15)
```

Listening for the occurrence of accounting events

Using the ENFREQ macro, an authorized program can request notification when SMF accounting events occur. Event code 37 signals SMF accounting events. For more information about how to use the ENFREQ macro, see *z/OS MVS Programming: Authorized Assembler Services Guide*. The macro that maps the parameter list for SMF events is IFAENF37; see *z/OS MVS Data Areas* in *z/OS Internet library* (<http://www.ibm.com/systems/z/os/zos/bkserv/>).

The system signals the end of each SMF global recording interval. SMF, RMF, and any other requestors listening for this event can schedule their own interval accounting function based on the end of this interval.

If the installation changes either the length value (using INTVAL) or the synchronization value (using SYNCVAL) for the SMF global recording interval, the system ends the interval, schedules a new interval based on that changed value. SMF, RMF, and any other requestors that are listening for either event can synchronize with this new interval.

The following table lists all of the SMF accounting events. Each event is identified by an ENFREQ qualifier:

ENFREQ Qualifier	SMF Accounting Event Signalled	Example Application
ENF37Q00	SMF completed initialization or reinitialization.	Start collecting data to generate interval records.
ENF37Q01	SMF ended abnormally.	Defer generating interval records until SMF is reinitialized. See ENFREQ qualifier ENF37Q00.
ENF37Q02	The global interval value (INTVAL option) has changed. The new value is passed as a parameter of the ENF signal.	Make appropriate changes based on recalculated SMF global recording interval.
ENF37Q03	The global synchronization value (SYNCVAL option) has changed. The new value is passed as a parameter of the ENF signal.	Make appropriate changes based on recalculated SMF global recording interval.

ENFREQ Qualifier	SMF Accounting Event Signalled	Example Application
ENF37Q04	The SMF global recording interval ended. The interval end time is passed as a parameter of the ENF signal.	Generate interval records when the SMF global recording interval ends. Note: Use the interval end time on any record that a requestor generates as a result of this signal. Using this time allows for the exact merging of all such records.
ENF37Q05	An SMF global recording interval processing error (which also causes messages IEE500I and IEE068A) occurred.	Stop listening for event code 37.

Using interval synchronization to compare interval records

With interval synchronization, you can directly compare type 23, 30, 32, and 42 interval records generated by SMF with interval records generated by other requestors (such as RMF). These other requestors can use the global interval and synchronization values that SMF provides to generate interval records whenever the SMF global recording interval ends.

For example, your installation might need to compare type 30 SMF records (user-level data) with RMF interval records (system-level data) to gain a more complete picture of system activity during a specified time period. If a performance problem occurred between 9:30 AM and 10:00 AM, you could easily compare RMF interval record data with type 30 SMF record data, because global synchronization allowed them both to be generated at 10:00 AM. Without synchronization, interval records are generated at different times. It is hard to compare records generated at different times because work units use resources unpredictably during an interval.

SMF Type 30 record interval accounting

For type 30 (common address space work) SMF interval records, you can:

- specify interval accounting that is synchronized or not synchronized.
- request interval accounting at the system or subsystem level.

For type 30 SMF records, there are five subtype records that provide address space level accounting information. SMF writes a subtype 1 record at the start of a work unit (such as a job), a subtype 2 record at the end of each recording interval, subtype 3 and 4 records at the end of a job step, and a subtype 5 record at the end of a work unit (such as a job). See “Record Type 30 (1E) — Common address space work” on page 276 for information about when these subtype records are written.

Type 32 SMF record interval accounting: If you have TSO/E installed, SMF generates type 32 (TSO/E user work accounting) records at the same intervals as type 30 records.

Nonsynchronized interval accounting

When interval accounting is not synchronized, SMF generates type 30 interval records for a work unit at the end of a recording interval based on the start time of the work unit. Each interval record contains data for the resources used during the recording interval.

SMFPRMxx parameters

Example: Assume a recording interval of 30 minutes. If a job step starts at 9:10 AM, and runs for two hours and six minutes, then SMF generates a type 30 record at the following times:

```
9:10 AM (job step start time)
9:40 AM (30 minute interval ends)
10:10 AM (30 minute interval ends)
10:40 AM (30 minute interval ends)
11:10 AM (30 minute interval ends)
11:16 AM (job step completion time)
```

Changes to interval value: If the SET SMF or SETSMF command changes the interval value, the new interval does not take effect until the current interval expires. If interval recording is not active when a job starts, there is no interval recording for that job. If interval recording is turned off and then back on with a SET command, interval recording for a job starts at the new value, at the beginning of the next job step.

Synchronized interval accounting

When interval accounting is synchronized, SMF generates interval records for a work unit based on the end of the SMF global recording interval, rather than the start time of a job. Interval synchronization is particularly useful when you want to compare interval records generated by SMF, RMF, and other requestors.

Example: Assume the SMF global recording interval has a length of 30 minutes and is synchronized with 15 minutes past the hour. If a job starts at 9:10 AM, and runs for two hours and six minutes, then SMF generates a type 30 record at the following times:

```
9:10 AM (job start time)
9:15 AM (SMF global recording interval ends)
9:45 AM (SMF global recording interval ends)
10:15 AM (SMF global recording interval ends)
10:45 AM (SMF global recording interval ends)
11:15 AM (SMF global recording interval ends)
11:16 AM (job completion time)
```

Changes to interval value: If the SET SMF or SETSMF command changes the interval value, then the current interval ends immediately and the new interval takes effect. If interval recording is not active when a job starts, there is no interval recording for that job. If interval recording is turned off and then back on with a SET command, interval recording for a job starts at the new value, at the beginning of the next job step.

If either INTVAL or SYNCVAL are changed, then the system reschedules the SMF global recording interval at that time.

Specifying a system or subsystem recording interval

You can request a recording interval at the system level by using the SYS INTERVAL parameter (or at the subsystem level using SUBSYS INTERVAL) to:

- Specify an interval value, between 1 second and 24 hours, in *hhmmss* format.
- Request that SMF use the global interval value specified on the INTVAL parameter. Specify the SMF,NOSYNC subparameter.
- Request that SMF synchronize with the SMF global recording interval. Specify the SMF,SYNC subparameter.

If you do not request a value for a subsystem, the subsystem takes its interval value from SYS INTERVAL.

Example 1: Assume you want a recording interval of 30 minutes, that is not synchronized, for started tasks (such as VTAM®). SMF generates a type 30 record at 30-minute intervals after the beginning of every started task step if you specify:

```
SUBSYS(STC,INTERVAL(003000))
```

Example 2: Assume you set the global interval value to 15 minutes, and set the global synchronization value to 15 minutes past the hour. These values mean that the SMF global recording interval will end at 15, 30, 45, and 60 minutes past the hour. You want jobs of type “STC” (started tasks and system address spaces) to have type 30 records generated every 15 minutes. Therefore, you request that “STC” type jobs use the global interval and synchronization values. Code the following statements in the SMFPRMxx parmlib member:

```
INTVAL(15)
SYNCVAL(15)
SUBSYS(STC,INTERVAL(SMF,SYNC))
```

STATUS — Collecting SMF statistics

Type 23 records collect SMF statistics. Your installation can track SMF recording with the type 23 record, which is generated at the expiration of the recording interval specified in the STATUS parameter. Use the STATUS parameter to either:

- Specify an interval value, between 1 second and 24 hours, in *hhmmss* format.
- Request that SMF use the global interval value specified on the INTVAL parameter. Specify the SMF,NOSYNC subparameter.
- Request that SMF synchronize with the SMF global recording interval. Specify the SMF,SYNC subparameter. See “SMF Type 30 record interval accounting” on page 73 for information about interval accounting and synchronization.

DETAIL or NODETAIL — Performing TSO/E command accounting

Type 32 records allow the installation to keep track of individual TSO/E commands entered during a TSO/E session, during recording interval, or in a command list (CLIST). If no commands are entered during a reporting interval, no record is created. SMF writes record type 32 when a TSO/E user logs off or when an SMF recording interval expires.

Note: To use the type 32 record and TSO/E command accounting, you must have installed TSO/E Version 1 for MVS/XA or Version 2 for MVS/ESA.

The installation can specify, through the DETAIL parameter in SMFPRMxx, that the record is to include the total CPU time under task control blocks (TCB) and SRBs and the total number of TPUTs, execute channel programs (EXCP), transactions, and TGETs associated with the command.

Many TSO/E commands, such as EDIT, have subcommands. These subcommands are counted in the type 32 record. However, these subcommands are not recorded as entered at the terminal. They are recorded with a prefix that associates the subcommand with a command. For example, under EDIT, the INPUT subcommand is recorded as EDINPUT. The prefixes are described in other topics.

The record includes all TSO/E commands attached directly by the terminal monitor program (TMP). However, some TSO/E products or, possibly, user applications currently do not count TSO/E commands and thus do not support the

SMFPRMxx parameters

type 32 record. For example, the Interactive Problem Control System (IPCS) does not count TSO/E commands but TSO/E subcommands are counted.

The TSO/E command interface lets a user application avoid this problem. The user application must take the following steps both before each TSO/E command (or subcommand) to be counted begins and after the command completes:

1. Load register 1 with the address of a parameter list containing a four-byte flag word. The parameter list must start on a word boundary. The high-order bit of this word is set as follows:
 - 1 -- indicates the start of a command
 - 0 -- indicates that the command has completed.

Following the four-byte flag word is an eight-byte command (or prefixed-subcommand) name field. The command must be left-justified and padded with blanks.

- Load register 15 with X'19'
- Issue SVC 109.

The user must include the name of the command or prefixed-subcommand in module IEEMB846 before invoking the interface.

The IBM-supplied module IEEMB846, contains a partial list of the TSO/E commands, prefixed subcommands, and aliases that are counted in the type 32 record. All other commands are counted in the '***OTHER' field.

An installation can use the IBM-supplied IEEMB846 or create its own module in SYS1.LINKLIB. The SMFTSOCM member of SYS1.SAMPLIB is provided so that the user can add or delete commands for the installation. The SMFTSOCM member contains the source code for the IBM-supplied IEEMB846. The format of IEEMB846 is:

Offset	Length	Content
0	4	Number of commands in the module
4	4	Reserved
8	8	Command name field
16	8	Command name field
.	.	.
.	.	.
.	.	.
.	.	.

Each command name field is 8 characters long. Therefore, each name must be left-justified and padded with blanks. The commands can appear in any order. However, by placing the most frequently used commands near the beginning of the module and deleting the commands that are not used, an installation can reduce the average time SMF needs to find the command. For example, after the following CSECT is link-edited into SYS1.LINKLIB, the ALLOCATE, ALLOC, SEND and GETINPUT commands are recorded in record type 32. (The GETINPUT command is a locally-defined command.)

```
IEEMB846  CSECT
          DC    F'4'
          DC    F'0'
          DC    CL8'ALLOCATE'
```

```

DC    CL8'ALLOCbbb'
DC    CL8'SENDbbbb'
DC    CL8'GETINPUT'
END

```

Note: Both ALLOCATE and ALLOC, its alias, are specified. If ALLOC, or any other alias, is not explicitly specified in IEEMB846, each use of the alias is counted under '***OTHER' and not under the corresponding command.

When adding subcommand names to IEEMB846, use the following prefixes:

Command	Subcommand Prefix
ACCOUNT	AC
CONSOLE	CN
EDIT	ED
OUTPUT	O
OPERATOR	OP
TEST	T
User-defined	U

If the length of the prefix plus the subcommand name exceeds eight characters, the subcommand name is truncated on the right. For example, the CONTINUE subcommand of OUTPUT appears in IEEMB846 as OCONTINU.

The subcommand prefix "U" allows an installation to collect data on user-defined subcommands while they use the TSO/E Command interface. An installation that has more than one user-defined command processor can add a one-digit qualifier (0-9, A-Z) to the prefix to differentiate between user commands.

SYS and SUBSYS — Performing started task accounting

The system handles accounting for started tasks much as it does for batch jobs and TSO/E work. Started task accounting includes:

- Accumulating CPU time under started task TCBs and SRBs
- Counting started task I/O operations
- Invoking SMF exits for started tasks
- Creating SMF records for started task activity.

For accounting purposes, the system sees the following as started tasks:

- The master address space
- The system address spaces
- The mounts
- The job entry subsystem
- The tasks initiated with a START command (at the operator console as started tasks).

SMFPRMxx parameters

The SYS default in SMFPRMxx requests that SMF write all possible records for what the system sees as started tasks. If you are using SMF data set recording, you can suppress started task accounting records by suppressing the accounting record types through the SUBSYS option in SMFPRMxx (STC parameter). If you specify any other record types it might cause loss of data other than accounting data for started tasks. For example:

- A JES2 installation runs the Resource Measurement Facility™ (RMF), which the system sees as a started task, to monitor system activity. To suppress started task accounting records for RMF, the installation specifies record type 70. However, the installation has inadvertently suppressed important data collected by RMF about CPU activity.
- An installation suppresses record types 6 and 26 to eliminate accounting for started tasks. However, this eliminates record types 6 and 26 completely (even for batch jobs), because JES, as a started task, is told to not write these record types.

For an initiator, the only meaningful data in a type 4, 5, or 30 record is job or session name, program name, step name, and reader start time and date. IEFIIC in the program name field identifies an initiator record.

Because CPU time is accumulated for started tasks, wait time limits and job step time limit abends can occur. To avoid these abends, you can code TIME=1440 on the EXEC statement in the cataloged procedure or set on the system task bit in the program properties table (PPT). For more information on the program properties table, see *z/OS MVS Initialization and Tuning Reference*.

Note:

1. MSTRJCL includes TIME=1440 so that the master scheduler does not time out.
2. Many IBM-supplied entries in the PPT have the system task bit set on, which prevents an abend because of time limits.

BUFSIZMAX, BUFUSEWARN, DSPSIZMAX, PERMFIIX, and NOBUFFS — Specifying SMF buffer options

You can use the BUFSIZMAX, BUFUSEWARN, DSPSIZMAX, PERMFIIX, and NOBUFFS parameters to specify SMF buffering options. Note how these parameters apply:

- BUFUSEWARN and NOBUFFS apply to SMF log streams and data sets
- BUFSIZMAX applies to data set record
- DSPSIZMAX and PERMFIIX applies to logstream recording

The BUFSIZMAX parameter specifies the maximum amount of storage that SMF can allocate for buffering purposes. The value of BUFSIZMAX can range from a minimum of 128M to a maximum of 1G. The default value of BUFSIZMAX is 128M.

The DSPSIZMAX parameter specifies the maximum amount of storage that SMF can use for a given SMF logstream's buffer. The value of DSPSIZMAX can range from a minimum of 128M to a maximum of 2G. The default value is 2G.

The BUFUSEWARN parameter specifies the overall buffer warning level percentage which, when exceeded, causes SMF to start issuing message IEE986E. The value of BUFUSEWARN can range from 10 to 90 percent; the default value

being 25 percent. When the overall SMF buffer in use percentage drops below the specified BUFUSEWARN value, SMF issues DOM message IEE986E.

The PERMFIx parameter specifies the default amount of storage SMF can keep permanently fixed for each log stream for purposes of communicating with the zEDC Express feature. Storage used by the zEDC Express feature must be page fixed; however, fixed pages are a constrained resource. Increasing this number can improve performance of SMF, but decrease the fixed storage available to the other applications. Decreasing this number can increase the fixed storage available to other applications, but may degrade SMF performance. PERMFIx can range from a minimum of 1M to a maximum of 2GB. The default value is NOPERMFIx. Due to processing needs, even if this value is NOPERMFIx, SMF may use up to 2MB of fixed storage for zEDC usage.

You can specify NOBUFFS, BUFUSEWARN, PERMFIx, and DSPSIzMAX on the LsNAME and DEFaulTlsNAME keywords. The global NOBUFFS, BUFUSEWARN and DSPSIzMAX values are applied to any logstream that does not have any of the options specified.

```

DEFAULTLSNAME(logstreamname,
NOBUFFS(MSG|HALT),
BUFUSEWARN(nn),
DSPSIzMAX(nnnnM | nG)
PERMFIx(nnnnM)
LSNAME(logstreamname,
TYPE({aa,bb}|{aa,bb:zz}|{aa,bb:zz,..}),
NOBUFFS(MSG|HALT),
BUFUSEWARN(nn),
DSPSIzMAX(nnnnM | nG)
PERMFIx(nnnnM)

```

You can use the combination of BUFSIZMAX and BUFUSEWARN parameters to prevent SMF data loss conditions (see “Preserving SMF Data” on page 31).

After setting the SMF buffer options, if you still cannot prevent data loss conditions, use the SMF NOBUFFS parameter (see “Using SMFPRMxx parameters” on page 67), to specify what the system is to do in this situation. The following are the possible system actions:

1. Continue processing with the loss of SMF data and if parmlib option NOBUFFS(MSG) is in effect, message IEE979W will be issued. All records presented to SMF will be lost until buffers become available. When no buffers are available for a given SMF log stream and the NOBUFFS(MSG) action is specified, message IFA786W will be issued. SMF records have been lost and more might be lost until SMF can write the buffered records to the SMF log stream.
2. Enter a restartable wait state.

Note: When the BUFSIZMAX parameter is specified, if the amount of storage requested is not available during initialization, SMF will take the specified value and decrease it by 20% and attempt to get that amount. If unsuccessful, SMF will retry this 4 additional times. Message IFA723E will be issued with the amount of storage which SMF was finally able to obtain.

When the BUFSIZMAX parameter is specified by using a SETSMF or SET SMF=xx command, if the new larger area cannot be obtained, the current value will remain in effect. Message IFA723E will be issued to the console where the SETSMF or SET SMF=xx command was entered.

FLOOD and FLOODPOL — Specifying SMF record flood options

You can use the FLOOD and FLOODPOL parameters to specify SMF record flood options. Issue the SETSMF FLOOD(ON|OFF) command or update an SMFPRMxx with FLOOD(ON|OFF) to enable or disable the SMF record flood automation facility. No policy changes are performed as a result of this command. Turning the facility on and off will reset all counts and any active flood situations.

Use the FLOODPOL parameter in SMFPRMxx to specify a filter for the SMF record in flooding. Several options are required to define a flood policy. In the definition you must specify the following options:

- The type of the records that the filter is for
- The number of records in an interval for a given filter
- The minimum amount of time that it can take to match the number of records in an interval
- The number of intervals that can occur at a flooding rate before an action is taken
- The length of time an interval should take before returning to normal
- The action to take, either DROP or MSG

When the MSG filter is specified, message IFA780A is issued at the start of the flood to warn the user. Message IFA781I is issued when the flooding has stopped. When the DROP filter is specified, message IFA782A is issued at the start of the flood and dropping of records begins. Any attempts to write a record through SMFEWTM or SMFWTM macro will get a return code xx = 52. At the end of the flooding, message IFA783I is issued with the number of records dropped.

SMFDLEXIT and SMFDPEXIT — Specifying the dump program exit

To enable SMF dump programs to call user exits, you might need to define the user exits to the system using the following keywords.

SMFDLEXIT

SMFDLEXIT enables the IFASMF DL program to specify user exits.

SMFDPEXIT

SMFDPEXIT enables the IFASMF DP program to specify user exits.

Validation only occurs for the IFASMF DP program when it runs in an APF authorized environment.

Both keywords have options USER1, USER2 and USER3, to allow you to specify multiple exits for each user exit point in the respective dump program.

After you specify an exit is using USER1, USER2 or USER3, it remains active until you redefine it in the SMFPRMxx parmlib member or use the SETSMF command (not to be confused with the SET SMF command).

For example, to have user exit SAMPEXIT available as a USER2 exit for IFASMF DP, you code the following in the active SMFPRMxx member:

```
SMFDPEXIT(USER2(SAMPEXIT))
```

If you enter a SETSMF command with the following parameters:

```
SMFDPEXIT(USER1(SAMPEXIT2))
```

This affects only USER1. The USER2 you previously specified remains in effect.

For additional details, see SMFPRMxx in *z/OS MVS Initialization and Tuning Reference*.

RECSIGN — Digitally signing SMF records

You can use the RECSIGN parameter to specify that SMF records are to be digitally signed for later validation. You can specify the RECSIGN parameter globally or on a per-logstream basis. The default is not to sign SMF records (NORECSIGN).

When you specify RECSIGN to digitally sign SMF records, you must also specify options for the hash type, signature type, and token name. These parameters are described under the SMFPRMxx member in *z/OS MVS Initialization and Tuning Reference*.

For more information, see Chapter 13, “Signing and validating SMF records,” on page 155.

Entering SMFPRMxx in SYS1.PARMLIB

When you have determined which SMF parameters you want to change, place them in a SMFPRMxx parmlib member. The two alphameric characters, represented by *xx*, are appended to SMFPRM to identify your SMFPRMxx member. If you do not specify an SMFPRMxx member (with system parameters, such as SMF=01 for member SMFPRM01, or with an alternate member, such as IEASYSxx), the default member SMFPRM00 is used. You may place alternate values, or additional values, in one or more alternate SMFPRMxx members.

For information about coding the SMFPRMxx member, see *z/OS MVS Initialization and Tuning Reference*.

Adding SMFPRMxx to SYS1.PARMLIB

To add the SMFPRMxx parameters as a member of SYS1.PARMLIB, use the IEBUPDTE utility program. Figure 28 shows sample JCL for using IEBUPDTE to enter SMFPRM01 into SYS1.PARMLIB. To change the default member, SMFPRM00, or the installation-defined SMFPRMxx member, replace them with a new version by again running IEBUPDTE.

```
//ENTER JOB MSGLEVEL=1
// EXEC PGM=IEBUPDTE,PARM=NEW
//SYSPRINT DD SYSOUT=A
//SYSUT2 DD DSN=SYS1.PARMLIB,DISP=(OLD,KEEP)1
//SYSIN DD DATA
./ ADD LIST=ALL,NAME=SMFPRM01,LEVEL=01,SOURCE=0
(SMFPRM01 member)
./ ENDUP
/*
```

¹To access SMFPRM00 on the distribution package before system installation, use the SYS1.PARMLIB data set.

Figure 28. Sample JCL for Entering SMFPRM01 into SYS1.PARMLIB Using IEBUPDTE

If PROMPT (LIST or ALL) was specified, the operator can modify the values in a SMFPRMxx parameter from the console during system initialization or SET SMF

processing. If parameter errors occur, the operator will be prompted for correct parameters regardless of the value specified for PROMPT.

Using installation exit routines

This topic provides a brief overview of installation-written exits. *z/OS MVS Installation Exits* describes the SMF installation and Chapter 3, "Using the SMF dump programs," on page 35 describes the SMF dump program exits.

You can customize SMF to meet your installation's requirements by coding installation exit routines or by writing application programs that use SMF macros.

SMF provides exits in the control program that allow installations to add installation-written routines to the control program to perform additional processing. Installation-written routines at SMF exits receive control at different times as a job moves through the system. They receive control when specific events occur, such as when a job CPU-time limit expires. These installation-written routines could collect additional information, cancel jobs, or enforce installation standards.

The IEFUJV, IEFUJP, and IEFU85 exits must run in 31-bit addressing mode. All other exits can execute in either 24-bit or 31-bit addressing mode. IBM recommends that you use 31-bit addressing mode whenever possible.

Exit routines that access SMF records with sub-sections, such as record type 30, should be coded using triplets (offset to *xxx* section, number of *xxx* sections, length of *xxx* section) rather than coding the exit to access the fields directly. An installation can use the triplets to calculate the location of each field, and avoid the need to recompile the exit with the mapping macro each time a field is added to the end of a section. When the position of a field changes, the exit will locate the field relative to the beginning of the section in which it is contained.

A brief description of the IBM-supplied exits is included here. *z/OS MVS Installation Exits* describes the SMF installation exits and how to code and use them. "Parameters for the SMF data set dump program (IFASMFDP)" on page 51 describes the SMF dump program exits.

Deciding which exits to use

The following are the SMF-supplied exits along with a summary of when each exit receives control, the information passed to each exit, and the type of return from each exit to the control program. They can link to installation-written exit routines. For complete information about these exits, see *z/OS MVS Installation Exits*.

- The termination exit (IEFACTRT) receives control on the normal or abnormal termination of each job step and job. A return code from this exit indicates whether the system is to continue the job (for job steps only) and whether SMF termination records are to be written to the SMF data set. The parameters passed to this exit are the addresses of:
 - The common exit parameter area
 - The job step name
 - The programmer name
 - The job CPU time
 - The job accounting fields
 - The step CPU time

- The step accounting fields
- The completion code
- The SMF termination record
- The name of the subsystem for the job being processed.
- The user account validation exit (IEFUAV) receives control during the set-up and execution of APPC/MVS transaction programs (TPs), and during the creation of a z/OS UNIX System Services forked or spawned address space whose profiles specify TAILOR_ACCOUNT(YES). IEFUAV is used to validate the accounting information of TP users and forked and spawned address spaces. Note that IEFUAV does not receive control for local spawns, as these only create processes in the same address space as the parent. A return code from this exit routine indicates whether processing for the unit of work should continue or be cancelled.

The parameters passed to this exit are the addresses of the common exit parameter area, an area containing the programmer's name, an indication of the processing environment (Exit Function Code), accounting information, and an 80 byte area into which the exit can place a message to be issued to the APPC/MVS or z/OS UNIX System Services job log.

- The job initiation exit (IEFUJI) receives control before a job on the input queue is selected for initiation. A return code from this exit indicates whether the system is to continue processing the job. The parameters passed to this exit are the addresses of the common exit parameter area, programmer name, job priority, job accounting fields, and the name of the subsystem for the job being processed.
- The job purge exit (IEFUJP) receives control when a job is ready to be purged from the system (after the job has terminated and all SYSOUT output that pertains to the job has been written). A return code from this exit indicates whether the SMF job purge record (type 26) is to be written to the SMF data set. The parameters passed to this exit are the addresses of the common exit parameter area, and SMF job purge record.
- The job validation exit (IEFUJV) receives control before each job control statement in the input stream or cataloged procedure is converted. This exit receives control after all the JCL is converted and again after all the JCL is interpreted. IEFUJV is not invoked for JCL comment statements or null statements. A return code from this exit indicates whether the system is to continue processing the job. For an alternative to IEFUJV, examine JES exits in *z/OS JES2 Installation Exits* and *z/OS JES3 Customization*.

The parameters passed to this exit are the addresses of:

- The common exit parameter area
- The JCL statement image (this address is zero for entry codes 16 and 32)
- The entry code (type of JCL statement for all entry codes except 16 and 32)
- The converter parameter
- The name of the subsystem for the job being processed
- The environment indicator associated with the subsystem for the job being processed
- The step initiation exit (IEFUSI) receives control before each job step is started (before allocation). A return code from this exit indicates whether the system is to continue processing the job step, or whether the job is to be cancelled. The parameters passed to this exit are the addresses of:
 - The common exit parameter area
 - The job step name
 - The program name
 - The step accounting fields

- An area which the exit can use to communicate to MVS the region size and region limit it desires for the job step
- A flag indicating whether the job is running V=R
- IBM-supplied default values for data spaces, hiperspaces, and data sharing (through the IARVSERV macro)
- The name of the subsystem for the job being processed
- MEMLIMIT information.
- The SYSOUT limit exit (IEFUSO) receives control when the number of records written to an output data set exceeds the output limit for that data set. A return code from this exit indicates whether the system is to continue processing the job with a new output limit or to cancel the job. The parameter passed to this exit is the address of the common exit parameter area.
- The time limit exit (IEFUTL) receives control when one of the following time limits expires:
 - The job CPU time limit (from the JOB statement).
 - The step CPU time limit (from the EXEC statement, the default from the job entry subsystem).
 - The continuous wait time limit for the job (from the SMFPRMxx JWT, SWT, or TWT parameters). Continuous wait time is defined as time spent waiting while the application program is in control. For example, for data sets allocated dynamically (while the application program is running, for example) either or both of the following count toward a job's continuous wait time:
 - The time required to recall a data set from HSM Migration Levels 1 or 2
 - The time required to mount a tape

If a data set was allocated statically (that is, for a DD statement) only the second of these activities will be counted towards the job's continuous wait time.

A return code from this exit indicates whether the system is to continue processing the job step with a new time limit or cancel the job. The parameters passed to this exit are the type of time limit that expired, and the addresses of the common exit parameter area, and the name of the subsystem being processed.

- The SMF dump exit (IEFU29) receives control when an SMF data set becomes full. A return code from this exit indicates whether the dump message (IEE362I or IEE362A) is to be issued. The parameter passed to this exit is the address of SMF data set name.
- The SMF log stream dump exit (IEFU29L) allows you to archive SMF from a log stream. This exit is invoked using the SWITCH SMF command. The parameter passed to this exit is the address of a 44-character field that contains the name of the SMF log stream to be dumped. This field is left-justified and padded on the right with blanks.
- The SMF record exit (IEFU83) receives control before each record is written to the SMF data set. A return code from this exit indicates whether the system is to suppress the current SMF record. The parameter passed to this exit is the address of the SMF record to be written.
- The SMF record exit (IEFU84) receives control when the SMF writer routine is branch-entered and is **not** entered in cross-memory mode. A return code from this exit indicates whether the system is to suppress the current SMF record. The parameter passed to this exit is the address of the SMF record to be written.
- The SMF record exit (IEFU85) receives control when the SMF writer routine is branch-entered and is entered in cross-memory mode. A return code from this

exit indicates whether the system is to suppress the current SMF record. The parameter passed to this exit is the address of the SMF record to be written.

Using operator commands

The following operator commands affect SMF:

- SET SMF=*xx*
- SETSMF
- DISPLAY SMF.

Note: SET SMF, SETSMF, and DISPLAY SMF commands cannot run simultaneously; one waits for the other to complete before starting.

For detailed information about the SMF commands see *z/OS MVS System Commands*.

Using the SET command

The SET operator command is used to restart SMF or modify the SMF recording options dynamically by specifying which SMFPRM*xx* parmlib member is to be used. If SMF ends, you may use the SET command to restart SMF. It is not necessary to IPL again.

The SET command allows the installation to replace the existing SMF options. For example, when NOACTIVE is specified after an IPL, an installation can activate SMF recording by using the SET and choosing the parmlib member that contains the ACTIVE option. In addition, the installation can use the SET command to reactivate SMF recording after an I/O error has terminated recording; however, the installation should define a new data set or correct the cause of the I/O error before reactivating SMF recording.

Special considerations

- To avoid installation exit communication problems, an installation should terminate:
 - All address spaces except the master scheduler address space.
 - The system address spaces (such as PCAUTH, ALLOCAS, and GRS)
 - The job entry subsystem before issuing a SET command that changes the EXIT keyword.
- The SET command cannot be used to change the SID parameter; if a value is specified, it is ignored. If processor serial numbers were displayed in message IEE967I prior to issuing the SET command, they will no longer be displayed following the SET command. Also, the SID parameter displayed in message IEE967I following the SET command will show an origin type of DEFAULT. In this case, DEFAULT indicates that the SID value is the value that was specified at IPL.
- The new values for STATUS or MAXDORM do not take effect until the old ones, if any, expire.
- For each IPL, you can define a maximum of eight subsystems to SMF (by use of the SUBSYS parameter). This is a combined total of subsystems specified at IPL and subsequent SET commands. If the maximum is reached, no new subsystems may be added. Subsystems previously specified can be given different options.
- In response to a SET command, SMF issues a subsystem interface (SSI) call to each user-defined subsystem specified in the SMF parameters SUBSYS and/or SUBPARM. This includes parameters specified in previous SET commands and at IPL.

- Unless it is necessary, recording data set switching does not take place at SET time. For example, if the current active data set is not included in the new options, the first empty data set in the new data set list becomes the active recording data set.
- If recording is not active at SET SMF time, the first non-full data set is used as the recording data set.

Using the SETSMF command

The SETSMF operator command allows an installation to add a SUBPARM parameter or to replace any previously-specified parameter in the active SMF parmlib member except the ACTIVE, PROMPT, SID, or EXITS parameters. The SETSMF command cannot be used with a parmlib member that specified NOPROMPT.

The SETSMF command cannot be used to change the SID parameter; if a value is specified, it is ignored. If processor serial numbers were displayed in message IEE967I prior to issuing the SETSMF command, they will no longer be displayed following the SETSMF command. Also, the SID parameter displayed in message IEE967I following the SETSMF command will show an origin type of DEFAULT. In this case, DEFAULT indicates that the SID value is the value that was specified at IPL.

Using the DISPLAY command

The DISPLAY (D) operator command can be used to display the status of the SMF data sets or the current SMFPRMxx options to the operator console.

Chapter 5. Using SMF macros

This topic provides a detailed description of SMF macros to use in any application program.

SMF macros

SMF supplies the following macros that can be used in application programs or in installation-written exit routines.

IFASMFR

Use the IFASMFR macro in any application program or in installation-written exit routines to symbolically address SMF record fields.

SMFCHSUB

Use the SMFCHSUB macro to change the information string specified in the current SUBPARAM parameter.

SMFDETAL

Use the SMFDETAL macro to determine if detail recording is active for the current subsystem.

SMFEWTM

Use the SMFEWTM macro to write records to the SMF data set in APF-authorized programs and any exit routine that is in supervisor state, except where noted.

SMFEXIT

Use the SMFEXIT macro to branch directly to any installation-written SMF exit residing in the SYS1.LPALIB.

SMFINTVL

Use the SMFINTVL macro to determine the current interval and synchronization values.

SMFRTEST

Use the SMFRTEST macro to determine if a particular type, or subtype, of a record is being recorded.

SMFSUBP

Use the SMFSUBP macro to determine if any SUBPARAM information is present or if the values have been changed.

SMFWTM

Use the SMFWTM macro to write records to the SMF data set in APF-authorized programs and any exit routine that is in supervisor state, except where noted.

Using a macro to write records

SMF supplies two macros that you can use to write records to the SMF data set: SMFWTM and SMFEWTM. These macros differ in the entry method that they use to the record-writing routine.

If a branch entry is required, use the SMFEWTM macro with BRANCH=YES. Use the SMFEWTM macro with BRANCH=NO (or the SMFWTM macro) if all of the following are true:

- The calling program is running enabled
- The calling program is not in supervisor state
- The calling program is APF-authorized.

The SMFWTM macro generates a supervisor call (SVC) instruction. For SMFEWTM BRANCH=NO, the SVC is generated by the code invoked by the SMFEWTM macro.

IFASMFR — Addressing SMF record fields

Use the IFASMFR macro in any application program or in installation-written exit routines to symbolically address SMF record fields. If you do not want the IFASMFR macro to use part of the application program's storage, then supply a CSECT or DSECT statement ahead of the macro.

Note: If you invoke the IFASMFR macro within a DSECT, multiple record types are mapped contiguously. That is, each record type will not have a zero origin.

Do not specify both record type 14 and record type 15 in the same program. These records are identical, whenever record type 15 is specified in the IFASMFR macro, record type 14 is defined.

IFASMFR *n*

n is the record type to be defined. You must specify at least one record type with the macro; if you specify more than one record type, you must enclose the record types in parentheses and separate them by commas. The values for *n* can be any of the current record types. Exceptions to this include record types 100, 101, 102 and 110. Other exceptions are record types that explicitly mention the proper macro to use.

Note: In all the SMF record formats, the 'name' column contains the symbolic addresses defined by the IFASMFR macro.

SMFCHSUB — Changing subsystem parameters

A user-defined subsystem issues the SMFCHSUB macro to change the information string specified in the current SUBPARM parameter. A user-defined subsystem issues this macro when the subsystem determines that an error, such as a spelling error, exists in the information string. Issuing the macro instruction to correct the error causes the SMF options to be displayed correctly on the operator's console.

When you invoke the SMFCHSUB macro, you must include the IEESMCA mapping macro, which maps the SMCA.

```
(label) SMFCHSUB SUBPARM={ (reg) } [,SUBSYS= { name } ]
                               { addr } [      { (reg) } ]
```

SUBPARM=(*reg*)

SUBPARM=*addr*

specifies the *address* of a 60-byte area or a *register* (2-12) that contains the address of the 60 bytes that is to replace the current SUBPARM value for the specified subsystem.

SUBSYS=*name***SUBSYS=(*reg*)**

specifies the name (or address in register 2-12) of the 4-byte field containing the subsystem name. If you use a register, it must be enclosed in parentheses. If you do not specify the SUBSYS parameter, the SUBPARM value, if one exists, of the current subsystem is changed; for example, TSO for TSO/E users, ASCH for APPC/MVS transactions programs, STC for started tasks, or the name of the job entry subsystem (JES2 or JES3) for batch jobs..

Return codes

When the SMFCHSUB macro returns control, register 15 contains one of the following return codes.

Code dec(hex)**Meaning**

00 (00) Successful completion of the macro.

04 (04) No SUBPARM value found; thus, the value was not changed.

08 (08) A SETSMF or a SET SMF command is currently being processed. SUBPARM is not changed for this request. The subsystem can reissue the macro instruction.

12 (0C)

A DISPLAY command for SMF is currently being processed. SUBPARM is not changed for this request. The subsystem can reissue the macro instruction.

16 (10) SMF has ended abnormally.

SMFDETAL — Testing detail recording

The SMFDETAL macro allows you to determine if detail recording is active for the current subsystem. A user subsystem can use this macro to determine what level of data to collect. For example, TSO/E uses SMFDETAL to determine if type 32 detail data or type 32 summary data is to be collected.

When you invoke the SMFDETAL macro, you must include the IEESMCA mapping macro, which maps the SMCA.

<pre>[label] SMFDETAL [(SUBSYS={ name}] [{(reg)}]</pre>

SUBSYS=*name***SUBSYS=(*reg*)**

specifies the name (or address in register 2-12) of the 4-byte field containing the subsystem name. The subsystem name must be left-justified and padded with blanks. If you use a register, it must be enclosed in parentheses. The macro looks for the subsystem name in SMFPRMxx and uses the options for that subsystem to determine if detail recording is active. If the subsystem name is not found, the macro uses the options specified for the entire system on the SYS option in SMFPRMxx to determine if detail recording is active.

If you do not specify a SUBSYS, the macro uses the subsystem name of the current address space: for example, TSO for TSO/E users, ASCH for APPC/MVS transactions programs, STC for started tasks, or the name of the job entry subsystem (JES2 or JES3) for batch jobs. If the defaulted subsystem

SMFDETAL macro

name is not found, the macro uses the options specified for the entire system on the SYS option in SMFPRMxx to determine if detail recording is active.

Return codes

When the SMFDETAL macro returns control, register 15 contains one of the following return codes.

Code dec(hex)	Meaning
---------------	---------

00 (00)	Detail recording is in effect
---------	-------------------------------

04 (04)	Detail recording for the subsystem is not in effect
---------	---

16 (10)	SMF has ended abnormally.
---------	---------------------------

SMFEWTM — Writing SMF records

The SMFEWTM macro can be used to write records to the SMF data set. You can use this macro in any exit routine that is in supervisor state except IEFU83, IEFU84, IEFU85, and IEFU29 and in any application program that has APF authorization. The SMFEWTM macro verifies that SMF recording is active and allows the issuer to branch directly to SMF.

When you invoke the SMFEWTM macro, you must include the IEESMCA mapping macro, which maps the SMCA.

Note that you can also write SMF records without using a macro. See `smf_record` (BPX1SMF, BPX4SMF) -- Write an SMF record in z/OS UNIX System Services *Programming: Assembler Callable Services Reference*.

```
[label] SMFEWTM {record address}{,BRANCH=NO }[{,SUBSYS=name}{,WRKAREA=addr }[,MODE=XMEM]]
           {(r)} {,BRANCH=YES} [{,SUBSYS=(reg)}{,WRKAREA=(reg)}]
```

record address

is the symbolic address of the record to be written.

(r)

is the *register* number (2-12), that contains the address of the record to be written.

Note: SMF does not preserve register 0 when processing SMFEWTM.

BRANCH=NO

BRANCH=YES

Specifies a branch entry (YES) or an SVC entry (NO) to the requested SMF writer routine. The default is BRANCH=NO.

If you specify BRANCH=NO, before SMF writes the record to the SMF data set, the SMF record is given to installation exit IEFU83.

If you specify BRANCH=YES, before SMF writes the record to the SMF data set, the SMF record is given to installation exit IEFU84, or IEFU85 if MODE=XMEM. To use BRANCH=YES, the caller must be in supervisor state, have a protection key of zero, and set register 13 to point to a standard 72-byte save area.

You should note therefore that if you change from using the SMFWTM macro to write SMF records and use the SMFEWTM macro, BRANCH=YES, then the SMF records are given to installation exit IEFU84 (rather than installation exit IEFU83) or IEFU85 if MODE=XMEM.

SUBSYS=*name*

SUBSYS=(*reg*)

specifies the name (or address in register 2-12) of the 4-byte field containing the subsystem name. The macro looks for the subsystem name in SMFPRMxx and uses the options for that subsystem to determine if the record is written. The subsystem name must be left-justified and padded with blanks. If you use a register, it must be enclosed in parentheses. If the subsystem name is not found, then the macro uses the options specified for the entire system on the SYS option in SMFPRMxx to determine if the record is written.

If you do not specify SUBSYS, the macro will use the subsystem name for the current address space, for example, TSO for TSO/E users, STC for started tasks, ASCH for APPC/MVS transactions programs, or the name of the job entry subsystem (JES2 or JES3) for batch jobs. If the defaulted subsystem name is not found, then the macro uses the options specified for the entire system on the SYS option to determine if the record is written.

WRKAREA=*addr*

WRKAREA=(*reg*)

specifies the *address* or a *register* (2-12) that contains the address of a five-word work area that you must supply for SMF to use. If you specify a register, it must be enclosed in parentheses. You must specify WRKAREA when you specify MODE=XMEM.

MODE=XMEM

specifies that the caller is entered in cross-memory mode (the primary address space is not the home address space). The caller must be in primary ASC mode. If you specify MODE=XMEM, you must specify BRANCH=YES and WRKAREA.

Record types 0 through 127, which are SMF-formatted records, are reserved for IBM products. For record types 0 through 127, you must supply the record descriptor word and the record type field in the standard SMF record header. The SMFEWTM macro supplies the remaining header information.

Record types 128 through 255 are available for user-written records. When using the SMFEWTM macro to write user records, you must provide the standard SMF record header, including the record descriptor word, the date, time, and system identifier. While the system identifier can be any four character identifier, specifying the value of the SID parameter is consistent with the system records SMF produces.

Return codes

When the SMFEWTM macro returns control, register 15 contains one of the following return codes.

Code dec(hex)

Meaning

00 (00) The record was written without error.

08 (08) The record was not written because the length specified in the RDW was less than 18 bytes, or an SMF record exit changed the length in the RDW to be less than 18 bytes.

SMFEWTM macro

- 16 (10) The record was not written because SMF is not active or has ended abnormally.
- 20 (14) The record was not written because the installation-written IEFU83, IEFU84, or IEFU85 exit routine suppressed the record.
- 24 (18) The record was not written because the data was lost.
- 36 (24) The record was not written because the record type specified is not currently being recorded.
- 40 (28) The record was not written because a buffer shortage caused the data to be lost.
- 44 (2C) The record was not written because SMF could not establish recovery.
- 48 (30) The caller was not in primary ASC mode or an incorrect ASID was encountered.
- 52 (34) SMF cannot write this record because of an SMF record flooding filter.

SMFEXIT — Branching to the SMF exits

The SMFEXIT macro allows the user to branch directly to any installation-written SMF exit residing in the SYS1.LPALIB. You must define the SMF exit name to SMF with the EXIT parameter before issuing the macro.

When you invoke the SMFEXIT macro, you must include the IEESMCA mapping macro, which maps the SMCA.

```
[label] SMFEXIT exitname [,SUBSYS={name }]  
[ {reg }]
```

exitname

The name of the exit as it is specified in SMFPRMxx, with the format SYS.yyyy or SYSxxxx.yyyy.

SUBSYS=*name*

SUBSYS=(*reg*)

specifies the name (or address in register 2-12) of the 4-byte field containing the subsystem name. The macro looks for the subsystem name in SMFPRMxx and uses the options for that subsystem to determine if the record is written. The subsystem name must be left-justified and padded with blanks. If you use a register, it must be enclosed in parentheses. If the subsystem name is not found, then the macro uses the options specified for the entire system on the SYS option in SMFPRMxx to determine which exit (if any) to call.

Note: SMF does not preserve register 0 when processing SMFEWTM.

If you do not specify a SUBSYS, the macro uses the subsystem name for the current address space: for example, TSO for TSO/E users, ASCH for APPC/MVS transactions programs, STC for started tasks, or the name of the job entry subsystem (JES2 or JES3) for batch jobs. If the defaulted subsystem name is not found, then the macro uses the options specified for the entire system on the SYS option to determine which exit (if any) to call.

Register use

On entry to the macro, register 13 must point to a 72-byte save area. Parameters can be passed to the exit in register 0 or 1; the parameters must be placed in the registers before the macro is invoked.

When control returns to the issuer:

- The contents of register 2 will have been destroyed.
- A return code of zero in register 15 indicates one of the following:
 - The exit was not invoked because SMF is not active
 - The exit was not invoked because the exit is not active for the requested subsystem
 - The exit was invoked and issued a return code of zero
- The installation exit routine can place a return code (zero or any non-zero value) into register 15.

SMFINTVL — Determining interval time

The SMFINTVL macro allows the requestor to determine the current interval and synchronization values. A requestor can use this value, for example, to set up interval recording for a subsystem.

```
[label] SMFINTVL (intvlreg) [,SUBSYS={ (namereg) }][,SYNC=(syncreg)][,GLOBAL]
                                     [,INTEXT={ (intextpreq) }
                                     [{ name }]
```

(intvlreg)

specifies a register (2-12). When the macro returns control, this register contains the address of an eight-byte area that contains the interval value. The interval value is in time-of-day (TOD) format, an unsigned 64-bit fixed-point number where bit 51 is equivalent to 1 microsecond.

SUBSYS=name

SUBSYS=(namereg)

specifies the name (or address in register 2-12) of the 4-byte field containing the subsystem name. The subsystem name must be left-justified and padded with blanks. If you use a register, it must be enclosed in parentheses. The macro looks for the subsystem name in SMFPRMxx and uses the options for that subsystem. If the subsystem name is not found, then the macro uses the options specified for the entire system on the SYS option in SMFPRMxx to determine the interval and synchronization values.

If you do not specify SUBSYS or GLOBAL, the macro returns the interval value for the subsystem represented by the current address space: for example, TSO for TSO/E users, ASCH for APPC/MVS transaction programs, STC for started tasks, or the name of the job entry subsystem (JES2 or JES3) for batch jobs. If the defaulted subsystem name is not found, then the macro uses the options specified for the entire system on the SYS option in SMFPRMxx to determine the interval and synchronization values.

If you specify GLOBAL, the system ignores SUBSYS (even if you specified it).

SYNC=(syncreg)

specifies a register (2-12). When the macro returns control, this register contains the 31-bit address of an eight-byte area that contains the synchronization value in time-of-day (TOD) format, an unsigned 64-bit fixed-point number where bit

SMFINTVL macro

51 is equivalent to 1 microsecond. This value is taken from the two-digit global synchronization value specified using the SYNCVAL parameter in the SMFPRMxx parmlib member.

The macro returns a value of -1 (X'FFFFFFFF') in *syncreg* if the subsystem specified by the SUBSYS parameter did not request synchronization.

GLOBAL

requests that the system return the 31-bit addresses of the global interval value in (*intvreg*) and the synchronization value, if requested, in *syncreg*. These values were specified using the INTVAL and SYNCVAL options of SMFPRMxx. When you specify GLOBAL, the system ignores SUBSYS.

,INTEXPT=(*intexptreg*)

specifies a register (2-12). When the macro returns control, this register contains the 31-bit address of an eight-byte area that contains the time when the next SMF global recording interval ends in time-of-day (TOD) format, an unsigned 64-bit fixed-point number where bit 51 is equivalent to 1 microsecond. This is the interval that is scheduled as a result of the combination of the INTVAL and SYNCVAL options of SMFPRMxx.

The macro returns a value of -1 (X'FFFFFFFF') in *intexptreg* when SMF interval synchronization processing is disabled.

Return codes

When the SMFINTVL macro returns control, register 15 contains one of the following return codes.

Code dec(hex)

Meaning

- 00 (00) Successful completion — requested information was returned in registers that were specified on the macro invocation.
- 04 (04) No interval specified for the requested subsystem, or SMF is not active.
- 16 (10) SMF has ended abnormally

Environment

Authorization:	None
Dispatchable unit mode:	Task or SRB
Cross memory mode:	PASN = HASN = SASN
AMODE:	24- or 31-bit (AMODE 31 is required if you specify the SYNC, GLOBAL, or INTEXPT keywords.)
ASC mode:	Primary
Serialization:	Enabled for I/O and external interrupts
Locks:	No Requirement
Control Parameters:	None

Register information

Register

Contents

AR 0 to 15

Unchanged

GPR 0 to 12

Unchanged — unless specified for macro output data

GPR 13

Pointer to 72-byte save area

GPR 14

Work Register

GPR 15

Return code

SMFRTEST — Testing record recording

The SMFRTEST macro allows you to determine if a particular type, or subtype, of a record is being recorded. Issue this macro before collecting data for a particular record or subtype to avoid the overhead of data collection if it is not written.

When you invoke the SMFRTEST macro, you must include the IEESMCA mapping macro, which maps the SMCA.

```
[label] SMFRTEST RECTYPE={record}[ ,SUBTYPE={subtype}][ ,SUBSYS={name }
                {(reg) }[          {(reg) }][          {(reg) }]
```

RECTYPE=record**RECTYPE=(reg)**

specifies the SMF record type to be checked, where *record* can be any one to three decimal digits (0-255). If you use a register, the *register* (2-12) contains the record type. You must code the parentheses if you code a register, and you must right justify the record type within the register.

SUBTYPE=subtype**SUBTYPE=(reg)**

specifies the SMF record *subtype* to be checked, where *record* can be any one to three decimal digits (0-255). If *reg* is specified, the register (2-12) contains the record subtype. You must code the parentheses if you code a register and you must right justify the record subtype within the register.

SUBSYS=name**SUBSYS=(reg)**

specifies the name (or address in register 2-12) of the 4-byte field containing the subsystem name. The macro looks for the subsystem name in SMFPRMxx and uses the options for that subsystem to determine if the record is written. The subsystem name must be left-justified and padded with blanks. If you use a register, it must be enclosed in parentheses. If the subsystem name is not found, then the macro uses the options specified for the entire system on the SYS option in SMFPRMxx to determine if the record is written.

If you do not specify a SUBSYS, the macro uses the subsystem name for the current address space. For example, TSO for TSO/E users, ASCH for APPC/MVS transactions programs, STC for started tasks, or the name of the job entry subsystem (JES2 or JES3) for batch jobs. The macro uses the options specified in the corresponding SUBSYS parameter for that subsystem in SMFPRMxx to determine if the record is written. If there is no corresponding SUBSYS parameter or if the SUBSYS parameter contains no information about whether the record would or would not be written for that subsystem, then the macro uses the options specified in the SYS parameter to determine if the record is written.

Return codes

When the SMFRTEST macro returns control, register 15 contains one of the following return codes.

Code dec(hex)

Meaning

00 (00) The record type is being recorded

16 (10) SMF is not active or has ended abnormally.

36 (24) Information for the specified record type is not being recorded.

Register use

Registers 14 and 15 are used by the macro and are not reset. On entry to the macro, register 13 must point to a 72-byte save area.

SMFSUBP — Determining subsystem parameters

An installation may pass information to a user-defined subsystem. The user-defined subsystem may issue the SMFSUBP macro during its initialization to determine if any SUBPARM information is present. The subsystem may also issue the SMFSUBP macro after initialization to determine if the SUBPARM information has changed.

The subsystem should issue the SMFSUBP macro after receiving the subsystem interface (SSI) call generated by a SET or SETSMF operator command. The user-defined subsystem may then determine if any values that affect its operation have changed.

When you invoke the SMFSUBP macro, you must include the IEESMCA mapping macro, which maps the SMCA.

```
(label) SMFSUBP (smfsubp_reg) [,SUBSYS= {(reg)}]
                [           {name }]
```

smfsubp_reg

specifies a register (2-12). You must enclose *smfsubp_reg* in parentheses. When the macro returns control, this register contains the address of the 60-byte information string followed by a sixteen-byte field that contains:

- Bytes 1-2: The length of the field.
- Byte 3 - The source flags, as follows:

Bit	Meaning when set
-----	------------------

0	SMF is active
---	---------------

1	Not applicable
---	----------------

2	Information string was issued by parmlib member
---	---

3	Information string was issued by operator reply
---	---

4	Information string was issued by default
---	--

5	Information string was changed due to conflicts or errors
---	---

6	Information string was changed by IPL, SET, or SETSMF
---	---

7	Not applicable.
---	-----------------

- Byte 4: Reserved.
- Bytes 5-8: The 4-byte console identifier.
- Bytes 9-16: The 8-character token field.

SUBSYS=(reg)

SUBSYS=name

specifies the name (or address in register 2-12) of the 4-byte field containing the subsystem name. The subsystem name must be left-justified and padded with blanks. If you use a register, it must be enclosed in parentheses. If the subsystem name is not found, then the macro uses the SUBPARM options specified (if any) for the entire system on the SYS option.

If you do not specify SUBSYS=, the macro returns the address of the SUBPARM value (if any) for the subsystem name of the current address space: for example, TSO for TSO/E users, ASCH for APPC/MVS transactions programs, STC for started tasks, or the name of the job entry subsystem (JES2 or JES3) for batch jobs. If the defaulted subsystem name is not found, then the macro uses the options specified (if any) for the entire system on the SYS option.

Return codes

When the SMFSUBP macro returns control, register 15 contains one of the following return codes.

Code dec(hex)

Meaning

- 00 (00) Successful completion of the macro
- 04 (04) No SUBPARM parameters are entered for the specified subsystem
- 16 (10) SMF has ended abnormally.

SMFWTM — Writing SMF records

The SMFWTM macro is used to write records to the SMF data set. You can use this macro in any exit routine that is supervisor state except for IEFU83, IEFU84, IEFU85, and IEFU29, and in any application program that is APF-authorized.

All SMF records are given to installation exits before they are written to the SMF data set. If you use SMFWTM, installation exit IEFU83 is invoked.

Note that you can also write SMF records without using a macro. See `smf_record` (BPX1SMF, BPX4SMF) -- Write an SMF record in *z/OS UNIX System Services Programming: Assembler Callable Services Reference*.

```
[label] SMFWTM {record address|(r)}
```

record address

is the symbolic address of the record to be written.

(r)

is a register containing the address of the record to be written. The value for (r) can be either the absolute register number or a symbol for the register. In either case, you must code the parentheses, for example, (2) or (REG2).

SMFWTM macro

Record types 0 through 127, which are SMF-formatted records, are reserved for IBM products. For record types 0 through 127, you must supply the record descriptor word (RDW) and the record type field in the standard SMF record header. The SMFWTM macro supplies the remaining header information.

Record types 128 through 255 are available for user-written records. When using the SMFWTM macro to write user records, you must provide the standard SMF record header, which includes a RDW for the record. You must fill in the date, time, and system identifier in the record header. While the system identifier can be any four character identifier, specifying the value of the SID parameter is consistent with the system records SMF produces. For a description of the standard SMF record header, see 'SMF Records' in *z/OS MVS System Management Facilities (SMF)*.

All SMF records are given to installation exit IEFU83 before they are written to the SMF data set.

Return codes

When the SMFWTM macro returns control, register 15 contains one of the following return codes.

Code dec(hex)	Meaning
---------------	---------

- | | |
|---------|--|
| 00 (00) | The record was written without error. |
| 08 (08) | The record was not written because the length specified in the RDW was less than 18 bytes, or an SMF record exit changed the length in the RDW to be less than 18 bytes. |
| 16 (10) | The record was not written because SMF is not active or has ended abnormally. |
| 20 (14) | The record was not written because the installation-written IEFU83 exit routine suppressed the record. |
| 24 (18) | The record was not written because the data was lost. |
| 36 (24) | The record was not written because the record specified is not currently being recorded. |
| 40 (28) | The record was not written because a buffer shortage problem caused the data to be lost. |
| 44 (2C) | The record was not written because SMF could not establish recovery. |
| 52 (34) | SMF cannot write this record because of an SMF record flooding filter. |

Chapter 6. User-written report programs

You can use the SMF dump program (IFASMFDP) to create data sets containing certain record types and to also produce a summary activity report. You can use Tivoli Decision Support for z/OS, an IBM program product, to process data sets that are produced by SMF. An installation may want to produce their own report. Producing a report usually requires at least two operations: sorting the SMF records and then writing them in an appropriate format.

For those installations that choose to read the SMF data sets directly (rather than using the dump program), note that the SMF data sets are preformatted with dummy records. A dummy record is shorter than any valid SMF record and is easily identified because it contains the characters SMFEOFMARK. The SMF dump program terminates processing when it encounters a dummy record, improving data set processing performance.

Sorting SMF Records

Any sort/merge program can be used to sort SMF records; this topic describes two sample sort/merge exit routines that you may use with the IBM DFSORT (Data Facility Sort) Licensed Program (No. 5740-SM1).

Sample Sort/Merge Exit Routines

The IBM DFSORT Program Product can, during various phases of processing, pass control to routines designed and written to perform specific functions. SYS1.SAMPLIB has two sample routines that receive control from exits E15 and E35 of this sort/merge program. The sample E15 exit routine, called SMFE15, extracts all SMF records without a job log identification (job name, time, and date that the reader recognized the JOB card) from the SMF dump data set. The SMFE15 exit routine retains the dump header and dump trailer records (types 2 and 3) in the temporary data set HDRDATA. It retains all other system-oriented records (records without a job log identification) in the temporary data set SORDATA.

The sample E35 exit routine, called SMFE35, places all the records extracted by the SMFE15 routine in the sort output data set. These records are inserted in the data set as follows: dump header records, dump trailer records, all other system-oriented records, and the sorted job-oriented records.

Note: If tape work devices are used, the minimum block length the IBM Sort/Merge Program Product can sort is 18 bytes. Otherwise, the minimum is one byte. The sample routines SMFE15 and SMFE35 use SMF record types 0 through 13 for input; the minimum length of these SMF records is 18 bytes.

Figure 29 on page 100 shows sample JCL for obtaining a listing of the SMFE15 and SMFE35 exit routines from SYS1.SAMPLIB. Figure 29 on page 100 also shows sample JCL for obtaining a listing of the SYS1.SAMPLIB member named SMFSORT. SMFSORT contains sample JCL for running the IBM DFSORT Program Product.

```

//PRINT    JOB      123456,SMITH
//          EXEC    PGM=IEBTPCH
//SYSPRINT DD      SYSOUT=A
//SYSUT1   DD      DSN=SYS1.SAMPLIB,DISP=(OLD,KEEP),
//          UNIT=xxx, VOLUME=SER=xxxxxx1
//SYSUT2   DD      SYSOUT=A
//SYSIN    DD      *
           PRINT   TYPORG=PO,MAXNAME=4,MAXFLDS=4
           MEMBER  NAME=SMFSORT
           RECORD  FIELD=(80)
           MEMBER  NAME=SMFE15
           RECORD  FIELD=(80)
           MEMBER  NAME=SMFE35
           RECORD  FIELD=(80)
/*

```

1

The volume and unit parameters depend on your installation's request.

Figure 29. Sample JCL for Obtaining a Listing of Sample Sort Exit Routines

To include the sample exit routines in your sort application, you must first assemble and link-edit them before running the sort/merge program. Figure 30 on page 101 shows sample JCL for this procedure, including one possible sort application. In this example, SMF records are to be sorted first on the job log identification (major control field), and then on the time and date portions of the time stamp (minor control fields). Displacements of these fields (shown in the record formats in Chapter 15, "SMF records," on page 165) are 14, 6, and 2. However, you must add four bytes for the record descriptor word (RDW) and one byte for the sort procedures (initial count of 1) to these displacements. Hence, displacements 19, 11, and 7 are shown in the SORT FIELDS=statement in Figure 30 on page 101.

```

//SMFSORT      JOB      MSGLEVEL=1
//STEP1        EXEC     ASMFCL1
//ASM,SYSIN    DD       *
                (E15 Source Deck)
/*
//LKED.SYSLMOD DD       DSNAMES=SMF1.EXIT,UNIT=SYSDA,2
//              DISP=(NEW,KEEP),SPACE=(TRK,(10,5,1)),
//              VOL=SER=xxxxxx
//LKED.SYSIN   DD       *
                NAME      E15(R)3
/*
//STEP2        EXEC     ASMFCL1
//ASM,SYSIN    DD       *
                (E35 Source Deck)
/*
//LKED.SYSLMOD DD       DSNAMES=SMF1.EXIT,DISP=(OLD,KEEP),2
//              UNIT=SYSDA,VOL=SER=xxxxxx
//LKED.SYSIN   DD       *
                NAME      E35(R)3
/*
//SORTSTEP     EXEC     PGM=SORT,REGION=100K4
//SYSOUT       DD       SYSOUT=A
//SORTLIB      DD       DSNAMES=SYS1,SORTLIB,DISP=SHR
//EXITLIB      DD       DSNAMES=SMF1.EXIT,DISP=(OLD,KEEP),5
//              UNIT=SYSDA,VOL=SER=xxxxxx
//SORTIN       DD       UNIT=3480,VOL=SER=SYSMAN,DISP=OLD,6
//              LABEL=(,SL),DCB=(RECFM=VBS,LRECL=600,BLKSIZE=200)7
//SORTWK01     DD       UNIT=SYSDA,SPACE=(CYL,(50),,CONTIG)8
//SORTWK02     DD       UNIT=SYSDA,SPACE=(CYL,(50),,CONTIG)8
//SORTWK03     DD       UNIT=SYSDA,SPACE=(CYL,(50),,CONTIG)8
//SORTOUT      DD       UNIT=3480,DSNAMES=SMF1,SORTOUT,LABEL=(,SL),9
//              DISP=(KEEP),DCB=(RECFM=VBS,LRECL=600,BLKSIZE=200)7
//SORDDATA     DD       UNIT=SYSDA,SPACE=(CYL,(1,1)),10
//              DCB=(RECFM=VBS,LRECL=600,BLKSIZE=200)7
//HDRDATA      DD       UNIT=SYSDA,SPACE=(TRK,(5,5)),10
//              DCB=(RECFM=VBS,LRECL=600,BLKSIZE=200)7
//SYSIN        DD       *
                SORT      FIELDS=(19,16,A,11,4,A,7,4,A),FORMAT=BI,SIZE=E400011
                MODS
                END
/*

```

Figure 30. Sample JCL for Running a Sort Procedure

Notes:

- ¹ EXEC statement for catalogued procedure ASMFCL (assemble and link-edit). (For a description of the ASMFCL procedure, see *IBM High Level Assembler/MVS & VM & VSE Programmer's Guide*.)
- ² The sample sort exit routines will be link-edited into data set SMF1.EXIT.
- ³ Link-edit control statements specifying that E15 and E35 will be the load module names of the exit routines.
- ⁴ EXEC statement for the sort/merge program.
- ⁵ Data set SMF1.EXIT is specified as the library in which sort exit routines can be found.
- ⁶ Input to the sort program is the SMF dump data set, contained on a tape having a volume serial number of SYSMAN.
- ⁷ The LRECL value can be larger than the BLKSIZE value because records might be segmented. The LRECL value must be as large as the longest SMF record being created plus four bytes for the RDW. Modify these parameters according to the longest record to be collected.

- 8 Three sort work units are defined as being direct access devices.
- 9 The sort output data set is to be written on tape.
- 10 Two data sets required by the sample sort exit routines are defined on direct access devices.
- 11 The sort/merge control statements define the sort control fields and exit routines to be used in this sort application.

Designing a Report Program

The basic operations of a report are formatting and printing data from SMF records. The input to a report program is normally the sorted SMF data set.

SYS1.SAMPLIB has a sample PL/1 source report program, called SMFFRMT, which formats record types 23 and 90. Contained within the program are declares for record types 23, 30, 32, and 90.

Before using the SMFFRMT program, you must compile the program using the PL/I compiler. Figure 31 shows a sample JCL for running the SMFFRMT program after it is compiled and link-edited into SYS1.LINKLIB.

```
//FORMAT JOB MSGLEVEL=1
//FRMT EXEC PGRM=SMFFRMT
//SYSPRINT DD SYSOUT=A
//RPORT23 DD SYSOUT=A
//RPORT90 DD SYSOUT=A
//SMFDATA DD DISP=(OLD,KEEP),LABEL=(,SL),VOL=SER=xxxxxx,DSN=nnn,
// UNIT=3480
```

Figure 31. Sample JCL for Running SMFFRMT

Converting binary fields to time of day format

As stated earlier, the basic operations of a report program include formatting and printing data from SMF records. Many SMF records have timestamp fields that contain a binary value that represents the time since midnight, in hundredths of seconds. One example is the SMFxxTME field which exists in all SMF record headers and contains a value representing the time when the record was moved into the SMF buffer.

The following examples show the steps to follow in order to convert any timestamp into time of day format. For more information about SMF record headers, see “Standard SMF record header” on page 162.

Note that the DISPLAY and OCCUR operators on the z/OS DFSORT ICETOOL utility include built in functions to convert the date and time. See *z/OS DFSORT: Getting Started*.

Example 1: Assume the time value in binary hundredths of a second past midnight is 005C5E00:

1. Convert the value of the binary timestamp to a decimal value:
 - 005C5E00 = 6053376
2. Determine the number of hours past midnight the timestamp was created:
 - a. Divide the decimal value from step 1 by 100. The result is the number of seconds past midnight.

$$6053376/100 = 60533.76$$

- b. Divide by the number of seconds in an hour to obtain the number of hours past midnight. There are 3600 seconds in an hour. For this example the hours portion of the time of day is equal to 16.

$$60533.76/3600 = 16.814933333$$

- c. Determine the number of hundredths of a second in that number of hours.

$$16 * 3600 * 100 = 5760000$$

- d. Subtract that number of hundredths of a second from the original decimal value.

$$6053376 - 5760000 = 293376$$

The remainder from step 2 is 293376.

3. Determine the number of minutes past midnight the timestamp was created:

- a. Divide the remainder from step 2 by 100. This is the number of seconds past the hour.

$$293376/100 = 2933.76$$

- b. Now divide your answer from part a by the number of seconds in a minute. The result is the number of minutes past the hour. In this example the minutes portion of the time of day is equal to 48.

$$2933.76/60 = 48.896$$

- c. Determine the number of hundredths of a second in that number of minutes.

$$48 * 60 * 100 = 288000$$

- d. Subtract that number of 100ths of a second from the remainder from step 2.

$$293376 - 288000 = 5376$$

The remainder from step 3 is 5376.

4. Determine the number of seconds, tenths, and hundredths.

- Divide the remainder from step 3 by 100.

$$5376/100 = 53.76$$

Therefore, the actual time of day is 16:48:53.76.

Example 2: Assume the time value in binary hundredths of a second past midnight is 005D7740:

1. Convert the value of the binary timestamp to a decimal value:

- $005D7740 = 6125376$

2. Determine the number of hours past midnight the timestamp was created:

- a. Divide the decimal value from step 1 by 100. The result is the number of seconds past midnight.

$$6125376/100 = 61253.76$$

- b. Divide by the number of seconds in an hour to obtain the number of hours past midnight. There are 3600 seconds in an hour. For this example the hours portion of the time of day is equal to 17.

$$61253.76/3600 = 17.014933333$$

- c. Determine the number of hundredths of a second in that number of hours.

$$17 * 3600 * 100 = 6120000$$

- d. Subtract that number of hundredths of a second from the original decimal value.

$$6125376 - 6120000 = 5376$$

The remainder from step 3 is 5376.

3. Determine the number of minutes past midnight the timestamp was created:
 - a. Divide the remainder from step 2 by 100. This is the number of seconds past the hour.
 $5376/100 = 53.76$
 - b. Now divide your answer from part a by the number of seconds in a minute. The result is the number of minutes past the hour. In this example the minutes portion of the timestamp equal 0.
 $53.76/60 = 0.896$
 - c. Determine the number of hundredths of a second in that number of minutes.
 $0 * 60 * 100 = 0$
 - d. Subtract that number of 100ths of a second from the remainder from step 2.
 $5376 - 0 = 5376$

The remainder from step 3 is 5376.

4. Determine the number of seconds, tenths, and hundredths.

- Divide the remainder from step 3 by 100.

$$5376/100 = 53.76$$

Therefore, the actual time of day is 17:00:53.76.

Table 6 and Table 7 on page 105 list the number of hundredths of a second in each full hour (0-24) and the number of hundredths of a second in each full minute (0-60) respectively. They may be used to make the calculations easier by finding the numbers that are just below the numbers calculated and subtracting them. See the examples following these tables.

Table 6. Number of hundredths of a second in each full hour of a day

Hundredths of seconds	Hour
000000	0
360000	1
720000	2
1080000	3
1440000	4
1800000	5
2160000	6
2520000	7
2880000	8
3240000	9
3600000	10
3960000	11
4320000	12
4680000	13
5040000	14
5400000	15
5760000	16
6120000	17
6480000	18

Table 6. Number of hundredths of a second in each full hour of a day (continued)

Hundredths of seconds	Hour
6840000	19
7200000	20
7560000	21
7920000	22
8280000	23
8640000	24

Table 7. Number of hundredths of a second in each full minute of an hour

Hundredths of seconds	Minutes
000000	0
006000	1
012000	2
018000	3
024000	4
030000	5
036000	6
042000	7
048000	8
054000	9
060000	10
066000	11
072000	12
078000	13
084000	14
090000	15
096000	16
102000	17
108000	18
114000	19
120000	20
126000	21
132000	22
138000	23
144000	24
150000	25
156000	26
162000	27
168000	28
174000	29
180000	30

Table 7. Number of hundredths of a second in each full minute of an hour (continued)

Hundredths of seconds	Minutes
186000	31
192000	32
198000	33
204000	34
210000	35
216000	36
222000	37
228000	38
234000	39
240000	40
246000	41
252000	42
258000	43
264000	44
270000	45
276000	46
282000	47
288000	48
294000	49
300000	50
306000	51
312000	52
318000	53
324000	54
330000	55
336000	56
342000	57
348000	58
354000	59
360000	60

Example 3: Assume the time value in binary hundredths of a second past midnight is 005C5E00:

1. Convert the value of the binary timestamp to a decimal value:
 - 005C5E00 = 6053376
2. Determine the number of hours past midnight the timestamp was created:
 - a. Find the value in Table 6 on page 104 which is closest to, but less than, the decimal value in step 1. In our example, the hours portion of the timestamp is equal to 16.

5760000 16

- b. Subtract the number of hundredths of a second from the original decimal value:

$$6053376 - 5760000 = 293376$$

The remainder from step 2 is 293376.

3. Determine the number of minutes past midnight the timestamp was created:
- a. Find the value in Table 7 on page 105 which is closest to, but less than, the remainder of step 2. In our example, the minutes portion of the timestamp is equal to 48.

$$288000 \quad 48$$

- b. Subtract the number of hundredths of a second from the remainder of step 2.

$$293376 - 288000 = 5376$$

The remainder from step 3 is 5376.

4. Determine the number of seconds, tenths, and hundredths.

- Divide the remainder from step 3 by 100.

$$5376/100 = 53.76$$

Therefore, the actual time of day is 16:48:53.76.

Self-defining data

Records with self-defining data, such as the type 30 record, are variable in nature, and the location of the sections or fields within these records are subject to change over time. Therefore, always design programs to use the self-defining data for navigating to any section or field in these records.

Chapter 7. APPC/MVS accounting

Advanced Program-to-Program Communication/MVS (APPC/MVS) is the MVS support for cooperative processing. For example, an APPC/MVS administrator defines a host program to process user requests. A user of a PS/2 can run a PS/2 program to interact with this host program. APPC/MVS allows the PS/2 user to access host system (MVS) data without having to log on to the MVS system directly. This data can reside on more than one system, and can be maintained in distributed databases.

The host and PS/2 programs communicate using APPC/MVS services, and are called transaction programs (TPs). The interaction between the PS/2 TP and the host TP is called a conversation. After the conversation is established, each “partner” in the conversation can send data to, or receive data from, the other partner. Each partner in a conversation is identified by its logical unit name (LU name) which is the VTAM “port” on the system, through which communication flows.

APPC/MVS work consists of inbound and outbound conversations. From an MVS point of view, an inbound conversation originates from a TP that requests service of an MVS TP. The requesting TP may be external to MVS (**remote** — such as a PS/2 program) or internal to MVS (**local** — such as TSO/E users or batch jobs). An outbound conversation originates from an MVS TP to another TP. See “Recording SMF Information for APPC/MVS Work” on page 113 for information that SMF collects for inbound and outbound conversations.

SMF accounts for each TP scheduled by the APPC/MVS transaction scheduler (ASCH) as a single accountable entity, in the same way that batch jobs or TSO/E sessions are accountable entities. Your installation can collect, sort, and report on TP resources by using methods similar to those used for other work.

SMF also accounts for each conversation (inbound or outbound) in the system as a single accountable entity. Conversation-level accounting is particularly useful when your installation uses an APPC/MVS server application to process multiple conversations concurrently. Conversation level accounting allows your installation to collect information for each conversation in the server address space.

Note: SMF does not produce records 4, 5, 20, 34, 35 for TPs.

To use APPC conversation information and APPC/MVS transaction records, your installation must customize any accounting packages that read the SMF records.

Note: Use the user account validation exit (IEFUAV) to validate the accounting information of users of APPC/MVS TPs.

Transaction Programs (TPs)

To SMF, a TP scheduled by the APPC/MVS transaction scheduler (ASCH) is a separate address space (like a batch job or TSO/E user). APPC/MVS and ASCH each run in their own system address spaces.

The requested TP can run on either the same system as the request or on another system elsewhere in the network. SMF reports on whatever part of the function

actually runs on the current MVS system. If an APPC/MVS-scheduled job requires resources from other systems, then you must correlate the accounting data for each participating system.

In contrast, if a TSO/E user requests a TP that runs on the same MVS system, then SMF reports on both ends of the conversation.

There are two kinds of scheduling available for APPC/MVS TPs: standard and multi-trans. And, as an alternative to scheduling, APPC/MVS also allows inbound conversation requests to be routed directly to an APPC/MVS server (thus bypassing a transaction scheduler). TPs that are processed by APPC/MVS servers are sometimes called *served TPs*.

This topic shows how SMF reports on each type of TP (standard, multi-trans, and served).

Standard TP Processing

APPC/MVS initializes standard TPs for each inbound conversation request and terminates them when they finish processing. With standard scheduling, a TP's resources are allocated and deallocated for each inbound conversation request. See Figure 32 for an example.

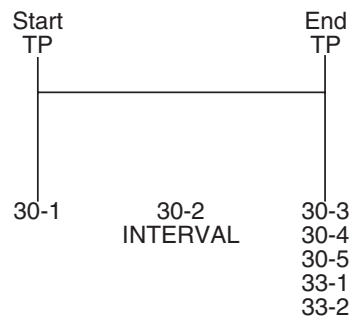


Figure 32. Example of standard TP processing

Note: Points at which SMF writes type 30 (subtypes 1, 2, 3, 4, and 5) and type 33 (subtypes 1 and 2) records to reflect standard TP processing.

Multi-trans TP Processing

A multi-trans TP remains active between inbound conversation requests, with its resources available. The first inbound request starts the multi-trans TP. Subsequent requests can use the same instance of the TP and avoid the overhead of repeated resource allocation and deallocation.

When a multi-trans TP is ready to run a user request, it issues a `Get_Transaction` call (`GETTRANS` — a request to get a transaction) to the APPC/MVS transaction scheduler. The scheduler informs the TP when there is work to do. If there is no work, the scheduler informs the TP, and then the TP ends itself.

When the multi-trans TP does some processing not directly related to a user request it can issue a `Return_Transaction` call (`RETTRANS` — a request to return a transaction).

Multi-trans Shell

A multi-trans TP is typically coded with a multi-trans shell, an environment that performs initialization and termination processing, surrounding the part of the TP that holds conversations.

Multi-trans shell processing can be distinguished by the generic ID (also indicated by a "generic" flag) associated with the type 33 record (see Figure 33). The generic ID is charged for the setup and cleanup work done by the multi-trans TP when it begins and ends, and when it does processing following a Return_Transaction call. Charging a generic ID means the first user is not charged for initialization processing for all users, nor is the last user charged for cleanup processing for all users.

Your billing for the multi-trans shell will probably be similar to your billing procedures for system address spaces.

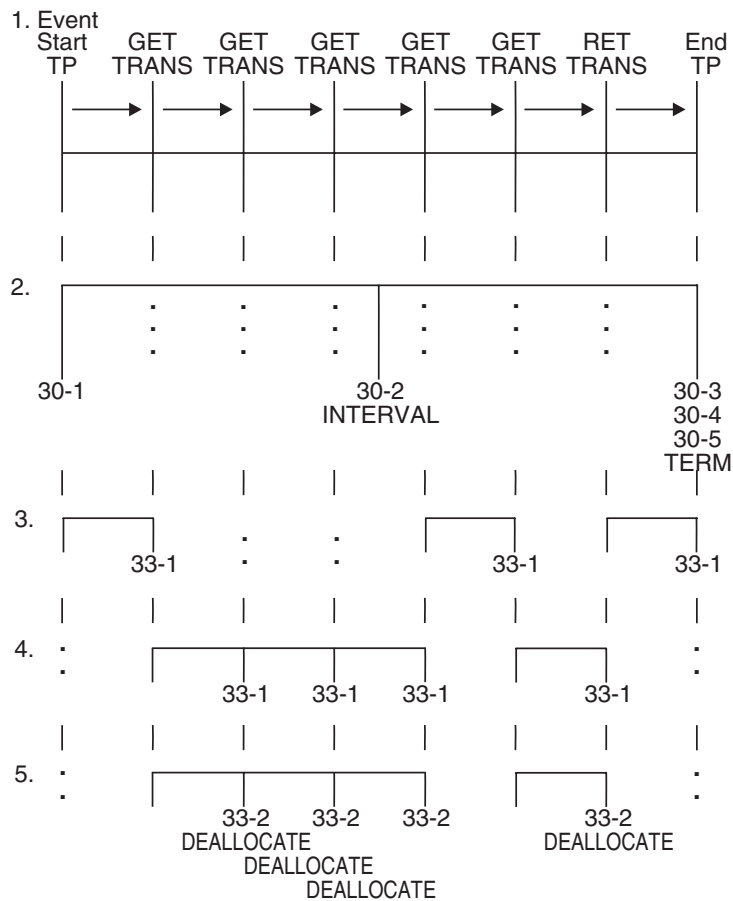


Figure 33. Example of multi-trans shell processing

1. Represents possible events in the life of a multi-trans TP. Items 2, 3, 4, and 5 correspond with these events.
2. Points at which SMF writes the type 30 (subtypes 1, 2, 3, 4, and 5) record. INIT represents initialization and TERM represents termination.

3. Points at which SMF writes a type 33 (subtype 1) record to reflect multi-trans shell activity. This record represents the time period since the last event. Multi-trans shell records do not contain scheduler data (such as LU names and queue times).
4. Points at which SMF writes a type 33 (subtype 1) record to reflect individual user requests to receive service (GETTRANS) from the multi-trans TP. This record represents the time period since the last event.
5. Points at which SMF writes a type 33 (subtype 2) record to reflect individual conversations within the multi-trans shell. DEALLOCATE represents conversation deallocation.

APPC/MVS Server Processing

Besides scheduling TPs in response to inbound requests, APPC/MVS also allows for inbound requests to be routed to an APPC/MVS server.

An APPC/MVS server is an MVS application that uses the Receive_Allocate callable service to receive inbound conversation requests directly (rather than through a transaction scheduler). APPC/MVS servers avoid the overhead associated with APPC/MVS scheduling. See Figure 34 on page 113 for an example.

Because APPC/MVS servers can process multiple inbound conversations concurrently, a single server address space might contain multiple *interleaved* (or overlapping) conversations concurrently.

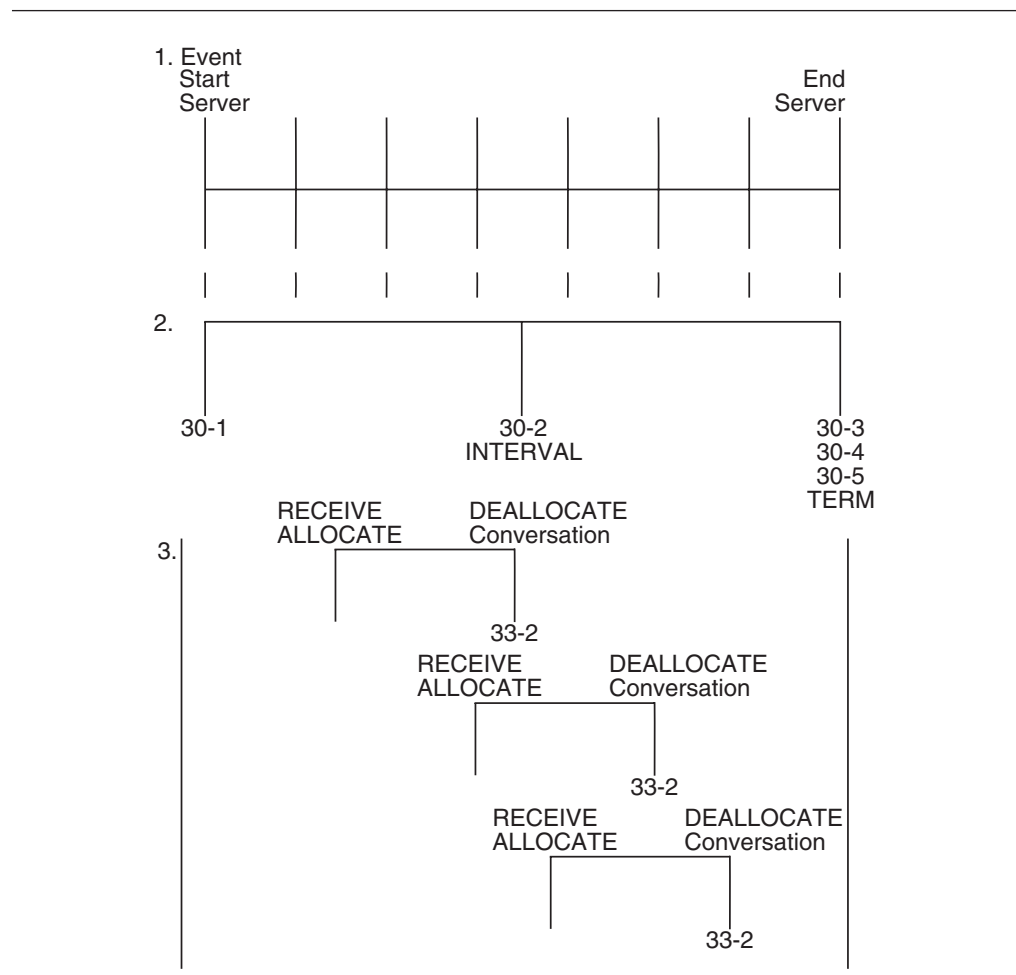


Figure 34. Example of APPC/MVS server processing

1. Represents possible events in the life of a server address space. Items 2 and 3 correspond with these events.
2. Points at which SMF writes the type 30 (subtypes 1, 2, 3, 4, and 5) record. INIT represents initialization and TERM represents termination.
3. Points at which SMF writes type 33 (subtype 2) records to reflect individual conversations within a server address space. RECEIVE ALLOCATE represents the start of conversation activity and DEALLOCATE represents conversation deallocation.

Recording SMF Information for APPC/MVS Work

For every job that issues APPC/MVS callable services, SMF writes summary conversation information in a type 30 record. This record reflects the total conversation activity for a particular job's address space. In addition, SMF writes type 33 records (subtypes 1 and 2) as follows:

- Subtype 1 records for individual APPC/MVS transactions that are scheduled by the APPC/MVS transaction scheduler.
- Subtype 2 records for individual APPC/MVS conversations (inbound and outbound) on the system. Subtype 2 records are written for work that is scheduled by the APPC/MVS transaction scheduler, or processed by an APPC/MVS server.

The following topics describe the contents of each of these SMF record types.

Record Type 30

As it does for any address-space level recording in MVS, SMF writes a type 30 record for APPC/MVS work. When APPC/MVS work begins, SMF marks its beginning with a subtype 1 record and marks its end with subtype 4 and 5 records. All SMF type 30 records for APPC/MVS work include summary conversation information, such as the number of conversations, the number of sends and receives, and the amount of data sent and received. Summary conversation information appears in records generated for both outbound and inbound conversations.

You may choose to collect type 30 job level detail information for transactions by using record type selection control.

Record Type 33, Subtype 1

When APPC/MVS inbound conversations create work scheduled by the APPC/MVS transaction scheduler, SMF writes a type 33 subtype 1 record. (APPC/MVS inbound conversations scheduled by a different transaction scheduler can also provide information to SMF for accounting.) For each TP request that is executed, SMF provides information such as TP name, local and partner LU names, user and account number, and I/O statistics. When a TP uses scheduling resources, SMF provides information such as:

- Schedule class
- Schedule type
- Specific dates and times that work was:
 - Received
 - Queued
 - Started
 - Ended.

The TP Usage Detail topic of the type 33 record contains zeroes for multi-trans shell processing records (a generic user ID is in effect). You can collect multi-trans TP resource information under a generic user ID or the account number associated with that TP. The costs can then be billed either to the specific users of the TP or to system users. Group these records together based on some criteria (TP name, job name), and charge users based on that criteria.

Record Type 33, Subtype 2

When APPC/MVS conversations are deallocated by either partner program, SMF writes a type 33 subtype 2 record. For each conversation, SMF provides information such as:

- Conversation ID
- Name of the TP that issued the conversation request
- Local and partner LU name
- Number of sends and receives
- Amount of data sent and received.

For inbound conversations that are processed by APPC/MVS servers, rather than transaction schedulers, subtype 2 records also contain information that is specific to server processing. For example, SMF records the specific dates and times that the conversation request was:

- Received by APPC/MVS
- Added to the server's allocate queue
- Received by the server for subsequent processing
- Deallocated.

To help correlate conversations between partner programs, APPC/MVS applications can write user-specific information to a 255-byte user data field in the subtype 2 record through the `Set_Conversation_Accounting_Information` service. For information about using this service, see *z/OS MVS Programming: Writing Transaction Programs for APPC/MVS*.

Chapter 8. z/OS UNIX System Services accounting

Much information regarding z/OS UNIX is available in various SMF records:

- Address space level information is available in the common address space work record (type 30).
- HFS data set caching information is available in the DFSMS statistics and configuration record (type 42).
- RMF support for z/OS UNIX Services is reflected in SMF record types 70 through 79.
- Activity data for the z/OS UNIX file system is available in SMF record type 92.

The common address space work record (type 30)

The common address space work record (type 30) provides the following information related to z/OS UNIX:

- Process accounting data for the address space
- Special accounting for the exec family of functions

Process accounting data

For address spaces which use z/OS UNIX callable services, a repeating section for process accounting is provided in SMF record type 30. Collection of process accounting data is triggered by the following events:

- Job step termination
- Invoking one of the exec functions (substep termination)
- SMF type 30 interval processing
- Invoking MVS process cleanup (undub)

Each time process accounting data is collected, another repeating section is added to the appropriate SMF type 30 subtype records.

Accounting for fork()

When a program issues a **fork()**, the activity of the child process is not included in the accounting data for the parent process. That is, when the program issues a **fork()**, the child process has its own SMF type 30 records. The parent's type 30 records do not include the activity of the child process. However, you can associate the parent process with the child process using the following:

- The process user ID, specified in the SMF30OUI field
- The process user group, specified in the SMF30OUG field
- The process session ID (SID), specified in the SMF30OSI field
- The process parent ID, specified in the SMF30OPP field

The field SMF30EXN provides the name of the program that was run. It is specified as up to 16 characters. After a **fork()**, the child process runs the same program as the parent. The program name of the child matches that of the parent at the time of the **fork()**. For more information about the contents of the SMF30EXN, see “Accounting for exec functions” on page 118.

Accounting for `attach_exec`

As part of setting up an interactive environment, the OMVS command must start another process, the shell, to interpret and run shell commands. When you specify the `NOSHAREAS` parameter, the shell is started using `fork()` and `exec`. However, when you specify the `SHAREAS` parameter, the OMVS command starts the shell using `attach_exec`. This function starts the shell process running in the address space of the OMVS command. Other applications can also use `attach_exec` to start a process without the overhead of an additional address space.

Because SMF data is collected on an address space basis, process identification (such as process ID and session ID) is recorded only for the parent process in the address space. However, z/OS UNIX resource consumption is accumulated for the parent process and all local child processes.

Accounting for `exec` functions

When a program issues an `exec` function, the requesting job goes through step termination, including record generation and the invocation of the `IEFACTRT` exit. Then the job goes through step initialization, including invocation of the `IEFUSI` exit. However, the new unit of work is not a job step, but a substep. The step number is unchanged, but the substep field is incremented. SMF provides the following fields to support `exec` processing:

- A “step completion” flag indicates the step is ending due to an `exec` request. The flag is in the Completion Section of the SMF type 30 record.

This flag indicates that the step is not really terminating (in the normal sense) and that there is another step in the job with the same step name and number.

- A field reporting the substep number is in the ID section of the SMF type 30 record.

This field is used in addition to job name, job start time, and step number to put records in sequence.

- The field `SMF30EXN` provides the name of the program that was run. It is specified as up to 16 characters.

Load modules can be distinguished from z/OS UNIX executable files in the `SMF30EXN` field as follows:

- Names that are longer than 8 bytes must be z/OS UNIX executable files
- For names that are 8 bytes or less, check the terminating character:
 - `X'00'`—z/OS Unix executable file (z/OS UNIX program)
 - `X'40'`—Load module (MVS program)

`SMF30EXN` contains information as follows:

- **z/OS UNIX executable filename.** `SMF30EXN` provides the name of a z/OS UNIX file that is invoked using the `exec` family of functions. The filename can be up to 16 characters in length.

For z/OS UNIX executable files, `SMF30EXN` contains the portion of the pathname after the last slash. z/OS UNIX filenames, if not truncated, are followed by the terminating character `X'00'`.

For example, if the z/OS UNIX executable file with pathname `/bin/grep` is invoked using an `exec` function, `SMF30EXN` contains `grep` followed by the terminating character `X'00'`.

z/OS UNIX filenames longer than 16 bytes (including the terminating character) are truncated. For example, the name `/usr/joe/somelongprogramname` is recorded as `somelongprogramm`. Because the filename is truncated, no terminating character is recorded.

It is recommended that you not use blanks in z/OS UNIX filenames. An z/OS UNIX file with a name padded with blanks appears in the SMF type 30 record to be an load module name.

- **Load module name.** For load modules invoked using exec functions, SMF30EXN contains the unqualified name of the load module, padded with blanks, to a length of 16 characters.

Address space accounting for z/OS UNIX file system activity

SMF type 30 records provide a summary of the I/O activity done using z/OS UNIX. The I/O activity is summarized in the following categories:

- I/O activity to regular files. This includes all I/O to file systems.
- I/O activity to pipe files. Although there is no physical I/O associated with pipes, this activity is still listed as I/O. This field contains I/O activity to pipe files and to UNIX domain sockets.
- I/O activity to special files. This includes I/O activity to terminals.
- I/O activity to network sockets. This field includes I/O activity to network sockets as returned by the TCP/IP physical file system.

Note:

1. These values may contain zeros if your TCP/IP physical file system does not support address space level accounting.
2. Different TCP/IP physical file systems may account differently for the same network activity.

Sample SMF job flows

Figure 35 shows the key for the following examples.

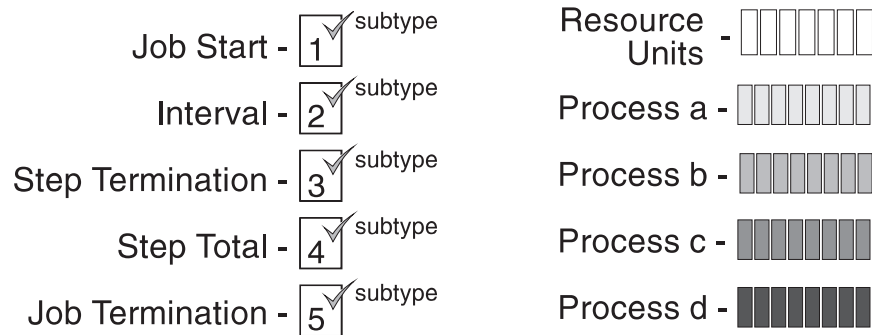


Figure 35. SMF job flow examples - key

The following examples show how the process data is accumulated and reported in several instances:

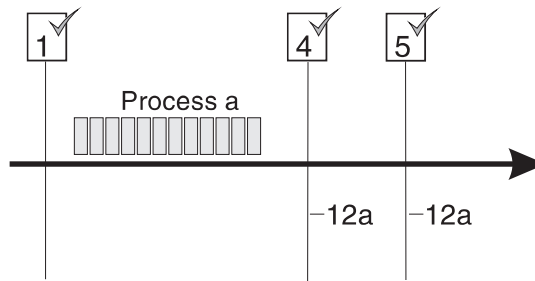


Figure 36. SMF record type 30: Example 1

In Figure 36, the flow is as follows:

1. The job starts and a job start (subtype 1) record is written.
2. Process a begins and consumes 12 units of resource.
3. The step ends and a step total record (subtype 4) is written. This record contains one z/OS UNIX process section showing the 12 units of resource consumed by process a.
4. The job ends and a job termination record (subtype 5) is written. Because this job contained only one step, the job termination record contains one z/OS UNIX process section matching that of the step total record.

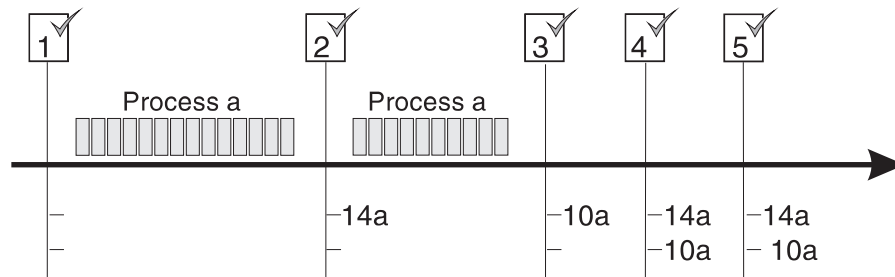


Figure 37. SMF record type 30: Example 2

In Figure 37, the flow is as follows:

1. The job starts and a job start (subtype 1) record is written.
2. Process a begins and consumes 14 units of resource.
3. An Interval record (subtype 2) is written containing one z/OS UNIX process section showing the 14 units of resource consumed by process a.
4. The job continues and process a consumes an additional 10 units of resource.
5. The step ends:
 - a. A step termination record (subtype 3) is written. This record contains a single z/OS UNIX process section showing the additional 10 units of resource consumed by process a after the interval.
 - b. A step total record (subtype 4) is written. This record contains two z/OS UNIX process sections:
 - One showing the 14 units of resource consumed by process a before the interval
 - One showing the 10 units of resource consumed by process a after the interval

6. The job ends and a job termination record (subtype 5) is written. Because this job contained only one step, the z/OS UNIX process sections in the job termination record are identical to those written in the step total record.

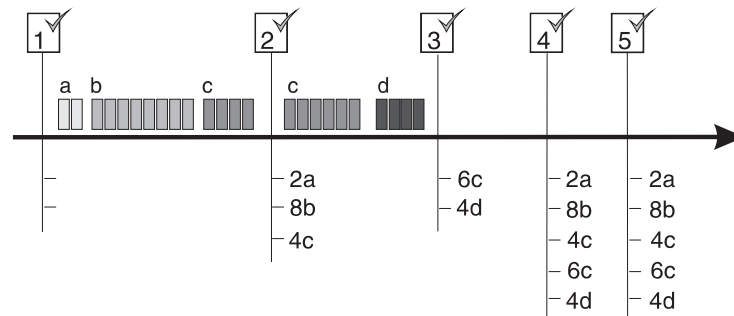


Figure 38. SMF record type 30: Example 3

In Figure 38, the flow is as follows:

1. The job starts and a job start (subtype 1) record is written.
2. Process a begins and consumes 2 units of resource.
3. The job is “undubbed” and “dubbed” again as process b. Process b consumes 8 units of resource.
4. The job is “undubbed” and “dubbed” again as process c. Process c consumes 4 units of resource.
5. An Interval record (subtype 2) is written containing three z/OS UNIX process sections:
 - One showing the 2 units of resource consumed by process a
 - One showing the 8 units of resource consumed by process b
 - One showing the 4 units of resource consumed by process c
6. The job continues and process c consumes an additional 6 units of resource.
7. The job is “undubbed” and “dubbed” again as process d. Process d consumes 4 units of resource.
8. The step terminates:
 - a. A step termination record (subtype 3) is written. This record contains two z/OS UNIX process sections:
 - One showing the 6 units of resource consumed by process c after the interval
 - One showing the 4 units of resource consumed by process d
 - b. A step total record (subtype 4) is written. This record contains five z/OS UNIX process sections:
 - One showing the 2 units of resource consumed by process a
 - One showing the 8 units of resource consumed by process b
 - One showing the 4 units of resource consumed by process c before the interval
 - One showing the 6 units of resource consumed by process c after the interval
 - One showing the 4 units of resource consumed by process d

9. The job ends and a job termination record (subtype 5) is written. Because this job contained only one step, the z/OS UNIX process sections in the job termination record are identical to those written in the step total record.

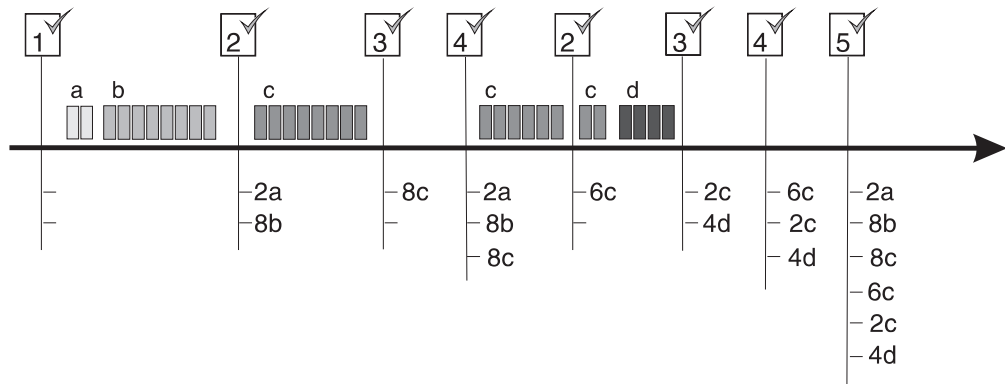


Figure 39. SMF record type 30: Example 4

In Figure 39, the flow is as follows:

1. The job starts and a job start (subtype 1) record is written.
2. Process a begins and consumes 2 units of resource.
3. The job is “undubbed” and “dubbed” again as process b. Process b consumes 8 units of resource.
4. The job is “undubbed.”
5. An Interval record (subtype 2) is written containing two z/OS UNIX process sections:
 - One showing the 2 units of resource consumed by process a
 - One showing the 8 units of resource consumed by process b
6. The job is “dubbed” again as process c. Process c consumes 8 units of resource.
7. The **exec** service is invoked, causing the job to go through step termination and to start another substep.
 - a. A step termination record (subtype 3) is written. This record contains one z/OS UNIX process section showing the 8 units of resource consumed by process c before the **exec**.
 - b. A step total record (subtype 4) is written. This record contains three z/OS UNIX process sections:
 - One showing the 2 units of resource consumed by process a
 - One showing the 8 units of resource consumed by process b
 - One showing the 8 units of resource consumed by process c before the **exec**
8. The job continues processing the new substep and process c consumes an additional 6 units of resource.
9. An Interval record (subtype 2) is written containing one z/OS UNIX process section showing the 6 units of resource consumed by process c since the **exec**.
10. The job continues and process c consumes an additional 2 units of resource.
11. The job is “undubbed” and “dubbed” again as process d. Process d consumes 4 units of resource.
12. The step ends:

- a. A step termination record (subtype 3) is written. This record contains two z/OS UNIX process sections:
 - One showing the 2 units of resource consumed by process c after the second interval
 - One showing the 4 units of resource consumed by process d
 - b. A step total record (subtype 4) is written. This record contains three z/OS UNIX process sections:
 - One showing the 6 units of resource consumed by process c after the **exec** but before the second interval
 - One showing the 2 units of resource consumed by process c after the second interval
 - One showing the 4 units of resource consumed by process d
13. The job ends and a job termination record (subtype 5) is written. This record contains all the z/OS UNIX process sections written with the first step total record followed by all the z/OS UNIX process sections written with the second step total record. The following six sections are written to the job termination record:
- One showing the 2 units of resource consumed by process a
 - One showing the 8 units of resource consumed by process b
 - One showing the 8 units of resource consumed by process c before the **exec**
 - One showing the 6 units of resource consumed by process c after the **exec** but before the second interval
 - One showing the 2 units of resource consumed by process c after the second interval
 - One showing the 4 units of resource consumed by process d

DFSMS statistics and configuration record (type 42)

The DFSMS statistics and configuration record (type 42, subtype 6) provides information about data set level performance. Each IBM-supplied mountable file system resides in a data set. I/O statistics for those data sets represent I/O statistics for the mountable file system. Each z/OS file system (zFS) resides in a linear data set. Each hierarchical file system (HFS) resides in an HFS data set.

RMF record support (types 70–79)

RMF records provide the following support for z/OS UNIX.

1. RMF supports the forked address space type, OMVS, in the CPU activity report (type 70) and in various Monitor II reports (type 79).
2. RMF supports swap reason codes z/OS UNIX input wait and z/OS UNIX output wait in the paging activity report (type 71) and in various monitor II reports (type 79).
3. SRM supports SUBSYS=OMVS in the IEAICSxx member of SYS1.PARMLIB. Therefore, this subsystem type may appear in the workload activity report (type 72).
4. RMF provides an OMVS kernel activity report showing status on kernel resources. Data for this report can be found in SMF record type 74, subtype 3.

File system activity record (type 92)

The file system activity record (type 92) provides information on:

- Mount and unmount of a file system
- Quiesce and unquiesce of a file system

- Open and close of a file

All file system activity records contain information needed to associate them with a particular job and job step.

- Jobname
- Reader start time and date
- Step name
- z/OS UNIX process ID
- z/OS UNIX process group ID

All file system activity records also contain information needed to associate them with a particular user, when appropriate.

- System authorization facility (SAF) group ID
- SAF user ID
- z/OS UNIX real user ID
- z/OS UNIX real group ID
- z/OS UNIX session ID

These fields can be used to link file system records with related common address space records (type 30) or with other related file system records.

Accounting for `open()` and `close()`

An `open()` or `opendir()` request generates an open record. No open record is written for `dup()`, `pipe()`, or `fork()`. A `fork()` or `dup()` function results in more than one file descriptor accessing the same file with the same cursor. (A cursor refers to the current position in the file.) In this case, when you have more than one file descriptor with the same cursor, if a `close()` or `closedir()` request occurs, no close record is written until the last file descriptor associated with the cursor is closed.

Because of the `fork()` function, a close record may be written by a process other than the one that opened the file. Open records that are created have a correlator, called the open file token. The open file token can be used to correlate open and close records.

Chapter 9. System Logger accounting

System logger produces SMF record type 88 to record the system logger activity of a single system in a sysplex; these records are written to the active SMF data set on that system. Using the IBM DFSORT program product, or its equivalent, you can sort and merge SMF data sets from each system into a single dump data set. System logger provides a SAMPLIB program, IXGRPT1, to show how an installation might write a program to analyze the dump data set input and summarize system logger activity across the sysplex.

Capacity planning

For capacity planning purposes, IBM recommends that you view the steady-state performance requirements of an application. Various flags in the SMF record type 88 highlight exception scenarios for additional analysis or changes in report processing. For example, if a log stream was temporarily unavailable during an SMF global interval, you might decide to exclude records written during that interval from a capacity planning study, because the interval did not exhibit normal capacity demands.

This topic describes the following:

- “Record Type 88”
 - “Primary storage full condition for Logstreams” on page 126
 - “Analysis of fields” on page 126
- “IXGRPT1 SAMPLIB program” on page 127
 - “System Logger interim storage related I/O activity” on page 127
 - “Nearness of the primary storage full condition for Logstreams” on page 128
 - “Selected capacity planning information” on page 128
 - “GROUP Information” on page 129

Record Type 88

Record type 88 focuses on the log stream data for a system in a sysplex, including use of interim storage. **Interim storage** is where log data is initially written, before being written to DASD log data sets. Data in interim storage can be accessed quickly without incurring DASD I/O. In a coupling facility log stream, interim storage for log data is in coupling facility list structures. In a DASD-only log stream interim storage for log data is contained in local storage buffers on the system and duplexed to staging data sets. Using record type 88 can help an installation avoid the STRUCTURE FULL exception, and perform other tuning and/or capacity planning analysis.

Record type 88 focuses on the coupling facility structure data and the log stream data for a system in a sysplex. Using the record can help an installation avoid the STRUCTURE FULL exception, and perform other tuning and/or capacity planning analysis.

Given a specific log stream, a record type 88 summarizes all of that log stream's activity on that system, as long as at least one address space is connected to the log stream on that system. If no system logger write activity is performed against

the log stream during a particular SMF interval, a record is produced showing zero for the various system logger activity total fields.

The system logger SMF record is cut for all log streams connected at the expiration of the SMF global recording interval. Record type 88 is also triggered by the disconnection of the last log stream on that system.

Analysis of fields

SMF fields relating to resource events, either structure full or staging data set full conditions, should be handled depending on the following:

- Whether the resource is shared sysplex-wide and each system will take action.
- Whether the resource is shared sysplex-wide but only one system will take action.
- Whether the resource is consumed on a system-local basis.

To obtain a sysplex-wide view of system logger activity, correct processing for most SMF 88 data fields is to sum the field contents for the target interval across all the SMF 88 records produced in the sysplex. There are, however, exceptions to this rule. Because each system must take its own action — that is, wait for an ENF signal indicating that system logger is available — an analysis program should use the maximum value for these fields: SMF88ERI, SMF88ERC, and SMF88ESF. For example, if a structure rebuild is initiated in a sysplex with three systems, the event is recorded on all three systems. The correct number of structure rebuild initiations is not three, however, it is one, or the maximum number provided SMF88ERI.

For dasd only log streams, staging data sets are a required part of the log stream configuration. For coupling facility log streams, on the other hand, use of staging data sets implies a trade-off between performance workload and data integrity. You should try to tune the staging data set size to minimize the number of Staging_Dataset_Threshold_Hit conditions. Without this type of tuning, such conditions can impact performance during staging data set processing. Note that only an installation can determine what the proper trade-off between performance and data integrity should be. For more information about staging data sets, for coupling facility log streams, see *z/OS MVS Setting Up a Sysplex*.

Because system logger maintains interim storage differently for coupling facility based versus dasd only log streams, the difference is reflected in SMF record 88 report:

- For a coupling facility based log stream, Structure (Interim Storage) Section of the record 88 report shows information about usage of coupling facility structure space allocated for a log stream and the flow of log data through the structure.
- For a dasd only log stream, the Structure (Interim Storage) section of the record 88 report shows information about usage of staging data set space and flow of data through the staging data set for the log stream.

Not all fields in the Structure (Interim Storage) Section of the record 88 report apply to dasd only log streams. For a dasd only log stream, fields that do not apply will contain zeros. Field SMF88STN contains *DASDONLY* for a dasd only log stream because there is no structure name. Use this field to identify a dasd only log stream.

Primary storage full condition for Logstreams

When a system logger user issues the IXGWRITE macro for a Logstream, system logger writes data to primary storage. When the write completes, system logger categorizes the event as a type-1, type-2, or type-3 completion. These

categorizations indicate how much space in the primary storage is being used by the Logstream when the IXGWRITE completion occurred. Field SMF88SC1 indicates a type-1 event, SMF88SC2 a type-2 event, and SMF88SC3 a type-3 event. SMF88SC3 will only be maintained for structure based Logstreams. It is not defined for DASDONLY Logstreams and will contain zero.

- A type-1 completion (field SMF88SC1) indicates that after the write completed, the percentage of resource in use by the primary storage was less than the high offload threshold.
- A type-2 completion (field SMF88SC2) indicates that after the write completed, the percentage of resource in use by the primary storage was equal to or greater than the high offload threshold, so system logger begins managing storage resources by migrating data from the coupling facility to DASD.
- A type-3 completion (field SMF88SC3) indicates that a given log stream is close to consuming all the coupling facility structure space or if the system logger configuration is tuned incorrectly. For example, access to the system logger DASD log data sets would be slowed if those data sets reside on the same device as some other heavily-used data sets. A type-3 completion can also occur if many Logstreams are defined to share the same structure, because each newly defined Logstream causes system logger to dynamically repartition storage among the existing Logstreams. If a log stream has a large proportion of type-3 completions, system logger is getting dangerously close to the STRUCTURE FULL condition. SMF88SC3 will not be defined for DASDONLY Logstreams.

Note: The counts of bytes written to the coupling facility structure and bytes written to DASD log data sets are sampled data; output totals are expected to be roughly proportional to the count of bytes written via IXGWRITE rather than a precise calculation.

IXGRPT1 SAMPLIB program

IXGRPT1 is available in SYS1.SAMPLIB. This program can help you analyze system logger SMF data for the systems in a sysplex. IXGRPT1 provides the following:

- System logger interim storage related I/O activity
- Nearness of the STRUCTURE FULL condition
- Selected capacity planning information

Note:

1. Input to IXGRPT1 should be sorted by timestamp and log stream name. For sorting purposes, analysis programs should use timestamp field SMF88LTD (note that this field is in GMT format), created when the ENF signal was issued, rather than fields SMF88TME and SMF88DTE, which indicate when a particular record was written. If IXGRPT1 detects a sorting error in the input, an error message is produced and the program ends.
2. When you use the IXGRPT1 program, make sure to include type 88 subtype 1 records and indicate whether or not you wish to include dasd only log stream information in this report or coupling facility data only. See the IXGRPT1 program for examples of how to do this.
3. Follow the instructions in the prolog of IXGRPT1 to run the utility or refer to JCL sample IXGRPT1J to run the utility.

System Logger interim storage related I/O activity

IXGRPT1 analyzes system logger-related I/O by calculating:

- Number of bytes written by users via IXGWRITE during the interval (SMF88LWB)
- Number of bytes written to interim storage during the interval (SMF88SWB)
- Number of bytes written to DASD during the interval (SMF88LDB)
- Number of bytes deleted from interim storage during interval without having been written to the log data set (SMF88SIB)
- Number of deletes from interim storage during interval without having been written to the log data set (SMF88SII)
- Number of bytes written to the DASD log data set and then deleted from interim storage during the interval (SMF88SAB)
- Number of deletes from interim storage during interval written to the DASD log data set and then deleted (SMF88SAI)
- Number of times the log stream was offloaded during interval (SMF88EO)
- Number of times a request was made by system logger to write log stream data to DASD during the expiring SMF interval (SMF88LIO)
- Number of times system logger had to suspend before writing log stream data to DASD because a previously-initiated write to DASD had not yet completed during the expiring SMF interval (SMF99LIS).

When the percentage of resource in use by a log stream exceeds the high offload threshold, data is asynchronously offloaded from interim storage to DASD log data sets, and then deleted from interim storage. Thus, SMF88SWB shows I/O from the main processor to interim storage. SMF88SIB shows the success of an application in avoiding offloads for data that it intends to delete from interim storage. SMF88SAB shows bytes deleted from interim storage and implies I/O from the interim storage to DASD log data sets.

Nearness of the primary storage full condition for Logstreams

IXGRPT1 analyzes the nearness of primary storage full condition for Logstreams as follows. For DASDONLY Logstreams the type-3 completion is not defined and will contain zero.

- Number of IXGWRITE invocations of completion type-1 (primary storage fullness in “normal” range).
- Number of IXGWRITE invocations of completion type-2 (primary storage fullness in “warning” range).
- Number of IXGWRITE invocations of completion type-3 (primary storage fullness in “critical” range). This field will be zero for DASDONLY Logstreams.
- Number of times all log stream in structure offloaded during interval
- Number of times the structure full condition was actually reached.

Selected capacity planning information

IXGRPT1 flags the existence of events that affect the interpretation of system logger data for capacity planning. Some events apply to coupling facility based log streams only, while others apply to both coupling facility and dasd only log streams.

Coupling facility log stream only events include:

- For every interval, IXGRPT1 displays the number of STRUCTURE FULL events that were detected for a coupling facility log stream. Frequent STRUCTURE FULL events can indicate a poorly sized coupling facility or that the applications writing to the coupling facility log stream have sporadic bursts of high activity. The installation should perform additional analysis.

- For every interval, IXGRPT1 displays the number of STRUCTURE REBUILD events that occur. Frequent STRUCTURE REBUILD events indicate a need for further analysis.

Coupling facility and dasd only log stream events include:

- For every interval, IXGRPT1 displays the number of bytes written to the coupling facility (SMF88SWB) and to the DASD log stream data set (SMF88LDB).
- For every interval, IXGRPT1 displays the number of staging data set full and staging data set threshold hit conditions for the log stream.
- For every interval, IXGRPT1 displays the number of DASD shift events that occur. Frequent DASD-shift events can indicate a poorly tuned system or a very high volume of system logger activity. The installation should perform additional analysis.

Note: A DASD-shift event occurs when system logger determines that a log stream must stop writing to one log data set and start writing to a different data set. A DASD-shift event generally occurs when a log data set becomes full.

- For a given log stream, IXGRPT1 displays the number of systems in the sysplex which contribute to an SMF record during the interval. In some cases a system expected to contribute a record might not do so. The count of contributing systems therefore may be used as a signal for further analysis, or to exclude exception records from normal state capacity planning.

GROUP Information

IXGRPT1 will show the GROUP information for a log streams and structures. For more information about the GROUP classification for log streams and structures, see Setting up a sysplex.

Chapter 10. EXCP count

SMF record types 4, 14, 15, 30, 32, 34, 40, and 64 have fields that contain a count related to I/O activity. EXCP is the name of a macro that initiates I/O. These fields are called execute channel program (EXCP) counts. (In a typical system most counts are not EXCP. This term is used for simplicity only.) There are two levels of EXCP counts, the DD level and the address space level. The type 30 record provides the address space level counts in the I/O Activity section and the DDLEVEL counts in the EXCP section. All other records provide only the DDLEVEL.

Note:

1. Most I/O is VSAM (that counts channel programs that are not done with EXCP), or BSAM, QSAM, or BPAM (that count blocks).
2. The I/O counts that are started by VSAM do not include data sets being accessed in cross memory or SRB mode.

DD Level

The DD level EXCP count includes:

- I/O for system services, for example:
 - Joblib/steplib processing
 - Jobcat/stepcat processing
 - Overlay supervisor processing
 - Checkpoint data set processing.
- Number of channel programs for VSAM data sets
- Number of channel programs for VSAM data sets (excludes VSAM extended format data sets)
- Number of 4K blocks for DIV objects (includes reads, writes, and re-reads)
- Starting a channel program from an EXCP macro (includes VIO, excludes BSAM, QSAM, BPAM on DASD)
- Starting a channel program from TCBEXCP macro (includes VIO, excludes BSAM, QSAM, BPAM on DASD)
- Starting a channel program from an EXCPVR macro (includes VIO, excludes BSAM, QSAM, BPAM on DASD)
- Starting a channel program in a system or user provided channel-end appendage
- Starting a channel program in an abnormal-end appendage
- EXCPs for VIO data sets
- EXCPs issued to the SYSUDUMP, SYSABEND, and SYSMDUMP data sets when these data sets reside on a direct access or tape device.

The DD level EXCP count does not include:

- EXCPs issued by the job entry subsystem
- TPUTs and TGETs handled by macro instructions (For TPUTs and TGETs, EXCPs are accumulated on a system basis and are contained in SMF record types 30, 32 (if detail is specified), 34 and 35 only.)
- I/O to or from spool

Only the type 6 and 26 SMF records contain counts for a job or step I/O activity to spool data sets managed by either job entry subsystem.

Type 30 and 64 records are data set oriented and may contain the EXCP count for one or more concurrent users.

Address Space Level

The address space level EXCP count in the type 30 record contains all of the I/O counts described for the DD level, plus the following:

- Library searches and fetches from data sets in the LINKLIST
- I/O initiated to the JES2 spool data sets from the address space being reported
- Catalog management I/O activity and VTOC and VTOC index I/O activity done by DADSM.
- OPEN and CLOSE I/O activity beyond priming and purging the buffers.
- For z/OS UNIX System Services, I/O activity for:
 - The physical file system
 - Pipes, including FIFO special files (named pipes)
 - Sockets, including the UNIX domain and INET

The address space EXCP level excludes all of the I/O counts that the DD level excludes, plus the following:

- Paging and swapping I/O activity
- VTAM I/O activity
- MSCC, OLTEP, and IOS retry.

Note:

1. In SMF record types 14 and 15, the EXCP count accumulates over the entire job step. Therefore, if a data set is opened and closed twice during a single job step, the count in the second record is the sum of all EXCPs for both uses of the data set. For multi-volume data sets (such as tape files), the EXCP count is accumulated over the volumes if all the volumes of the data set are mounted on the same device. If more than one device is used, the EXCP counts will not be cumulative.
2. The EXCP count in the last type 14 and 15 records for a given job step equals the corresponding entry for the data set in the type 4 and 34 records.
3. If concatenated data sets reside on the same physical device, the EXCP count is accumulated in the first data set entry having that device entry.
4. If SMF cannot acquire storage to expand the area where the EXCP count is maintained, only the existing data sets are counted.
5. If a data set is dynamically unallocated, the EXCP count is in record types 30 and 40; there is no EXCP-count entry in record types 4 and 34.

Chapter 11. CPU time

SMF record types 4, 5, 30, 32, 34 and 35 have fields that contain the job and job step CPU times. This topic summarizes the different times that are included and those that are excluded in these CPU-time fields. This topic lists a few examples of some of the major causes of CPU-time variation between different runs of the same job or job step.

Job step CPU time is the amount of time devoted by the central processing unit to the processing of instructions for a given job step. Job CPU time is the sum of job step CPU times for all of the steps in a given job. CPU timing is done on an address space basis. The accumulation of CPU time is separated into processing time under TCBs and processing time under SRBs.

Note: If you want to account for CPU time for a single TCB or SRB (rather than a whole address space), use either the TIMEUSED. Do not use a store CPU timer (STPT) instruction, which can cause incorrect (such as negative) values. Use TIMEUSED either under a TCB or an SRB. See the *z/OS MVS Programming: Authorized Assembler Services Reference SET-WTO* for more information on the TIMEUSED macro.

CPU Time Under TCBs

This topic describes times related to the Vector Facility, and times under TCBs that are included or excluded in CPU-time fields of certain SMF record types.

Vector Facility Time

If the current task uses the Vector Facility (VF), the system accumulates VF affinity time and VF usage time; these times are found in record type 30. VF affinity time is the job step time for tasks accumulated while the task had affinity to processors with the Vector Facility. This time is useful for capacity management of the Vector Facility. VF usage time, a subset of the VF affinity time, is the time that the task actually spent processing vector instructions. The units for VF affinity and VF usage time are the same units as TCB time. Use the TIMEUSED macro to get the vector time usage for individual TCBs.

Included/Excluded TCB Times

Timing values accumulated for the address space under TCB control include:

- Problem program time
- SVCs
- Lock spins encountered in an MP environment
- EMS (emergency signals between CPUs) interrupt occurring within a lock spin
- Abend/Abterm
- User SPIE and ESPIE exit processing.

Times excluded are:

- External interrupt time
- Page fault processing time, including resolving page faults from expanded storage

- CPU “stopped” time if the QUIESCE command is used
- Attention processing time for TSO/E.

The following times are excluded but are available in record type 30:

- I/O interrupt time (accumulated separately in SMF30IIP)
- Swap-out/swap-in processing and I/O error recovery processing (accumulated separately in SMF30RCT)
- Managing hiperspaces
- Program check handling.

CPU Time Under SRBs

This topic describes times under SRBs that are included or excluded in CPU-time fields of certain SMF record types.

Included/Excluded SRB Times

Timing values accumulated for the address space under SRB control include:

- Swap control
- Cross-memory communications
- Any supervisor service under SRB control
- Page stealing
- I/O completion processing
- Enclave timing.

Times excluded are:

- Lock request suspension
- Hiperspace™ management.

CPU-Time Variation

There are many reasons why CPU time varies between different runs of the same job or job step. The following list describes some of the major causes of variation:

- Cycle stealing on systems with integrated channels — CPU instruction processing is temporarily suspended when channels require the use of hardware resources shared with the CPU.
- CPUs using a high speed buffer — CPU time may vary due to any of the following:
 - Buffer interference caused by concurrent tasks
 - Partial or full disabling of a buffer because of storage errors
 - Translation lookaside buffer (TLB) affect on instruction processing rate.
- Storage access — The CPU cannot access central storage if a channel is using it. Storage-access time depends on CPU architecture such as interleaving, data widths and paths.
- DASD space allocation — If the number of extents is not exactly the same as before, additional end-of-extent processing is required.
- Temporary I/O errors — Additional processing may be required for temporary I/O errors.
- Expanded storage frame accesses — If a run has a different number of such accesses than another run, the CPU time may differ. Accessing expanded storage requires more time than central.

- BLDL/FIND requests — If BPAM is used extensively, CPU time for processing BLDL/FIND requests varies if there was change in the PDS directory. That is, a change in the location of the entry for the required member is reflected by a change in the time needed to find the block containing it.
- STOW processing — A difference in the PDS directory may vary STOW processing time because of the additional reordering or bumping that may be necessary.
- Macro processing — Processing time for macros such as LINK, LOAD, XCTL, ATTACH and BLDL is affected by where the requested module is located. For example, CPU time may be less if the module is in the LPA and JOBLIBS and STEPLIBS are not used.
- Availability of serially reusable resources (locks) — For example, the system ENQ routine time will vary depending on whether the resource is available. DEQ time increases if other tasks have subsequently requested the resource that the current task is releasing.
- Wait processing — CPU time varies depending on whether ECBs have been posted before issuing the WAIT macro instruction.
- Lock spins — If a job is run on an MP, CPU time may vary due to lock spins encountered in supervisor services.
- Queue searching — System service time varies with the status of the queue environment.
- Generalized trace facility (GTF) — When GTF is active, CPU time increases depending on the system functions (SVC, SSCH, IO, PCI, DSP) that are selected for current GTF recording. If USR functions are to be recorded and the application contains GTRACE macros, the CPU time variability is even more pronounced.
- System resource manager (SRM) — SRM processing may cause CPU time to vary when it is invoked from supervisor services that issue SYSEVENT, such as ENQ, WAIT (LONG=YES option), TPUT and TGET.
- Page stealing — Page stealing affects the number of page faults that a particular job incurs. CPU time varies depending on both the number of page faults resolved by I/O and the number of page faults resolved by reclaim.
- Sequential access method and chain scheduling — CPU time can vary from run to run depending on the amount of chain scheduling that was successful. The number of starts for I/O will vary under different system loads.
- MP-serialization — Contention for resources between CPs in a processor will vary.
- Branch tracing and mode tracing — These operations require additional processing.
- SLIP PER trap — Dealing with PER interrupts requires additional processing.

Chapter 12. IFAUSAGE — Collecting usage data

Any product or application can measure usage. If you are a software vendor or application owner, use the information in this topic to enable your software product to measure its usage, perhaps to participate in measured usage pricing.

The measurement function collects data using SMF record types 30 and 89. SMF record type 30 (Version 5 only) contains usage data for the product's address space. System-wide usage data for each product is recorded on SMF record type 89. The control and writing of these records is the same as for any SMF record type.

Collecting Your Own Data Using the IFAUSAGE Macro

MVS provides the IFAUSAGE macro for collecting usage data as CPU time. For products that need to collect some other type of usage data, IFAUSAGE also allows a product to define its own usage data. Information about the IFAUSAGE macro appears in this topic. The data that IFAUSAGE collects is periodically written in type 89 SMF records. See “Record Type 89 (59) — Usage Data” on page 741 for a complete description.

IBM provides a program to generate usage reports so that customers can send usage reports to product owners. Information about the usage report program appears in *MVS/ESA Support for Measured Usage License Charges*. The reports are generated using the data in the type 89 SMF records. If these reports are not sufficient for the needs of your product, you can provide an exit routine that the usage reporting program will call or you can process the type 89 records via a program you provide for that purpose.

Collecting Usage Data

First you must decide what usage data you need. The IFAUSAGE macro supports collection of the following:

- all CPU time for an address space
- all CPU time for a task
- CPU time for a function
- data other than CPU time for a function.

In all cases you must identify the product for which usage data is to be collected. Use REQUEST=REGISTER on the IFAUSAGE macro to identify the product and to begin data collection. Issue REQUEST=DEREGISTER to end data collection.

Requesting the Status of the Measurement Function

You can verify that SMF is active and that the installation has requested SMF record 89 by specifying REQUEST=STATUS on the IFAUSAGE macro. Two reasons for requesting status are:

- to warn the user if usage data is not being collected
- to stop your product from being used if usage data is not being collected.

Collecting CPU Time for an Address Space or Task

You might want to collect CPU time for an address space or task when all of the processing for the address space or task is product processing. If your product is

the job step task, collect all CPU time for the address space. When your product runs under some other task, collect CPU time for that task.

Use macro IFAUSAGE with REQUEST=REGISTER to begin collection of CPU time. To collect CPU time for the task, specify DOMAIN=TASK. To collect CPU time for the address space, specify DOMAIN=ADDRSP. When data collection is complete, specify REQUEST=DEREGISTER on the IFAUSAGE macro.

Collecting CPU Time for a Function

Some products run in a user address space to perform services requested by the user. In this case, not all processing for the address space or task is product processing. For this type of product, you need to collect usage data on a function basis.

Let's use an I/O system as an example. The user issues a GET or PUT to transfer data. Before the first GET request, the user must issue an OPEN so that the I/O system can recognize requests. After the last GET or PUT, the user issues a CLOSE to indicate that processing is complete. The I/O subsystem could collect CPU time on a function basis by capturing the CPU time for each GET and PUT request, as Figure 40 shows.

```
User issues OPEN
      Product issues IFAUSAGE REQUEST=REGISTER,SCOPE=FUNCTION
User issues GET
      Product issues IFAUSAGE REQUEST=FUNCTIONBEGIN
      .
      .product processing
      .
      Product issues IFAUSAGE REQUEST=FUNCTIONEND
User issues PUT
      Product issues IFAUSAGE REQUEST=FUNCTIONBEGIN
      .
      .product processing
      .
      Product issues IFAUSAGE REQUEST=FUNCTIONEND
      .
      .other GETs and PUTs
      .
User issues CLOSE
      Product issues IFAUSAGE REQUEST=DEREGISTER
```

Figure 40. Example of how the I/O subsystem could collect CPU time on a function basis

Collecting Data Other Than CPU Time

You might need to collect resource usage data other than CPU time. Examples of usage data you might choose to collect are number of transactions or number of bytes of data transferred.

To collect data other than CPU time, you must register with SCOPE=FUNCTION. Provide the resource data for accumulation by first issuing IFAUSAGE with REQUEST=FUNCTIONBEGIN. Collect the resource data by issuing IFAUSAGE with REQUEST=FUNCTIONDATA, specifying the resource data and its format. When you select the data format, consider how large you expect the numbers to be. Selecting floating point format allows any size number to be represented. If you select a different format, wrapping is possible, so you should ensure the unit of measure is one that will preclude wrapping. Resource data values are collected by adding the current resource data value to the accumulated resource data value.

Collection Intervals

If you are performing your own usage data analysis, (perhaps through an exit routine you provide for IEAURP), you may need to analyze two records. If your customer does not specify interval synchronization and are collecting data at the task level, you may receive multiple type 89 records for the same reporting interval. Without synchronization, task data collection, which is invoked by SMF address space interval processing, might not coincide with type 89 record generation (although both may have the same interval value, such as 30 minutes).

Suppose task data collection is scheduled for 4:45 and 5:15, and type 89 record generation is scheduled for 5:00 and 5:30. Both are on a 30 minute interval, but not synchronized. It is possible that the 5:30 reporting interval will include usage data from both the 4:00 - 5:00 and the 5:00 - 6:00 usage data intervals. Because the usage reporting program presents product usage in hourly buckets, SMF generates two records for the 5:30 interval. The first represents usage for the 4:00 - 5:00 usage data interval and the second reflects usage for the 5:00 - 6:00 usage data interval.

There can also be multiple type 89 records for a given interval if the number of products to be reported causes the record to exceed the maximum allowable size (32,756 bytes). In this case, the information is continued on a subsequent record.

IFAUSAGE macro

IFAUSAGE identifies individual products as users of a system and identifies the type and level of usage data for each product. If you do not provide your own product-specific usage data, IFAUSAGE collects data that already exists in the system, generally CPU time. (See Chapter 11, “CPU time,” on page 133 for detailed information about CPU time.) The usage reporting program analyzes the usage data and produces a report that contains identification and usage data for each product over specific intervals of time. Together, IFAUSAGE and the usage reporting program enable you to track product usage on a system or a sysplex basis, assuming that the system or systems are running SMF.

You identify a product to SMF by issuing the IFAUSAGE macro with the REQUEST=REGISTER parameter. You must register a product before issuing any of the other REQUEST parameters.

When you specify REQUEST=REGISTER, the system returns a token that you can use on subsequent request options. Specifying this token eliminates the need to specify the product registration information (PRODOWNER, PRODNAME, PRODVERS, PRODQUAL, and PRODID parameters). If you do not code the optional parameters PRODVERS, PRODQUAL, and PRODID on REQUEST=REGISTER and any subsequent requests, a blank field will appear in the corresponding report field. For the report program only, specifying PRODOWNER=NONE, PRODNAME=NONE, or PRODVERS=NONE, has the same effect as not coding the parameter at all.

When registering a product, you also can identify the scope of data you want to accumulate for the eventual report. For example, you can attribute all CPU time for an address space or for a task to a specified product.

If you choose to accumulate data for a task, you can further choose to record the product's use of resources on the REQUEST=FUNCTIONDATA parameter. In this case, IFAUSAGE starts collecting data only when you specify REQUEST=FUNCTIONBEGIN, and it ends when you specify REQUEST=FUNCTIONEND. Resources identified on the FUNCTIONDATA

IFAUSAGE macro

parameter are recorded in the SMF type 89 record. The report program, IFAURP, does not currently process the FUNCTIONDATA fields in the type 89 record or include the data in its report.

You cannot specify any of the other request options for a particular product once you have specified REQUEST=DEREGISTER for the product. When you specify REQUEST=DEREGISTER for a product, the system no longer collects usage data for this registration instance of the product. If other registrations for the product are still active, data recorded under those registrations continues to be collected. The system stops collecting data for the product only when there are no active registrations for the product.

Programs in both supervisor and problem state can issue the IFAUSAGE macro. However, programs running in problem state can only issue LINKAGE=SVC with the REQUEST=REGISTER or REQUEST=STATUS parameters. For problem state programs, IFAUSAGE allows only two REQUEST=REGISTER invocations for each domain specified on the DOMAIN parameter. Problem state callers must pass parameters in storage with the same key as the initial execution key of the job step or attached program.

Environment

The requirements for the caller are:

Minimum authorization:	Problem state and any PSW key. For LINKAGE=BRANCH, REQUEST=DEREGISTER, REQUEST=FUNCTIONBEGIN, and REQUEST=FUNCTIONDATA, supervisor state. Problem state callers must pass parameters in storage with the same key as the initial execution key of the job step or attached program.
Dispatchable unit mode:	Task
Cross memory mode:	PASN=HASN=SASN
AMODE:	31-bit
ASC mode:	Primary
Interrupt status:	Enabled for I/O and external interrupts
Locks:	No locks held
Control parameters:	None

Programming Requirements

None.

Restrictions

None.

Input Register Information

Before issuing the IFAUSAGE macro with LINKAGE=BRANCH, the caller must ensure that the following general purpose registers (GPRs) contain the specified information.

Register

Contents

13 The address of a standard 72-byte save area

Output Register Information

When control returns to the caller, the GPRs contain:

Register	Contents
0	Unchanged
1	Used by the system
2-13	Unchanged
14	Used by the system (LINKAGE=BRANCH) or unchanged (LINKAGE=SVC)
15	Return code

When control returns to the caller, the ARs contain:

Register	Contents
0-15	Unchanged

Some callers depend on register contents remaining the same before and after issuing a service. If the system changes the contents of registers on which the caller depends, the caller must save them before issuing the service, and restore them after the system returns control.

Performance Implications

None.

REQUEST=REGISTER

The standard form of the IFAUSAGE macro with the REQUEST=REGISTER parameter is written as follows:

Variable	Value
<i>name</i>	<i>name</i> : symbol. Begin <i>name</i> in column 1.
b	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
b	One or more blanks must follow IFAUSAGE.
REQUEST=REGISTER	
<i>,PRODOWNER=product owner</i>	<i>product owner</i> : RS-type address or address in register (2) - (12).
<i>,PRODNAME=product name</i>	<i>product name</i> : RS-type address or address in register (2) - (12).
<i>,PRODVERS=product version</i>	<i>product version</i> : RS-type address or address in register (2) - (12).
<i>,PRODQUAL=product qualifier</i>	<i>product qualifier</i> : RS-type address or address in register (2) - (12).

IFAUSAGE macro

Variable	Value
,PRODID= <i>product id</i>	<i>product id</i> : RS-type address or address in register (2) - (12).
,DOMAIN=ADDRSP ,DOMAIN=TASK	Default: DOMAIN=ADDRSP
,SCOPE=ALL ,SCOPE=FUNCTION	Default: SCOPE=ALL SCOPE is valid only with DOMAIN=TASK
,PRTOKEN= <i>product token</i>	<i>product token</i> : RS-type address or address in register (2) - (12).
,LINKAGE=SVC ,LINKAGE=BRANCH	Default: LINKAGE=SVC
,RETCODE= <i>return code</i>	<i>return code</i> : RS-type address or address in register (2) - (12).

Parameters

REQUEST=REGISTER

Specifies that you are identifying a product for which you want to collect usage data, and specifies the level of data you want to collect for that product.

,PRODOWNER=*product owner*

Specifies the name or address of a required 16-byte input field into which you place the product owner's name. IBM products use the character string "IBM CORP."

,PRODNAME=*product name*

Specifies the name or address of a required 16-byte input field into which you place the product's name.

,PRODVERS=*product version*

Specifies the name or address of an optional 8-byte input field into which you place the product version identification.

,PRODQUAL=*product qualifier*

Specifies the name or address of an optional 8-byte input field into which you place the qualifier of the product. You might wish to use this parameter when there are several iterations of the same product running on one system and you want to record usage data for each iteration, rather than grouping all product usage together. If a product is running multiple times on a specific system, you can record usage based on individual system use of the product. A subsystem product could use as the qualifier the subsystem name under which each copy of the product runs.

Note: The Usage Reporting Program (IFAURP) will not consider the *product qualifier* as part of the product ID when the product name is "DB2".

,PRODID=*product id*

Specifies the name or address of an optional 8-byte input field into which you place the product identifier. IBM products use the product's order number.

,DOMAIN=ADDRSP

,DOMAIN=TASK

Specifies whether IFAUSAGE attributes all CPU time for the address space or

for the current task to the product. The actual amount of task CPU time attributed to the product is defined by the SCOPE parameter. The default is DOMAIN=ADDRSP.

,SCOPE=ALL

,SCOPE=FUNCTION

Specifies the level of data that IFAUSAGE collects within the current task and attributes to the specified product. ALL specifies that IFAUSAGE is to track all CPU time in the current task for the specified product. FUNCTION specifies that IFAUSAGE is to track CPU time for parts of the current task defined as the periods between the time you issue REQUEST=FUNCTIONBEGIN and REQUEST=FUNCTIONEND for the specified product.

,PRTOKEN=product token

Specifies the name or address of an optional 8-character output field into which IFAUSAGE returns a product token. You can use this product token as input on other requests. Using the token as input on other requests eliminates the need to specify PRODNAME, PRODVERS, PRODOWNER, PRODQUAL, and PRODID on each invocation.

,LINKAGE=SVC

,LINKAGE=BRANCH

Specifies the type of linkage used in IFAUSAGE processing. LINKAGE=BRANCH indicates branch entry. You may specify LINKAGE=BRANCH if you are in supervisor state. LINKAGE=SVC indicates the linkage is by non-branch entry, and is the default.

,RETCODE=return code

Specifies an optional fullword location into which IFAUSAGE stores the return code. The return code is also in GPR 15.

REQUEST=DEREGISTER

The standard form of the IFAUSAGE macro with REQUEST=DEREGISTER parameter is written as follows:

<i>name</i>	<i>name: symbol. Begin name in column 1.</i>
␣	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
␣	One or more blanks must follow IFAUSAGE.
REQUEST=DEREGISTER	
,PRTOKEN= <i>product token</i>	<i>product token:</i> RS-type address or address in register (2) - (12).
,PRODOWNER= <i>product owner</i>	<i>product owner:</i> RS-type address or address in register (2) - (12).
,PRODNAME= <i>product name</i>	<i>product name:</i> RS-type address or address in register (2) - (12).
,PRODVERS= <i>product version</i>	<i>product version:</i> RS-type address or address in register (2) - (12).
,PRODQUAL= <i>product qualifier</i>	<i>product qualifier:</i> RS-type address or address in register (2) - (12).
,PRODID= <i>product id</i>	<i>product id:</i> RS-type address or address in register (2) - (12).
,ENDTIME= <i>ending tcb time</i>	<i>ending tcb time:</i> RS-type address or address in register (2) - (12).
,ENDDATA= <i>ending level</i>	<i>ending level:</i> RS-type address or address in register (2) - (12).
,LINKAGE=SVC	Default: LINKAGE=SVC
,LINKAGE=BRANCH	
,RETCODE= <i>return code</i>	<i>return code:</i> RS-type address or address in register (2) - (12).

Parameters

REQUEST=DEREGISTER

Specifies that the system is to stop collecting usage data for the specified product.

,PRTOKEN=product token

Specifies the product token that was returned on the REQUEST=REGISTER request. You can specify either PRTOKEN or PRODOWNER, PRODNAME, PRODVERS, PRODQUAL, and PRODID.

,PRODOWNER=product owner

Specifies the name or address of a required 16-character input field into which you place the owner of the product for which IFAUSAGE is to no longer collect usage data. PRODOWNER is required if you do not specify PRTOKEN.

,PRODNAME=product name

Specifies the name or address of a required 16-character input field into which you place the name of the product for which IFAUSAGE is to no longer collect usage data. PRODNAME is required if you do not specify PRTOKEN.

,PRODVERS=product version

Specifies the name or address of an optional eight-character input field into which you place the version of the product for which IFAUSAGE is to no longer collect usage data. PRODVERS is valid only if you specify PRODOWNER.

,PRODQUAL=product qualifier

Specifies the name or address of an optional eight-character input field into which you place the qualifier of the product for which IFAUSAGE is to no longer collect usage data. PRODQUAL is valid only if you specify PRODOWNER.

,PRODID=product id

Specifies the name or address of an optional 8-byte input field into which you place the product identifier. PRODID is valid only if you specify PRODOWNER. IBM products use the product's order number.

,ENDTIME=ending tcb time

Specifies the name or address of an optional eight-character output area into which IFAUSAGE returns the amount of TCB time, from the time you issued REQUEST=REGISTER, or the time the task has run up to the point you issue REQUEST=DEREGISTER.

,ENDDATA=ending level

Specifies the name or address of an optional eight-character output area into which IFAUSAGE returns data accumulated by all FUNCTIONDATA requests for the product recorded under this domain since the REQUEST=REGISTER.

,LINKAGE=SVC

,LINKAGE=BRANCH

Specifies the type of linkage used in IFAUSAGE processing. LINKAGE=BRANCH indicates branch entry. You may specify LINKAGE=BRANCH or LINKAGE=SVC if you are in supervisor state. LINKAGE=SVC indicates the linkage is by non-branch entry, and is the default.

,RETCODE=return code

Specifies the fullword location where the system stores the return code. The return code is also in GPR 15.

REQUEST=FUNCTIONBEGIN

The standard form of the IFAUSAGE macro with REQUEST=FUNCTIONBEGIN parameter is written as follows:

<i>name</i>	<i>name</i> : symbol. Begin <i>name</i> in column 1.
b	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
b	One or more blanks must follow IFAUSAGE.
REQUEST=FUNCTIONBEGIN	
,PRTOKEN= <i>product token</i>	<i>product token</i> : RS-type address or address in register (2) - (12).
,PRODOWNER= <i>product owner</i>	<i>product owner</i> : RS-type address or address in register (2) - (12).
,PRODNAME= <i>product name</i>	<i>product name</i> : RS-type address or address in register (2) - (12).
,PRODVERS= <i>product version</i>	<i>product version</i> : RS-type address or address in register (2) - (12).
,PRODQUAL= <i>product qualifier</i>	<i>product qualifier</i> : RS-type address or address in register (2) - (12).
,PRODID= <i>product id</i>	<i>product id</i> : RS-type address or address in register (2) - (12).
,BEGTIME= <i>beginning cpu time</i>	<i>beginning cpu time</i> : RS-type address or address in register (2) - (12).
,LINKAGE=SVC	Default: LINKAGE=SVC
,LINKAGE=BRANCH	
,RETCODE= <i>return code</i>	<i>return code</i> : RS-type address or address in register (2) - (12).

Parameters

REQUEST=FUNCTIONBEGIN

Specifies that IFAUSAGE is to start accumulating data for the current function and associates the data with the specified product.

,PRTOKEN=*product token*

Specifies the product token that was returned on the REQUEST=REGISTER request. You can specify either PRTOKEN or PRODOWNER, PRODNAME, PRODVERS, PRODQUAL, and PRODID.

,PRODOWNER=*product owner*

Specifies the name or address of a required 16-character input field into which you place the product owner's name. PRODOWNER is required if you do not specify PRTOKEN.

,PRODNAME=*product name*

Specifies the name or address of a required 16-character input field into which you place the name of the product for which IFAUSAGE is to begin collecting usage data. PRODNAME is required if you do not specify PRTOKEN.

,PRODVERS=*product version*

Specifies the name or address of an optional eight-character input field into which you place the version of the product for which IFAUSAGE is to begin collecting usage data. PRODVERS is valid only if you specify PRODOWNER.

,PRODQUAL=*product qualifier*

Specifies the name or address of an optional eight-character input field into which you place the qualifier of the product for which IFAUSAGE is to begin collecting usage data. PRODQUAL is valid only if you specify PRODOWNER.

IFAUSAGE macro

,PRODID=product id

Specifies the name or address of an optional 8-byte input field into which you place the product identifier. PRODID is valid only if you specify PRODOWNER. IBM products use the product's order number.

,BEGTIME=beginning cpu time

Specifies the name or address of an optional eight-character output area into which IFAUSAGE returns the CPU time for the current task, which is the beginning time for the function.

,LINKAGE=SVC

,LINKAGE=BRANCH

Specifies the type of linkage used in IFAUSAGE processing. LINKAGE=BRANCH indicates branch entry. You may specify LINKAGE=BRANCH if you are in supervisor state. LINKAGE=SVC indicates the linkage is by non-branch entry, and is the default.

,RETCODE=return code

Specifies an optional fullword location into which IFAUSAGE stores the return code. The return code is also in GPR 15.

REQUEST=FUNCTIONDATA

The standard form of the IFAUSAGE macro with REQUEST=FUNCTIONDATA parameter is written as follows:

<i>name</i>	<i>name: symbol. Begin name in column 1.</i>
b	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
b	One or more blanks must follow IFAUSAGE.
REQUEST=FUNCTIONDATA	
,PRTOKEN= <i>product token</i>	<i>product token: RS-type address or address in register (2) - (12).</i>
,PRODOWNER= <i>product owner</i>	<i>product owner: RS-type address or address in register (2) - (12).</i>
,PRODNAME= <i>product name</i>	<i>product name: RS-type address or address in register (2) - (12).</i>
,PRODVERS= <i>product version</i>	<i>product version: RS-type address or address in register (2) - (12).</i>
,PRODQUAL= <i>product qualifier</i>	<i>product qualifier: RS-type address or address in register (2) - (12).</i>
,PRODID= <i>product id</i>	<i>product id: RS-type address or address in register (2) - (12).</i>
,DATA= <i>resource data</i>	<i>resource data: RS-type address or address in register (2) - (12).</i>
,FORMAT=CPUTIME	Default: FORMAT=CPUTIME
,FORMAT=BINARY	
,FORMAT=FLOAT	
,CURRENTDATA= <i>current resource</i>	<i>current resource: RS-type address or address in register (2) - (12).</i>
,LINKAGE=SVC	Default: LINKAGE=SVC
,LINKAGE=BRANCH	
,RETCODE= <i>return code</i>	<i>return code: RS-type address or address in register (2) - (12).</i>

Parameters

REQUEST=FUNCTIONDATA

Specifies that IFAUSAGE will accumulate data based on product specifications, that is, you can record product usage based on your own data specifications in

addition to the CPU time accumulated by default. You must have issued REQUEST=FUNCTIONBEGIN before issuing REQUEST=FUNCTIONDATA.

,PRTOKEN=product token

Specifies the product token that was returned on the REQUEST=REGISTER request. You can specify either PRTOKEN or PRODOWNER, PRODNAME, PRODVERS, PRODQUAL, and PRODID.

,PRODOWNER=product owner

Specifies the name or address of a required 16-character input field into which you place the product owner's name. PRODOWNER is required if you do not specify PRTOKEN.

,PRODNAME=product name

Specifies the name or address of a required 16-character input field into which you place the name of the product for which IFAUSAGE is to provide usage data. PRODNAME is required if you do not specify PRTOKEN.

,PRODVERS=product version

Specifies the name or address of an optional eight-character input field into which you place the version of the product for which IFAUSAGE provides usage data. PRODVERS is valid only if you specify PRODOWNER.

,PRODQUAL=product qualifier

Specifies the name or address of an optional eight-character input field into which you place the qualifier of the product for which IFAUSAGE is to provide usage data. PRODQUAL is valid only if you specify PRODOWNER.

,PRODID=product id

Specifies the name or address of an optional 8-byte input field into which you place the product identifier. PRODID is valid only if you specify PRODOWNER. IBM products use the product's order number.

,DATA=resource data

Specifies the name or address of a required eight-character field where IFAUSAGE obtains the resource data you want to accumulate. Fixed data should be right justified and padded with zeros.

,FORMAT=CPUTIME

,FORMAT=BINARY

,FORMAT=FLOAT

Specifies the format of the data specified on the DATA parameter. The default is CPUTIME. CPUTIME indicates that the data is to be CPU time, in TOD format (bit position 51 represents 1 micro second); the data is reported in floating point, .01 seconds. BINARY indicates that the data is to be in 64-bit binary format. FLOAT indicates that the data is to be in long floating point hex format.

,CURRENTDATA=current resource

Specifies the name or address of an optional eight-character output area into which IFAUSAGE returns data accumulated by this and previous FUNCTIONDATA requests for the product since the REQUEST=REGISTER.

,LINKAGE=SVC

,LINKAGE=BRANCH

Specifies the type of linkage used in IFAUSAGE processing. LINKAGE=BRANCH indicates branch entry. You may specify LINKAGE=BRANCH if you are in supervisor state. LINKAGE=SVC indicates the linkage is by non-branch entry, and is the default.

,RETCODE=return code

Specifies an optional fullword location into which IFAUSAGE stores the return code. The return code is also in GPR 15.

REQUEST=FUNCTIONEND

The standard form of the IFAUSAGE macro with REQUEST=FUNCTIONEND parameter is written as follows:

<i>name</i>	<i>name: symbol. Begin name in column 1.</i>
b	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
b	One or more blanks must follow IFAUSAGE.
REQUEST=FUNCTIONEND	
,PRTOKEN= <i>product token</i>	<i>product token</i> : RS-type address or address in register (2) - (12).
,PRODOWNER= <i>product owner</i>	<i>product owner</i> : RS-type address or address in register (2) - (12).
,PRODNAME= <i>product name</i>	<i>product name</i> : RS-type address or address in register (2) - (12).
,PRODVERS= <i>product version</i>	<i>product version</i> : RS-type address or address in register (2) - (12).
,PRODQUAL= <i>product qualifier</i>	<i>product qualifier</i> : RS-type address or address in register (2) - (12).
,PRODID= <i>product id</i>	<i>product id</i> : RS-type address or address in register (2) - (12).
,ENDTIME= <i>ending time</i>	<i>ending time</i> : RS-type address or address in register (2) - (12).
,ENDDATA= <i>end resource level</i>	<i>end resource level</i> : RS-type address or address in register (2) - (12).
,LINKAGE=SVC	Default: LINKAGE=SVC
,LINKAGE=BRANCH	
,RETCODE= <i>return code</i>	<i>return code</i> : RS-type address or address in register (2) - (12).

Parameters

REQUEST=FUNCTIONEND

Specifies that IFAUSAGE is to end data accumulation for the current function and associate the data with the specified product.

,PRTOKEN=*product token*

Specifies the product token that was returned on the REQUEST=REGISTER request. You can specify either PRTOKEN or PRODOWNER, PRODNAME, PRODVERS, PRODQUAL, and PRODID.

,PRODOWNER=*product owner*

Specifies the name or address of a required 16-character input field into which you place the product owner's name. PRODOWNER is required if you do not specify PRTOKEN.

,PRODNAME=*product name*

Specifies the name or address of a required 16-character input field into which you place the name of the product for which IFAUSAGE is to stop collecting usage data. PRODNAME is required if you do not specify PRTOKEN.

,PRODVERS=*product version*

Specifies the name or address of an optional eight-character input field into which you place the version of the product for which IFAUSAGE is to stop collecting usage data.

,PRODQUAL=product qualifier

Specifies the name or address of an optional eight-character input field into which you place the qualifier of the product for which IFAUSAGE is to stop collecting usage data. PRODQUAL is valid only if you specify PRODOWNER.

,PRODID=product id

Specifies the name or address of an optional 8-byte input field into which you place the product identifier. IBM products use the product's order number.

,ENDTIME=ending time

Specifies the name or address of an optional eight-character output area in which IFAUSAGE returns the current accumulation of the CPU time data for the specified product since the REQUEST=FUNCTIONBEGIN was issued.

,ENDDATA=end resource level

Specifies the name or address of an optional eight-character output area in which IFAUSAGE returns the current accumulation of resource data for the specified product since the REQUEST=FUNCTIONBEGIN was issued.

,LINKAGE=SVC

,LINKAGE=BRANCH

Specifies the type of linkage used in IFAUSAGE processing. LINKAGE=BRANCH indicates branch entry. You may specify LINKAGE=BRANCH if you are in supervisor state. LINKAGE=SVC indicates the linkage is by non-branch entry, and is the default.

,RETCODE=return code

Specifies an optional fullword location into which IFAUSAGE stores the return code. The return code is also in GPR 15.

REQUEST=STATUS

The standard form of the IFAUSAGE macro with REQUEST=STATUS parameter is written as follows:

Variable	Value
<i>name</i>	<i>name</i> : symbol. Begin <i>name</i> in column 1.
b	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
b	One or more blanks must follow IFAUSAGE.
REQUEST=STATUS	
,LINKAGE=SVC ,LINKAGE=BRANCH	Default: LINKAGE=SVC
,RETCODE= <i>return code</i>	<i>return code</i> : RS-type address or address in register (2) - (12).

Parameters

REQUEST=STATUS

Specifies that IFAUSAGE is to return an indication of whether the installation

IFAUSAGE macro

has requested SMF record 89. Register 15 and RETCODE, if specified, will contain the return code indicating the status.

,LINKAGE=SVC

,LINKAGE=BRANCH

Specifies the type of linkage used in IFAUSAGE processing. LINKAGE=BRANCH indicates branch entry. You may specify LINKAGE=BRANCH if you are in supervisor state. LINKAGE=SVC indicates the linkage is by non-branch entry, and is the default.

,RETCODE=return code

Specifies an optional fullword location into which IFAUSAGE stores the return code. The return code is also in GPR 15.

ABEND Codes

None.

Return Codes

When the IFAUSAGE macro returns control to your program, GPR 15 (and *retcode* if you coded RETCODE) contains the return code. Table 8 lists the possible values.

Table 8. Return codes for the IFAUSAGE macro

Return Code (in decimal)	Meaning and Action
00	Meaning: IFAUSAGE completed successfully. Action: None.
04	Meaning: The error is due to one of the following conditions: <ul style="list-style-type: none">• DOMAIN - Another product has already registered for the domain you specified on the DOMAIN parameter. IFAUSAGE records the data for each product. Action: None necessary. However, you may receive duplicate data for each product.• FORMAT - The data format you specified on the FORMAT parameter of REQUEST=FUNCTIONDATA does not match the format specified by a previous caller. All subsequent invocations of REQUEST=FUNCTIONDATA must specify the same data format as the first caller. Action: Check usage records or read SMF type 89 records to identify the specified data format. Ensure that you specify the same format on the FORMAT parameter on any subsequent invocations of REQUEST=FUNCTIONDATA.• STATUS - You specified REQUEST=STATUS, but the installation is not collecting SMF record 89. Action: Ensure that the installation intends to collect type 89 records. If it does not, do not issue IFAUSAGE. If the installation does intend to collect type 89 records, check with your installation programmer that the record type is specified on the SMFPRMxx parmlib member.

Table 8. Return codes for the IFAUSAGE macro (continued)

Return Code (in decimal)	Meaning and Action
08	<p>Meaning:</p> <ul style="list-style-type: none"> • REGISTER – IFAUSAGE could not process more than two problem state program invocations of REQUEST=REGISTER for a domain. Action: Do not specify REQUEST=REGISTER more than two times for any specific domain. • DEREGISTER – You specified REQUEST=DEREGISTER for a product that has not first specified REQUEST=REGISTER. Action: Issue IFAUSAGE with the REQUEST=REGISTER parameter to identify the product to the system for usage data collection. • FUNCTIONBEGIN – You specified REQUEST=FUNCTIONBEGIN for a product that has not first specified REQUEST=REGISTER. Action: Issue IFAUSAGE with the REQUEST=REGISTER parameter to identify the product to the system for usage data collection. • FUNCTIONDATA – You specified REQUEST=FUNCTIONDATA without first identifying the start of the function with REQUEST=FUNCTIONBEGIN. Action: Issue IFAUSAGE with the REQUEST=FUNCTIONBEGIN parameter to identify the function to the system for usage data collection. • FUNCTIONEND – You specified REQUEST=FUNCTIONEND without first specifying REQUEST=FUNCTIONBEGIN. Action: Issue IFAUSAGE with the REQUEST=FUNCTIONBEGIN parameter to identify the function to the system for usage data collection. <p>Note: This return code also results if you make a mistake in coding PRODOWNER, PRODNAME, PROVERS, PRODQUAL or PRODID and what you code for them on REQUEST=DEREGISTER, FUNCTIONBEGIN, FUNCTIONDATA, or FUNCTIONEND does not match what you coded on REQUEST=REGISTER.</p>

Table 8. Return codes for the IFAUSAGE macro (continued)

Return Code (in decimal)	Meaning and Action
12	<p>Meaning: You specified a token on the PRTOKEN parameter that the system cannot identify.</p> <p>Action: Check your specification on the PRTOKEN parameter, ensuring that it is the same token returned by the REQUEST=REGISTER invocation. Also check that you received a return code of 0 when REQUEST=REGISTER completed.</p> <ul style="list-style-type: none"> • You specified a token on the PTOKEN parameter that the system cannot identify, which implies that you specified REQUEST=DEREGISTER for a product that has not first specified REQUEST=REGISTER. Action: Issue IFAUSAGE with the REQUEST=REGISTER parameter to identify the product to the system for usage data collection. • You specified a token on the PTOKEN parameter that the system cannot identify, which implies that you specified REQUEST=FUNCTIONBEGIN for a product that has not first specified REQUEST=REGISTER. Action: Issue IFAUSAGE with the REQUEST=REGISTER parameter to identify the product to the system for usage data collection. • You specified a token on the PTOKEN parameter that the system cannot identify, which implies that you specified REQUEST=FUNCTIONDATA without first identifying the start of the function with REQUEST=FUNCTIONBEGIN. Action: Issue IFAUSAGE with the REQUEST=FUNCTIONBEGIN parameter to identify the function to the system for usage data collection. • You specified a token on the PTOKEN parameter that the system cannot identify, which implies that you specified REQUEST=FUNCTIONEND without first specifying REQUEST=FUNCTIONBEGIN. Action: Issue IFAUSAGE with the REQUEST=FUNCTIONBEGIN parameter to identify the function to the system for usage data collection.
16	<p>Meaning: IFAUSAGE cannot complete processing because SMF usage processing is not available on the system.</p> <p>Action: Do not issue IFAUSAGE.</p>

Table 8. Return codes for the IFAUSAGE macro (continued)

Return Code (in decimal)	Meaning and Action
20	<p>Meaning: The error is due to one of the following conditions:</p> <ul style="list-style-type: none"> • DEREGISTER – IFAUSAGE could not process a problem state invocation of REQUEST=DEREGISTER. Action: Change the problem state invocation to a supervisor state invocation. • FUNCTIONBEGIN – IFAUSAGE could not process a problem state invocation of REQUEST=FUNCTIONBEGIN. Action: Change the problem state invocation to a supervisor state invocation. • FUNCTIONDATA – IFAUSAGE could not process a problem state invocation of REQUEST=FUNCTIONDATA. Action: Change the problem state invocation to a supervisor state invocation. • FUNCTIONEND – IFAUSAGE could not process a problem state invocation of REQUEST=FUNCTIONEND. Action: Change the problem state invocation to a supervisor state invocation. • Otherwise, an internal error was detected. Record the return code and contact the appropriate IBM support personnel.

IFAUSAGE – List Form

Use the list form of the IFAUSAGE macro together with the execute form of the macro for applications that require reentrant code. The list form of the macro defines an area of storage, which the execute form of the macro uses to contain the parameters.

The list form of the IFAUSAGE macro is written as follows.

<i>name</i>	<i>name</i> : symbol. Begin <i>name</i> in column 1.
b	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
b	One or more blanks must follow IFAUSAGE.
MF=(L, <i>list addr</i>)	<i>list addr</i> : symbol.
MF=(L, <i>list addr,attr</i>)	<i>attr</i> : 1- to 60-character input string.
MF=(L, <i>list addr</i> ,0D)	Default: 0D

The parameters are explained under the standard form of the IFAUSAGE macro with the following exception:

MF=(L,*list addr*)
MF=(L,*list addr,attr*)
MF=(L,*list addr*,0D)

Specifies the list form of the IFAUSAGE macro.

IFAUSAGE macro

list addr is the name of a storage area to contain the parameters.

attr is an optional 1- to 60-character input string, which can contain any value that is valid on an assembler DS pseudo-op. You can use this parameter to force boundary alignment of the parameter list. If you do not code *attr*, the system provides a value of 0D, which forces the parameter list to a doubleword boundary.

IFAUSAGE – Execute Form

Use the execute form of the IFAUSAGE macro together with the list form of the macro for applications that require reentrant code. The execute form of the macro stores the parameters into the storage area defined by the list form.

The execute form of the IFAUSAGE macro is written as follows:

<i>name</i>	<i>name</i> : symbol. Begin <i>name</i> in column 1.
␣	One or more blanks must precede IFAUSAGE.
IFAUSAGE	
␣	One or more blanks must follow IFAUSAGE.
	The parameters on the execute form are identical to those on the standard form with the exception of the MF and COMPLETE parameters.
,MF=(E, <i>list addr</i>)	<i>list addr</i> : RX-type address or address in register (2) - (12).
,MF=(E, <i>list addr</i> ,COMPLETE)	Default: COMPLETE

The parameters are explained under the standard form of the IFAUSAGE macro with the following exception:

,MF=(E,*list addr*)

,MF=(E,*list addr*,COMPLETE)

Specifies the execute form of the IFAUSAGE macro.

list addr specifies the area that the system uses to contain the parameters.

COMPLETE, which is the default, specifies that the system is to check for required parameters and supply defaults for omitted optional parameters.

Chapter 13. Signing and validating SMF records

You can use digital signatures to detect a change, addition, or removal of an SMF record from a group of records. Using industry standard encryption methods, digital signatures provide a built-in mechanism to validate SMF records, providing protection and verification for your SMF data.

Overview of digital signatures and SMF

This topic describes what digital signatures are and how SMF uses them to sign records.

What are digital signatures?

Digital signatures provide a way to ensure the source and validity of data using a public/private key pair.

- The signer hashes the data and then encrypts the hash using the signer's private key. The encrypted hash is the signature.
- A consumer can hash the same data and decrypt the signature using the public key to obtain the signer's hash. The hashes can then be compared.
- When the consumer's hash value matches the signer's decrypted hash value, the data is considered to be verified. If the hashes do not match, it indicates that some form of data corruption or tampering has occurred.

How SMF digitally signs records

SMF data is signed on its way to the system logger.

- As each record is written to the log stream, it is hashed. SMF maintains a running hash for each unique record type and subtype.
- Periodically, SMF digitally signs the hash by encrypting it with the private key, and writes the signature data to the log stream as a signature record.
- On the global interval, SMF creates a signature for all of the data hashed during the interval (again using the private key) and writes the signature data to the log stream.

The IFASMF DL dump program understands signature records and, optionally, moves them along with the records of an associated SMF record type and subtype.

When signature records are available in the data, the IFASMF DP dump program can verify that a set of SMF records has not been corrupted or tampered with. IFASMF DP uses the public key to perform this operation.

To perform all hash and signature processing, SMF uses the PKCS #11 services provided by Integrated Cryptographic Services Facility (ICSF), specifically, the CSFPOWH function. For information about the requirements for using PKCS #11 services, see *z/OS Cryptographic Services ICSF Writing PKCS #11 Applications*. For more information about the requirements for using ICSF, see *z/OS Cryptographic Services ICSF Administrator's Guide*.

Setting up and using digitally signed SMF records

The basic steps to set up and use digitally signed SMF records are:

1. Create the keys that will serve as the public/private key pair.
2. Update the SMFPRMxx member of parmlib to specify that you want SMF to sign records.
3. Use the IFASMF DL dump program to carry signature records to data sets.
4. Use the IFASMF DP dump program to validate records.

Creating the keys

Perform this task to create a public/private key pair.

Before you begin

You should be familiar with your system's cryptographic hardware, the PKCS#11 standard, and with using z/OS Cryptographic Services Integrated Cryptographic Service Facility (ICSF) services to create a public/private key pair.

About this task

You will use ICSF to create a public/private key pair for use in creating and validating signature records in SMF. You must also ensure that the SMF address space and any invoker of the IFASMF DP program have access to ICSF, PKCS#11, and the appropriate key.

Procedure

1. Create a public/private key pair according to the information in *z/OS Cryptographic Services ICSF Administrator's Guide*.

Note the following information about the public/private key pair:

- The type of key (clear or secure) does not matter to SMF, as long as the available hardware can support it.
- The scope of the key usage can be per enterprise, sysplex, system, or logstream.
- Bind the key to only one certificate to avoid an error (RC=8, RSN=BD2) indicating that the z/OS PKCS #11 token or object handle syntax is invalid.
- SMF needs the token name to perform the PKCS#11 functions via ICSF, as well as the type of encryption (such as, RSA or Elliptical Curve). You will need to specify the token name later in "Updating SMFPRMxx to sign SMF records" on page 157 and "Using IFASMF DP to validate records" on page 158.

2. Permit access to ICSF, PKCS#11, and the appropriate key for the SMF address space and for any invoker of IFASMF DP for signature validation purposes.

See the information about defining resource profiles in the SAF CRYPTOZ, CSFSERV, and CSFKEYS classes in *z/OS Cryptographic Services ICSF Administrator's Guide*.

Results

You now have a public/private key pair for use in creating and validating SMF digital signatures.

What to do next

Use the key token name to enable digital signatures in “Updating SMFPRMxx to sign SMF records.”

Updating SMFPRMxx to sign SMF records

Perform this task to specify that you want SMF to produce signature records.

About this task

The default is for SMF not to sign records (NORECSIGN). Use the RECSIGN parameter in the SMFPRMxx member of parmlib to specify that SMF is to sign records, either globally or on a per logstream basis.

Procedure

Update the SMFPRMxx member to specify the RECSIGN parameter and supply values for the HASH, SIGNATURE, and TOKENNAME subparameters, as described in *z/OS MVS Initialization and Tuning Reference*.

You can specify the RECSIGN parameter globally or as a subparameter of the LSNAMES and DEFAULTLSNAME parameters.

Note: The RECSIGN parameter and its subparameters are dynamic; however, changing them requires some operational coordination. Data can only be verified with a single set of parameters, so new and old data must be segregated. That is, records that were signed before the RECSIGN values were changed can only be validated using the values that were in effect at that time. Likewise, records that were signed after a RECSIGN change must be validated using the new values.

Example

```
RECSIGN(HASH(SHA512),SIGNATURE(RSA),  
TOKENNAME(TAMPER#RESISTANT#SMF#TOKEN#NAME1))
```

What to do next

Use the same HASH and TOKENNAME values that you specified for these SMF records later in order to perform signature validation, as described in “Using IFASMFDP to validate records” on page 158.

Using IFASMFDP to carry signatures to data sets

Perform this task to move signature data along with SMF records from log streams to output data sets.

About this task

The default behavior is for the IFASMFDP log stream dump program not to carry signature data along with the SMF records (SIGSTRIP). You must use the NOSIGSTRIP parameter to cause IFASMFDP to carry signature data with the SMF records to the OUTDD data sets.

IFASMFDP carries the signature records transparently. If there are multiple OUTDD statements for different record types and subtypes, IFASMFDP will carry the correct signature records to each OUTDD data set.

Procedure

Run the IFASMF DL program with the NOSIGSTRIP parameter. For details, see “Specifying parameters for the SMF log stream dump program” on page 36 and “Running the SMF log stream dump program” on page 45.

Results

IFASMF DL carries signature records to the OUTDD data sets. The IFASMF DL output will report a type 2 record as output for each signature record.

Using IFASMF DP to validate records

Perform this task to validate signature records.

About this task

The default behavior is for the IFASMF DP data set dump program not to carry signature records (SIGSTRIP) and not to perform signature validation (NOSIGVALIDATE). You must use the NOSIGSTRIP and SIGVALIDATE parameters to cause IFASMF DP to carry signature data and perform signature validation.

Procedure

Run the IFASMF DP program with the following SYSIN parameters:

1. Specify the NOSIGSTRIP parameter to carry signature records. This is required in order to perform signature validation. NOSIGSTRIP behaves the same way as for the IFASMF DL program.
2. Specify the SIGVALIDATE parameter along with the HASH and TOKENNAME subparameters to perform signature validation.

The HASH and TOKENNAME values that you specify here must match those that were specified for these SMF records on the RECSIGN parameter in the SMFPRMxx parmlib member. The TOKENNAME is associated with the public/private key pair; however, IFASMF DP only needs access to the public key.

Example:

```
SIGVALIDATE(HASH(SHA512),  
TOKENNAME(TAMPER#RESISTANT#SMF#TOKEN#NAME1))
```

3. Examine and set the DATE, START, and END parameters to ensure successful validation.

The behavior of the DATE, START, and END parameters are slightly different. Align each with an interval to ensure that complete intervals of records can be validated.

The records must retain the same order and contents as they were originally written in order for signature validation to succeed.

For details, see “Specifying parameters for the SMF data set dump program” on page 50 and “Running the SMF data set dump program” on page 55.

Results

IFASMF DP performs signature validation and produces a record validation report. For details about the report, see “IFASMF DP record validation report” on page 63.

|

Note that IFASMFDP ends processing after the first failure is detected.

Chapter 14. SMF record general information and best practices

The following list contains some general information about SMF records.

- To write any SMF-formatted records (except record types 2, 3, and 7) to the SMF data set, specify the ACTIVE parameter. To write record type 17 for temporary data sets, specify REC(ALL).
- The method of entry to a particular SMF record type determines whether installation-exit routine IEFU83, IEFU84, or IEFU85 receives control before control is returned to the caller of the SVC routine. A branch entry by a cross-memory caller causes IEFU85 to receive control. A branch entry by a non-cross-memory caller causes IEFU84 to receive control. An SVC 83 call causes IEFU83 to receive control.
- Many current SMF records contain variable sections. The user of these records should be aware that the record pointers must be updated by the length of each variable section of the record when the record data is being manipulated. Failure to do the address calculation will result in writing over valid data in previously processed sections. Other SMF records, (types 23, 30, 32, and 90), contain offsets that point directly from the record header to the data section.
- Unless otherwise specified, all EBCDIC fields within the SMF records are left-justified and right filled with blanks.
- Detailed information about the device type and device class, within a record, can be found in *z/OS MVS Data Areas* in z/OS Internet library (<http://www.ibm.com/systems/z/os/zos/bkserv/>).
- In JES2 and JES3 records, information found in the 'Common Section' and the 'Identification Section' is defined in JESPARMS.
- In a loosely-coupled multiprocessing environment (such as JES2 shared spool or JES3), it is possible for the job START/LOGON time to be greater than the STOP/LOGOFF time because the installation does not synchronize the CPU clocks. The difference occurs when the START/LOGON time is initialized on processor A and the job is then processed on processor B. The STOP/LOGOFF time is recorded from processor B.
- SMF records created by IBM components never exceed 32,756 bytes. If the data required in a record causes the record to exceed that length, the component responsible for creating the record can, instead, create multiple (continuation) records, none of which exceed 32,756 bytes. See "Record Type 22 (16) — Configuration" on page 238 for an example that uses a continuation section and "Record Type 24 (18) — JES2 Spool Offload" on page 256 for an example that uses bit mapping to indicate continuation.
- SMF records are written as spanned (VBS) in order to conserve storage space by ensuring that each block of data is as full as possible. If you specify DCB parameters on any of the input or output DD statements for IFASMF DL, you must specify RECFM=VBS.
- You should not specify LRECL=X for reading or writing SMF dump data, because LRECL=X signifies that a single record may be larger than 32,756 bytes, which is not the case for SMF data.
- You can specify LRECL=32760 instead of 32767. You can also specify any block size from 4096 to the maximum allowed for the chosen device.

Standard SMF record header

Each record written to the SMF data set by the SMF writer routine contains the standard SMF record header. Each user record written to the SMF data set by user-written routines, should include the standard record header. The length and field types for the record header vary with the kind of record writer. The header length for records without subtypes is 18 bytes (see Table 9). The header length for records with subtypes is 24 bytes (see Table 10 on page 163).

The header contains information about the record, such as: record type, record subtype (if the record includes subtypes), record length, and the time and date the record was written to the data set. The time in the header record is based on the LOCAL TIME. Record subtypes are used to group related data and control record types. For example, one record might contain three separate subtypes, each reporting different kinds of data. By using those subtypes you can eliminate the need for three separate record numbers.

The header section *must include* the record descriptor word (RDW). The RDW is a 4-byte field that must introduce each SMF record when it is written to the SMF data set by the SMFWTM macro instruction. The first two bytes of the RDW must contain the length of the logical record (including the four bytes of the RDW). The second two bytes are used for variable blocked spanned records; that is, records that contain more than 32,756 bytes. This field (the second two bytes) is set to zero if the record is *not* spanned. The remainder of the record immediately follows the RDW.

Because the record formats include the RDW, it is not necessary to add four bytes to the offset listed in the record; however, depending on the access method used to read the record from the SMF data set, these fields might not be present in your SMF record. You might have to subtract four bytes from the offsets listed in your record.

Table 9 shows the header mapping for records without subtypes.

Table 9. Standard SMF record header for records without subtypes.

Offsets	Name	Length	Format	Description														
00	00 SMF _x LEN	2	binary	Record length (maximum size of 32,756). This field and the next field (total of four bytes) form the record descriptor word (RDW). The first two bytes (this field) must contain the logical record length including the RDW.														
02	02 SMF _x SEG	2	binary	Segment descriptor provide by SMF. Initialize with zeros.														
04	04 SMF _x FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>MVS/SP Version 4 and above. Bits 3, 4, 5, and 6 are on.*</td> </tr> <tr> <td>4</td> <td>MVS/SP Version 3. Bits 4, 5, and 6 are on.</td> </tr> <tr> <td>5</td> <td>MVS/SP Version 2. Bits 5 and 6 are on.</td> </tr> <tr> <td>6</td> <td>VS2. Bit 6 is on.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*IBM recommends that you use information located elsewhere in this record to determine the MVS product level.</p>	Bit	Meaning when set	0-2	Reserved	3	MVS/SP Version 4 and above. Bits 3, 4, 5, and 6 are on.*	4	MVS/SP Version 3. Bits 4, 5, and 6 are on.	5	MVS/SP Version 2. Bits 5 and 6 are on.	6	VS2. Bit 6 is on.	7	Reserved.
Bit	Meaning when set																	
0-2	Reserved																	
3	MVS/SP Version 4 and above. Bits 3, 4, 5, and 6 are on.*																	
4	MVS/SP Version 3. Bits 4, 5, and 6 are on.																	
5	MVS/SP Version 2. Bits 5 and 6 are on.																	
6	VS2. Bit 6 is on.																	
7	Reserved.																	

Table 9. Standard SMF record header for records without subtypes (continued).

Offsets	Name	Length	Format	Description
05	05 SMF _x RTY	1	binary	Record type (hexadecimal values are 0 - FF).
06	06 SMF _x TME	4	binary	Time since midnight, in hundredths of a second, record was moved into the SMF buffer. In record types 2 and 3 this field indicates the time that the record was moved to the dump data set.
10	0A SMF _x DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> (where <i>c</i> is 0 for 19 _{xx} and 1 for 20 _{xx} , <i>yy</i> is the current year (0 - 99), <i>ddd</i> is the current day (1 - 366), and <i>F</i> is the sign). In record types 2 and 3, this field indicates the date that the record was moved into the dump data set.
14	0E SMF _x SID	4	EBCDIC	System identification (from the SID parameter).

Table 10 shows the header mapping for records with subtypes.

Table 10. Standard SMF record header for records with subtypes.

Offsets	Name	Length	Format	Description																		
00	00 SMF _x LEN	2	binary	Record length (maximum size of 32,756). This field and the next field (total of four bytes) form the record descriptor word (RDW). The first two bytes (this field) must contain the logical record length including the RDW.																		
02	02 SMF _x SEG	2	binary	Segment descriptor provided by SMF. Initialize with zeros.																		
04	04 SMF _x FLG	1	binary	System indicator <table border="0" style="margin-left: 20px;"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Subtypes are valid.</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>MVS/SP Version 4 and above. Bits 3, 4, 5, and 6 are on. (IBM recommends that you use record type 30 to obtain the MVS product level.)</td> </tr> <tr> <td>4</td> <td>MVS/SP Version 3. Bits 4, 5, and 6 are on.</td> </tr> <tr> <td>5</td> <td>MVS/SP Version 2. Bits 5 and 6 are on.</td> </tr> <tr> <td>6</td> <td>VS2. Bit 6 is on.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved.	1	Subtypes are valid.	2	Reserved.	3	MVS/SP Version 4 and above. Bits 3, 4, 5, and 6 are on. (IBM recommends that you use record type 30 to obtain the MVS product level.)	4	MVS/SP Version 3. Bits 4, 5, and 6 are on.	5	MVS/SP Version 2. Bits 5 and 6 are on.	6	VS2. Bit 6 is on.	7	Reserved.
Bit	Meaning when set																					
0	Reserved.																					
1	Subtypes are valid.																					
2	Reserved.																					
3	MVS/SP Version 4 and above. Bits 3, 4, 5, and 6 are on. (IBM recommends that you use record type 30 to obtain the MVS product level.)																					
4	MVS/SP Version 3. Bits 4, 5, and 6 are on.																					
5	MVS/SP Version 2. Bits 5 and 6 are on.																					
6	VS2. Bit 6 is on.																					
7	Reserved.																					
05	05 SMF _x RTY	1	binary	Record type (hexadecimal values are 0 - FF).																		
06	06 SMF _x TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer. In record types 2 and 3, this field indicates the time that the record was moved into the dump data set.																		
10	0A SMF _x DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>00yydddF</i> or <i>0cyydddF</i> (where <i>c</i> is 0 for 19 _{xx} and 1 for 20 _{xx} , <i>yy</i> is the current year (0 - 99), <i>ddd</i> is the current day (1 - 366), and <i>F</i> is the sign). In record types 2 and 3, this field indicates the date that the record was moved to the dump data set.																		
14	E SMF _x SID	04	EBCDIC	System identification (from the SID parameter).																		
18	12 SMF _x SSI	4	EBCDIC	Subsystem identification. This field is a four byte character value set by the <i>SUBSYS=option</i> specified in the SMF macros.																		
22	16 SMF _x STY	2	binary	Record subtype (hexadecimal values are 0 - FF). See "SYS and SUBSYS with TYPE and NOTYPE — Selecting subtypes for SMF recording" on page 70 for a description of subtype selectivity.																		

Best practices for designing SMF records

Consider the following list of guidelines when designing SMF records:

1. Never compromise compatibility with existing records or fields.
2. Never change the meaning, format, or length of any existing field. If the meaning, format or length do change, add a new field.
3. Add a new field to the end of a section rather than in front of an existing field within the section.
4. Always use the standard SMF header fields.
5. Use a standard SMF subtype field even if only the subtype is present.
6. Use record types 0-127 for IBM records; Use record types 128-255 for applications and independent software vendor (ISV) products.
7. Use the triplet convention, as seen in the SMF type 30 record, for including variable sections (such as: offset to section, number of sections, length of sections). Include the length of the section containing the triplets or the number of triplets.
8. If you report service units, be sure to include both the speed constant and the service definition coefficients in the record. This ensures they can be properly interpreted.
9. Use the most precise time format available for date and time fields and provide the GMT offset with leap seconds. Ensure you document the format you use.
10. Left justify and fill with blanks any EBCDIC and ASCII fields and ensure you document the format. If EBCDIC or ASCII text is mixed with binary data in a single field, ensure the format is documented.
11. Use the system identifier (SID) or SYSNAME along with the SYSPLEX name to identify a system. Ensure you document how you are identifying the system.
12. Consider adding a release indicator to allow programs to identify whether certain changes are present.
13. Avoid cumulative fields whenever possible. Instead, use interval fields to allow the application to perform any necessary accumulation. If you need cumulative fields, also provide interval fields.
14. Ensure interval values do not become negative because of a change to the operating environment during an interval. When the accumulated counter wraps, document the maximum and consider including a bit to indicate the wrap.
15. If a field value is determined not valid for any reason (such as a wrapped accumulator, or a value not obtained at the time the record is being built), use an indicator bit to indicate that the field is unreliable.

Chapter 15. SMF records

The following sections describe each SMF record in detail.

Record type 0 (00) — IPL

Record type 0 is written after every SMF initialization. It includes the virtual and central storage sizes and some of the SMF options in effect. See record type 90 (subtype 9) for information about the IPL of SMF.

Record environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record mapping

Header/self-defining section

This section contains the common SMF record header fields and, if applicable, the triplet fields (offset/length/number) that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF0LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF0SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF0FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF0RTY	1	binary	Record type 0 (X'00')								
6	6 SMF0TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF0DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF0SID	4	EBCDIC	System identification (from the SID parameter).								

Record type 0

Offsets	Name	Length	Format	Description																		
18	12 SMF0JWT	4	binary	<p>Limit, in minutes, of continuous wait for the job (taken from JWT parameter).</p> <p>Continuous wait time is defined as time spent waiting while the application program is in control. For example, for data sets allocated dynamically (while the application program is running, for example) either or both of the following count toward a job's continuous wait time:</p> <ul style="list-style-type: none"> • The time required to recall a data set from HSM Migration Levels 1 or 2 • The time required to mount a tape <p>If a data set was allocated statically (for a DD statement, for example) these activities will not be counted towards the job's continuous wait time.</p>																		
22	16 SMF0BUF	4	binary	This field contains meaningless information.																		
26	1A SMF0VST	4	binary	Number of 1K bytes in virtual storage.																		
30	1E SMF0OPT	1	binary	<p>SMF options:</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Reserved</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>Data set accounting. Record types selected. This bit is on when one of the following record types is selected: 14, 15, 17, 18, 62, 63, 64, 67 or 68. (See "TYPE and NOTYPE — Selecting and directing SMF records" on page 70.)</td> </tr> <tr> <td>4</td> <td>Volume accounting. Record types 10 or 69 selected. (See "TYPE and NOTYPE — Selecting and directing SMF records" on page 70.)</td> </tr> <tr> <td>5</td> <td>Reserved.</td> </tr> <tr> <td>6</td> <td>Type 17 records will be written for temporary data sets (REC(ALL)).</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Reserved	2	Reserved.	3	Data set accounting. Record types selected. This bit is on when one of the following record types is selected: 14, 15, 17, 18, 62, 63, 64, 67 or 68. (See "TYPE and NOTYPE — Selecting and directing SMF records" on page 70.)	4	Volume accounting. Record types 10 or 69 selected. (See "TYPE and NOTYPE — Selecting and directing SMF records" on page 70.)	5	Reserved.	6	Type 17 records will be written for temporary data sets (REC(ALL)).	7	Reserved.
Bit	Meaning when set																					
0	Reserved																					
1	Reserved																					
2	Reserved.																					
3	Data set accounting. Record types selected. This bit is on when one of the following record types is selected: 14, 15, 17, 18, 62, 63, 64, 67 or 68. (See "TYPE and NOTYPE — Selecting and directing SMF records" on page 70.)																					
4	Volume accounting. Record types 10 or 69 selected. (See "TYPE and NOTYPE — Selecting and directing SMF records" on page 70.)																					
5	Reserved.																					
6	Type 17 records will be written for temporary data sets (REC(ALL)).																					
7	Reserved.																					
31	1F SMFORST	4	binary	Number of 1K bytes in central storage.																		
35	23 SMFORSV	1		Reserved.																		
36	24 SMF0OSL	8	EBCDIC	MVS product name.																		
44	2C SMF0SYN	8	EBCDIC	System name (from the SYSNAME parameter in the IEASYSxx parmlib member).																		
52	34 SMF0SYP	8	EBCDIC	Sysplex name (from the SYSPLEX parameter in the COUPLExx parmlib member).																		
60	3C SMF0TZ	4	binary	Difference in time between local time and Greenwich mean time in binary units of 1.048576 seconds. The value of SMF0TZ is copied from the CVTTZ field. For more information about the CVTTZ field, see the CVT mapping macro in <i>z/OS MVS Data Areas</i> in <i>z/OS Internet library</i> (http://www.ibm.com/systems/z/os/zos/bkserv/).																		
64	40 SMF0MSWT	4	binary	Started task wait time limit (SMFPRMxx SWT(<i>hhmm</i>) value) converted to minutes.																		
68	44 SMF0MTWT	4	binary	TSO wait time limit (SMFPRMxx TWT(<i>hhmm</i>) value) converted to minutes.																		

Record type 2 (02) — Dump header

The SMF dump program writes record type 2 to the dump data set. It indicates the beginning of a dump of the SMF data set from a direct access device (usually to a tape). There are three variations of this record. If bit 1 at offset 4 is ON, then subtypes are supported; if the bit is OFF, the record consists of the standard SMF record header only.

Record environment

The following conditions exist for the generation of this record:

Macro None

Record mapping

Header/self-defining section

This section contains the common SMF record header fields and, if applicable, the triplet fields (offset/length/number) that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF2LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See “Standard SMF record header” on page 162 for a detailed description.								
2	2 SMF2SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF2FLG	1	binary	System indicator: <table border="0" style="margin-left: 20px;"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See “Standard SMF record header” on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF2RTY	1	binary	Record type 2 (X'02').								
6	6 SMF2TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the dump data set.								
10	A SMF2DTE	4	packed	Date when the record was moved into the dump date set, in the form <i>0cyydddF</i> . See “Standard SMF record header” on page 162 for a detailed description.								
14	E SMF2SID	4	EBCDIC	System identification (from the SID parameter).								

Subtype 1

This is a signature record that represents a signature group and is consumed for signature verification by the IFASMF DL and IFASMF DP utilities.

Offsets	Name	Length	Format	Description
0	0 SMF2GLEN	2	binary	Record length. This field and the next field (total of 4 bytes) form the record descriptor word (RDW). See “Standard SMF record header” on page 162 for a detailed description.
2	2 SMF2GSEG	2	binary	Segment descriptor (see record length field).

Record type 2

Offsets	Name	Length	Format	Description												
4	4 SMF2GFLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Subtypes are valid.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved.	1	Subtypes are valid.	2-7	Reserved.				
Bit	Meaning when set															
0	Reserved.															
1	Subtypes are valid.															
2-7	Reserved.															
5	5 SMF2GRTY	1	binary	Record type 2 (X'02').												
6	6 SMF2GTME	4	binary	Time since midnight, in hundredths of a second, of the last record in the group.												
10	A SMF2GDTE	4	packed	Date of the last record in the group, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF2GSID	4	EBCDIC	System identification: DUMY												
18	12 SMF2GWID	4	EBCDIC	Subsystem identification.												
22	16 SMF2GSTP	2	binary	Subtype 1 (X'0001').												
24	18 SMF2GRSID	4	EBCDIC	The group's SID.												
28	1C SMFGFLG2	1	binary	Group indicators: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>First group written.</td> </tr> <tr> <td>1</td> <td>Group's subtype is valid.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	First group written.	1	Group's subtype is valid.	2-7	Reserved.				
Bit	Meaning when set															
0	First group written.															
1	Group's subtype is valid.															
2-7	Reserved.															
29	1D SMF2GRTYPE	1	binary	The record type for this group.												
30	1E SMF2GSTYPE	2	binary	The record subtype for this group.												
32	20 SMF2GFTME	4	binary	Time since midnight, in hundredths of a second, of the first record in the group.												
36	24 SMF2GFDTE	4	EBCDIC	Date of the first record in the group, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
40	28 SMF2GCNT	4	binary	The number of records in this signature group.												
44	2C SMF2GHASHMETH	1	binary	A bit array indicating the hash method used for this group. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>SHA1</td> </tr> <tr> <td>1</td> <td>SHA256</td> </tr> <tr> <td>2</td> <td>SHA384</td> </tr> <tr> <td>3</td> <td>SHA512</td> </tr> <tr> <td>4-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	SHA1	1	SHA256	2	SHA384	3	SHA512	4-7	Reserved
Bit	Meaning when set															
0	SHA1															
1	SHA256															
2	SHA384															
3	SHA512															
4-7	Reserved															
45	2D SMF2GSIGTYPE	1	binary	A bit array indicating the signature type used for this group. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>RSA</td> </tr> <tr> <td>1</td> <td>ECDSA</td> </tr> <tr> <td>2-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	RSA	1	ECDSA	2-7	Reserved				
Bit	Meaning when set															
0	RSA															
1	ECDSA															
2-7	Reserved															
46	2E SMF2GTOKENNAME	32	EBCDIC	The saved CKA_ID of the PKCS#11 token name used to generate this signature.												
78	4E *	2	-	Reserved space for future expansion.												
80	50 SMF2GSIGLEN	4	binary	The digital signature length for this signature group												

Offsets	Name	Length	Format	Description
84	54 SMF2GSIG	512	EBCDIC	<p>The digital signature for this signature group. It is the result of the hash and sign operation (using the hash method and signature type specified in this record) on the concatenation of the following:</p> <ol style="list-style-type: none"> 1. Running hashsum of all this group's records (hash each entire record padded out to a 128-byte boundary with zeros) 2. Running hashsum of all the previous group's records (hash each entire record padded out to a 128-byte boundary with zeros)

Subtype 2

This is a signature record that represents a signature interval and is consumed for signature verification by the IFASMF DL and IFASMF DP utilities.

Offsets	Name	Length	Format	Description												
0	0 SMF2ILEN	2	binary	Record length. This field and the next field (total of 4 bytes) form the record descriptor word (RDW). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF2ISEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF2IFLG	1	binary	<p>System indicator:</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Subtypes are valid.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved.	1	Subtypes are valid.	2-7	Reserved.				
Bit	Meaning when set															
0	Reserved.															
1	Subtypes are valid.															
2-7	Reserved.															
5	5 SMF2IRTY	1	binary	Record type 2 (X'02').												
6	6 SMF2ITME	4	binary	Time since midnight, in hundredths of a second, of the interval.												
10	A SMF2IDTE	4	packed	Date of the interval, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF2ISID	4	EBCDIC	System identification: DUMY												
18	12 SMF2IWID	4	EBCDIC	Subsystem identification.												
22	16 SMF2ISTP	2	binary	Subtype 2 (X'0002').												
24	18 SMF2IRSID	4	EBCDIC	The interval's SID.												
28	1C SMFIFLG2	1	binary	<p>Group indicators:</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>First interval written.</td> </tr> <tr> <td>1</td> <td>Interval's subtype is valid.</td> </tr> <tr> <td>2</td> <td>This interval is the result of a HALT.</td> </tr> <tr> <td>3</td> <td>This interval contains new cryptography options.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	First interval written.	1	Interval's subtype is valid.	2	This interval is the result of a HALT.	3	This interval contains new cryptography options.	4-7	Reserved.
Bit	Meaning when set															
0	First interval written.															
1	Interval's subtype is valid.															
2	This interval is the result of a HALT.															
3	This interval contains new cryptography options.															
4-7	Reserved.															
29	1D SMF2IRTYPE	1	binary	The record type for this interval.												
30	1E SMF2ISTYPE	2	binary	The record subtype for this interval.												
32	20 SMF2IFTME	4	binary	Time since midnight, in hundredths of a second, of the first record in the interval.												
36	24 SMF2IFDTE	4	EBCDIC	Date of the first record in the interval, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
40	28 SMF2ILTME	4	binary	Time since midnight, in hundredths of a second, of the last record in the interval.												

Record type 2

Offsets	Name	Length	Format	Description												
44	2C SMF2ILDTE	4	EBCDIC	Date of the last record in the interval, in the form 0cyyddF. See "Standard SMF record header" on page 162 for a detailed description.												
48	30 SMF2INTME	4	binary	Time since midnight, in hundredths of a second, of the next interval.												
52	34 SMF2INDTE	4	EBCDIC	Date of the next interval, in the form 0cyyddF. See "Standard SMF record header" on page 162 for a detailed description.												
56	38 SMF2ICNT	4	binary	The number of records in this signature interval.												
60	3C SMF2IHASHMETH	1	binary	A bit array indicating the hash method used for this group. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SHA1</td> </tr> <tr> <td>1</td> <td>SHA256</td> </tr> <tr> <td>2</td> <td>SHA384</td> </tr> <tr> <td>3</td> <td>SHA512</td> </tr> <tr> <td>4-7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	SHA1	1	SHA256	2	SHA384	3	SHA512	4-7	Reserved
Bit	Meaning when set															
0	SHA1															
1	SHA256															
2	SHA384															
3	SHA512															
4-7	Reserved															
61	3D SMF2ISIGTYPE	1	binary	A bit array indicating the signature type used for this group. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>RSA</td> </tr> <tr> <td>1</td> <td>ECDSA</td> </tr> <tr> <td>2-7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	RSA	1	ECDSA	2-7	Reserved				
Bit	Meaning when set															
0	RSA															
1	ECDSA															
2-7	Reserved															
62	3E SMF2ITOKENNAME	32	EBCDIC	The saved CKA_ID of the PKCS#11 token name used to generate this signature.												
94	5E *	2	-	Reserved space for future expansion.												
96	60 SMF2ISIGLEN	4	binary	The digital signature length for this signature interval.												
100	64 SMF2ISIG	512	EBCDIC	The digital signature for this signature interval. It is the result of the hash and sign operation (using the hash method and signature type specified in this record) on the concatenation of the following: <ol style="list-style-type: none"> Running hashsum of all this group's records (hash each entire record padded out to a 128-byte boundary with zeros) Hash of the previous interval record's data, excluding the signature and signature length fields Hash of this interval record's data, excluding the signature and signature length fields 												

Record Type 3 (03) — Dump Trailer

The SMF dump program writes record type 3 to the dump data set. This record consists of the standard SMF record header only. It marks the end of a dump of the SMF data set from a direct access device (usually to a tape).

Record Environment

The following conditions exist for the generation of this record:

Macro None

Record Mapping

Header/Self-defining Section

This section contains the common SMF record header fields and, if applicable, the triplet fields (offset/length/number) that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF3LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF3SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF3FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF3RTY	1	binary	Record type 3 (X'03').								
6	6 SMF3TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the dump data set.								
10	A SMF3DTE	4	packed	Date when the record was moved into the dump data set, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF3SID	4	EBCDIC	System identification (from the SID parameter).								

Record Type 4 (04) — Step Termination

Record type 4 is written at the normal or abnormal termination of a job step for a background job, or when a job step is flushed during or after job initiation. It is not written for a job step that follows a CANCEL operator command.

Note: IBM recommends that you use record type 30 rather than record types 4, 5, 20, 34, 35, and 40. Use of record type 4 may cause you to miss key workload indicators.

This record identifies the job step by the job log identification, step name, number of the step within the job, user identification, program name and performance group number. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification. If accounting numbers (which can be alphanumeric) were specified in the EXEC statement, they are included.

This record also contains operating information such as:

- The job step start and end times
- Step CPU time
- Step service
- Step termination status
- Number of records in DD DATA and DD* data sets (processed by the step)
- Device allocation start time
- Problem program start time
- Storage protect key.

It contains the number of page-ins, page-outs, swap-ins, and swap-outs for both VIO and non-VIO data sets.

Record type 4

Record type 4 has an entry for each non-spooled data set that was defined by a DD statement. Each entry lists the device class, unit type, channel address, unit address, and EXCP count for the data set. Data sets are usually recorded in the order of the step DD statements; they are not identified by name. (An installation written IEFUJV exit routine can record this order as each statement is validated). Dynamic allocation or deallocation can affect the order. For data sets that are dynamically unallocated, the data set entry information is in record type 40 — not record type 4.

When the TIOT size is greater than 32K (more than 1635 DD statements), device data is not collected for the type 4 record. The data is available in the type 30 record.

The record contains information on service and transaction active timer. For information on service and transaction time, see *z/OS MVS Initialization and Tuning Guide*. For more information on EXCP count and CPU time, see Chapter 10, “EXCP count,” on page 131 and Chapter 11, “CPU time,” on page 133.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record header fields and, if applicable, the triplet fields (offset/length/number) that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF4LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See “Standard SMF record header” on page 162 for a detailed description.								
2	2 SMF4SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF4FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators (see “Standard SMF record header” on page 162 for details.)</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (see “Standard SMF record header” on page 162 for details.)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (see “Standard SMF record header” on page 162 for details.)											
7	Reserved.											
5	5 SMF4RTY	1	binary	Record type 4 (X'04').								
6	6 SMF4TME	4	binary	Time since midnight, in hundredths of a second, that the record is passed to the SMF writer. This is the time when the step terminated.								
10	A SMF4DTE	4	packed	Date when the record is passed to the SMF writer, in the form <i>0cyydddF</i> . See “Standard SMF record header” on page 162 for a detailed description. This is the date when the step terminated.								
14	E SMF4SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF4JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF4RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF4RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See “Standard SMF record header” on page 162 for a detailed description.								

Offsets	Name	Length	Format	Description
34	22 SMF4UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
42	2A SMF4STN	1	binary	Step number (first step=1, and so on).
43	2B SMF4SIT	4	binary	Time since midnight, in hundredths of a second, that the initiator selected this step.
47	2F SMF4STID	4	packed	Date when the initiator selected this step, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
51	33 SMF4NCI	4	binary	Number of card-image records in DD DATA and DD* data sets read by the reader for the step.
55	37 SMF4SCC	2	binary	Step completion code: X'0ccc' indicates system ABEND in the job step where <i>ccc</i> is the system ABEND code. (See <i>z/OS MVS System Codes</i> .) X'8ccc' indicates user ABEND in the job step where <i>ccc</i> is the user ABEND code. X'nnnn' indicates normal completion where <i>nnnn</i> is the contents of the two low-order bytes in register 15 at termination. X'0000' indicates either <ol style="list-style-type: none"> 1. The job step was flushed (not processed) because of an error during allocation or in a preceding job step, or 2. normal job completion with a return code of zero. Use this field in conjunction with the step termination indicator field (offset 87).
57	39 SMF4PRTY	1	binary	Address space dispatching priority (taken from DPRTY=parameter on EXEC card or the default APG value). For more information see <i>z/OS MVS Initialization and Tuning Guide</i> .
58	3A SMF4PGMN	8	EBCDIC	Program name (taken from PGM= parameter on EXEC card). If a backward reference was used, then this field contains *.DD.
66	42 SMF4STMN	8	EBCDIC	Step name (taken from name on EXEC card).
74	4A SMF4RSV5	2	binary	Reserved. SMF4RSH0, formerly a two-byte field at this offset, has been increased to four bytes and moved to offset 82.
76	4C SMF4SYST	2	binary	Largest amount of storage used from top of private area, in 1K units. This storage area includes the LSQA and SWA (subpools 229, 230, 236, 237, 249, and 253-255). If ADDRSPC=REAL is specified, this field equals the amount of storage used that was not from the contiguous central storage reserved for the program. See offsets 82 and 102. If storage was not allocated (job step was flushed), these fields equal zero.
78	4E SMF4HOST	2	binary	Largest amount of storage from bottom of private area, in 1K units. This storage area includes subpools 0-127, 129-132, 244, 251 and 252. If ADDRSPC=REAL is specified, this field equals the amount of contiguous central storage that was used. See offsets 82 and 102.
80	50 SMF4RV1	2		Reserved.
82	52 SMF4RSH0	4	binary	Region size established, in 1K units taken from the REGION=parameter in the JCL, and rounded up to a 4K boundary. If ADDRSPC=REAL is specified, this field equals the amount of contiguous central storage reserved for the program. If the region requested was greater than 16 megabytes, the region established resides above 16 megabytes, and this field will contain a minimum value of 32 megabytes.
86	56 SMF4SPK	1	binary	Storage protect key, in the form <i>xxxx0000</i> (where <i>xxxx</i> is the key).

Record type 4

Offsets	Name	Length	Format	Description																		
87	57 SMF4STI	1	binary	<p>Step termination indicator</p> <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Canceled by exit IEFUJV</td> </tr> <tr> <td>2</td> <td>Canceled by exit IEFUJI</td> </tr> <tr> <td>3</td> <td>Canceled by exit IEFUSI</td> </tr> <tr> <td>4</td> <td>Canceled by exit IEFACTRT</td> </tr> <tr> <td>5</td> <td>Step is to be restarted</td> </tr> <tr> <td>6</td> <td>If 0, normal completion. If 1, ABEND. If step completion code (offset 55) equals 0322 or 0522, IEFUTL allowed the abend to occur. If step completion code equals 0722, IEFUSO allowed the abend to occur.</td> </tr> <tr> <td>7</td> <td>If 0, normal completion. If 1, step was flushed.</td> </tr> </table>	Bit	Meaning when set	0	Reserved	1	Canceled by exit IEFUJV	2	Canceled by exit IEFUJI	3	Canceled by exit IEFUSI	4	Canceled by exit IEFACTRT	5	Step is to be restarted	6	If 0, normal completion. If 1, ABEND. If step completion code (offset 55) equals 0322 or 0522, IEFUTL allowed the abend to occur. If step completion code equals 0722, IEFUSO allowed the abend to occur.	7	If 0, normal completion. If 1, step was flushed.
Bit	Meaning when set																					
0	Reserved																					
1	Canceled by exit IEFUJV																					
2	Canceled by exit IEFUJI																					
3	Canceled by exit IEFUSI																					
4	Canceled by exit IEFACTRT																					
5	Step is to be restarted																					
6	If 0, normal completion. If 1, ABEND. If step completion code (offset 55) equals 0322 or 0522, IEFUTL allowed the abend to occur. If step completion code equals 0722, IEFUSO allowed the abend to occur.																					
7	If 0, normal completion. If 1, step was flushed.																					
88	58 SMF4RV2	2		Reserved.																		
90	5A SMF4AST	4	binary	Device allocation start time, in hundredths of a second.																		
94	5E SMF4PPST	4	binary	Problem program start time, in hundredths of a second.																		
98	62 SMF4RV3	1	binary	Reserved.																		
99	63 SMF4SRBT	3	binary	Step CPU time under SRBs, in hundredths of a second. This field includes the CPU time for various supervisory routines that are dispatched from SRBs: locking routines, page resolution, swap control, cross-memory communications (WAIT, POST, I/O POST), and TQE scheduling.																		
102	66 SMF4RIN	2	binary	<p>Record indicator</p> <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-3</td> <td>Reserved</td> </tr> <tr> <td>4</td> <td>Field SMF4SETM is not valid. An overflow condition occurs when the length of the value for the step CPU time under TCBs is greater than 3 bytes. In this case, the step CPU time under TCBs is not recorded in the type 4 record (SMF4SETM); The value is available in the type 30 record (SMF30CPT).</td> </tr> <tr> <td></td> <td>If your installation uses an accounting program that does not use the type 30 record to gather step CPU time, you must update that program. Only the type 30 record should be considered valid.</td> </tr> <tr> <td>5</td> <td>Device data not recorded. When the TIOT size is greater than 32K (more than 1635 DD statements), device data is not collected for the type 4 record. The data is available in the type 30 record.</td> </tr> <tr> <td>6</td> <td>EXCP count might be wrong. For more information on EXCP count, see Chapter 10, "EXCP count," on page 131.</td> </tr> <tr> <td>7</td> <td>If 0, storage is virtual. If 1, storage is central (real).</td> </tr> <tr> <td>8-15</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-3	Reserved	4	Field SMF4SETM is not valid. An overflow condition occurs when the length of the value for the step CPU time under TCBs is greater than 3 bytes. In this case, the step CPU time under TCBs is not recorded in the type 4 record (SMF4SETM); The value is available in the type 30 record (SMF30CPT).		If your installation uses an accounting program that does not use the type 30 record to gather step CPU time, you must update that program. Only the type 30 record should be considered valid.	5	Device data not recorded. When the TIOT size is greater than 32K (more than 1635 DD statements), device data is not collected for the type 4 record. The data is available in the type 30 record.	6	EXCP count might be wrong. For more information on EXCP count, see Chapter 10, "EXCP count," on page 131.	7	If 0, storage is virtual. If 1, storage is central (real).	8-15	Reserved.		
Bit	Meaning when set																					
0-3	Reserved																					
4	Field SMF4SETM is not valid. An overflow condition occurs when the length of the value for the step CPU time under TCBs is greater than 3 bytes. In this case, the step CPU time under TCBs is not recorded in the type 4 record (SMF4SETM); The value is available in the type 30 record (SMF30CPT).																					
	If your installation uses an accounting program that does not use the type 30 record to gather step CPU time, you must update that program. Only the type 30 record should be considered valid.																					
5	Device data not recorded. When the TIOT size is greater than 32K (more than 1635 DD statements), device data is not collected for the type 4 record. The data is available in the type 30 record.																					
6	EXCP count might be wrong. For more information on EXCP count, see Chapter 10, "EXCP count," on page 131.																					
7	If 0, storage is virtual. If 1, storage is central (real).																					
8-15	Reserved.																					
104	68 SMF4RLCT	2	binary	Offset from the beginning of the record (SMF4FLG) header to the relocate section. The displacement depends upon the size of the accounting fields and the number of devices.																		
106	6A SMF4LENN	2	binary	Length of device entry portion of record. Equals: (8 times the number of devices) + 2																		

Device Data Section

For each device assigned to each non-spooled data set, there is an eight-byte entry with the following format:

Note: When the TIOT size is greater than 32K (more than 1635 DD statements), device data is not collected for the type 4 record. The data is available in the type 30 record.

Offsets	Name	Length	Format	Description
0	0 SMF4EXPS	8	structure	Data set access information. Note: Virtual I/O devices are identified by the following: Device Class 0 Unit Type 0 Device Number X'7FFF' It is important to understand the following: Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname. SMF records will show VIO unit addresses as X'7FFF'. The actual in-storage UCB built for VIO will show address X'3FFF'. For example, the messages: <ul style="list-style-type: none"> • IEF237I X'3FFF' ALLOCATED TO ddname • IEF237I X'7FFF' ALLOCATED TO ddname indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.
0	0 SMF4DEVC	0	binary	Device class.
1	1 SMF4UTYP	1	binary	Unit type.
2	2 SMF4CUAD	2	binary	Device number.
4	4 SMF4EXCP	4	binary	EXCP count (see offset 102).

Accounting section

After the device entries are the following fields:

Offsets	Name	Length	Format	Description
0	0 SMF4LNTH	1	binary	Length of accounting section, excluding this field.
1	1 SMF4SETM	3	binary	Step CPU time under TCBs, in hundredths of a second. This field includes the CPU time for all tasks that are dispatched from TCBs below the level of RCT. CPU time is not expected to be constant between different runs of the same job step. For more information on CPU time, see Chapter 11, "CPU time," on page 133.
4	4 SMF4NAF	1	binary	Number of accounting fields.
5	5 SMF4ACTF	variable	EBCDIC	Accounting fields. Each entry for an accounting field contains the length of the field (one byte, binary) followed by the field (EBCDIC). A zero indicates an omitted field.

Relocate Section

Offsets	Name	Length	Format	Description
0	0 SMF4PGIN	4	binary	Number of non-VIO, non-swap page-ins for this step. This field includes page-ins that are required through page faults, specific page requests, and page fixes. It does not include page reclaims, page-ins for VIO data sets, pages that are swapped in, and page-ins for the common area.
4	4 SMF4PGOT	4	binary	Number of non-VIO, non-swap page-outs for this step. This field includes page-outs required through page requests, including those pages stolen by the paging supervisor through infrequent use. It does not include page-outs for VIO data sets, pages that are swapped out, and page-outs for the common area.

Record type 4

Offsets	Name	Length	Format	Description
8	8 SMF4NSW	4	binary	Number of address space swap sequences. (A swap sequence consists of an address space swap-out and swap-in.)
12	C SMF4PSI	4	binary	Number of pages swapped in. This field includes: LSQA, fixed pages, and those pages that the real storage manager determined to be active when the address space was swapped in. It does not include page reclaims nor pages found in storage during the swap-in process (such as pages brought in from SRBs started after completion of swap-in Stage 1 processing).
16	10 SMF4PSO	4	binary	Number of pages swapped out. This field includes: LSQA, private area fixed pages, and private area non-fixed changed pages.
20	14 SMF4VPI	4	binary	Number of VIO page-ins for this step. This field includes page-ins resulting from page faults or specific page requests on a VIO window. It does not include VIO swap-ins or page-ins for the common area.
24	18 SMF4VPO	4	binary	Number of VIO page-outs for this step. This field includes page-outs resulting from specific page requests on a VIO window, and also those pages stolen by the paging supervisor through infrequent use. It does not include VIO swap-outs or page-outs for the common area.
28	1C SMF4SST	4	binary	Step service, in service units. This field equals: total job service minus the accumulated job service before this step's initialization.
32	20 SMF4ACT (SMF4TAT)	4	binary	Step transaction active time, in 1024-microsecond units equal: total job transaction active time minus the accumulated transaction active time before this step's initialization.
36	24 SMF4PGNO	2	binary	Step performance group number (taken from PERFORM= parameter on JOB or EXEC card or the RESET operator command).
38	26 SMF4TRAN	4	binary	Step transaction residency time in 1024-microsecond units. That is the time the transaction was in central storage.
42	2A SMF4CPM	4	binary	Number of attempts to read data from an ESO hiperspace that were not satisfied because the data has been deleted.
46	2E SMF4RCLM	4	binary	Number of VIO reclaims for this step.
50	32 SMF4CPGN	4	binary	Number of common area page-ins for this step (LPA+CSA).
54	36 SMF4HSPI	4	binary	Number of hiperspace page-ins from auxiliary to processor storage.
58	3A SMF4PGST	4	binary	Number of pages stolen from the storage for this step.
62	3E SMF4PSEC	8	binary	Number of page seconds for this step, in page millisecond units. Equals: the number of pages used by this step times the processing time it held that number of pages.
70	46 SMF4LPAI	4	binary	Number of link pack area page-ins for the step.
74	4A SMF4HSPO	4	binary	Number of hiperspace page-outs from processor to auxiliary storage.
78	4E SMF4CPUS	4	binary	Step CPU service, in service units.
82	52 SMF4IOCS	4	binary	Step I/O service, in service units.
86	56 SMF4MSOS	4	binary	Step main storage service, in service units.
90	5A SMF4SRBS	4	binary	Step SRB service, in service units.
94	5E SMF4RSV1	8		Reserved.

Record Type 5 (05) — Job Termination

Record type 5 is written at the normal or abnormal termination of a background job.

Note: IBM recommends that you use record type 30 rather than record types 4, 5, 20, 34, 35, and 40. Use of record type 5 may cause you to miss key workload indicators.

This record identifies the job by job log identification, user identification, priority, input class, and programmer's name. If accounting numbers (which can be alphameric) were specified in the JOB statement, they are included. The job name, time, and date that the reader recognized the Job card (for this job) constitute the job log identification. If the job that is terminating is 'JES2' or 'JES3' then these might be set to zero.

This record also contains operating information such as:

- The job step start and end times
- Number of steps in the job
- Number of records in DD DATA and DD* data sets (processed by the job)
- Job termination status
- Device class
- Unit type
- Storage protect key
- Job service and job CPU time (the job CPU time equals the sum of the job step times).

When a step in a multi-step job terminates abnormally, the subsequent steps, whether processed or flushed, do not propagate the step abend code for processing by this record. The code appears in the step termination record (type 4). Offset 55, can contain X'nnnn' or X'0000' (the job termination indicator (offset 65, bit 6) is set to 1 if an abend occurred in the job).

For more information on service, transaction active time, and performance group number see *z/OS MVS Initialization and Tuning Guide*. For more information on EXCP count and CPU time, see Chapter 10, "EXCP count," on page 131 and Chapter 11, "CPU time," on page 133 respectively.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record header fields and, if applicable, the triplet fields (offset/length/number) that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF5LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF5SEG	2	binary	Segment descriptor (see record length field).

Record type 5

Offsets	Name	Length	Format	Description								
4	4 SMF5FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators (see "Standard SMF record header" on page 162 for details).</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-2	Reserved.	3-6	Version indicators (see "Standard SMF record header" on page 162 for details).	7	Reserved.
Bit	Meaning when set											
0-2	Reserved.											
3-6	Version indicators (see "Standard SMF record header" on page 162 for details).											
7	Reserved.											
5	5 SMF5RTY	1	binary	Record type 5 (X'05').								
6	6 SMF5TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF5DTE	4	packed	Date when the record is passed to the SMF writer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description. This is the date that the job terminated.								
14	E SMF5SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF5JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF5RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF5RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF5UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A SMF5NST	1	binary	Number of steps in the job.								
43	2B SMF5JIT	4	binary	Time since midnight, in hundredths of a second, that the initiator selected the job.								
47	2F SMF5JID	4	packed	Date when the initiator selected the job, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
51	33 SMF5NCI	4	binary	Number of card-image records in DD DATA and DD* data sets read by the reader for the job.								

Offsets	Name	Length	Format	Description																		
55	37 SMF5JCC	2	binary	<p>Job completion code:</p> <p>X'0ccc' indicates system ABEND in the last job step where <i>ccc</i> is the system ABEND code (see <i>z/OS MVS System Codes</i>).</p> <p>X'8ccc' indicates user ABEND in the last job step where <i>ccc</i> is the user ABEND code.</p> <p>X'nnnn' indicates normal completion where <i>nnnn</i> is the contents of the two low-order bytes in register 15 at termination.</p> <p>X'0000' indicates either: (see note)</p> <ol style="list-style-type: none"> The last job step was flushed (not processed) because of an error during allocation or in a preceding job step, or normal job completion with a return code of 0. <p>Note: When a step in a multi-step job terminates abnormally, the subsequent steps, whether executed or flushed, do not propagate the step abend code for processing this record. The code appears in the job termination record (type 4). In this case, the field - SMF5JCC, can contain X'nnnn'. If an abend occurred in the job, the job termination indicator (bit 6 in the SMF5JBTI field) is set to 1.</p> <p>Use this field in conjunction with the job termination indicator field, SMF5JBTI.</p>																		
57	39 SMF5JPTY	1	binary	<p>Job selection priority. This field normally equals the user-assigned priority of zero to 13, but if the job fails while being scheduled, this field equals 14 (taken from the PRTY parameter on the JOB card). If no value is specified for the PRTY parameter on the JOB card, this field contains:</p> <ul style="list-style-type: none"> For JES3, the default priority specified on the JES3 STANDARDS initialization card For JES2, a zero. <p>Note that JES2 does not use the priority value reported in this field.</p>																		
58	3A SMF5RSTT	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the end of the job.																		
62	3E SMF5RSTD	4	packed	Date when the reader recognized the end of the job, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.																		
66	42 SMF5JBTI	1	binary	<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Canceled by exit IEFUJV.</td> </tr> <tr> <td>2</td> <td>Canceled by exit IEFUJI.</td> </tr> <tr> <td>3</td> <td>Canceled by exit IEFUSI.</td> </tr> <tr> <td>4</td> <td>Canceled by exit IEFACTRT (step exit only).</td> </tr> <tr> <td>5</td> <td>Reserved.</td> </tr> <tr> <td>6</td> <td>If 0, normal completion (if 1, then ABEND).</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved.	1	Canceled by exit IEFUJV.	2	Canceled by exit IEFUJI.	3	Canceled by exit IEFUSI.	4	Canceled by exit IEFACTRT (step exit only).	5	Reserved.	6	If 0, normal completion (if 1, then ABEND).	7	Reserved.
Bit	Meaning when set																					
0	Reserved.																					
1	Canceled by exit IEFUJV.																					
2	Canceled by exit IEFUJI.																					
3	Canceled by exit IEFUSI.																					
4	Canceled by exit IEFACTRT (step exit only).																					
5	Reserved.																					
6	If 0, normal completion (if 1, then ABEND).																					
7	Reserved.																					
67	43 SMF5MCI	1		Reserved.																		
68	44 SMF5TRAN	4	binary	Job transaction residency time, in 1024-microsecond units. That is the total amount of time the transaction was in central storage.																		
72	48 SMF5CKRE	1		Reserved.																		
73	49 SMF5RDCL	1	binary	Reader device class. (This field is not filled in for jobs submitted by way of an internal reader.)																		

Record type 5

Offsets	Name	Length	Format	Description
74	4A SMF5RUTY	1	binary	Reader unit type. (This field is not filled in for jobs submitted by way of an internal reader.)
75	4B SMF5JICL	1	EBCDIC	Job input class (taken from JOB card; default equals 'A').
76	4C SMF5SPK	1	binary	Storage protect key, in the form xxxx0000 where xxxx is the key.
77	4D SMF5SRBT	3	binary	Job CPU time under SRBs, in hundredths of a second. This field includes the CPU time for various supervisory routines that are dispatched from SRBs: locking routines, page resolution, swap control, cross-memory communications (WAIT, POST, I/O POST), and TQE scheduling.
80	50 SMF5TJS	4	binary	Job service, in service units.
84	54 SMF5TTAT	4	binary	Job transaction active time, in 1024-microsecond units.
88	58 SMF5RV2	4		Reserved.
92	5C SMF5PGNO	2	binary	Reserved.
94	5E SMF5RV3	2		Reserved.
96	60 SMF5TLEN	1	binary	Length of rest of the fixed portion of the record.
97	61 SMF5PRGN	20	EBCDIC	Programmer's name.
117	75 SMF5JCPU	3	binary	Reserved.
120	78 SMF5ACTF	1	binary	Number of accounting fields.
121	79 SMF5JSAF	variable	EBCDIC	Accounting fields. Each entry for an accounting field contains the length of the field (one byte, binary) followed by the field (EBCDIC). A zero indicates an omitted field.

Relocate Section

Offsets	Name	Length	Format	Description
0	0 SMF5CPUS	4	binary	Job CPU service, in service units.
4	4 SMF5IOCS	4	binary	Job I/O service in service units.
8	8 SMF5MSOS	4	binary	Job main storage service, in service units.
12	C SMF5SRBS	4	binary	Job SRB service, in service units.
16	10 SMF5RSV1	8		Reserved.

Record Type 6 (06) — External Writer

The external writer writes record type 6 when processing is completed for the job output element (JOE). If a printer is running under the control of a functional subsystem (FSS), record type 6 is written for each data set printed on that printer.

This record identifies the output writer by SYSOUT class and form number, and identifies the job according to job log identification, JES2-assigned job number, and user identification. The job name, time, and date that the reader recognized the JOB card for this job constitute job log identification. It contains information on the output writer activity such as the number of data sets processed, and the FCB and universal character set identification for the printer.

The external writer does not fill every field in the common section. Unfilled fields are left with zeroes.

Any post-processor accounting routine that scans a type 6 record can determine the writer of the record from field SMF6SBS and check field SMF6PAD1 to determine the optional sections that are present in the record. When scanning the record for

data, the accounting routine obtains the length for each extension section at run time when it moves from one section to the next. The length is a two-byte field at the beginning of each section.

It is possible that records with truncated job numbers will be generated (refer to SMF6JNM for details). This erroneous output will cause problems with customer's accounting programs as well as other report programs such as Tivoli Decision Support for z/OS. A change may be required in the testing of the record level indicator.

If a SYSOUT data set, such as one that is held, is deleted before printing, a record type 6 will not be written.

If an external writer or user-supplied writer is used, SMF produces an incomplete record type 6. SMF produces this incomplete record only when the external writer directs output to a printer or punch. If the external writer directs output to a tape or disk, then SMF does not produce this record. The incomplete record type 6 differs from the JES2 record type as follows:

- Its length is 88 bytes (offsets 88 and 92 are not produced)
- The following fields are zero:
 - The number of logical records (offset 51)
 - I/O status indicators (offset 55)
 - Subsystem generating identification (offset 62)
 - Data set control indicators (offset 66)
 - JES2 logical output device name (offset 72).

Record Mapping

Header/Self-defining Section for External Writer

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF6LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF6SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF6FLG	1	binary	System indicator: <table border="0" style="margin-left: 20px;"> <tr> <td style="text-align: right;">Bit</td> <td>Meaning when set</td> </tr> <tr> <td style="text-align: right;">0-2</td> <td>Reserved.</td> </tr> <tr> <td style="text-align: right;">3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for details.).</td> </tr> <tr> <td style="text-align: right;">7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-2	Reserved.	3-6	Version indicators (See "Standard SMF record header" on page 162 for details.).	7	Reserved.
Bit	Meaning when set											
0-2	Reserved.											
3-6	Version indicators (See "Standard SMF record header" on page 162 for details.).											
7	Reserved.											
5	5 SMF6RTY	1	binary	Record type 6 (X'06').								
6	6 SMF6TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF6DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details.								
14	E SMF6SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF6JBN	8	EBCDIC	Job name (taken from job's RESQ). The job name, time, and date that the reader recognized the JOB card (for this job) log identification, or transaction name (for APPC output).								

Record type 6

Offsets	Name	Length	Format	Description												
26	1A SMF6RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).												
30	1E SMF6RSD	4	packed	Date that the reader recognized the JOB card for this job, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
34	22 SMF6UIF	8	EBCDIC	User identification (taken from common exit parameter area not from USER= parameter on job statement).												
42	2A SMF6OWC	1	EBCDIC	SYSOUT class (this field is blank for non-SYSOUT data sets).												
43	2B SMF6WST	4	binary	Start time since midnight, in hundredths of a second, of print/punch processor including remote device working on the data in this record.												
47	2F SMF6WSD	4	packed	Start date of print/punch processor including remote device working on the data in this record, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
51	33 SMF6NLR	4	binary	Number of logical records written by the writer, by form number and class (this field includes JOBLOG information and data set copies). For an example, a data set of 1000 lines with two copies will show 2000 in this field.												
55	37 SMF6IOE	1	binary	Zero or X'04' if the system detects an error while processing the input data set.												
56	38 SMF6NDS	1	binary	Number of data sets processed by the writer and included in this record. If multiple copies are produced, each copy is counted. (This field includes JOBLOG information.)												
57	39 SMF6FMN	4	EBCDIC	Form number as defined in the FORM= parameter of the DD statement.												
61	3D SMF6PAD1	1	binary	Section indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Common section present.</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>Enhanced SYSOUT support section present.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved.	1	Common section present.	2	Reserved.	3	Enhanced SYSOUT support section present.	4-7	Reserved.
Bit	Meaning when set															
0	Reserved.															
1	Common section present.															
2	Reserved.															
3	Enhanced SYSOUT support section present.															
4-7	Reserved.															
62	3E SMF6SBS	2	binary	Subsystem identification (X'0000' indicates external writer).												

I/O Data Section for External Writer

Offsets	Name	Length	Format	Description												
0	0 SMF6LN1	2	binary	Length of this section, including this field.												
2	2 SMF6DCI	1	binary	X'0000' indicates external writer.												
3	3 SMF6INDC	1	binary	Record level indicator <table border="0"> <tr> <td>Value</td> <td>Release- Support</td> </tr> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>MVS/XA SP2.2.0 and before- restructured SMF type 6 record.</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>MVS/ESA SP3.1.0- greater than 10K job support.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </table> <p>This field definition changes with each new version of the SMF type 6 record.</p>	Value	Release- Support	0	Reserved.	1	MVS/XA SP2.2.0 and before- restructured SMF type 6 record.	2	Reserved	3	MVS/ESA SP3.1.0- greater than 10K job support.	4-7	Reserved.
Value	Release- Support															
0	Reserved.															
1	MVS/XA SP2.2.0 and before- restructured SMF type 6 record.															
2	Reserved															
3	MVS/ESA SP3.1.0- greater than 10K job support.															
4-7	Reserved.															
4	4 SMF6JNM	4	EBCDIC	When SMF6INDC contains an X'1', this field contains a four-digit EBCDIC job number. When SMF6INDC contains an X'3' or greater, the job number has more than four digits, and this field contains zeros. The correct job number is then found in SMF6JBID.												

Offsets	Name	Length	Format	Description
8	8 SMF6OUT	8	EBCDIC	X'0000' external writer.
16	10 SMF6FCB	4	EBCDIC	FCB image identification (printer only).
20	14 SMF6UCS	4	EBCDIC	UCS image identification (printer only).

Common Section for External Writer

Offsets	Name	Length	Format	Description
0	0 SMF6LN3	2	binary	Length of the common section, including this field.
2	2 SMF6ROUT	4	binary	Output route code (this field is always set to zero). The route code is specified on the /*OUTPUT or DD statement.
6	6 SMF6EFMN	8	EBCDIC	Output form number. This field is set regardless of the number of characters in the forms field (SMF6FMN). The form number is specified on the FORM= parameter of the DD statement.
14	E	16		Reserved.
30	1E SMF6JBID	8	EBCDIC	Job ID, or transaction ID (for APPC output).
The following fields (up to and including SMF6OTOK) are only present if SMF6INDC is equal to or greater than X'04':				
38	26 SMF6STNM	8	EBCDIC	This field is not filled in for an output writer.
46	2E SMF6PRNM	8	EBCDIC	This field is not filled in for an output writer.
54	36 SMF6DDNM	8	EBCDIC	This field is not filled in for an output writer.
62	3E SMF6USID	8	EBCDIC	The user ID associated with the job/session that created the data set, or the user ID associated with the transaction ID (for APPC output).
70	46 SMF6SECS	8	EBCDIC	The security label of the created data set, or data set level seclabel.
78	4E SMF6PRMD	8	EBCDIC	The processing mode of the data set.
86	56 SMF6DSNM	53	EBCDIC	The name of the data set being printed.
139	8B	3		Reserved.
142	8E SMF6OTOK	20	EBCDIC	Reserved.

Enhanced SYSOUT Support (ESS) Section for External Writer

This section contains the output descriptor (if any) for first offloaded data set in this record.

Offsets	Name	Length	Format	Description						
64	40 SMF6LN5	2	binary	Length of ESS section (including this field).						
66	42 SMF6SGID	4	binary	Segment identifier. Contains 0 when the file is not segmented.						
70	46 SMF6IND	1	binary	Section indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.	1-7	Reserved.
Bit	Meaning when set									
0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.									
1-7	Reserved.									
71	47 SMF6RSV	1		Reserved.						
72	48 SMF6JDVT	8	EBCDIC	JCL definition table (JDT) name in JCL definition vector table (JDTV).						
80	50 SMF6TUL	2	binary	Text unit (SWBTU) data area length.						
82	52 SMF6TU	VAR	binary	Text unit (SWBTU) data area. The data area can be processed using the SWBTUREQ macro and is mapped by MVS macro IEFSJPFY.						

Record Type 6 (06) — JES2 Output Writer

The JES2 writer writes record type 6 when processing is completed for a job output element (JOE), or when there is a change in certain information (indicated by “*”) describing SYSOUT data sets processed in the same JOE. Record 6 is written for SYSOUT data sets that are printed or routed to a remote workstation. It is not written for held then deleted SYSOUT data sets. If a printer is running under the control of a functional subsystem (FSS), record type 6 is written for each data set printed on that printer. This record is written for spin data sets. JES2 can be induced to not write this record on a job class basis.

This record identifies the output writer by SYSOUT class and form number, and identifies the job according to job log identification, JES2-assigned job number, and user identification. It contains information on the output writer activity such as the number of logical records processed, number of data sets processed, writer start and end times, input/output status indicators data set control indicators, and JES2 logical output device name.

The JES2 writer does not fill every field in the common section. Unfilled fields are left with zeroes.

Any post-processor accounting routine that scans a type 6 record can determine the writer of the record from field SMF6SBS and check field SMF6PAD1 to determine the optional sections that are present in the record. When scanning the record for data, the accounting routine obtains the length for each extension section at run time when it moves from one section to the next. The length is a two-byte field at the beginning of each section.

This record also provides information on the activity of the 3800 (non-impact) printing subsystem.

Record Mapping

Header/Self-defining Section for JES2 Output Writer

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF6LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See “Standard SMF record header” on page 162 for a detailed description.								
2	2 SMF6SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF6FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (see “Standard SMF record header” on page 162 for details)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (see “Standard SMF record header” on page 162 for details)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (see “Standard SMF record header” on page 162 for details)											
7	Reserved.											
5	5 SMF6RTY	1	binary	Record type 6 (X'06').								
6	6 SMF6TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF6DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See “Standard SMF record header” on page 162 for a detailed description.								
14	E SMF6SID	4	EBCDIC	System identification (from the SID parameter).								

Offsets	Name	Length	Format	Description												
18	12 SMF6JBN	8	EBCDIC	Job name (taken from job's RESQ). The job name, time, and date that the reader recognized the JOB card (for this job) log identification, or transaction name (for APPC output).												
26	1A SMF6RST	4	binary	Time from midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).												
30	1E SMF6RSD	4	packed	Date when the reader recognized the JOB card for this job, in the form 0cydddF. See "Standard SMF record header" on page 162 for a detailed description.												
34	22 SMF6UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).												
42	2A SMF6OWC	1	EBCDIC	*SYSOUT class (this field is blank for non-SYSOUT data sets).												
43	2B SMF6WST	4	binary	Start time from midnight, in hundredths of a second, of print/punch processor including remote device that is working on the data in this record.												
47	2F SMF6WSD	4	packed	Start date of print/punch processor including remote device that is working on the data in this record, in the form 0cydddF. See "Standard SMF record header" on page 162 for a detailed description.												
51	33 SMF6NLR	4	binary	Number of logical records written by the writer, by form number and class (this field includes JOBLOG information and data set copies). For an example, a data set of 1000 lines with two copies will show 2000 in this field.												
55	37 SMF6IOE	1	binary	I/O status indicators <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-4</td> <td>Reserved</td> </tr> <tr> <td>5*</td> <td>Data buffer read error</td> </tr> <tr> <td>6</td> <td>Reserved</td> </tr> <tr> <td>7*</td> <td>Control buffer read error.</td> </tr> </table> <p>*A change in this field will cause a new record type 6.</p>	Bit	Meaning when set	0-4	Reserved	5*	Data buffer read error	6	Reserved	7*	Control buffer read error.		
Bit	Meaning when set															
0-4	Reserved															
5*	Data buffer read error															
6	Reserved															
7*	Control buffer read error.															
56	38 SMF6NDS	1	binary	Number of data sets processed by the writer and included in this record. If multiple copies are produced, each copy is counted. (This field includes JOBLOG information.)												
57	39 SMF6FMN	4	EBCDIC	Output form number as defined in the FORM= parameter of the DD statement. If the source field contains four or fewer characters, SMF6FMN will be set. Otherwise, this field contains blanks and the contents of the source field appear only in SMF6EFMN, described under the JES2 Common Section later in this record.												
61	3D SMF6PAD1	1	binary	Section indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>3800 printing subsystem section present</td> </tr> <tr> <td>1</td> <td>Common section present</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>Enhanced SYSOUT support section present</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	3800 printing subsystem section present	1	Common section present	2	Reserved	3	Enhanced SYSOUT support section present	4-7	Reserved.
Bit	Meaning when set															
0	3800 printing subsystem section present															
1	Common section present															
2	Reserved															
3	Enhanced SYSOUT support section present															
4-7	Reserved.															
62	3E SMF6SBS	2	binary	Subsystem identification — X'0002' signifies JES2.												

I/O data section for JES2 output writer

This section contains the remainder of the record information.

Offsets	Name	Length	Format	Description
0	0 SMF6LN1	2	binary	Length of this section, including this field.

Record type 6

Offsets	Name	Length	Format	Description																		
2	2 SMF6DCI	1	binary	<p>Data set control indicators</p> <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Record represents spin data sets</td> </tr> <tr> <td>2*</td> <td>Operator ended this data group</td> </tr> <tr> <td>3*</td> <td>Operator interrupted this data group</td> </tr> <tr> <td>4*</td> <td>Operator restarted this data group</td> </tr> <tr> <td>5*</td> <td>Record represents continuation of interrupted data group</td> </tr> <tr> <td>6*</td> <td>Operator overrode programmed carriage control (printer only)</td> </tr> <tr> <td>7*</td> <td>Punch output was interpreted (3525 only).</td> </tr> </table> <p>*A change in this field will cause a new record type 6</p>	Bit	Meaning when set	0	Reserved	1	Record represents spin data sets	2*	Operator ended this data group	3*	Operator interrupted this data group	4*	Operator restarted this data group	5*	Record represents continuation of interrupted data group	6*	Operator overrode programmed carriage control (printer only)	7*	Punch output was interpreted (3525 only).
Bit	Meaning when set																					
0	Reserved																					
1	Record represents spin data sets																					
2*	Operator ended this data group																					
3*	Operator interrupted this data group																					
4*	Operator restarted this data group																					
5*	Record represents continuation of interrupted data group																					
6*	Operator overrode programmed carriage control (printer only)																					
7*	Punch output was interpreted (3525 only).																					
3	3 SMF6INDC	1	binary	<p>Record level indicator</p> <table border="0"> <tr> <td>Value</td> <td>Release — Support</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>MVS/XA JES2 SP2.2.0 and before — restructured SMF type 6 record.</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>MVS/ESA JES2 SP3.1.1 — greater than 10K job support.</td> </tr> <tr> <td>4</td> <td>MVS/ESA JES2 SP3.1.3 — security support.</td> </tr> <tr> <td>5</td> <td>MVS/ESA JES2 SP4.1.0</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </table> <p>This field definition changes with each new version of the SMF type 6 record.</p>	Value	Release — Support	0	Reserved	1	MVS/XA JES2 SP2.2.0 and before — restructured SMF type 6 record.	2	Reserved	3	MVS/ESA JES2 SP3.1.1 — greater than 10K job support.	4	MVS/ESA JES2 SP3.1.3 — security support.	5	MVS/ESA JES2 SP4.1.0	6-7	Reserved.		
Value	Release — Support																					
0	Reserved																					
1	MVS/XA JES2 SP2.2.0 and before — restructured SMF type 6 record.																					
2	Reserved																					
3	MVS/ESA JES2 SP3.1.1 — greater than 10K job support.																					
4	MVS/ESA JES2 SP3.1.3 — security support.																					
5	MVS/ESA JES2 SP4.1.0																					
6-7	Reserved.																					
4	4 SMF6JNM	4	EBCDIC	<p>When SMF6INDC contains a X'1', this field contains a 4-digit EBCDIC job number. When SMF6INDC contains a X'3' or greater, and the job number has more than 4 digits, this field contains zeroes. If the job number is greater than or equal to 999, this field contains the job number. For an APPC transaction, this field contains zeroes. The correct job number or APPC transaction is found in SMF6JBID.</p>																		
8	8 SMF6OUT	8	EBCDIC	JES2 logical output device name defined in JESPARMS.																		
16	10 SMF6FCB	4	EBCDIC	FCB image identification (for printer only). A change in this field will cause a new record type 6.																		
20	14 SMF6UCS	4	EBCDIC	UCS image identification (for printer only). A change in this field will cause a new record type 6.																		
24	28 SMF6PGE	4	binary	<p>Approximate page count (printer only). For a printer controlled by JES2, the count is updated:</p> <ul style="list-style-type: none"> On a new page* definition, if LINECT=0 is specified on the JOBPARM JECL statement, in the accounting field of the JOB statement, on the OUTPUT JECL statement, or on the OUTPUT JCL statement. After the number of lines specified in LINECT or on a new page* definition. <p>*New page: The NEWPAGE parameter on the PRINTDEF or PRT(nnnn) JES2 Initialization statement determines the method of counting pages. If NEWPAGE=ALL or NEWPAGE=DEFAULT, then skip to any channel will be counted as a page. If NEWPAGE=1, then only skip to channel 1 will be counted as a page.</p> <p>For a printer controlled by an FSS, the count is affected by one or more of the following:</p> <ul style="list-style-type: none"> A PAGEDEF statement A FORMDEF statement The presence of page mode data. 																		

Offsets	Name	Length	Format	Description
28	1C SMF6RTE	2	binary	<p>Output route code defined in JESPARMS. The route code is specified on the /*OUTPUT or DD statement. The form number is specified on the FORM parameter of the DD statement.</p> <p>This field is defined as follows: X'0100' indicates local routine; X'nnrr' (where <i>nn</i> is the node number and <i>rr</i> is the remote device within the node) indicates remote routing; and X'00nn' indicates local routing. If more than 255 remotes are specified (in JESPARMS) for the system, this field is set to zero.</p>

3800 (non-impact) printing subsystem section for JES2 output writer

This section contains information on the activity of the 3800 (non-impact) printing subsystem.

Offsets	Name	Length	Format	Description								
64	40 SMF6LN2	2	binary	Length of 3800 printing subsystem section including this field.								
66	42 SMF6CPS	8	binary	Number of copies in each copy group. Each byte represents one copy group, and the sum of the 8 bytes is the total number of copies printed. A change in this field will cause a new record type 6 record.								
74	4A SMF6CHR	16	EBCDIC	Names of the character arrangement tables that define the characters used in printing. Each name is 4 bytes long, with a maximum of 4 names. A change in this field will cause a new record type 6.								
90	5A SMF6MID	4	EBCDIC	Names of the copy modification module used to modify the data. A change in this field will cause a new record type 6.								
94	5E SMF6FLI	4	EBCDIC	Name of the forms overlay printed on the copies. A change in this field will cause a new record type 6.								
98	62 SMF6FLC	1	binary	Number of copies on which the forms overlay is printed. A change in this field will cause a new record type 6.								
99	63 SMF6BID	1	binary	<p>Options indicator</p> <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0*</td> <td>Output was burst into sheets by the Burster-Trimmed-Stacker</td> </tr> <tr> <td>1*</td> <td>DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the character arrangement table used when printing that line.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*A change in this field will cause a new record type 6.</p>	Bit	Meaning when set	0*	Output was burst into sheets by the Burster-Trimmed-Stacker	1*	DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the character arrangement table used when printing that line.	2-7	Reserved.
Bit	Meaning when set											
0*	Output was burst into sheets by the Burster-Trimmed-Stacker											
1*	DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the character arrangement table used when printing that line.											
2-7	Reserved.											

JES2 Common Section for JES2 Output Writer

This section contains the general output information including the user ID associated with the job or session.

Offsets	Name	Length	Format	Description
64	40 SMF6LN3	2	binary	Length of common section (including this field).

Record type 6

Offsets	Name	Length	Format	Description
66	42 SMF6ROUT	4	binary	Output route code This field is defined as follows: X'00010000' indicates local routing; X'nnnnrrrr' (where <i>nnnn</i> is the node number and <i>rrrr</i> is the remote device within that node) indicates remote routine; and X'0000nnnn' indicates special local routing. This field is always set regardless of the number of remotes specified by the system. The node and remote devices are defined in JESPARMS. See <i>z/OS JES2 Initialization and Tuning Guide</i> for more information.
70	46 SMF6EFMN	8	EBCDIC	Output form number. This field is set regardless of the number of characters in the forms field (SMF6FMN).
78	4E	16		Reserved.
94	5E SMF6JBID	8	EBCDIC	Job name, transaction ID (for APPC output), or TSO/E userid.
The following fields (up to and including SMF6OTOK) are only present if SMF6INDC is equal to or greater than X'04':				
102	66 SMF6STNM	8	EBCDIC	This field is not filled in for an output writer.
110	6E SMF6PRNM	8	EBCDIC	This field is not filled in for an output writer.
118	76 SMF6DDNM	8	EBCDIC	This field is not filled in for an output writer.
126	7E SMF6USID	8	EBCDIC	The user ID associated with the job/session that created the data set, or the user ID associated with the transaction ID (for APPC output).
134	86 SMF6SECS	8	EBCDIC	The security label of the created data set, or the data set level seclabel.
142	8E SMF6PRMD	8	EBCDIC	The processing mode of the data set.
150	96 SMF6DSNM	53	EBCDIC	The name of the data set being printed.
203	CB	3		Reserved.
206	CE SMF6OTOK	20	EBCDIC	Output security token: The identifier JES assigns to those SYSOUT data sets that share common printing attributes and security information. Data sets thus grouped are then printed sequentially. If your installation also produces job header and trailer pages, these data sets appear between those job header and trailer pages as a job.

Enhanced SYSOUT Support (ESS) Section for JES2 Output Writer

This section contains the output descriptor (if any) for first offloaded data set in this record.

Offsets	Name	Length	Format	Description						
64	40 SMF6LN5	2	binary	Length of ESS section (including this field).						
66	42 SMF6SGID	4	binary	Segment identifier. Contains 0 when the file is not segmented.						
66	42 SMF6BNOF	2	binary	Offset to bin section.						
66	42 SMF6RES	2	binary	Reserved - redefines SMF6BNOF.						
70	46 SMF6IND	1	binary	Section indicator <table border="0"> <tr> <td style="padding-right: 20px;">Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.	1-7	Reserved.
Bit	Meaning when set									
0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.									
1-7	Reserved.									
71	47 SMF6RSV	1		Reserved.						
72	48 SMF6JDVT	8	EBCDIC	JCL definition table (JDT) name in JCL definition vector table (JDTV).						
80	50 SMF6TUL	2	binary	Text unit (SWBTU) data area length.						

Offsets	Name	Length	Format	Description
82	52 SMF6TU	VAR	binary	Text unit (SWBTU) data area. The data area can be processed using the SWBTUREQ macro and is mapped by MVS macro IEFSJPFEX.

Record Type 6 (06) — JES3 Output Writer

The JES3 output writer writes record type 6 for each data set processed by JES3 output service. One type 6 record is written for each data set section within an output scheduler element (OSE). If you issue the *RESTART command to restart a data set, one type 6 record is written when the data set is restarted and another type 6 record is written when the data set completes. If a printer is running under the control of a functional subsystem (FSS), record type 6 is written on the processor which has the FSS address space that processed the data set. The FSS writes the record if it processes the data set (JES3 does not).

This record identifies the output writer by SYSOUT class and form number, and identifies the job according to job log identification, JES3-assigned job number, and user identification. It contains information on the output writer activity such as:

- The number of logical records processed
- Number of data sets processed
- Output service start time and date
- I/O status indicators
- Data set control indicators
- JES3 logical output device name
- Output activity.

The JES3 writer does not fill every field in the common section. Unfilled fields are left with zeroes.

Any post-processor accounting routine that scans a type 6 record can determine the writer of the record from field SMF6SBS and check field SMF6PAD1 to determine the optional sections that are present in the record. When scanning the record for data, the accounting routine obtains the length for each extension section at run time when it moves from one section to the next. The length is a two-byte field at the beginning of each section.

It is possible that records with truncated job numbers will be generated (refer to SMF6JNM for details). This erroneous output will cause problems with customer's accounting programs as well as other report programs such as Tivoli Decision Support for z/OS. A change may be required in the testing of the record level indicator.

This record provides information on the activity of the 3800 (non-impact) printing subsystem.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section for JES3 Output Writer

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF6LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF6SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF6FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF6RTY	1	binary	Record type 6 (X'06').								
6	6 SMF6TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF6DTE	4	packed	Date that the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF6SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF6JBN	8	EBCDIC	Job name (taken from job's RESQ). The job name, time, and date that the reader recognized the JOB card (for this job) constitutes the log identification, or transaction name (for APPC output).								
26	1A SMF6RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF6RSD	4	packed	Date that the reader recognized the JOB card for this job, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF6UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement.)								
42	2A SMF6OWC	1	EBCDIC	SYSOUT class (this field is blank for non-SYSOUT data sets).								
43	2B SMF6WST	4	binary	Start time since midnight, in hundredths of a second, of output service working on the data in this record. This field is filled in at JES3 LOGIN time for the writer job.								
47	2F SMF6WSD	4	packed	Start date of output service working on the data in this record, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description. This field is filled in at JES3 LOGIN time for the writer job.								
51	33 SMF6NLR	4	binary	Number of logical records written by the writer. This field is filled in when a data set is completed or restarted. The count is a cumulative count which includes repeats and restarts. It does not include records skipped due to forward repositioning of the writer.								

Offsets	Name	Length	Format	Description
55	37 SMF6IOE	1	binary	I/O status indicators Bit Meaning when set 0-4 Reserved 5 Data buffer read error 6 Reserved 7 Control buffer read error.
56	38 SMF6NDS	1	binary	Number of data sets processed by the writer and included in this record. If multiple copies are produced, each copy is counted. (This field is filled in when data set is completed or restarted; it does not include restarts.)
57	39 SMF6FMN	4	EBCDIC	Form number — If the source field contains four or fewer characters, SMF6FMN will be set. Otherwise, this field contains blanks and the contents of the source field appears only in SMF6EFMN.
61	3D SMF6PAD1	1	binary	Section indicator Bit Meaning when set 0 3800 printing subsystem section present 1 Common section present 2 Reserved 3 Enhanced SYSOUT support section present 4-7 Reserved.
62	3E SMF6SBS	2	binary	Subsystem identification — X'0005' signifies JES3.

I/O Data Section for JES3 Output Writer

Offsets	Name	Length	Format	Description
00	00 SMF6LN1	2	binary	Length of this section, including this field.
02	02 SMF6DCI	1	binary	Data set control indicators. (These bits are set when a data set is completed or restarted.) Bit Meaning when set 0 Reserved 1 Record represents spin data sets 2 Operator ended this data group 3 Operator restarted data set with destination 4 Operator restarted this data group 5 Received operator restarted data set 6 Operator started with single space 7 Punch output was interpreted.

Record type 6

Offsets	Name	Length	Format	Description														
03	03 SMF6INDC	1	binary	Record level indicator <table border="0"> <tr> <td>Value</td> <td>Release — Support</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>MVS/XA JES3 SP2.2.1 and before — restructured SMF type 6 record</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>MVS/ESA JES3 SP3.1.1 — greater than 10K job support</td> </tr> <tr> <td>4</td> <td>MVS/ESA JES3 SP3.1.3 — security support</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table> <p>This field definition changes with each new version of the SMF type 6 record.</p>	Value	Release — Support	0	Reserved	1	MVS/XA JES3 SP2.2.1 and before — restructured SMF type 6 record	2	Reserved	3	MVS/ESA JES3 SP3.1.1 — greater than 10K job support	4	MVS/ESA JES3 SP3.1.3 — security support	5-7	Reserved.
Value	Release — Support																	
0	Reserved																	
1	MVS/XA JES3 SP2.2.1 and before — restructured SMF type 6 record																	
2	Reserved																	
3	MVS/ESA JES3 SP3.1.1 — greater than 10K job support																	
4	MVS/ESA JES3 SP3.1.3 — security support																	
5-7	Reserved.																	
04	04 SMF6JNM	4	EBCDIC	When SMF6INDC contains a X'1', this field contains a four-digit EBCDIC job number. When SMF6INDC contains a X'3' or greater, the job number has more than four digits, and this field contains zeroes. The correct job number is then found in SMF6JBID.														
08	08 SMF6OUT	8	EBCDIC	JES3 logical output device name.														
16	10 SMF6FCB	4	EBCDIC	FCB image identification (printer only).														
20	14 SMF6UCS	4	EBCDIC	UCS image identification (printer only).														
24	18 SMF6PGE	4	binary	For printer, approximate page count (A skip to carriage control channel one is counted as a page.) For punch, the number of cards punched. This field is filled in when a data set is completed or restarted. The count is a cumulative count which includes repeats and restarts. It does not include pages skipped due to forward repositioning of the writer.														
28	1C SMF6DFE	2	binary	Data format error indicators. (These bits are set when a data set is completed or restarted.) <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-5</td> <td>Reserved</td> </tr> <tr> <td>6</td> <td>Some first character control data bad, default used</td> </tr> <tr> <td>7</td> <td>Bad record length (truncate or pad)</td> </tr> <tr> <td>8-15</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-5	Reserved	6	Some first character control data bad, default used	7	Bad record length (truncate or pad)	8-15	Reserved.				
Bit	Meaning when set																	
0-5	Reserved																	
6	Some first character control data bad, default used																	
7	Bad record length (truncate or pad)																	
8-15	Reserved.																	
30	1E SMF6OPR	2	binary	Output priority.														
32	20 SMF6GRP	8	EBCDIC	JES3 logical output device group name.														
40	28 SMF6RSVJ	8		Reserved for JES3.														
48	30 SMF6RSVU	4		Reserved for user.														

3800 (non-impact) Printing Subsystem Section for JES3 Output Writer

Offsets	Name	Length	Format	Description
0	0 SMF6LN2	2	binary	Length of 3800 printing subsystem section, including this field.
2	2 SMF6CPS	8	binary	Number of copies printed in each copy group. Each byte represents one copy group, and the sum of the 8 bytes is the total number of copies printed.

Offsets	Name	Length	Format	Description								
10	A SMF6CHR	16	EBCDIC	Names of the character arrangement tables that define the characters used in printing. Each name is 4 bytes long, with a maximum of 4 names.								
26	1A SMF6MID	4	EBCDIC	Name of the copy modification module used to modify the data.								
30	1E SMF6FLI	4	EBCDIC	Name of the forms overlay printed on the copies.								
34	22 SMF6FLC	1	binary	Number of copies on which the forms overlay is printed.								
35	23 SMF6BID	1	binary	Options indicator <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Output was burst into sheets by the Burster-Trimmer-Stacker.</td> </tr> <tr> <td>1</td> <td>DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the character arrangement table used when printing that line.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Output was burst into sheets by the Burster-Trimmer-Stacker.	1	DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the character arrangement table used when printing that line.	2-7	Reserved.
Bit	Meaning when set											
0	Output was burst into sheets by the Burster-Trimmer-Stacker.											
1	DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the character arrangement table used when printing that line.											
2-7	Reserved.											

JES3 Common Section for JES3 Output Writer

Offsets	Name	Length	Format	Description
0	0 SMF6LN3	2	binary	Length of common section (including this field).
2	2 SMF6ROUT	4		Reserved.
6	6 SMF6EFMN	8	EBCDIC	Output form number. This field is set regardless of the number of characters in the forms field (SMF6FMN).
14	E	16		Reserved.
30	1E SMF6JBID	8	EBCDIC	Job ID, or transaction ID (for APPC output).
The following fields (up to and including SMF6OTOK) are only present if SMF6INDC is equal to or greater than X'04':				
38	26 SMF6STNM	8	EBCDIC	This field is not filled in for an output writer.
46	2E SMF6PRNM	8	EBCDIC	This field is not filled in for an output writer.
54	36 SMF6DDNM	8	EBCDIC	This field is not filled in for an output writer.
62	3E SMF6USID	8	EBCDIC	The user ID associated with the job/session that created the data set, or the user ID associated with the transaction ID (for APPC output).
70	46 SMF6SECS	8	EBCDIC	The security label of the created data set, or data set level seclabel.
78	4E SMF6PRMD	8	EBCDIC	The processing mode of the data set.
86	56 SMF6DSNM	53	EBCDIC	The name of the data set being printed.
139	8B	3		Reserved.
142	8E SMF6OTOK	20	EBCDIC	Reserved.

Enhanced SYSOUT Support (ESS) Section for JES3 Output Writer

This section contains the output descriptor (if any) for first offloaded data set in this record.

Offsets	Name	Length	Format	Description
00	00 SMF6LN5	2	binary	Length of ESS section (including this field).
02	02 SMF6SGID	4	binary	Segment identifier. Contains 0 when the file is not segmented.

Record type 6

Offsets	Name	Length	Format	Description
06	06 SMF6IND	1	binary	Section indicator Bit Meaning when set 0 Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present. 1-7 Reserved.
07	07 SMF6RSV	1		Reserved.
08	08 SMF6JDVT	8	EBCDIC	JCL definition table (JDT) name in JCL definition vector table (JDTV).
16	10 SMF6TUL	2	binary	Text unit (SWBTU) data area length.
18	12 SMF6TU	VAR	binary	Text unit (SWBTU) data area. The data area can be processed using the SWBTUREQ macro and is mapped by MVS macro IEFSJPFEX.

Record Type 6 (06) — Print Services Facility™ (PSF)

PSF writes record type 6 whenever data set processing is complete, that is, whenever the JES subsystem that PSF is running under is informed that the user data set is to be released. This type 6 record includes any auxiliary data sets.

For example, a job that includes a job header, data set header, two user data sets, and a job trailer produces two type 6 records. The first record contains data for the job header, the data set header, the first user data set, and any associated message data set. The second record contains data for the second user data set, any associated message data set, and the job trailer.

This record identifies the output writer by SYSOUT class and form number, and subsystem identification. It identifies the job according to job log identification, JES-assigned job number, and user identification. It contains information on the output writer activity such as:

- The number of logical records processed
- Writer start time
- I/O status indicators
- Logical output device name.

Also covered is information about the number of resources, such as:

- Fonts
- Overlays
- Page segments
- PAGEDDFS
- FORMDEFS.

This record provides information in separate sections on the activity of the non-impact printing subsystem, and information on the activity of the all-points-addressable (APA) printing subsystem.

Any post-processor accounting routine that scans a type 6 record can determine the writer of the record from field SMF6SBS and check field SMF6PAD1 to determine the optional sections that are present in the record. When scanning the record for

data, the accounting routine obtains the length for each extension section at run time when it moves from one section to the next. The length is a two-byte field at the beginning of each section.

It is possible that records with truncated job numbers will be generated (refer to SMF6JNM for details). This erroneous output will cause problems with customer's accounting programs as well as other report programs such as Tivoli Decision Support for z/OS. A change may be required in the testing of the record level indicator.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTMM (record exit: IEFU83)

Mode Task

Storage Residency
24-bit

Record Mapping

Header/self-defining section for PSF

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF6LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for details.								
2	2 SMF6SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF6FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (see "Standard SMF record header" on page 162 for details)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (see "Standard SMF record header" on page 162 for details)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (see "Standard SMF record header" on page 162 for details)											
7	Reserved.											
5	5 SMF6RTY	1	binary	Record type 6 (X'06')								
6	6 SMF6TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer. Before the SVC 83, PSF fills in this field via SVC 11 for use with PSF exit 5.								
10	A SMF6DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. Before the SVC 83, PSF fills in this field via SVC 11 for use with PSF exit 5.								
14	E SMF6SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF6JBN	8	EBCDIC	Job name (taken from job's RESQ). The job name, time, and date that the reader recognized the JOB card (for this job) log identification, or transaction name (for APPC output).								
26	1A SMF6RST	4	binary	Time, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF6RSD	4	packed	Date that the reader recognized the JOB card for this job, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details.								
34	22 SMF6UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A SMF6OWC	1	EBCDIC	SYSOUT class (this field is blank for non-SYSOUT data sets).								

Record type 6

Offsets	Name	Length	Format	Description														
43	2B SMF6WST	4	binary	Start time, in hundredths of a second, of output service working on the data in this record. This field is filled in at JES3 LOGIN time for the writer job. Note: The timestamps should not be used to determine printer utilization.														
47	2F SMF6WSD	4	packed	Start date of output service working on the data in this record, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description. This field is filled in at JES3 LOGIN time for the writer job. Note: The timestamps should not be used to determine printer utilization.														
51	33 SMF6NLR	4	binary	Number of logical records written by the writer. (This field is filled in when a data set is completed or restarted; it includes repeats and restarts). This field is non-cumulative across interrupts.														
55	37 SMF6IOE	1	binary	I/O status indicators <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-4</td> <td>Reserved</td> </tr> <tr> <td>5</td> <td>Data buffer read error</td> </tr> <tr> <td>6</td> <td>Reserved</td> </tr> <tr> <td>7</td> <td>Control buffer read error.</td> </tr> </table>	Bit	Meaning when set	0-4	Reserved	5	Data buffer read error	6	Reserved	7	Control buffer read error.				
Bit	Meaning when set																	
0-4	Reserved																	
5	Data buffer read error																	
6	Reserved																	
7	Control buffer read error.																	
56	38 SMF6NDS	1	binary	Number of data sets processed by the writer and included in this record. If multiple copies are produced, each copy is counted.														
57	39 SMF6FMN	4	EBCDIC	Form number — only the first four bytes appear in this field. This value is taken from the last SETUP message or from the FORMS parameter of the OUTPUT statement for the user data set.														
61	3D SMF6PAD1	1	binary	Section indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Non-impact printing subsystem section present</td> </tr> <tr> <td>1</td> <td>Common section present.</td> </tr> <tr> <td>2</td> <td>All-points-addressable (APA) printing subsystem section present</td> </tr> <tr> <td>3</td> <td>Enhanced SYSOUT support section present</td> </tr> <tr> <td>4</td> <td>File Transfer section present</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Non-impact printing subsystem section present	1	Common section present.	2	All-points-addressable (APA) printing subsystem section present	3	Enhanced SYSOUT support section present	4	File Transfer section present	5-7	Reserved.
Bit	Meaning when set																	
0	Non-impact printing subsystem section present																	
1	Common section present.																	
2	All-points-addressable (APA) printing subsystem section present																	
3	Enhanced SYSOUT support section present																	
4	File Transfer section present																	
5-7	Reserved.																	
62	3E SMF6SBS	2	binary	Subsystem identification — X'0007' signifies PSF.														

I/O Data Section for PSF

Offsets	Name	Length	Format	Description																		
0	0 SMF6LN1	2	binary	Length of this section, including this field.																		
2	2 SMF6DCI	1	binary	Data set control indicators. (These bits are set when a data set is completed or restarted.) <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Record represents spin data sets</td> </tr> <tr> <td>2</td> <td>Operator ended this data group</td> </tr> <tr> <td>3</td> <td>Operator restarted data set with destination</td> </tr> <tr> <td>4</td> <td>Operator restarted this data group</td> </tr> <tr> <td>5</td> <td>Received operator restarted data set</td> </tr> <tr> <td>6</td> <td>Operator started with single space</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved	1	Record represents spin data sets	2	Operator ended this data group	3	Operator restarted data set with destination	4	Operator restarted this data group	5	Received operator restarted data set	6	Operator started with single space	7	Reserved.
Bit	Meaning when set																					
0	Reserved																					
1	Record represents spin data sets																					
2	Operator ended this data group																					
3	Operator restarted data set with destination																					
4	Operator restarted this data group																					
5	Received operator restarted data set																					
6	Operator started with single space																					
7	Reserved.																					

Offsets	Name	Length	Format	Description														
3	3 SMF6INDC	1	binary	Record level indicator. Bits 0-3 are reserved. Bits 4-7 have a value as follows: <table border="0"> <tr> <td>Value</td> <td>Release — Support</td> </tr> <tr> <td>1</td> <td>PSF/MVS release 1.1 — restructured SMF type 6 record</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>MVS/ESA JES2 SP3.1.1 — greater than 10K job support</td> </tr> <tr> <td>4</td> <td>MVS/ESA JES2 SP3.1.3 and above — security support</td> </tr> <tr> <td>5</td> <td>MVS/ESA JES2 SP4.1.0</td> </tr> <tr> <td>6</td> <td>PSF/MVS Release 3.1.0.</td> </tr> </table> This field definition changes with each new version of the SMF type 6 record.	Value	Release — Support	1	PSF/MVS release 1.1 — restructured SMF type 6 record	2	Reserved	3	MVS/ESA JES2 SP3.1.1 — greater than 10K job support	4	MVS/ESA JES2 SP3.1.3 and above — security support	5	MVS/ESA JES2 SP4.1.0	6	PSF/MVS Release 3.1.0.
Value	Release — Support																	
1	PSF/MVS release 1.1 — restructured SMF type 6 record																	
2	Reserved																	
3	MVS/ESA JES2 SP3.1.1 — greater than 10K job support																	
4	MVS/ESA JES2 SP3.1.3 and above — security support																	
5	MVS/ESA JES2 SP4.1.0																	
6	PSF/MVS Release 3.1.0.																	
4	4 SMF6JNM	4	EBCDIC	When SMF6INDC contains a X'1', this field contains a four-digit EBCDIC job number. When SMF6INDC contains a X'3' or greater, the job number has more than four digits, and this field contains zeroes. The correct job number is then found in SMF6JBID.														
8	8 SMF6OUT	8	EBCDIC	For SNA-attached printers, the VTAM logical unit name. For channel-attached printers, the printer device name.														
16	10 SMF6FCB	4		Reserved.														
20	14 SMF6UCS	4		Reserved.														
24	18 SMF6PGE	4	binary	Approximate physical page count, including duplicates and separators. This field is not incremented in the following cases: <ul style="list-style-type: none"> • When blank pages are sent through the printer after a job because of an NPRO request. • When a blank page is generated because PSF is not generating header and trailer pages, but mark forms is active. 														

Non-impact Printing Subsystem Section for PSF

This section contains information about the number of copies and the types of fonts used.

Note: This field is non-cumulative across interrupts.

Offsets	Name	Length	Format	Description
0	0 SMF6LN2	2	binary	Length of non-impact printing subsystem section, including this field.
2	2 SMF6CPS	8	binary	Number of copies specified in the COPIES parameter of the OUTPUT statement for the user data set. Each byte represents one copy group. These values can be changed by operator commands.
10	A SMF6CHR	16	EBCDIC	Names of the fonts that define the characters used in printing as specified in the JCL. Each name is 4 bytes long, with a maximum of 4 names.
26	1A SMF6MID	4		Reserved.
30	1E SMF6FLI	4	EBCDIC	Name of the forms overlay printed on the copies, taken from the data set JCL.
34	22 SMF6FLC	1	binary	Number of copies on which the forms overlay is printed, taken from the data set JCL.

Record type 6

Offsets	Name	Length	Format	Description										
35	23 SMF6BID	1	binary	Device indicator										
				<table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Output was burst into sheets by the Burster-Trimmed-Stacker.</td> </tr> <tr> <td>1</td> <td>DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the font used when printing that line.</td> </tr> <tr> <td>2</td> <td>Cut-sheet printer. This field is valid only when SMF6SBS equals X'0007', and SMFINDC is equal to or greater than X'02'.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Output was burst into sheets by the Burster-Trimmed-Stacker.	1	DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the font used when printing that line.	2	Cut-sheet printer. This field is valid only when SMF6SBS equals X'0007', and SMFINDC is equal to or greater than X'02'.	3-7	Reserved.
Bit	Meaning when set													
0	Output was burst into sheets by the Burster-Trimmed-Stacker.													
1	DCB subparameter OPTCD=J was specified. Each output data line contained a table reference character that selected the font used when printing that line.													
2	Cut-sheet printer. This field is valid only when SMF6SBS equals X'0007', and SMFINDC is equal to or greater than X'02'.													
3-7	Reserved.													

Common Section for PSF

This section contains the general output information including the user ID associated with the job or session.

Offsets	Name	Length	Format	Description
0	0 SMF6LN3	2	binary	Length of the common section, including this field.
2	2 SMF6ROUT	4		Output route code. This field is defined as follows: <ul style="list-style-type: none"> X'00010000' indicates local routing. X'nnnnrrrr' (where nnnn is the node number and rrrr is the remote device within that node) indicates remote routine X'0000nnnn' indicates special local routing. This field is always set regardless of the number of remote specified by this system. The node and remote devices are defined in JESPARMS.
6	6 SMF6EFMN	8	EBCDIC	Output form number. SMF6EFMN is derived from the last setup message, the JES initialization statements, or from the FORMS parameter of the OUTPUT statement.
14	E	16		Reserved.
30	1E SMF6JBID	8	EBCDIC	Job ID, or Transaction ID (for APPC output).
The following fields (up to and including SMF6OTOK) are only present if SMF6INDC is equal to or greater than X'04':				
38	26 SMF6STNM	8	EBCDIC	This field is not filled in for an output writer.
46	2E SMF6PRNM	8	EBCDIC	This field is not filled in for an output writer.
54	36 SMF6DDNM	8	EBCDIC	This field is not filled in for an output writer.
62	3E SMF6USID	8	EBCDIC	The user ID associated with the job/session that created the data set, or the user ID associated with the transaction ID (for APPC output).
70	46 SMF6SECS	8	EBCDIC	The security label of the created data set, or data set level seclabel.
78	4E SMF6PRMD	8	EBCDIC	The processing mode of the data set.
86	56 SMF6DSNM	53	EBCDIC	The name of the data set being printed.
139	8B	3		Reserved.
142	8E SMF6OTOK	20	EBCDIC	Output security token: the identifier JES assigned to those SYSOUT data sets that share common printing attributes and security information. Data sets thus grouped are then printed sequentially. If your installation also produces job header and trailer pages, these data sets appear between those job header and trailer pages as a job.

All-points-addressable printing subsystem section for PSF

This section contains meaningful data fields only if the all-points-addressable printing subsystem is running under the control of print services facility (PSF), that is, SMF6SBS equals X'0007'.

Offsets	Name	Length	Format	Description																		
0	0 SMF6LN4	2	binary	Length of the section (including this field).																		
2	2 SMF6BNOF	2	binary	Offset to the Multi-Bins Header Section from start of APA section.																		
4	4 SMF6FONT	4	binary	Number of fonts mapped with an MCF.																		
8	8 SMF6LFNT	4	binary	Number of fonts loaded.																		
12	C SMF6OVLY	4	binary	Number of overlays mapped with an MMO.																		
16	10 SMF6LOLY	4	binary	Number of overlays loaded.																		
20	14 SMF6PGSG	4	binary	Number of page segments mapped with an MPS.																		
24	18 SMF6LPSG	4	binary	Number of page segments loaded.																		
28	1C SMF6IMPS	4	binary	<p>Number of sides of sheets of paper printed (number of logical impressions), including duplicates and separators. This field is non-cumulative across interrupts and is valid only when SMFINDC is equal to or greater than X'02'.</p> <p>This field is not incremented in the following cases:</p> <ul style="list-style-type: none"> • When blank pages are sent through the printer after a job because of an NPRO request. • When a blank page is generated because PSF is not generating header and trailer pages, but mark forms is active. 																		
32	20 SMF6FEET	4	binary	<p>Number of feet of paper printed for the document (zero for printers that do not report paper size). This field is non-cumulative across interrupts.</p> <p>This field is not incremented in the following cases:</p> <ul style="list-style-type: none"> • When blank pages are sent through the printer after a job because of an NPRO request. • When a blank page is generated because PSF is not generating header and trailer pages, but mark forms is active. 																		
36	24 SMF6PGDF	4	binary	Number of PAGEDEFS used.																		
40	28 SMF6FMDF	4	binary	Number of FORMDEFS used.																		
44	2C SMF6BIN	1	binary	<p>Bin indicators. This field is valid only when SMF6INDC is equal to or greater than X'02' and for printers that support bin selection.</p> <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Bin 1 used for any part of the data set</td> </tr> <tr> <td>1</td> <td>Bin 2 used for any part of the data set</td> </tr> <tr> <td>2</td> <td>Bin 3 used for any part of the data set</td> </tr> <tr> <td>3</td> <td>Bin 4 used for any part of the data set</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Bin 1 used for any part of the data set	1	Bin 2 used for any part of the data set	2	Bin 3 used for any part of the data set	3	Bin 4 used for any part of the data set	4-7	Reserved.						
Bit	Meaning when set																					
0	Bin 1 used for any part of the data set																					
1	Bin 2 used for any part of the data set																					
2	Bin 3 used for any part of the data set																					
3	Bin 4 used for any part of the data set																					
4-7	Reserved.																					
45	2D SMF6PGOP	1	binary	<p>Duplex indicators. This field is valid only when SMF6INDC is equal to or greater than X'02'.</p> <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Standard duplex was used for any part of the data set.</td> </tr> <tr> <td>1</td> <td>Tumble duplex was used for any part of the data set.</td> </tr> </tbody> </table> <p>System security indicators. Valid only when SMF6INDC is equal to or greater than X'04'.</p> <table border="0"> <tbody> <tr> <td>2</td> <td>Keyword SYSAREA=YES</td> </tr> <tr> <td>3</td> <td>Keyword DPAGELBL=YES</td> </tr> <tr> <td>4</td> <td>Print operation was successful</td> </tr> <tr> <td>5</td> <td>Keyword SPAGELBL=YES</td> </tr> <tr> <td>6</td> <td>Error occurred processing the security overlay</td> </tr> <tr> <td>7</td> <td>Image generator overrun error occurred.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Standard duplex was used for any part of the data set.	1	Tumble duplex was used for any part of the data set.	2	Keyword SYSAREA=YES	3	Keyword DPAGELBL=YES	4	Print operation was successful	5	Keyword SPAGELBL=YES	6	Error occurred processing the security overlay	7	Image generator overrun error occurred.
Bit	Meaning when set																					
0	Standard duplex was used for any part of the data set.																					
1	Tumble duplex was used for any part of the data set.																					
2	Keyword SYSAREA=YES																					
3	Keyword DPAGELBL=YES																					
4	Print operation was successful																					
5	Keyword SPAGELBL=YES																					
6	Error occurred processing the security overlay																					
7	Image generator overrun error occurred.																					

Record type 6

Offsets	Name	Length	Format	Description												
46	2E SMF6FLG3	1	binary	Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Security label integrity is guaranteed. Valid only when SMF6INDC is equal to or greater than X'04'.</td> </tr> <tr> <td>1</td> <td>The job header page was printed</td> </tr> <tr> <td>2</td> <td>The job trailer page was printed</td> </tr> <tr> <td>3</td> <td>Data page labelling was suppressed</td> </tr> <tr> <td>4</td> <td>User printable area was suppressed.</td> </tr> </table>	Bit	Meaning when set	0	Security label integrity is guaranteed. Valid only when SMF6INDC is equal to or greater than X'04'.	1	The job header page was printed	2	The job trailer page was printed	3	Data page labelling was suppressed	4	User printable area was suppressed.
Bit	Meaning when set															
0	Security label integrity is guaranteed. Valid only when SMF6INDC is equal to or greater than X'04'.															
1	The job header page was printed															
2	The job trailer page was printed															
3	Data page labelling was suppressed															
4	User printable area was suppressed.															
47	2F	1		Reserved.												
48	30 SMF6NSOL	4	binary	Number of security overlays used while printing the data set. Valid only when SMF6INDC is equal to or greater than X'04'.												
52	34 SMF6NSFO	4	binary	Number of security fonts used while printing the data set. Valid only when SMF6INDC is equal to or greater than X'04'.												
56	38 SMF6NPS	4	binary	Number of security page segments used while printing the data set. Valid only when SMF6INDC is equal to or greater than X'04'.												
60	3C SMF6FDNM	8	EBCDIC	FORMDEF name used to print the data set.												
68	44 SMF6PDNM	8	EBCDIC	PAGEDEF name used to print the data set.												
76	4C SMF6PTDV	8	EBCDIC	PRINTDEV name used to print the data set.												
84	54 SMF6SETU	8	EBCDIC	COMSETUP name used to print the data set.												
92	5C	24		Reserved.												
116	74 SMF6LPGE	4	binary	Number of logical pages processed. (The accumulative number of logical pages per side.) This field is non-accumulative across interrupts. This field is not incremented in the following case: <ul style="list-style-type: none"> • When blank pages are sent through the printer after a job because of an NPRO request. • When a blank page is generated because PSF is not generating header and trailer pages, but forms marking is active. 												

Multi-Bins Header Section for PSF

Offsets	Name	Length	Format	Description
0	0 SMF6BNLN	2	binary	Length bins section including FLD.
2	2 SMF6BNUM	2	binary	Number of counters entries.

Multi-Bins Counter Section for PSF

Offsets	Name	Length	Format	Description
0	0 SMF6BNNO	1	binary	Bin number.
1	1 SMF6BNCT	3	binary	Bin counter. This field is not incremented in the following cases: <ul style="list-style-type: none"> • When blank pages are sent through the printer after a job because of an NPRO request. • When a blank page is generated because PSF is not generating header and trailer pages, but mark forms is active.
4	4 SMF6BNLE	2	binary	Paper length in millimeters.
6	6 SMF6BNWI	2	binary	Paper width in millimeters.

Enhanced SYSOUT Support (ESS) Section for PSF

This section contains the output descriptor (if any) for the first offloaded data set in this record.

Offsets	Name	Length	Format	Description						
0	0 SMF6LN5	2	binary	Length of ESS section (including this field).						
2	2 SMF6SGID	4	binary	Segment identifier. Contains 0 when the file is not segmented.						
6	6 SMF6IND	1	binary	Section indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.	1-7	Reserved.
Bit	Meaning when set									
0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.									
1-7	Reserved.									
7	7 SMF6RSV	1		Reserved.						
8	8 SMF6JDVT	8	EBCDIC	JCL definition table (JDT) name in JCL definition vector table (JDTV).						
16	10 SMF6TUL	2	binary	Text unit (SWBTU) data area length.						
18	12 SMF6TU	VAR	binary	Text unit (SWBTU) data area. The data area can be processed using the SWBTUREQ macro and is mapped by MVS macro IEFSJPF.						

File Transfer Section for PSF

Offsets	Name	Length	Format	Description
0	0 SMF6LN6	2	binary	Length of File Transfer section (including this field).
2	2 SMF6BYTE	4	binary	Total bytes sent.
6	6 SMF6IPV4	4	binary	Target IPv4 address.
10	A SMF6FTL	1	binary	Level indicator for file transfer section.
11	B	11	char	Reserved.
22	16 SMF6PQLN	2	binary	Length of print queue name.
24	18 SMF6PRTQ	variable	EBCDIC	Print queue name.
48	30 SMF6BYTD	8	binary	Total bytes sent when > 4 gigabytes.
56	38 SMF6IPV6	16	binary	Target IPv6 IP address.

Record Type 6 (06) — IP PrintWay

IP PrintWay™ writes record type 6 before deleting a data set from the JES spool or before releasing the data set back to the system (JES).

If IP PrintWay has attempted to transmit the data set to the target system, the file-transfer section contains the number of bytes IP PrintWay transmitted or attempted to transmit. If IP PrintWay attempted to transmit the data set more than once, the file-transfer section contains the total number of bytes in all transmission attempts, including the number of bytes in the successful transmission, if any.

If IP PrintWay restarts a data set that IP PrintWay had previously released back to the system, two SMF records may be written for the same data set. IP PrintWay writes one SMF record when it releases the data set back to the system and writes another when it deletes the data set from the JES spool. When IP PrintWay writes a record for a data set that it restarted, that record contains only the number of bytes transmitted, if any, after IP PrintWay restarted the data set. The calculation of records read (SMF6NLR) and pages printed (SMF6PGE) is handled like that of bytes transmitted.

If IP PrintWay basic mode resubmits a data set to Print Interface for filtering, IP PrintWay basic mode writes two SMF type-6 records for the data set, one record

Record type 6

when IP PrintWay sends the data set to Print Interface, and another record when it sends the data set to the printer. You can use the IP PrintWay SMF exit to suppress the first SMF record written.

Determining the writer of the IP PrintWay record type 6: Any post-processor accounting routine that scans a type 6 record can determine the writer of the record from field SMF6SBS and check field SMF6PAD1 to determine the optional sections that are present in the record. When scanning the record for data, the accounting routine obtains the length for each extension section at run time when it moves from one section to the next. The length is a two-byte field at the beginning of each section.

Distinguishing between IP PrintWay basic and extended modes: To ascertain whether type 6 records were written by IP PrintWay basic mode or IP PrintWay extended mode, use the following flag field:

- IP PrintWay basic mode: SMF6INDC is set to 1
- IP PrintWay extended mode: SMF6INDC is set to 7

For additional information about this record, see *z/OS Infoprint Server Operation and Administration*.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/self-defining section for IP PrintWay

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF6LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for details.								
2	2 SMF6SET	2	binary	Segment descriptor (see record length field).								
4	4 SMF6FLG	1	binary	System Indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators (see "Standard SMF record header" on page 162 for details)</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (see "Standard SMF record header" on page 162 for details)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (see "Standard SMF record header" on page 162 for details)											
7	Reserved.											
5	5 SMF6RTY	1	binary	Record type 6 (X'06')								
6	6 SMF6TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF6DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0ccyddF. See "Standard SMF record header" on page 162 for details.								
14	E SMF6SID	4	EBCDIC	System identification (from the SID parameter).								

Offsets	Name	Length	Format	Description														
18	12 SMF6JBN	8	EBCDIC	Job name (taken from job's RESQ). The job name, time, and date that the reader recognized the JBO card (for this job) log identification, or transaction name (for APPC output).														
26	1A SMF6RST	4	binary	Time, in hundredths of a second, that the reader recognized the JOB card (for this job).														
30	1E SMF6RSD	4	packed	Date that the reader reconciled the JOB card for this job, in the form 0cyyddF. See "Standard SMF record header" on page 162 for details.														
34	22 SMF6UIF	8	EBCDIC	User identification (taken from common exit parameter area not from USER=parameter on job statement).														
42	2A SMF6OWC	1	EBCDIC	SYSOUT class (this field is blank for non-SYSOUT data sets).														
43	2B SMF6WST	4	binary	Start time, in hundredths of a second, of output service working on the data in this record. This field is filled in at JES3 LOGIN time for the writer job. Note: The timestamps should not be used to determine printer utilization.														
47	2F SMF6WSD	4	packed	Start date of output service working on the data in this record, in the form 0cyyddF. See "Standard SMF record header" on page 162 for details. This field is filled in at JES3 LOGIN time for the writer job. Note: The timestamps should not be used to determine printer utilization.														
51	33 SMF6NLR	4	binary	Number of logical records read by the writer. This field contains a value established like the byte count described in the introduction.														
55	37 SMF6IOE	1	binary	I/O status indicators <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-4</td> <td>Reserved</td> </tr> <tr> <td>5</td> <td>Data buffer read error</td> </tr> <tr> <td>6</td> <td>Reserved.</td> </tr> <tr> <td>7</td> <td>Control buffer read error</td> </tr> </table>	Bit	Meaning when set	0-4	Reserved	5	Data buffer read error	6	Reserved.	7	Control buffer read error				
Bit	Meaning when set																	
0-4	Reserved																	
5	Data buffer read error																	
6	Reserved.																	
7	Control buffer read error																	
56	38 SMF6NDS	1	binary	Number of copies of the data set requested.														
57	39 SMF6FMN	4	EBCDIC	Form number — only the first four bytes appear in this field. This value is taken from the last SETUP message or from the FORMS parameter of the OUTPUT statement for the user data set.														
61	3D SMF6PAD1	1	binary	Section indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Common section present</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>Enhanced SYSOUT support section present</td> </tr> <tr> <td>4</td> <td>File Transfer section present</td> </tr> <tr> <td>5-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	Reserved	1	Common section present	2	Reserved.	3	Enhanced SYSOUT support section present	4	File Transfer section present	5-7	Reserved
Bit	Meaning when set																	
0	Reserved																	
1	Common section present																	
2	Reserved.																	
3	Enhanced SYSOUT support section present																	
4	File Transfer section present																	
5-7	Reserved																	
62	3E SMF6SBS	2	binary	Subsystem identification -- 'X'0009' signifies IP PrintWay.														

I/O Data Section for IP PrintWay

Offsets	Name	Length	Format	Description
0	0 SMF6LN1	2	binary	Length of this section, including this field.

Record type 6

Offsets	Name	Length	Format	Description														
2	2 SMF6DCI	1	binary	Data set control indicators (These bits are set when a data set is completed or restarted). <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Transmission attempted</td> </tr> <tr> <td>1</td> <td>Transmission successful</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>Data set released to the system with checkpoint</td> </tr> <tr> <td>4</td> <td>Data set restarted using checkpoint information.</td> </tr> <tr> <td>5-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	Transmission attempted	1	Transmission successful	2	Reserved.	3	Data set released to the system with checkpoint	4	Data set restarted using checkpoint information.	5-7	Reserved
Bit	Meaning when set																	
0	Transmission attempted																	
1	Transmission successful																	
2	Reserved.																	
3	Data set released to the system with checkpoint																	
4	Data set restarted using checkpoint information.																	
5-7	Reserved																	
3	3 SMF6INDC	1	binary	Record level indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-3</td> <td>Reserved</td> </tr> <tr> <td>4-7</td> <td>Have a value as follows:</td> </tr> <tr> <td>Value</td> <td>Release — Support</td> </tr> <tr> <td>1</td> <td>IP PrintWay basic mode</td> </tr> <tr> <td>2-6</td> <td>Reserved</td> </tr> <tr> <td>7</td> <td>IP PrintWay extended mode - z/OS V1R5 and above</td> </tr> </table> <p>This field definition changes with each new version of the SMF type 6 record.</p>	Bit	Meaning when set	0-3	Reserved	4-7	Have a value as follows:	Value	Release — Support	1	IP PrintWay basic mode	2-6	Reserved	7	IP PrintWay extended mode - z/OS V1R5 and above
Bit	Meaning when set																	
0-3	Reserved																	
4-7	Have a value as follows:																	
Value	Release — Support																	
1	IP PrintWay basic mode																	
2-6	Reserved																	
7	IP PrintWay extended mode - z/OS V1R5 and above																	
4	4 SMF6JNM	4	EBCDIC	This field contains zeroes. The correct job number is found in SMF6JBID.														
8	8 SMF6OUT	8	EBCDIC	Printer name.														
16	10 SMF6FCB	4		Reserved.														
20	14 SMF6UCS	4		Reserved.														
24	18 SMF6PGE	4		For IP PrintWay extended mode, the total number of pages that printed successfully. When the printer prints on both sides of a sheet of paper (duplex printing), most printers count each side as one page. If no pages printed, or if no page count is available, this field contains X'00'. For IP PrintWay basic mode, this field contains X'00' Tips: <ol style="list-style-type: none"> 1. IP PrintWay fills in the page count only when it uses the direct sockets protocol to send data to the printer and the "Record pages printed for accounting" option is selected in the Printer Inventory. 2. If the document did not finish printing, this field contains the number of pages that printed before the error. Field SMF6DCI contains X'00'. 														

Common Section for IP PrintWay

This section contains the general output information including the user ID associated with the job or session.

Offsets	Name	Length	Format	Description
0	0 SMF6LN3	2	binary	Length of the common section, including this field.
2	2 SMF6ROUT	4		Reserved.
6	6 SMF6EFMN	8	EBCDIC	Output form number. SMF6EFMN is derived from the last setup message, the JES initialization statements, or from the FORMS parameter of the OUTPUT statement.
14	E	16		Reserved
30	1E SMF6JBID	8	EBCDIC	Job ID.
38	26 SMF6STNM	8	EBCDIC	Step name.
46	2E SMF6PRNM	8	EBCDIC	Proc step name.

Offsets	Name	Length	Format	Description
54	36 SMF6DDNM	8	EBCDIC	DD name.
62	3E SMF6USID	8	EBCDIC	The user ID associated with the job/session that created the data set.
70	46 SMF6SECS	8	EBCDIC	Reserved.
78	4E SMF6PRMD	8	EBCDIC	The processing mode of the data set.
86	56 SMF6DSNM	53	EBCDIC	The name of the data set being printed.
139	8B	3		Reserved.
142	8E SMF6OTOK	20	EBCDIC	Output security token: assigns to those SYSOUT data sets that share common printing attributes and security information. Data sets thus grouped are then printed sequentially. If your installation also produces job header and trailer pages, these data sets appear between those job header and trailer pages as a job.

Enhanced SYSOUT Support (ESS) Section for IP PrintWay

This section contains the output descriptor (if any) for first offloaded data set in this record:

Offsets	Name	Length	Format	Description						
0	0 SMF6LN5	2	binary	Length of ESS section (including this field).						
2	2 SMF6SGID	4	binary	Segment identifier.						
6	6 SMF6IND	1	binary	Section indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.	1-7	Reserved.
Bit	Meaning when set									
0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.									
1-7	Reserved.									
7	7 SMF6RSV	1		Reserved.						
8	8 SMF6JDVT	8	EBCDIC	JCL definition table (JDT) name in JCL definition vector table (JDTV).						
16	10 SMF6TUL	2	binary	Text unit (SWBTU) data area length.						
18	12 SMF6TU	VAR	binary	Text unit (SWBTU) data area. The data area can be processed using the SWBTUREQ macro.						

File Transfer Section for IP PrintWay

Offsets	Name	Length	Format	Description
0	0 SMF6LN6	2	binary	Length of File Transfer section (including this field).
2	2 SMF6BYTE	4	binary	Total number of bytes transmitted, described in the section introduction.
6	6 SMF6IP1	1	binary	1st segment of IP address of target address. If these records are written in IP PrintWay extended mode, these fields contain 0. IP PrintWay basic mode fills in the IP address only when it uses the LPR or direct sockets protocols to send data to the printer.
7	7 SMF6IP2	1	binary	2nd segment of IP address of target address. If these records are written in IP PrintWay extended mode, these fields contain 0. IP PrintWay basic mode fills in the IP address only when it uses the LPR or direct sockets protocols to send data to the printer.

Record type 6

Offsets	Name	Length	Format	Description								
8	8 SMF6IP3		1	binary 3rd segment of IP address of target address. If these records are written in IP PrintWay extended mode, these fields contain 0. IP PrintWay basic mode fills in the IP address only when it uses the LPR or direct sockets protocols to send data to the printer.								
9	9 SMF6IP4		1	binary 4th segment of IP address of target address. If these records are written in IP PrintWay extended mode, these fields contain 0. IP PrintWay basic mode fills in the IP address only when it uses the LPR or direct sockets protocols to send data to the printer.								
10	A SMF6FTL		1	binary File transfer level indicator <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>IP PrintWay basic mode wrote the record.</td> </tr> <tr> <td>1</td> <td>IP PrintWay extended mode wrote the record. Fields SMF6ACTL and SMF6ACCT are not present.</td> </tr> <tr> <td>3</td> <td>IP PrintWay extended mode wrote the record. Fields SMF6ACTL and SMF6ACCT are present.</td> </tr> </tbody> </table>	Value	Meaning	0	IP PrintWay basic mode wrote the record.	1	IP PrintWay extended mode wrote the record. Fields SMF6ACTL and SMF6ACCT are not present.	3	IP PrintWay extended mode wrote the record. Fields SMF6ACTL and SMF6ACCT are present.
Value	Meaning											
0	IP PrintWay basic mode wrote the record.											
1	IP PrintWay extended mode wrote the record. Fields SMF6ACTL and SMF6ACCT are not present.											
3	IP PrintWay extended mode wrote the record. Fields SMF6ACTL and SMF6ACCT are present.											
11	B		11	Reserved.								
22	16 SMF6PQLN		2	binary Length of the Print Queue Name field. When IP PrintWay basic mode writes the record, SMF6PQLN contains the length of the SMF6PRTQ field. When IP PrintWay extended mode writes the record, SMF6PQLN contains the length of the meaningful portion of SMF6PRTQ.								
24	18 SMF6PRTQ		24	EBCDIC Print Queue Name. If IP PrintWay basic mode writes the record, SMF6PRTQ is variable in length, with the length as specified in SMF6PQLN. If IP PrintWay extended mode writes the record, SMF6PRTQ is always 24 bytes in length and the print queue name is padded to the right with blanks. SMF6PQLN can be used to extract the print queue name from SMF6PRTQ.								
48	30 SMF6BYTD		8	binary For IP PrintWay extended mode, the total bytes transmitted (64-bit integer), described in the section introduction. For IP PrintWay basic mode, the SMF6BYTD field is not present.								
56	38		16	Reserved								
72	48 SMF6URIL		2	binary For IP PrintWay extended mode, the length of the target device universal resource indicator (URI). For IP PrintWay basic mode, the SMF6URIL field is not present.								
74	4A SMF6URI		variable	EBCDIC For IP PrintWay extended mode, the target device universal resource indicator (URI). For IP PrintWay basic mode, the SMF6URI field is not present.								
329	149 *		3	Reserved								
332	14C SMF6ACTL		2	binary For IP PrintWay extended mode, the length of the accounting information in the SMF6ACCT field. If this field contains 0, there is no accounting information in SMF6ACCT. This situation can occur if Print Interface or NetSpool dynamically allocated the print job on the JES spool. For IP PrintWay basic mode, this field is not present.								

Offsets	Name	Length	Format	Description
334	14E SMF6ACCT	143	EBCDIC	<p>For IP PrintWay extended mode, accounting information from the JOB JCL statement. The first byte contains the number (in binary) of accounting pairs that follow. Each accounting pair has this format:</p> <ul style="list-style-type: none"> • 1 byte with the length (in binary) of accounting information that follows. If the length is zero, there is no string of accounting information in this accounting pair. • A variable length string that contains the accounting information (in EBCDIC). <p>For example, if the JOB JCL statement contains: (TSS40000,JROMXB,1234,5,4321,,3,N,254)</p> <p>The SMF SMF6ACCT field contains: '0908e3e2e2f4f0f0f006d1d9d6d4e7c204f1f2f3f401f504f4f3f2f10001f301d503f2f5f4'x</p> <p>For IP PrintWay basic mode, this field is not present.</p>
477	1DD *	3		Reserved

Record Type 7 (07) — Data Lost

If all SMF buffers become full (either a result of no available output data sets for SMF to write to OR the system generating records at a rate faster than SMF can physically write them), SMF data will be lost. When this condition occurs, record type 7 tracks the number of lost records. It contains a count of the SMF records that were not written and the start and end times of the period when data was lost. (The end time is the time recorded in SMF7TME at offset 6).

Record type 7 is not built until SMF buffers become available again. Data existing in the SMF buffer, prior to data lost, is written to available SMF data sets before record type 7 is written to a data set.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF7LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF7SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF7FLG	1	binary	System indicator: <table border="0" style="margin-left: 20px;"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (see "Standard SMF record header" on page 162 for details)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (see "Standard SMF record header" on page 162 for details)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (see "Standard SMF record header" on page 162 for details)											
7	Reserved.											

Record type 7

Offsets	Name	Length	Format	Description										
5	5 SMF7RTY	1	binary	Record type 7 (X'07).										
6	6 SMF7TME	4	binary	Time since midnight, in hundredths of a second, when the record was built into the SMF buffer.										
10	A SMF7DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.										
14	E SMF7SID	4	EBCDIC	System identification (from the SID parameter).										
18	12 SMF7NRO	2	binary	Number of SMF records lost because no SMF data sets were available for recording. Unsigned, count up to 65,535. This field is marked as invalid, and is set to zero when SMF7NRF is ON. SMF7NROX is the 4 byte equivalent of this field.										
20	14 SMF7STM	4	binary	When SMF7DRP is off, this is the time when the buffers condition began. When SMF7DRP is on, this is the time when the DROP record filter became active. This field is in hundredths of a second.										
24	18 SMF7STD	4	packed	When SMF7DRP is off, this is the date when the buffers condition began. When SMF7DRP is on, this is the date when the DROP record filter became active. This field is in packed decimal format: <i>00yydddF</i> .										
28	1C SMF7FL1	1	binary	Flag byte: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Bit SMF7NRF indicates that field SMF7NRO has exceeded its 2 byte capacity and is therefore invalid. Use SMF7NROX, which is the 4 byte equivalent of SMF7NRO.</td> </tr> <tr> <td>1</td> <td>Bit SMF7LSD indicates that this record is the result of a log stream becoming full.</td> </tr> <tr> <td>2</td> <td>Bit SMF7DRP indicates that this record is the result of the SMF record flood facility dropping records.</td> </tr> <tr> <td>3- 7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Bit SMF7NRF indicates that field SMF7NRO has exceeded its 2 byte capacity and is therefore invalid. Use SMF7NROX, which is the 4 byte equivalent of SMF7NRO.	1	Bit SMF7LSD indicates that this record is the result of a log stream becoming full.	2	Bit SMF7DRP indicates that this record is the result of the SMF record flood facility dropping records.	3- 7	Reserved.
Bit	Meaning when set													
0	Bit SMF7NRF indicates that field SMF7NRO has exceeded its 2 byte capacity and is therefore invalid. Use SMF7NROX, which is the 4 byte equivalent of SMF7NRO.													
1	Bit SMF7LSD indicates that this record is the result of a log stream becoming full.													
2	Bit SMF7DRP indicates that this record is the result of the SMF record flood facility dropping records.													
3- 7	Reserved.													
29	1D SMF7RSV1	2		Reserved.										
31	1F SMF7DTYP	1	character	The type of record that was dropped by the filter. This field is zero unless SMF7DRP is ON.										
32	20 SMF7NROX	4	binary	Number of SMF records lost because no SMF data sets were available for recording. Unsigned, 4 byte equivalent of SMF7NRO.										
36	24 SMF7LSN	26	character	The name of the log stream associated with the data space that experiences the loss. Only filled in when SMF7LSD is ON.										

Record Type 8 (08) — I/O Configuration

Record type 8 is written during IPL when the SMF address space initializes. This record identifies each device that is online at IPL by device class, unit type, and device number.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record header fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0 0	SMF8LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2 2	SMF8SEG	2	binary	Segment descriptor (see record length field).								
4 4	SMF8FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5 5	SMF8RTY	1	binary	Record type 08 (X'08').								
6 6	SMF8TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.								
10 A	SMF8DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>OcyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14 E	SMF8SID	4	EBCDIC	System identification (from the SID parameter).								
18 12	SMF8LENN	2	binary	Length of rest of record including this field.								

Device Data Section

For each device online at IPL, there is a four-byte entry with the following format:

Offsets	Name	Length	Format	Description
0 0	SMF8IODV	4	structure	Device identification. Note: Virtual I/O devices are identified by the following: Device Class 0 Unit Type 0 Device Number X'7FFF' It is important to understand the following: Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname. SMF records will show VIO unit addresses as X'7FFF'. The actual in-storage UCB built for VIO will show address X'3FFF'. For example, the messages: <ul style="list-style-type: none"> • IEF237I X'3FFF' ALLOCATED TO ddname • IEF237I X'7FFF' ALLOCATED TO ddname indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.

Record type 8

Offsets	Name	Length	Format	Description
0	0 SMF8DUT	2	binary	Device class and unit type.
2	2 SMF8CHA	2	binary	Device number.

Record Type 9 (09) — VARY Device ONLINE

Record type 9 is written when a VARY Device ONLINE command is processed. This record identifies the device being added to the configuration by device class, unit type, and device number.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF9LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF9SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF9FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF9RTY	1	binary	Record type 9 (X'09').								
6	6 SMF9TME	4	binary	Time since midnight, in hundredths of a second, when the record was built into the SMF buffer.								
10	A SMF9DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF9SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF9LENN	2	binary	Length of rest of record including this field.								

Data Device Section

For each device varied online, there is an entry with the following format:

Offsets	Name	Length	Format	Description								
0	0 SMF9DVAD	8	structure	<p>Device identification.</p> <p>Note: Virtual I/O devices are identified by the following:</p> <p>Device Class 0</p> <p>Unit Type 0</p> <p>Device Number X'7FFF'</p> <p>It is important to understand the following:</p> <p>Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname.</p> <p>SMF records will show VIO unit addresses as X'7FFF'.</p> <p>The actual in-storage UCB built for VIO will show address X'3FFF'.</p> <p>For example, the messages:</p> <ul style="list-style-type: none"> • IEF237I X'3FFF' ALLOCATED TO ddname • IEF237I X'7FFF' ALLOCATED TO ddname <p>indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.</p>								
0	0 SMF9DUT	2	binary	Device class and unit type.								
2	2 SMF9CUA	2	binary	Device number.								
4	4 SMF9VPC	1	binary	<p>Identifies the issuer of the vary path command that causes the specified device to change states</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Operator</td> </tr> <tr> <td>2</td> <td>Enterprise Systems Connection Manager Program Product (5688-008)</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Value	Meaning	0	Operator	2	Enterprise Systems Connection Manager Program Product (5688-008)	3-7	Reserved.
Value	Meaning											
0	Operator											
2	Enterprise Systems Connection Manager Program Product (5688-008)											
3-7	Reserved.											
5	5 SMF9RSV	3		Reserved.								

Record Type 10 (0A) — Allocation Recovery

Record type 10 is written after a successful device allocation recovery.

This record identifies the device that is made available by device class, unit type, channel address, and unit address. It identifies the job requiring the allocation job log identification and user identification.

Note: This record is produced only when the response to message IEF238D is a device number. This record is not produced for any other responses.

Record type 10

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro SVC 83 (record exit: IEFU83)

Mode Task

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF10LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF10SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF10FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF10RTY	1	binary	Record type 10 (X'0A').								
6	6 SMF10TME	4	binary	Time since midnight, in hundredths of a second, that the record was built into the SMF buffer.								
10	A SMF10DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF10SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF10JBN	8	EBCDIC	Job name The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output). Note: This field contains blanks if allocation recovery is for a system task.								
26	1A SMF10RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job). This field equals zero if allocation recovery is for a system task.								
30	1E SMF10RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See Table 9 on page 162 for a detailed description. This field equals zero if allocation recovery is for a system task.								
34	22 SMF10UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A SMF10LN	2	binary	Length of rest of record including this field.								

Data Definition Section

For each device made available there is an entry with the following format:

Offsets	Name	Length	Format	Description
0	0 SMF10DEV	4	structure	Device identification. Note: Virtual I/O devices are identified by the following: Device Class 0 Unit Type 0 Device Number X'7FFF' It is important to understand the following: Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname. SMF records will show VIO unit addresses as X'7FFF'. The actual in-storage UCB built for VIO will show address X'3FFF'. For example, the messages: <ul style="list-style-type: none"> • IEF237I X'3FFF' ALLOCATED TO ddname • IEF237I X'7FFF' ALLOCATED TO ddname indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.
0	0 SMF10DUT	2	binary	Device class and unit type.
2	2 SMF10CUA	2	binary	Device number.

Record Type 11 (0B) — VARY Device OFFLINE

Record type 11 is written when a VARY device OFFLINE command is processed. This record identifies the device being removed from the configuration by device class, unit type, and device number.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF11LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.

Record type 11

Offsets	Name	Length	Format	Description								
2	2 SMF11SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF11FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF11RTY	1	binary	Record type 11 (X'0B').								
6	6 SMF11TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF11DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF11SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF11LN	2	binary	Length of the rest of the record (including this field).								

Data Definition Section

For each device varied offline, there is an entry with the following format:

Offsets	Name	Length	Format	Description
0	0 SMF11DEV	8	structure	Device identification. Note: Virtual I/O devices are identified by the following: Device Class 0 Unit Type 0 Device Number X'7FFF' It is important to understand the following: Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname. SMF records will show VIO unit addresses as X'7FFF'. The actual in-storage UCB built for VIO will show address X'3FFF'. For example, the messages: <ul style="list-style-type: none"> • IEF237I X'3FFF' ALLOCATED TO ddname • IEF237I X'7FFF' ALLOCATED TO ddname indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.
0	0 SMF11DUT	2	binary	Device class and unit type.
2	2 SMF11CUA	2	binary	Device number.

Offsets	Name	Length	Format	Description						
4	4 SMF11VPC	1	binary	Identifies the issuer of the vary path command that causes the specified device to change states <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Operator</td> </tr> <tr> <td>2</td> <td>Enterprise Systems Connection Manager Program Product (5688-008).</td> </tr> </tbody> </table>	Value	Meaning	0	Operator	2	Enterprise Systems Connection Manager Program Product (5688-008).
Value	Meaning									
0	Operator									
2	Enterprise Systems Connection Manager Program Product (5688-008).									
5	5 SMF11RSV	3		Reserved.						

Record Type 14 (0E) — INPUT or RDBACK Data Set Activity

Record type 14 is written for non-VSAM direct access data sets, tape data sets, or VIO data sets. that are defined by DD statements or dynamic allocation and opened for RDBACK or INPUT processing by problem programs. It is written when a data set is closed or processed by EOVS. Its length varies, depending upon the number of volumes for the data set.

This record contains information from the TIOT, JFCB, DCB, DEB, and UCB data areas. The job name and the time and date the reader recognized the JOB card for this job constitute the job log identification.

Note:

- Record type 14 is not written for a data set defined by a DD* or DD DATA statement. Record type 14 is not written for BPAM if only z/OS UNIX directories are allocated. For accounting purposes, the card-image count for these data sets is provided in record type 4.
- When PDSs are concatenated, the system treats the group as a single data set. A partitioned concatenation can contain a mixture of PDSs, PDSEs, and UNIX directories. That means you will get one SMF type 14 record for the open of the concatenated group rather than one for each data set. See *Concatenating PDSs in z/OS DFSMS Using Data Sets* for more information.
- If a data set is closed multiple times within a single step, a record is written with each close, and the data counts are cumulative. Post processing programs should consider this, otherwise duplicate counts will be processed. An exception to this is the PDSE type 6 section which is only written at close and the counts are not cumulative. Also, the PDSE type 6 section is not written with most IEBCOPY operations.

Macro to Symbolically Address Record Types 14 and 15: There are two ways to map the type 14 and 15 records:

- You can code IFASMFR in the same way as with other record types. This method does not generate a DSECT statement. It generates sections contiguously. This method might be error-prone because an ordinary USING statement will give addressability to later sections that might not exist. For example if you code USING SMF14UCB,R5 to address the UCB section, the assembler will assume that the record has only one UCB section but the actual record might have many UCB sections. If you also incorrectly refer to a subsequent section in the record, the assembler will generate the wrong offset and not give an error. One way to solve that is to use an address range such as USING (SMF14UCB,SMFHBTCH),R5. This use of an address range prevents addressability to SMFHBTCH and to later symbols.
- You can code the IFGSMF14 macro to map types 14 and 15. With this technique you will be less likely to make a coding mistake. Optionally you can code

Record type 14

DSECT=NO or DSECT=YES. If you code no options or code DSECT=NO, the mapping is the same as if you used IFASMF. If you code DSECT=YES, then IFGSMF14 generates several DSECTs (dummy sections). You can control the names for the DSECTs. The first DSECT name is whatever you code in the label position (normally column 1) of the macro call. If you do not code a label there, the default is IFGSMF. The tables in the next sections show the other DSECT names. Do not code "SMF14" as the label because it will cause definitions of duplicate symbols.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name specified as the label on the IFGSMF14 macro call or, if no label was specified, the default is IFGSMF. For example, if you did not code a label on the IFGSMF14 macro call, the name of this DSECT will be IFGSMF.

Offsets	Name	Length	Format	Description								
0	0 SMF14LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF14SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF14FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators (see "Standard SMF record header" on page 162 for details)</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (see "Standard SMF record header" on page 162 for details)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (see "Standard SMF record header" on page 162 for details)											
7	Reserved.											
5	5 SMF14RTY	1	binary	Record type 14 (X'0E').								
6	6 SMF14TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF14DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF14SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF14JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF14RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF14RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF14UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								

Offsets	Name	Length	Format	Description
42	2A SMF14RIN	2	binary	Record and data set indicator
				<p>Bit Name and Meaning when set</p> <p><i>First Byte</i></p> <p>0 Reserved.</p> <p>1 SMF14EOV. Record written by end of volume (EOV).</p> <p>2 SMF14DAD. DASD.</p> <p>3 SMF14TDS. Temporary data set.</p> <p>4 SMF14DDA. DCBDSORG=DA (the data set organization being used is direct access-BDAM).</p> <p>5 SMF14IS. DCBDSORG=IS and DCBMACRF not EXCP (the data set organization being used is indexed sequential and the EXCP access method is not being used).</p> <p>6 SMF14JIS. JFCDSORG=IS (the data set organization being used is indexed sequential).</p> <p>7 SMF14VIO. Virtual input output (VIO) data set access.</p> <p><i>Second Byte</i></p> <p>0 SMF14IPD. Partitioned data set directory entries (PDSE) data set.</p> <p>1 SMF14TRC. The QSAM TRUNC macro has been issued against a PDSE.</p> <p>2 SMF14NSG. Null segment encountered in a PDSE.</p> <p>3 SMF14STR. Extended format sequential data set indicator.</p> <p>4 SMF14HBT. Hiperbatch section present.</p> <p>5 SMF14XSG. Extended information segment present.</p> <p>6 SMF14TCL. Task termination closed the DCB.</p> <p>7 SMF14ABD. Task is terminating (TCBFA is on).</p> <p>Note: A data set is considered temporary if:</p> <ul style="list-style-type: none"> • It has a system-generated name where the first qualifier starts with SYS and the second qualifier starts with T (SYS____.T____). or • It is created within a job step and exists only for the duration of that job step.

Section Sizes

This section contains the UCB information associated with this record.

Offsets	Name	Length	Format	Description
44	2C SMF14SDC	1	binary	Size of DCB/DEB section.
45	2D SMF14NUC	1	binary	Number of UCB sections. There is always one UCB section for each UCB currently processing except for BPAM-concatenated data sets. For BPAM there is one UCB section for each data set in the concatenation except that any z/OS UNIX directories are omitted. For extended format data sets, there is one UCB section for each volume.
46	2E SMF14SUC	1	binary	Size of each UCB section.
47	2F SMF14SET	1	binary	Size of ISAM extension section. This field always contains X'0'. See "ISAM Extension Section" on page 221.
48	30 SMF14OPE	4	binary	Time since midnight, in hundredths of a second, when the data set was opened.

TIOT Section

This section contains a portion of the TIOT from the DD entry, the TIOT section is 16 bytes long.

Record type 14

Offsets	Name	Length	Format	Description
52	34 SMFTIOE1	1	binary	Length, in bytes, of the DD entry (including all device entries). This field is mapped by TIOELNGH in the TIOT mapping.
53	35 SMFTIOE2	1	binary	Status indicator. This field indicates the tape label processing to be performed; whether unallocating, rewinding, or unloading tape data sets is required. This field is mapped by TIOESSTA in the TIOT mapping.
54	36 SMFTIOE3	1	binary	Number of devices requested for this data set during allocation. For PDSE data sets, this field will always contain X'1'. This field is mapped by TIOEWTCT in the TIOT mapping.
55	37 SMFTIOE4	1	binary	A data set and device indicator. This field is mapped by TIOELINK in the TIOT mapping.
56	38 SMFTIOE5	8	EBCDIC	Data definition name (DDname). This field is mapped by TIOEDDNM in the TIOT mapping.
64	40 SMFTIOE6	3	binary	Scheduler Work Area (SWA) address of the job file control block (JFCB). This field is mapped by TIOEJFCB in the TIOT mapping.
67	43 SMFTIOE7	1	binary	This field is mapped by TIOESTTC in the TIOT mapping.

JFCB Section

This section contains information concerning the job file control block.

Offsets	Name	Length	Format	Description
68	44 SMFJFCB1 JFCBTSDM JFCBADBF JFCBLTYP JFCBCRDT JFCBXPDT JFCBIND1 JFCBIND2 JFCBCTRI JFCBPQTY JFCBSQTY	176	binary	The job file control block (JFCB), excluding JFCB extensions. Used to find uncataloged data sets. Indicates number of data buffers. Indicates type of label. Indicates file's creation date. Indicates file's expiration date. Indicates bits flag RLSE processing, extension onto a new volume and whether the file is a member of a GDG or a PDS. Indicates DISP= settings. Indicates type of space request. Indicates primary space request size. Indicates secondary space request size.

DCB/DEB Section (tape and DASD)

This section contain portions of the DCB and DEB, including:

Offsets	Name	Length	Format	Description
244	F4 SMFDCBOR	2	binary	Data set organization being used. This field is mapped by DCBDSORG in the DCB mapping.
246	F6 SMFDCBRF	1	binary	Record format. This field is mapped by DCBREFCM in the DCB mapping.
247	F7 SMFDCBMF	2	binary	Type of I/O macro instruction and options. This field is mapped by DCBMACRF in the DCB mapping.
249	F9 SMFDCBFL	1	binary	Indicator used by the OPEN, CLOSE, EOVS routines such as the type of the last I/O operation. This field is mapped by DCBOFLGS in the DCB mapping.
250	FA SMFDCBOP	1	binary	Option codes used by access-method interfaces. This field is mapped by DCBOPTCD in the DCB mapping.
251	FB SMF14RV2	1	binary	Reserved.
252	FC SMFDEBFL	1	binary	Data set and device status indicator. This field indicates whether a data set is modified, new or old, and shows the status of DASD. This field is mapped by DEBOFLGS in the DEB mapping. For information about DEBOFLGS, see z/OS DFSMSdfp Diagnosis.

Offsets	Name	Length	Format	Description
253	FD SMFDEBOP	1	binary	Indicator showing both the method of I/O processing and the disposition that is to be performed when an end-of-volume (EOV) condition occurs. This field is mapped by DEBOPATB in the DEB mapping.
254	FE SMFDEBVL	2	binary	Volume sequence number. For direct access, the sequence number is relative to the first volume of the data set. For tape, the sequence number is relative to the first volume processed. This field is valid only for sequential data sets. This field is mapped by DEBVOLSQ in the DEB mapping.

The following 16 bytes apply to the DCB/DEB Tape extension. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "TDDEX" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFTDDEX.

Offsets	Name	Length	Format	Description
256	100 SMFDCBBL	4	binary	Block count for each volume. For PDSE data sets, this field will always contain X'0'. This field is mapped by DCBBLKCT in the DCB mapping.
260	104 SMFDSSNO	6	EBCDIC	Data set serial number. For PDSE data sets, this field will always contain X'0'. This field is mapped by UCBFSE in the UCB mapping.
266	10a SMF14RV3	2		Reserved.
267	10B SMF14TDA	1	unsigned	Tape DS authorization flags.
268	10c SMF14OPD	4	packed	Date when the data set was opened, in the form 0ccyyddF.

The following 16 bytes apply to the DCB/DEB DASD extension:

Offsets	Name	Length	Format	Description												
256	100 SMF14NTU	4	binary	Relative track and record of the last user block in the form of TTR0, if a basic format data set. Relative track and record of the last user block in the form of TTTR, if a large format data set. For extended data sets, this field will accumulate the number of tracks used across all the volumes (TTTT).												
260	104 SMF14NTR	4	binary	Number of tracks released by the DADSM routine. For PDSE data sets, this field will always contain X'0'.												
264	108 SMF14NER	1	binary	Number of extents released by the DADSM routine. For PDSE data sets, this field will always contain X'0'.												
265	109 SMF14EDI	1	binary	Enhanced Data Integrity (EDI) flag indicator. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Data set name found in EDI exclusion table.</td> </tr> <tr> <td>1</td> <td>Data set being opened for output but is currently open for output.</td> </tr> <tr> <td>2</td> <td>Data set being opened for input but is currently open for output and the data set is not excluded from EDI processing..</td> </tr> <tr> <td>3</td> <td>Application requested EDI processing be bypassed and the data set is not excluded from EDI processing..</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Data set name found in EDI exclusion table.	1	Data set being opened for output but is currently open for output.	2	Data set being opened for input but is currently open for output and the data set is not excluded from EDI processing..	3	Application requested EDI processing be bypassed and the data set is not excluded from EDI processing..	4-7	Reserved.
Bit	Meaning when set															
0	Data set name found in EDI exclusion table.															
1	Data set being opened for output but is currently open for output.															
2	Data set being opened for input but is currently open for output and the data set is not excluded from EDI processing..															
3	Application requested EDI processing be bypassed and the data set is not excluded from EDI processing..															
4-7	Reserved.															

Record type 14

Offsets	Name	Length	Format	Description								
266	10A SMF14FG1	1		Flag byte. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Large format data set. SMF14NTU is in TTTR format.</td> </tr> <tr> <td>1</td> <td>EAV BAM detected one or more EXCP or XDAP issuances-DEB2XEXCP flag is on.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Large format data set. SMF14NTU is in TTTR format.	1	EAV BAM detected one or more EXCP or XDAP issuances-DEB2XEXCP flag is on.	2-7	Reserved.
Bit	Meaning when set											
0	Large format data set. SMF14NTU is in TTTR format.											
1	EAV BAM detected one or more EXCP or XDAP issuances-DEB2XEXCP flag is on.											
2-7	Reserved.											
267	10B SMF14RV4	1		Reserved.								
268	10C SMF14OPD	4	packed	Date when the data set was opened, in the form 0cyyddF.								

UCB Section

This section contains a portion of the UCB (see fields SMF14NUC and SMF14SUC). If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "UCB" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFUCB.

Offsets	Name	Length	Format	Description
0	0 SMFUCBDV	2	binary	Device number. If this field contains X'7FFF', this could be a virtual I/O (VIO) data set. If bit 7 of field SMF14RIN is set to one, this is a VIO data set. Virtual I/O devices are identified by the following: Device Class 0 Unit Type 0 Device Number X'7FFF' It is important to understand the following: <ul style="list-style-type: none"> • Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname. • SMF records will show VIO unit addresses as X'7FFF'. • The actual in-storage UCB built for VIO will show address X'3FFF'. For example, the following messages indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively: <ul style="list-style-type: none"> • IEF237I X'3FFF' ALLOCATED TO ddname • IEF237I X'7FFF' ALLOCATED TO ddname
2	2 SMFSRTEV	6	EBCDIC	Volume serial number.
8	8 SMFUCBTY	4	binary	Unit type. This field is mapped by UCBTYP in the UCB mapping.
12	C SMFSRTES	1	binary	DASD volume status indicator. This field indicates whether this DASD volume is a private, public, storage, or control volume. For PDSE data sets, this field will always contain X'0'. This field is mapped by UCBSTAB in the UCB mapping.
13	D SMF14NEX	1	binary	Number of extents.
14	E SMF14RV5	2		Reserved.

Offsets	Name	Length	Format	Description	
16	10 SMFEXCP		4	binary	EXCP count for entire step. Note that if a data set is opened and closed twice during a single step, the count in the second type 14 record is the sum of all EXCPs for both uses of the data set. (The EXCP count in the last type 14 record for the step is equal to the corresponding entry for the data set in record type 4). For more information about EXCP count, see Chapter 10, "EXCP count," on page 131. For PDSE data sets, the number of pages that were read or written. For compressed data sets the number of physical blocks (see SMF14CIS for physical block size) that were read or written.

For each UCB tape extension, there is a four-byte entry with the following format:

Offsets	Name	Length	Format	Description	
0	0 SMFSRTEF		2	binary	Data set sequence count.
2	2 SMFSRTEQ		2	binary	Data set sequence number.

The following four bytes apply to the UCB section if DASD (see SMFUCBTY):

Offsets	Name	Length	Format	Description	
0	0 SMF14NTA		4	binary	Number of tracks allocated on the device. For PDSE data sets, this field will always contain X'0'.

Hiperbatch Section

This section describes the DASD information acquired from Hiperbatch. These fields are only valid for data sets accessed using Hiperbatch (see SMF14RIN).

If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "HBTCH" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFHBTCH.

Offsets	Name	Length	Format	Description	
0	0 SMFIOREQ		4	binary	Number of requests for I/O issued by the access method for this data set for which Hiperbatch attempted to find the requested data in its buffers (see SMFCHITS and SMFPHIOS).
4	4 SMFCHITS		4	binary	Number of requests for I/O issued by the access method for this data set satisfied by moving data from Hiperbatch buffers.
8	8 SMFNMWTS		4	binary	Number of times Hiperbatch temporarily suspended this requester because another user was already reading some or all of the requested data.
12	C SMFPHIOS		4	binary	Number of requests for I/O issued by the access method for this data set satisfied by performing DASD I/O. Note that the sum of SMFPHIOS and SMFCHITS should equal SMFIOREQ.
16	10 SMFCIOS		4	binary	Number of DASD I/Os (as recorded in SMFPHIOS) for which Hiperbatch copied the data into its buffers.

ISAM Extension Section

As of z/OS V1R7 the system no longer produces the ISAM segment. The value in SMF14SET, length of the ISAM segment, is always 0 because you cannot open an ISAM data set.

Record type 14

If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "ISAMX" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFISAMX.

Offsets	Name	Length	Format	Description
0	0 SMF14RV6	2		Reserved.
2	2 SMFDCBMA	1	binary	Extension of I/O macro instruction (DCBMACRF) for ISAM. This field is mapped by DCBMACCT in the DCB mapping.
3	3 SMFDCBNL	1	binary	Number of index levels. This field is mapped by DCBNLVET in the DCB mapping.
4	4 SMFDCBR3	4	binary	For each use of the data set, number of read or write accesses to an overflow record which is not first in a chain of such records. This field is mapped by DCBRORG3 in the DCB mapping.
8	8 SMFDCBNR	4	binary	Number of logical records in prime data area. This field is mapped by DCBNRECT in the DCB mapping.
12	C SMFDCBR2	2	binary	Number of tracks (whole or partial remaining in overflow area). This field is mapped by DCBRORG2 in the DCB mapping.
14	E SMFDCBNO	2	binary	Number of logical records in overflow area. This field is mapped by DCBNOREC in the DCB mapping.
16	10 SMFDCBR1	2	binary	Number of cylinder overflow areas that are full. This field is mapped by DCBRORG1 in the DCB mapping.
18	12 SMF14RV7	1		Reserved.
19	13 SMFDEBNI	1	binary	Number of extents in independent index area. This field is mapped by DEBNIEEQ in the DEB mapping.
20	14 SMFDEBNP	1	binary	Number of extents in prime data area. This field is mapped by DEBNPEEQ in the DEB mapping.
21	15 SMFDEBNO	1	binary	Number of extents in independent overflow area. This field is mapped by DEBNOEEQ in the DEB mapping.
22	16 SMFN CYLS	2	binary	Number of cylinders in independent index area.
24	18 SMFNPCYL	2	binary	Number of cylinders in prime data area.
26	1A SMFNOCYL	2	binary	Number of cylinders in independent overflow area.

Extended Information Segment

This segment contains a 2 byte segment length, which is the length of all sections that are contained in it. Each section contains its section length, a section type code, and variable information depending upon the section type. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "XIS" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFXIS.

Extended Information Segment Descriptor

Offsets	Name	Length	Format	Description
0	0 SMF14SXS	2	binary	Size of extended information segment (size of all sections including this length field).

Extended Information Section Descriptor Word

If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "XIC" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFXIC.

Offsets	Name	Length	Format	Description														
0	0 SMF14ESL	2	binary	Size of this extended information section (size of variable length fields including this 4 byte section descriptor word).														
2	2	1	binary	Reserved.														
3	3 SMF14STY	1	binary	Section type code. <table border="0"> <thead> <tr> <th>Type</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Compressed format data set section</td> </tr> <tr> <td>2</td> <td>SMS class information section</td> </tr> <tr> <td>3</td> <td>Step Information section</td> </tr> <tr> <td>4</td> <td>ISO/ANSI Version 4 CCSID (coded character set ID) information section</td> </tr> <tr> <td>5</td> <td>Additional data set characteristics section</td> </tr> <tr> <td>6</td> <td>PDSE data set caching statistics</td> </tr> </tbody> </table>	Type	Meaning when set	1	Compressed format data set section	2	SMS class information section	3	Step Information section	4	ISO/ANSI Version 4 CCSID (coded character set ID) information section	5	Additional data set characteristics section	6	PDSE data set caching statistics
Type	Meaning when set																	
1	Compressed format data set section																	
2	SMS class information section																	
3	Step Information section																	
4	ISO/ANSI Version 4 CCSID (coded character set ID) information section																	
5	Additional data set characteristics section																	
6	PDSE data set caching statistics																	

Compressed format data set section (Type 1)

This section describes the information acquired for compressed format data sets. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "CSB" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFCSB.

Offsets	Name	Length	Format	Description												
4	4 SMF14XF1	1	binary	Indicators: <table border="0"> <thead> <tr> <th>Bit</th> <th>Name and meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF14LBD. Compressed format data set size values (SMF14CDS and SMF14UDS) are invalid.</td> </tr> <tr> <td>1</td> <td>SMF14CRJ. Compression of the data set has been rejected.</td> </tr> <tr> <td>2</td> <td>SMF14ZEDCNAC. During output processing, the system determined that the zEDC feature was not available. In this case, some or all data was written non-compressed due to unavailability of the zEDC feature. (If 0, then zEDC used on all compression.) Valid only when SMF14CMPTYPE is SMF14CMPTYPEZEDC.</td> </tr> <tr> <td>3</td> <td>SMF14ZEDCNAD. During input processing, the system determined that the zEDC feature was not available. In this case, it used software decompression to decompress the data. (If 0, then zEDC used on decompression.) Valid only when SMF14CMPTYPE is SMF14CMPTYPEZEDC.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Name and meaning when set	0	SMF14LBD. Compressed format data set size values (SMF14CDS and SMF14UDS) are invalid.	1	SMF14CRJ. Compression of the data set has been rejected.	2	SMF14ZEDCNAC. During output processing, the system determined that the zEDC feature was not available. In this case, some or all data was written non-compressed due to unavailability of the zEDC feature. (If 0, then zEDC used on all compression.) Valid only when SMF14CMPTYPE is SMF14CMPTYPEZEDC.	3	SMF14ZEDCNAD. During input processing, the system determined that the zEDC feature was not available. In this case, it used software decompression to decompress the data. (If 0, then zEDC used on decompression.) Valid only when SMF14CMPTYPE is SMF14CMPTYPEZEDC.	4-7	Reserved.
Bit	Name and meaning when set															
0	SMF14LBD. Compressed format data set size values (SMF14CDS and SMF14UDS) are invalid.															
1	SMF14CRJ. Compression of the data set has been rejected.															
2	SMF14ZEDCNAC. During output processing, the system determined that the zEDC feature was not available. In this case, some or all data was written non-compressed due to unavailability of the zEDC feature. (If 0, then zEDC used on all compression.) Valid only when SMF14CMPTYPE is SMF14CMPTYPEZEDC.															
3	SMF14ZEDCNAD. During input processing, the system determined that the zEDC feature was not available. In this case, it used software decompression to decompress the data. (If 0, then zEDC used on decompression.) Valid only when SMF14CMPTYPE is SMF14CMPTYPEZEDC.															
4-7	Reserved.															
5	5 SMF14XF2	1	binary	Indicators: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-7	Reserved.								
Bit	Meaning when set															
0-7	Reserved.															
6	6 SMF14CDL	8	binary	Number of bytes of compressed data read or written since this open.												
14	E SMF14UDL	8	binary	Number of bytes of data read or written since this open (data length prior to compression).												
22	16 SMF14CDS	8	binary	Size of the compressed format data set (number of compressed user data bytes).												

Record type 14

Offsets	Name	Length	Format	Description										
30	1E SMF14UDS	8	binary	Size of the compressed format data set (number of uncompressed user data bytes).										
38	26 SMF14CIS	4	binary	Physical block size of extended format data set.										
42	2A SMF14TKL	2	binary	Length of dictionary token, SMF14TKN field (not including the length of this field). Currently equals 36.										
44	2C SMF14TKN	36	binary	Dictionary token for compressed format data set.										
80	50 SMF14CMPTYPE	1	binary	Indicators: <table border="1"> <thead> <tr> <th>Value</th> <th>Name and meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF14CMPTYPENA. Not compressed format, or unknown.</td> </tr> <tr> <td>1</td> <td>SMF14CMPTYPEGEN. Generic compression.</td> </tr> <tr> <td>2</td> <td>MF14CMPTYPEPLRD. Tailored compression.</td> </tr> <tr> <td>3</td> <td>SMF14CMPTYPEZEDC. zEDC compression.</td> </tr> </tbody> </table>	Value	Name and meaning when set	0	SMF14CMPTYPENA. Not compressed format, or unknown.	1	SMF14CMPTYPEGEN. Generic compression.	2	MF14CMPTYPEPLRD. Tailored compression.	3	SMF14CMPTYPEZEDC. zEDC compression.
Value	Name and meaning when set													
0	SMF14CMPTYPENA. Not compressed format, or unknown.													
1	SMF14CMPTYPEGEN. Generic compression.													
2	MF14CMPTYPEPLRD. Tailored compression.													
3	SMF14CMPTYPEZEDC. zEDC compression.													

SMS Class Section (Type 2)

This section describes the management, data and storage classes for SMS managed data sets. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "SCI" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFSCI.

Offsets	Name	Length	Format	Description
4	4 SMF14MCN	8	EBCDIC	SMS Management class name.
12	C SMF14DCN	8	EBCDIC	SMS Data class name.
20	14 SMF14SCN	8	EBCDIC	SMS Storage class name (first 8 characters).

Step Information Section (Type 3)

This section describes the step name and the active program name for the data set. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "SPI" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFSPI.

Offsets	Name	Length	Format	Description
4	4 SMF14SPN	8	EBCDIC	Job step name.
12	C SMF14PGN	8	EBCDIC	Job step program name.
20	14 SMFJOBID	8	EBCDIC	Job ID.
28	1C SMFPLXID	8	EBCDIC	Sysplex name.

ISO/ANSI Version 4 CCSID Information Section (Type 4)

This section describes the CCSID information specified for an ISO/ANSI Version 4 tape data set. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "A4I" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFA4I.

Offsets	Name	Length	Format	Description																
4	4 SMF14CFG	1	binary	Indicators: <table border="0"> <thead> <tr> <th>Bit</th> <th>Name and meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF14IBM. IBM format Version 4 tape</td> </tr> <tr> <td>1</td> <td>SMF14OUT. Opened for OUTPUT not DISP=MOD (see note 1)</td> </tr> <tr> <td>2</td> <td>SMF14MOD. Opened for OUTPUT DISP=MOD (see note 1)</td> </tr> <tr> <td>3</td> <td>SMF14UDF. User CCSID value is defaulted to CCSID=500</td> </tr> <tr> <td>4</td> <td>SMF14TDF. Tape CCSID value is defaulted to CCSID=367</td> </tr> <tr> <td>5</td> <td>SMF14IGN. CCSID value specified on DD statement was ignored</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Name and meaning when set	0	SMF14IBM. IBM format Version 4 tape	1	SMF14OUT. Opened for OUTPUT not DISP=MOD (see note 1)	2	SMF14MOD. Opened for OUTPUT DISP=MOD (see note 1)	3	SMF14UDF. User CCSID value is defaulted to CCSID=500	4	SMF14TDF. Tape CCSID value is defaulted to CCSID=367	5	SMF14IGN. CCSID value specified on DD statement was ignored	6-7	Reserved.
Bit	Name and meaning when set																			
0	SMF14IBM. IBM format Version 4 tape																			
1	SMF14OUT. Opened for OUTPUT not DISP=MOD (see note 1)																			
2	SMF14MOD. Opened for OUTPUT DISP=MOD (see note 1)																			
3	SMF14UDF. User CCSID value is defaulted to CCSID=500																			
4	SMF14TDF. Tape CCSID value is defaulted to CCSID=367																			
5	SMF14IGN. CCSID value specified on DD statement was ignored																			
6-7	Reserved.																			
5	5 SMF14USR	4	binary	CCSID user application expects data records to be in (specified on JOB/EXEC statement or defaulted). (See note 2)																
9	9 SMF14TPE	4	binary	CCSID of data records on tape (specified on DD statement or in tape label). (See note 2)																
13	D SMF14LBL	4	binary	CCSID specified in the tape label of an existing tape when opened for input processing.																
Note:																				
1. If opened for input processing, then bit 1 and 2 will both be off.																				
2. If no CCSID information is specified (in other words SMF14USR and SMF14TPE are 0), then the IBM standard ASCII/EBCDIC (XLATE) was used to process this Version 4 tape.																				

Additional data set characteristics section (Type 5)

This section contains information about the additional data set characteristics optionally provided for tape data sets. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "ADI" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFADI.

Offsets	Name	Length	Format	Description												
0	0 SMF14BFG	2	binary	Indicators												
0	0 SMF14BFG0	1	binary	Flag byte 1. Indicators: <table border="0"> <thead> <tr> <th>Bit</th> <th>Name and meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF14BLK. Block size is present.</td> </tr> <tr> <td>1</td> <td>SMF14FLGP Flag field is present.</td> </tr> <tr> <td>2</td> <td>SMF14DST Data set version field is present.</td> </tr> <tr> <td>3</td> <td>SMF14ALS Alias name is present.</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Name and meaning when set	0	SMF14BLK. Block size is present.	1	SMF14FLGP Flag field is present.	2	SMF14DST Data set version field is present.	3	SMF14ALS Alias name is present.	4-15	Reserved.
Bit	Name and meaning when set															
0	SMF14BLK. Block size is present.															
1	SMF14FLGP Flag field is present.															
2	SMF14DST Data set version field is present.															
3	SMF14ALS Alias name is present.															
4-15	Reserved.															
1	1 SMF14BFG1	1	binary	Flag byte 2.												
2	2 SMF14LBS	8	binary	Block size value.												

Record type 14

Offsets	Name	Length	Format	Description												
10	A SMF14FLGS/ SMF14FLG1	2	binary	Flag byte 1. Indicators: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF14UPF. BSAM user PGFIX option flag (DEB2XUPF).</td> </tr> <tr> <td>1</td> <td>SMF14EADSCB. DCBEADSCBOK flag (If on, then EADSCB=OK specified in DCBE. If off, then either there is no DCBE or EADSCB=OK is not specified in the DCBE).</td> </tr> <tr> <td>2</td> <td>SMF14EADSCB. DCBEADSCBOK flag (If on, then EADSCB=OK specified in DCBE. If off, then either there is no DCBE or EADSCB=OK is not specified in the DCBE).</td> </tr> <tr> <td>3</td> <td>SMF14XTIO. DD has XTIO, not TIOT entry.</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	SMF14UPF. BSAM user PGFIX option flag (DEB2XUPF).	1	SMF14EADSCB. DCBEADSCBOK flag (If on, then EADSCB=OK specified in DCBE. If off, then either there is no DCBE or EADSCB=OK is not specified in the DCBE).	2	SMF14EADSCB. DCBEADSCBOK flag (If on, then EADSCB=OK specified in DCBE. If off, then either there is no DCBE or EADSCB=OK is not specified in the DCBE).	3	SMF14XTIO. DD has XTIO, not TIOT entry.	4-15	Reserved.
Bit	Meaning when set															
0	SMF14UPF. BSAM user PGFIX option flag (DEB2XUPF).															
1	SMF14EADSCB. DCBEADSCBOK flag (If on, then EADSCB=OK specified in DCBE. If off, then either there is no DCBE or EADSCB=OK is not specified in the DCBE).															
2	SMF14EADSCB. DCBEADSCBOK flag (If on, then EADSCB=OK specified in DCBE. If off, then either there is no DCBE or EADSCB=OK is not specified in the DCBE).															
3	SMF14XTIO. DD has XTIO, not TIOT entry.															
4-15	Reserved.															
11	B SMF14FLG2	1	binary	Flag byte 2.												
12	C SMF14DSVER	1	binary	Indicates the version of the data set or, in the case of a partitioned concatenation, the first data set in the concatenation, as follows: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The data set is neither a PDSE nor an extended-format data set.</td> </tr> <tr> <td>1</td> <td>The data set is either a PDSE V1 or an extended-format V1.</td> </tr> <tr> <td>2</td> <td>The data set is either a PDSE V2 or an extended-format V2.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The data set is neither a PDSE nor an extended-format data set.	1	The data set is either a PDSE V1 or an extended-format V1.	2	The data set is either a PDSE V2 or an extended-format V2.				
Bit	Meaning when set															
0	The data set is neither a PDSE nor an extended-format data set.															
1	The data set is either a PDSE V1 or an extended-format V1.															
2	The data set is either a PDSE V2 or an extended-format V2.															
13	D SMF14ALI	44	EBCDIC	Alias data set name.												
57	39	9	binary	Reserved.												

PDSE Statistics Section (Type6)

This section describes the statistical information acquired for PDSE Data Sets. If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "PSI" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFPSI.

Offsets	Name	Length	Format	Description
0	0 SMF14DRD	4	binary	Directory read request count.
4	4 SMF14DRDH	4	binary	Directory read hit count.
8	8 SMF14MRD	4	binary	Member read request count.
12	C SMF14MRDH	4	binary	Member read hit count.
16	10 SMF14MCE	4	binary	Member cache eligible count.
20	14 SMF14MST	4	binary	Member cache stolen count.
24	18 SMF14MNC	4	binary	Member cache eligible but not cached count.
28	1C SMF14MCF	4	binary	Member cache eligible but cache full count.
Note: If concatenation is involved, the counts reflect the total count for all concatenated PDSE data sets.				

Tape Encryption Data Section (Type 7)

This section describes the key labels and encoding mechanisms for the key labels.

If you coded DSECT=YES when calling the IFGSMF14 macro, then it generates a DSECT statement at this point with the DSECT name with "ENC" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFENC.

Offsets	Name	Length	Format	Description
0	0 SMF14KL1	64	EBCDIC	Key label 1
64	40 SMF12CD1	1	EBCDIC	Encoding mechanism for key label 1. This field can be 'L' for Label or 'H' for Hash.
65	41 SMF14KL2	64	EBCDIC	Key label 2
129	81 SMF14CD2	1	EBCDIC	Encoding mechanism for key label 2. This field can be 'L' for Label or 'H' for Hash.
130	82 SMF14KET	4	binary	Key exchange time in hundredths seconds. The key exchange (encryption overhead) time is only applicable for SMF record type 15 and only for non-parallel OPEN processing writing file sequence 1 from loadpoint. In all other cases, this field is set to zero.

RAS Section (Type 8)

This section contains RAS (Reliability, Availability, Serviceability) information about this data set. If you coded DSECT=YES when calling the IFGSMF14 macro, it generates a DSECT statement at this point with the DSECT name with "RAS" appended to it. For example, if you did not code a label on the IFGSMF14 call, the name of this DSECT will be IFGSMFRAS.

Offsets	Name	Length	Format	Description																		
4	4 SMF14RFG0	1	Binary	Indicators: <table border="0"> <tr> <td>Bit</td> <td>Name and meaning when set</td> </tr> <tr> <td>0</td> <td>SMF14DCBEREJ. DCBE reject flags present.</td> </tr> <tr> <td>1</td> <td>SMF14PREL. PARTREL flags present.</td> </tr> <tr> <td>2 - 7</td> <td>Reserved.</td> </tr> </table>	Bit	Name and meaning when set	0	SMF14DCBEREJ. DCBE reject flags present.	1	SMF14PREL. PARTREL flags present.	2 - 7	Reserved.										
Bit	Name and meaning when set																					
0	SMF14DCBEREJ. DCBE reject flags present.																					
1	SMF14PREL. PARTREL flags present.																					
2 - 7	Reserved.																					
5	5 SMF14RFG1	1	Binary	Reserved																		
6	6 SMF14RFG2	1	Binary	Reserved																		
7	7 SMF14RFG3	1	Binary	Reserved																		
8	8 SMF14RASDATA0	1	binary	Indicators: <table border="0"> <tr> <td>Bit</td> <td>Name and meaning when set</td> </tr> <tr> <td>0</td> <td>SMF14DCBEEEXCP. DCBE invalidated because EXCP and no foundation extension present.</td> </tr> <tr> <td>1</td> <td>SMF14DCBEDSORG. DCBE invalidated because DSORG is not PS, PO OR DA.</td> </tr> <tr> <td>2</td> <td>SMF14DCBEFREE. DCBE invalidated because storage is not addressable.</td> </tr> <tr> <td>3</td> <td>SMF14DCBEKEY. DCBE invalidated because DCBE storage is not in key of caller.</td> </tr> <tr> <td>4</td> <td>SMF14DCBEID. DCBE invalidated because the DCBEID is not 'DCBE'.</td> </tr> <tr> <td>5</td> <td>SMF14DCBEMIN. DCBE invalidated because it is not at least the minimum length required (56 bytes)</td> </tr> <tr> <td>6</td> <td>SMF14NODCBE. DCBEHIARC flags set but DCBDCBE is zeros.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Name and meaning when set	0	SMF14DCBEEEXCP. DCBE invalidated because EXCP and no foundation extension present.	1	SMF14DCBEDSORG. DCBE invalidated because DSORG is not PS, PO OR DA.	2	SMF14DCBEFREE. DCBE invalidated because storage is not addressable.	3	SMF14DCBEKEY. DCBE invalidated because DCBE storage is not in key of caller.	4	SMF14DCBEID. DCBE invalidated because the DCBEID is not 'DCBE'.	5	SMF14DCBEMIN. DCBE invalidated because it is not at least the minimum length required (56 bytes)	6	SMF14NODCBE. DCBEHIARC flags set but DCBDCBE is zeros.	7	Reserved.
Bit	Name and meaning when set																					
0	SMF14DCBEEEXCP. DCBE invalidated because EXCP and no foundation extension present.																					
1	SMF14DCBEDSORG. DCBE invalidated because DSORG is not PS, PO OR DA.																					
2	SMF14DCBEFREE. DCBE invalidated because storage is not addressable.																					
3	SMF14DCBEKEY. DCBE invalidated because DCBE storage is not in key of caller.																					
4	SMF14DCBEID. DCBE invalidated because the DCBEID is not 'DCBE'.																					
5	SMF14DCBEMIN. DCBE invalidated because it is not at least the minimum length required (56 bytes)																					
6	SMF14NODCBE. DCBEHIARC flags set but DCBDCBE is zeros.																					
7	Reserved.																					

Record type 14

Offsets	Name	Length	Format	Description
9	9 SMF14RASDATA1	1	Binary	RAS data: Bit Name and meaning when set 0 SMF14PRELVIO. Partial release not called by CLOSE because VIO data set. 1 SMF14PRELABD. Partial release not called by CLOSE because task is abending. 2 SMF14PRELINP. Partial release not called by CLOSE because not opened for output 3 SMF14PRELEXCP. Partial release not called by CLOSE because EXCP DCB but no direct access device section present. 4 SMF14PRELNOUT. Partial release not called by CLOSE because even though opened for output, last I/O was not output. 5 SMF14PRELIO. Partial release had an I/O error. 6 - 7 Reserved
10	A	18		Reserved

Record Type 15 (0F) — OUTPUT, UPDAT, INOUT, or OUTIN Data Set Activity

Record type 15 is written for non-VSAM direct access, or VIO tape data sets that are defined by DD statements or dynamic allocation and opened for OUTPUT, UPDAT, INOUT, or OUTIN processing by problem programs. It is written when a data set is closed or processed by the end-of-volume (EOV). Its length varies, depending upon the number of volumes for the data set.

This record contains information from the TIOT, JFCB, DCB, DEB, and UCB data areas.

Note: Record type 15 is not written for data sets defined as SYSOUT data sets on DD statements. For accounting purposes, the SYSOUT logical record count is provided in record type 6.

The format for this record is the same as the format for record type 14.

Record Type 16 (10) — DFSORT Statistics

Record type 16 is written to record information about events and operations of the IBM DFSORT licensed program. Depending on the option specified at initialization (and whether DFSORT runs successfully), a short record, full record, or no record is produced. For this record, see SMF Type-16 Record in *z/OS DFSORT Installation and Customization*.

Record Type 17 (11) — Scratch Data Set Status

Record type 17 is written when a non-temporary DASD data set or a temporary DASD data set is scratched. This record contains the data set name, number of volumes, and volume serial numbers. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification. Its length varies, depending upon the number of volumes for the data set. Refer to record type 65 for information on renaming a VSAM object.

Note: You use the REC parameter, in the SMFPRMxx parmlib member, to specify record type 17 is to be collected. REC(ALL) specifies that record type 17 is to be

written for both temporary and non-temporary data sets. REC(PERM) specifies that SMF is to write record type 17 only for non-temporary data sets; it is not to be written for temporary data sets (data sets having names that start with SYSyddddd.Thhmmss, either from DSN=&&datasetname or from the absence of any data set name).

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF17LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF17SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF17FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF17RTY	1	binary	Record type 17 (X'11').								
6	6 SMF17TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.								
10	A SMF17DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF17SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF17JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF17RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF17RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF17UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A SMF17RIN	2		Reserved.								
44	2C SMF17DSN	44	EBCDIC	Data set name.								
88	58 SMF17RV1	3		Reserved.								
91	5B SMF17NVL	1	binary	Number of volumes.								

Record type 17

Volume Information Section

For each volume there is an eight-byte entry with the following format:

Offsets	Name	Length	Format	Description
0	0 SMF17RV2		2	Reserved.
2	2 SMF17FVL		6	EBCDIC Volume serial number.

Record Type 18 (12) — Rename Non-VSAM Data Set Status

Record type 18 is written when a non-VSAM data set defined by a DD statement (either explicitly or implicitly) is renamed. (When a DD statement defines a volume, all the data sets on that volume are implicitly defined.) This record contains the old data set name, new data set name, number of volumes, and volume serial numbers. Its length varies, depending upon the number of volumes for the data set.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF18LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF18SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF18FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF18RTY	1	binary	Record type 18 (X'12').								
6	6 SMF18TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.								
10	A SMF18DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF18SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF18JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF18RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF18RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								

Offsets	Name	Length	Format	Description				
34	22 SMF18UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).				
42	2A SMF18RIN	2		Reserved.				
42	2A SMF18IN1	1	binary	Record indicator byte 1. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Continuation record indicator for a multi-volume data set rename request whereby the volume being processed by rename is not the first volume. This flag is set when the volume serial number in this record is one that had a volume sequence number of more than one and rename is processing each volume individually. Field name SMF18CON.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Continuation record indicator for a multi-volume data set rename request whereby the volume being processed by rename is not the first volume. This flag is set when the volume serial number in this record is one that had a volume sequence number of more than one and rename is processing each volume individually. Field name SMF18CON.
Bit	Meaning when set							
0	Continuation record indicator for a multi-volume data set rename request whereby the volume being processed by rename is not the first volume. This flag is set when the volume serial number in this record is one that had a volume sequence number of more than one and rename is processing each volume individually. Field name SMF18CON.							
43	2B SMF18IN2	1	binary	Record indicator byte 2.				
44	2C SMF180DS	44	EBCDIC	Old data set name.				
88	58 SMF18NDS	44	EBCDIC	New data set name.				
132	84 SMF18RV1	3		Reserved.				
135	87 SMF18NVL	1	binary	When rename is called one volume at a time, the value will be one for each SMF 18 record. When rename is called with a list, the value will reflect the total number of volumes processed in the list that are recorded in one SMF 18 record. This value designates the number of volume entries that follow.				

Volume Information Section

For each volume there is an eight-byte entry with the following format:

Offsets	Name	Length	Format	Description
0	0 SMF18RV2	2		Reserved.
2	2 SMF18FVL	6	EBCDIC	Volume serial number.

Record Type 19 (13) — Direct Access Volume

Record type 19 is written:

1. For each online device associated with a specific IPL time frame,
2. For each online device associated with a processed HALT EOD or SWITCH SMF command, and
3. When a direct access volume that is defined by DD statement is demounted.

This record contains:

- The volume serial number
- The volume table of contents (VTOC) address
- The owner identification
- The unit type
- The number of unused alternate tracks
- The number of unallocated cylinders and tracks
- The number of cylinders and tracks in the largest free extent
- The number of unallocated extents.
- The previous three fields repeated for track-managed space

Record type 19

- The volume size information

It contains the device number and module identification for devices having movable plugs.

Note:

1. Record type 19 is not produced for DOS volumes used under the operating system.
2. In order to determine the latest status of a shared file, the CPU clocks must be synchronized.

Record Mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description																
0	0 SMF19LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.																
2	2 SMF19SEG	2	binary	Segment descriptor (see record length field).																
4	4 SMF19FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.								
Bit	Meaning when set																			
0-2	Reserved																			
3-6	Version indicators*																			
7	Reserved.																			
5	5 SMF19RTY	1	binary	Record type 19 (X'13').																
6	6 SMF19TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.																
10	A SMF19DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.																
14	E SMF19SID	4	EBCDIC	System identification (from the SID parameter).																
18	12 SMF19RV1	2		Reserved.																
20	14 SMF19VOL	6	EBCDIC	Volume serial number.																
26	1A SMF19OID	10	EBCDIC	Owner identification from the VTOC.																
36	24 SMF19DEV	4	binary	Device type.																
40	28 SMF19VTC	5	binary	Volume table of contents (VTOC) address (format of CCHHR).																
45	2D SMF19VTI	1	binary	Volume table of contents (VTOC) indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Format 5 data set control blocks (DSCB) missing or erroneous</td> </tr> <tr> <td>1-2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>VTOC does not begin on record 1</td> </tr> <tr> <td>4</td> <td>Accurate Format 5 and 6 data set control blocks (DSCB); bit 0 set to zero</td> </tr> <tr> <td>5</td> <td>Possible VTOC or VTOC index error</td> </tr> <tr> <td>6</td> <td>VTOC error has been fixed; bit 5 set to zero</td> </tr> <tr> <td>7</td> <td>Indexed VTOC.</td> </tr> </table>	Bit	Meaning when set	0	Format 5 data set control blocks (DSCB) missing or erroneous	1-2	Reserved	3	VTOC does not begin on record 1	4	Accurate Format 5 and 6 data set control blocks (DSCB); bit 0 set to zero	5	Possible VTOC or VTOC index error	6	VTOC error has been fixed; bit 5 set to zero	7	Indexed VTOC.
Bit	Meaning when set																			
0	Format 5 data set control blocks (DSCB) missing or erroneous																			
1-2	Reserved																			
3	VTOC does not begin on record 1																			
4	Accurate Format 5 and 6 data set control blocks (DSCB); bit 0 set to zero																			
5	Possible VTOC or VTOC index error																			
6	VTOC error has been fixed; bit 5 set to zero																			
7	Indexed VTOC.																			

Offsets	Name	Length	Format	Description
The next eight 2-byte fields describe free space statistics for the entire volume. When the value for a free space statistic exceeds the field size of two bytes, that field is set to X'FFFF'. When this occurs, use the relocated values in SMF19EVF and SMF19TMF.				
46	2E SMF19NDS	2	binary	Number of data set control blocks (DSCB) calculated as: number of DSCBs per track times number of tracks in VTOC.
48	30 SMF19DSR	2	binary	Number of data set control blocks (DSCB) — format 0 DSCBs, that is, number of available DSCBs.
50	32 SMF19NAT	2	binary	Number of unused alternate tracks.
52	34 SMF19SPC	2	binary	Number of unallocated cylinders.
54	36	2	binary	Number of unallocated tracks.
56	38 SMF19LEX	2	binary	Number of cylinders in the largest unallocated extent.
58	3A	2	binary	Number of tracks in the largest unallocated extent.
60	3C SMF19NUE	2	binary	Number of unallocated extents.
62	3E SMF19FL1	1	binary	SMF flags 1. Bit Meaning when set 0 SMF19CYM. Returned data is for a volume that has CYL-managed space.
63	3F SMF19FL2	1	binary	Reserved.
64	40 SMF19CUU	2	binary	Device Number.
66	42 SMF19IND	2	binary	Module identification or drive number indicating physical identity of devices having moveable address plugs. This field is taken from bits 2-7 of sense byte 4 for these devices. (See the component descriptions of these devices for the meaning of sense byte 4.)
Beginning of expanded SMF statistics				
68	44 SMF19RV3	4	EBCDIC	Reserved.
72	48 SMF19SDS	4	binary	Number of DSCBs.
76	4C SMF19SL0	4	binary	Number of format 0 DSCBs.
80	50 SMF19RV4	4	EBCDIC	Reserved.
SMF19EVF: Free space statistics from the entire volume. For volumes with cylinder-managed space (SMF19CYM='1'), these statistics represent space from both the track- and cylinder-managed space on the volume. See SMF19TMF for statistics from the track-managed space on the volume.				
84	54 SMF19EVF	20	EBCDIC	Total vol free space.
84	54 SMF19SUC	4	binary	Number of free cylinders.
88	58 SMF19SUT	4	binary	Number of addl free tracks.
92	5C SMF19SNC	4	binary	Number of free cylinders in largest free extent.
96	60 SMF19SNT	4	binary	Number of addl free tracks in largest free extent.
100	64 SMF19SNE	4	binary	Number of free extents.
SMF19TMF: Free space statistics from track-managed space for a volume with cylinder-managed space (SMF19CYM='1'). For volumes with no cylinder-managed space (SMF19CYM='0'), these statistics are equivalent to the total volume statistics described in the preceding fields.				
104	68 SMF19TMF	20	EBCDIC	Track-managed free space.
104	68 SMF19BUC	4	binary	Number of free cylinders.
108	6C SMF19BUT	4	binary	Number of addl free tracks.
112	70 SMF19BNC	4	binary	Number of free cylinders in largest free extent
116	74 SMF19BNT	4	binary	Number of addl free tracks in largest free extent.
120	78 SMF19BNE	4	binary	Number of free extents.
Volume size information				
124	7C SMF19VLI	8	EBCDIC	Volume size information

Record type 19

Offsets	Name	Length	Format	Description
124	7C SMF19TRK	4	binary	Total number of tracks on the volume
128	80 SMF19TRM	4	binary	Total number of tracks in the track-managed space when SMF19CYM = '1'. Set to the value of SMF19TRK otherwise. When SMF19CYM = '1' this value is also the first track address where cylinder-managed space begins.
End of expanded SMF statistics				

Record type 20 (14) — Job initiation

Reference information:

For information about the RACF Report Writer, see *z/OS Security Server RACF Auditor's Guide*.

Record type 20 is written at job initiation (including TSO/E logon). This record contains the job log identification programmer's name, number of accounting fields on the JOB statement, accounting fields, and RACF-related information. The job name, time, and date the reader recognized the JOB card (for this job) constitute the job log identification. It is used by the RACF Report Writer in combination with record types 30, 80, 81, and 83 to produce RACF reports.

The length of record type 20 includes the length of the JOB statement accounting fields and the relocatable RACF section.

Note: IBM recommends that you use record type 30 rather than record types 4, 5, 20, 34, 35, and 40.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF20LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF20SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF20FLG	1	binary	System indicator: <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											

Offsets	Name	Length	Format	Description
5	5 SMF20RTY	1	binary	Record type 20 (X'14').
6	6 SMF20TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.
10	A SMF20DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.
14	E SMF20SID	4	EBCDIC	System identification (from the SID parameter).
18	12 SMF20JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).
26	1A SMF20RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).
30	1E SMF20RSD	4	packed	Date when the reader recognized the JOB card for this job, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.
34	22 SMF20UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
42	2A SMF20RLO	2	binary	Offset to relocatable area. See <i>z/OS Security Server RACF Macros and Interfaces</i> for more information about relocatable areas for RACF-owned records.
44	2C SMF20PGM	20	EBCDIC	Programmer's name.
64	40 SMF20NAF	1	binary	Number of accounting fields.
65	41 SMF20ACT	variable	EBCDIC	Accounting fields. Each entry for an accounting field contains the length of the field (one byte, binary) followed by the field (EBCDIC). A zero indicates an omitted field.

Relocate Section

Offsets	Name	Length	Format	Description
0	0 SMF20FLS	2	binary	Size of relocate section (including this field).
2	2 SMF20GRP	8	EBCDIC	RACF Group ID. If RACF is not active, this field is set to zero.
10	A SMF20RUD	8	EBCDIC	RACF User ID. If RACF is not active, this field is set to zero.
18	12 SMF20TID	8	EBCDIC	RACF terminal ID. If RACF is not active, or if RACF is active and the user is not a terminal user, then this field is set to zero.

Record Type 21 (15) — Error Statistics by Volume

Record type 21 is written when a data set on magnetic tape is demounted. This record contains statistics for the entire volume during the period of time that the volume is mounted, regardless of the number of data sets on the volume being accessed (and regardless of the number of CLOSE macro instructions issued).

This record contains the volume serial number, device number, unit type, and tape format. It contains the number of temporary and permanent read and write errors, START Subchannel (SSCH) instruction, noise blocks, erase gaps, and cleaner actions.

Note:

Record type 21

1. The IFHSTATR utility program formats and prints the error-statistics-by-volume (ESV) information in this record.
2. The current record does not describe who requested the amount or who performed the I/O.
3. Record type 21 does not indicate which records are written because of environmental record editing and printing (EREP).
4. If a maximum count is reached, it is no longer increased. A count at its maximum value indicates at least that number because no record is written when the counter is full.
5. A record type 21 is written, in addition to demount time, any time the environmental record editing and printing (EREP) program is run or when EOD is issued. Therefore, more than one type 21 record may be written for each tape that was mounted.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF21LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF21SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF21FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF21RTY	1	binary	Record type 21 (X'15').								
6	6 SMF21TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.								
10	A SMF21DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF21SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF21LGH	2	binary	Length of rest of record.								
20	14 SMF21VOL	6	EBCDIC	Volume serial number.								
26	1A SMF21CA	2	binary	Device number or device address.								
28	1C SMF21UCB	4	binary	UCBTYP value.								
31	1F SMF21DEV	1	binary	Low order byte of UCB device type. Values less than X'80' represent reel tapes. Values of X'80' or greater represent cartridge tapes.								
32	20 SMF21TR	1	binary	Number of temporary read errors (non-buffered log).								
33	21 SMF21TW	1	binary	Number of temporary write errors (non-buffered log).								
34	22 SMF21SIO	2	binary	Number of start sub-channel (SSCH) instructions.								
36	24 SMF21PR	1	binary	Number of permanent read errors.								

Offsets	Name	Length	Format	Description
37	25 SMF21PW	1	binary	Number of permanent write errors.
38	26 SMF21NB	1	binary	Number of noise blocks (non-buffered log).
39	27 SMF21ERG	2	binary	Number of erase gaps.
41	29 SMF21CLN	2	binary	Number of cleaner actions.
44	2C SMF21BLS	2	binary	Block size of the last data set closed on the tape if the tape was demounted during CLOSE processing, not at a different time. Some programs that use EXCP do not provide a block size. This field is valid only (but still might contain zero) when bit SMF21LB is off.
46	2E SMF21OFL	1	binary	DCBOFLGS. Bit Meaning 1... Output tape .1.. Input tape (READ BACKWARD)
47	2F SMF21TUS	3	packed	Tape unit serial.
50	32 SMF21TRF	2	binary	Temporary read forward errors.
52	34 SMF21TRB	2	binary	Temporary read backward errors.
54	36 SMF21TWF	2	binary	Temporary write errors.
56	38 SMF21BR	3	binary	Number of bytes read, in units of 4096. The length of each block is rounded up to a multiple of 4096 before being counted. This count includes volume mount and verify, in addition to task I/O. Provided only for cartridge tape devices. Maximum value is X'FFFFFF'.
59	3B SMF21BW	3	binary	Number of bytes written, in units of 4096. The length of each block is rounded up to a multiple of 4096 before being counted. Provided only for cartridge tape devices. Maximum value is X'FFFFFF'.
62	3E SMF21FL1	1	binary	General flag bytes. Bit Meaning 1... Field SMF21NCT, indicating that SMF21BRN and SMF21BWN at 64 and 68 contain valid values. Currently this bit is on only for 3590. .1.. Field SMF21LS, indicating that field SMF21LST has a valid value. ..1. Field SMF21LB, indicating that SMF21LBS has a valid value. ...1 Field SMF21DBV, indicating that SMF21DBR and SMF21DBW at 80 and 84 contain valid values. 1... Field SMF21MFV, indicating that SMF21MCR, SMF21MCW, SMF21MDR, and SMF21MDW contain valid values.xxx Reserved.
63	3F SMF21FL2	1	bit string	Reserved.
64	40 SMF21BRN	4	unsigned binary	Number of bytes read, in units of 4096. The length of each block is rounded up to a multiple of 4096 before being counted. Valid only if SMF21NCT is on. If the value is less than X'FFFFFF', it is also in SMF21BR.
68	44 SMF21BWN	4	unsigned binary	Number of bytes written, in units of 4096. The length of each block is rounded up to a multiple of 4096 before being counted. Valid only if SMF21NCT is on. If the value is less than X'FFFFFF', it is also in SMF21BW.

Record type 21

Offsets	Name	Length	Format	Description
72	48 SMF21LST	4	unsigned binary	Number of I/Os initiated on current volume. Valid only if SMF21LS is on.
76	4C SMF21LBS	4	unsigned binary	Block size. Valid only if SMF21LB is on.
80	50 SMF21DBR	4	unsigned binary	Number of bytes read by the device, in units of 4096. Valid only if SMF21DBV is on.
84	54 SMF21DBW	4	unsigned binary	Number of bytes written by the device, in units of 4096. Valid only if SMF21DBV is on.
88	58 SMF21MCR	4	unsigned binary	Number of bytes read by the channel, in units of 1M. Valid only if SMF21MFV is on.
92	5C SMF21MCW	4	unsigned binary	Number of bytes written by the channel, in units of 1M. Valid only if SMF21MFV is on.
96	60 SMF21MDR	4	unsigned binary	Number of bytes read by the device, in units of 1M. Valid only if SMF21MFV is on.
100	64 SMF21MDW	4	unsigned binary	Number of bytes written by the device, in units of 1M. Valid only if SMF21MFV is on.

Record Type 22 (16) — Configuration

Record type 22 is written:

- After every SMF initialization.
- When any of the following operator commands are processed:
 - CONFIG CPU
 - CONFIG CHP
 - CONFIG PFID
 - CONFIG VF
 - CONFIG STOR
 - CONFIG ONLINE,S
 - CONFIG OFFLINE,S.
- When an ACTIVATE command or ACTIVATE function from a Hardware Configuration Definition (HCD) panel results in successful dynamic configuration changes.
- When Asynchronous Operations Manager (AOM) attention-handling code is processing volume state change interrupts or when processing subsystem status change interrupts.
- During pack-change interrupt processing, when the subsystem or originating device status has changed.

This record describes processor, channel path, storage in effect after the IPL or change. Record type 22 contains the current and previous status of the subsystem and originating device. The storage section contains 31-bit central storage addresses.

The length of record type 22 is variable. The maximum length of the type 22 record is 32,756 bytes. If the space required for data is such that the length would exceed the maximum length, one or more additional type 22 records are produced.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and a count of the number of other sections on the record.

Offsets	Name	Length	Format	Description																
0	0 SMF22LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.																
2	2 SMF22SEG	2	binary	Segment descriptor (see record length field).																
4	4 SMF22FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (see "Standard SMF record header" on page 162 for details)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (see "Standard SMF record header" on page 162 for details)	7	Reserved.								
Bit	Meaning when set																			
0-2	Reserved																			
3-6	Version indicators (see "Standard SMF record header" on page 162 for details)																			
7	Reserved.																			
5	5 SMF22RTY	1	binary	Record type 22 (X'16').																
6	6 SMF22TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.																
10	A SMF22DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for details.																
14	E SMF22SID	4	EBCDIC	System identification (from the SID parameter).																
18	12 SMF22IND	2	binary	Record creator indicator <table border="0"> <tr> <td>Value</td> <td>Meaning</td> </tr> <tr> <td>1</td> <td>IPL</td> </tr> <tr> <td>2</td> <td>VARY ONLINE</td> </tr> <tr> <td>3</td> <td>VARY OFFLINE</td> </tr> <tr> <td>7</td> <td>VARY CHANNEL PATH ONLINE OR OFFLINE</td> </tr> <tr> <td>8</td> <td>3990 State Change</td> </tr> <tr> <td>9</td> <td>ACTIVATE</td> </tr> <tr> <td>99</td> <td>This record was continued from the previous record, because the previous record was filled. If this is the first record, SMF22IND can not equal 99.</td> </tr> </table>	Value	Meaning	1	IPL	2	VARY ONLINE	3	VARY OFFLINE	7	VARY CHANNEL PATH ONLINE OR OFFLINE	8	3990 State Change	9	ACTIVATE	99	This record was continued from the previous record, because the previous record was filled. If this is the first record, SMF22IND can not equal 99.
Value	Meaning																			
1	IPL																			
2	VARY ONLINE																			
3	VARY OFFLINE																			
7	VARY CHANNEL PATH ONLINE OR OFFLINE																			
8	3990 State Change																			
9	ACTIVATE																			
99	This record was continued from the previous record, because the previous record was filled. If this is the first record, SMF22IND can not equal 99.																			
20	14 SMF22ECT	2	binary	Number of sections that are to follow.																

CPU Section

The following section contains information about the CPU flags, CPU section identification, model number, and identifier:

Offsets	Name	Length	Format	Description										
0	0 SMF22CFG	1	binary	CPU Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Vector feature indicator</td> </tr> <tr> <td>1</td> <td>Reserved</td> </tr> <tr> <td>2</td> <td>CPU reconfiguration indicator</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Vector feature indicator	1	Reserved	2	CPU reconfiguration indicator	3-7	Reserved.
Bit	Meaning when set													
0	Vector feature indicator													
1	Reserved													
2	CPU reconfiguration indicator													
3-7	Reserved.													
1	1 SMF22PID	1	binary	CPU section identification (this field is always 1).										
2	2 SMF22CPN	2	binary	CPU model number (taken from CONFIG CPU command).										
4	4 SMF22CpuId	2	binary	CPU identifier (taken from CONFIG CPU command or default in PSACPUPA).										
5	5 SMF22CPA	1	binary	CPU identifier (Should not be used. Use SMF22CpuId.)										

Record type 22

Storage Section

The following section contains the storage flags, storage identifier, and contiguous storage information.

When the storage frame number, reported in SMF22PGL, is larger than a full word (X'FFFFFFFF'), a Storage Element Extension section is generated in place of this section. The Storage Element Extension section is section ID 12, or X'0C'.

Offsets	Name	Length	Format	Description
0	0 SMF22MFL	1	EBCDIC	Storage flags Bit Meaning when set 0 Central storage frames are interleaved 1 Real storage status could not be obtained. 2-7 Reserved.
1	1 SMF22TID	1	binary	Storage section identification (this field is always 3).
2	2 SMF22PGL	4	binary	Block number of the first online frame reported in this storage element. When the block number exceeds X'FFFFFFFF', it is reported in the SMF22 Storage Element Extension (ID=X'0C')
6	6 SMF22NPG	4	binary	The number of online frames reported in this storage element

Channel Path (CHP) Section

The following section contains channel path information.

Offsets	Name	Length	Format	Description
0	0 SMF22RV7	1		Reserved.
1	1 SMF22UID	1	binary	Channel Path section Identification (this field is always 7).
2	2 SMF22PAR	256	EBCDIC	Array of 256 entries to map each unique CHP (channel path).
	SMF22PFG	X'80'		
	SMF22POW	X'40'		If 1=CHP, CHP is valid for this installation. If 0, SMF22POW=0 and SMF22PON=0
	SMF22PON	X'20'		If 1=CHP, CHP is owned by this system, and SMF22PFG=1; if 0, SMF22PON=0
				If 1=CHP, CHP is ONLINE, SMF22PFG=1, and SMF22POW=1

Reconfigured Channel Path Section

This section contains reconfigured channel path information.

Offsets	Name	Length	Format	Description
0	0 SMF22RV8	1		Reserved.
1	1 SMF22RID	1	binary	Reconfigured Channel Path section identification (this field is always 8).
2	2 SMF22CNT	1	binary	Count of channel path IDs (CHPIDs) in this section.
3	3 SMF22CHI	1	EBCDIC	Array of channel path identifiers.

Reconfigured PCIE Function Identifier (PFID) Section

The following section contains reconfigured PCIE function identifier information.

Offsets	Name	Length	Format	Description
0	0	1		Reserved.
1	1 SMF22PCIID	1	binary	Reconfigured PCIE function identifier section identification (this field is always X'0B').

Offsets	Name	Length	Format	Description
2	2	2		Reserved.
4	4 SMF22PCICNT	2	binary	Count of PCIE function identifiers (PFIDs) in this section.
6	6 SMF22PFID	4	binary	Array of PCIE function identifiers (PFIDs).

Expanded Storage Section

This section contains one contiguous block of online expanded storage.

Offsets	Name	Length	Format	Description
0	0	1		Reserved.
1	1 SMF22XID	1	binary	Expanded storage identification (this field is always 9).
2	2 SMF22XAD	4	binary	Beginning expanded storage frame (E-frame) address in this contiguous block (taken from the CONFIG command). Note: Expanded storage is always addressed in frames.
6	6 SMF22XNP	4	binary	Number of 4K expanded storage frames in this contiguous block (taken from the CONFIG command).

Storage Control Section

Offsets	Name	Length	Format	Description																								
0	0 *	1		Reserved.																								
1	1 SMF22GID	1	binary	Storage control section identification (this field is always 10, X'0A').																								
2	2 SMF22SSI	2	binary	3990 subsystem identifier.																								
4	4 SMF22MDL	1	binary	3990 model identifier.																								
5	5 SMF22VOL	6	EBCDIC	Originating device volume serial (this field is blank if device is offline).																								
11	B SMF22CUA	2	binary	Originating device identification.																								
13	D SMF22CCA	1	binary	Originating device channel connection address (CCA).																								
14	E SMF22DDC	1	binary	Originating device director-to-device connection (DDC).																								
15	F SMF22PDC	1	binary	Originating device previous DDC.																								
16	10 SMF22SCS	1	binary	3990 subsystem caching status: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>One of the following values:</td> </tr> <tr> <td>000</td> <td>Active.</td> </tr> <tr> <td>001</td> <td>Pending active.</td> </tr> <tr> <td>010</td> <td>Deactivated-subsystem.</td> </tr> <tr> <td>100</td> <td>Deactivated-host.</td> </tr> <tr> <td>110</td> <td>Pending.</td> </tr> <tr> <td>111</td> <td>Pending off failed.</td> </tr> <tr> <td>3</td> <td>Subsystem storage is disabled for maintenance.</td> </tr> <tr> <td>4-5</td> <td>Reserved.</td> </tr> <tr> <td>6</td> <td>IML device is not available.</td> </tr> <tr> <td>7</td> <td>Cache fast write is disabled.</td> </tr> </table>	Bit	Meaning when set	0-2	One of the following values:	000	Active.	001	Pending active.	010	Deactivated-subsystem.	100	Deactivated-host.	110	Pending.	111	Pending off failed.	3	Subsystem storage is disabled for maintenance.	4-5	Reserved.	6	IML device is not available.	7	Cache fast write is disabled.
Bit	Meaning when set																											
0-2	One of the following values:																											
000	Active.																											
001	Pending active.																											
010	Deactivated-subsystem.																											
100	Deactivated-host.																											
110	Pending.																											
111	Pending off failed.																											
3	Subsystem storage is disabled for maintenance.																											
4-5	Reserved.																											
6	IML device is not available.																											
7	Cache fast write is disabled.																											
17	11 SMF22PCS	1	binary	Previous subsystem caching status. The bit meanings are the same as SMF22SCS.																								

Record type 22

Offsets	Name	Length	Format	Description																																												
18	12 SMF22SNV	1	binary	3990 subsystem NVS status: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>One of the following values: <table border="0"> <tr> <td>00</td> <td>Active.</td> </tr> <tr> <td>01</td> <td>Deactivated-subsystem.</td> </tr> <tr> <td>10</td> <td>Deactivated-host.</td> </tr> <tr> <td>11</td> <td>Pending.</td> </tr> </table> </td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>Disabled for maintenance.</td> </tr> <tr> <td>4</td> <td>Pending due to error.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-1	One of the following values: <table border="0"> <tr> <td>00</td> <td>Active.</td> </tr> <tr> <td>01</td> <td>Deactivated-subsystem.</td> </tr> <tr> <td>10</td> <td>Deactivated-host.</td> </tr> <tr> <td>11</td> <td>Pending.</td> </tr> </table>	00	Active.	01	Deactivated-subsystem.	10	Deactivated-host.	11	Pending.	2	Reserved.	3	Disabled for maintenance.	4	Pending due to error.	5-7	Reserved.																								
Bit	Meaning when set																																															
0-1	One of the following values: <table border="0"> <tr> <td>00</td> <td>Active.</td> </tr> <tr> <td>01</td> <td>Deactivated-subsystem.</td> </tr> <tr> <td>10</td> <td>Deactivated-host.</td> </tr> <tr> <td>11</td> <td>Pending.</td> </tr> </table>	00	Active.	01	Deactivated-subsystem.	10	Deactivated-host.	11	Pending.																																							
00	Active.																																															
01	Deactivated-subsystem.																																															
10	Deactivated-host.																																															
11	Pending.																																															
2	Reserved.																																															
3	Disabled for maintenance.																																															
4	Pending due to error.																																															
5-7	Reserved.																																															
19	13 SMF22PNV	1	binary	Previous subsystem NVS status. The bit meanings are the same as SMF22SNV.																																												
20	14 SMF22SDS	2	binary	Device status: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Caching status <table border="0"> <tr> <td>00</td> <td>Active.</td> </tr> <tr> <td>10</td> <td>Deactivation pending.</td> </tr> <tr> <td>11</td> <td>Deactivated.</td> </tr> </table> </td> </tr> <tr> <td>2-3</td> <td>Fast write status <table border="0"> <tr> <td>00</td> <td>Allowed.</td> </tr> <tr> <td>10</td> <td>Deactivation pending.</td> </tr> <tr> <td>11</td> <td>Deactivated.</td> </tr> </table> </td> </tr> <tr> <td>4</td> <td>Primary of duplex pair.</td> </tr> <tr> <td>5</td> <td>Secondary of duplex pair.</td> </tr> <tr> <td>6-7</td> <td>Duplex pair status; for Multi-target PPRC, PPRC pair status for relationship 1 if primary. <table border="0"> <tr> <td>00</td> <td>Available.</td> </tr> <tr> <td>01</td> <td>Pending.</td> </tr> <tr> <td>10</td> <td>Failed duplex, originally on primary.</td> </tr> <tr> <td>11</td> <td>Failed duplex, originally not on primary.</td> </tr> </table> </td> </tr> <tr> <td>8-9</td> <td>Pinned data <table border="0"> <tr> <td>00</td> <td>No pinned data exists for device.</td> </tr> <tr> <td>01</td> <td>Pinned data exists for device, fast write not suspended.</td> </tr> <tr> <td>10</td> <td>Reserved.</td> </tr> <tr> <td>11</td> <td>Pinned data exists for device, fast write suspended.</td> </tr> </table> </td> </tr> <tr> <td>10-15</td> <td>Low-order 6 bits of CCA value of other device in duplex.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-1	Caching status <table border="0"> <tr> <td>00</td> <td>Active.</td> </tr> <tr> <td>10</td> <td>Deactivation pending.</td> </tr> <tr> <td>11</td> <td>Deactivated.</td> </tr> </table>	00	Active.	10	Deactivation pending.	11	Deactivated.	2-3	Fast write status <table border="0"> <tr> <td>00</td> <td>Allowed.</td> </tr> <tr> <td>10</td> <td>Deactivation pending.</td> </tr> <tr> <td>11</td> <td>Deactivated.</td> </tr> </table>	00	Allowed.	10	Deactivation pending.	11	Deactivated.	4	Primary of duplex pair.	5	Secondary of duplex pair.	6-7	Duplex pair status; for Multi-target PPRC, PPRC pair status for relationship 1 if primary. <table border="0"> <tr> <td>00</td> <td>Available.</td> </tr> <tr> <td>01</td> <td>Pending.</td> </tr> <tr> <td>10</td> <td>Failed duplex, originally on primary.</td> </tr> <tr> <td>11</td> <td>Failed duplex, originally not on primary.</td> </tr> </table>	00	Available.	01	Pending.	10	Failed duplex, originally on primary.	11	Failed duplex, originally not on primary.	8-9	Pinned data <table border="0"> <tr> <td>00</td> <td>No pinned data exists for device.</td> </tr> <tr> <td>01</td> <td>Pinned data exists for device, fast write not suspended.</td> </tr> <tr> <td>10</td> <td>Reserved.</td> </tr> <tr> <td>11</td> <td>Pinned data exists for device, fast write suspended.</td> </tr> </table>	00	No pinned data exists for device.	01	Pinned data exists for device, fast write not suspended.	10	Reserved.	11	Pinned data exists for device, fast write suspended.	10-15	Low-order 6 bits of CCA value of other device in duplex.
Bit	Meaning when set																																															
0-1	Caching status <table border="0"> <tr> <td>00</td> <td>Active.</td> </tr> <tr> <td>10</td> <td>Deactivation pending.</td> </tr> <tr> <td>11</td> <td>Deactivated.</td> </tr> </table>	00	Active.	10	Deactivation pending.	11	Deactivated.																																									
00	Active.																																															
10	Deactivation pending.																																															
11	Deactivated.																																															
2-3	Fast write status <table border="0"> <tr> <td>00</td> <td>Allowed.</td> </tr> <tr> <td>10</td> <td>Deactivation pending.</td> </tr> <tr> <td>11</td> <td>Deactivated.</td> </tr> </table>	00	Allowed.	10	Deactivation pending.	11	Deactivated.																																									
00	Allowed.																																															
10	Deactivation pending.																																															
11	Deactivated.																																															
4	Primary of duplex pair.																																															
5	Secondary of duplex pair.																																															
6-7	Duplex pair status; for Multi-target PPRC, PPRC pair status for relationship 1 if primary. <table border="0"> <tr> <td>00</td> <td>Available.</td> </tr> <tr> <td>01</td> <td>Pending.</td> </tr> <tr> <td>10</td> <td>Failed duplex, originally on primary.</td> </tr> <tr> <td>11</td> <td>Failed duplex, originally not on primary.</td> </tr> </table>	00	Available.	01	Pending.	10	Failed duplex, originally on primary.	11	Failed duplex, originally not on primary.																																							
00	Available.																																															
01	Pending.																																															
10	Failed duplex, originally on primary.																																															
11	Failed duplex, originally not on primary.																																															
8-9	Pinned data <table border="0"> <tr> <td>00</td> <td>No pinned data exists for device.</td> </tr> <tr> <td>01</td> <td>Pinned data exists for device, fast write not suspended.</td> </tr> <tr> <td>10</td> <td>Reserved.</td> </tr> <tr> <td>11</td> <td>Pinned data exists for device, fast write suspended.</td> </tr> </table>	00	No pinned data exists for device.	01	Pinned data exists for device, fast write not suspended.	10	Reserved.	11	Pinned data exists for device, fast write suspended.																																							
00	No pinned data exists for device.																																															
01	Pinned data exists for device, fast write not suspended.																																															
10	Reserved.																																															
11	Pinned data exists for device, fast write suspended.																																															
10-15	Low-order 6 bits of CCA value of other device in duplex.																																															
22	16 SMF22PDS	2	binary	Device previous status. The bit meanings are the same as SMF22SDS.																																												
24	18 SMF22ADS	1	binary	Additional device status: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Reserved.</td> </tr> <tr> <td>2</td> <td>Data exists in failed MVS for the devices.</td> </tr> <tr> <td>3-7</td> <td>Reserved, and set to zero.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-1	Reserved.	2	Data exists in failed MVS for the devices.	3-7	Reserved, and set to zero.																																				
Bit	Meaning when set																																															
0-1	Reserved.																																															
2	Data exists in failed MVS for the devices.																																															
3-7	Reserved, and set to zero.																																															

Offsets	Name	Length	Format	Description																		
25	19 SMF22SMT	1	binary	Multi-target PPRC status: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-1</td> <td>PPRC pair status rel 1: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.</td> </tr> <tr> <td>2-3</td> <td>PPRC pair status rel 2: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.</td> </tr> <tr> <td>4-5</td> <td>PPRC pair status rel 3: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.</td> </tr> <tr> <td>6-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0-1	PPRC pair status rel 1: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.	2-3	PPRC pair status rel 2: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.	4-5	PPRC pair status rel 3: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.	6-7	Reserved								
Bit	Meaning when set																					
0-1	PPRC pair status rel 1: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.																					
2-3	PPRC pair status rel 2: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.																					
4-5	PPRC pair status rel 3: 00 PPRC pair available. 01 PPRC pair pending. 10 Reserved. 11 PPRC suspended.																					
6-7	Reserved																					
26	1A SMF22PAD	1	binary	Device previous status. The bit meanings are the same as for SMF22ADS.																		
27	1B SMF22PMT	1	binary	Previous multi-target PPRC status. The bit meanings are the same as SMF22SMT.																		
28	1C SMF22CYS	1	binary	State of copy services functions: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>XRC active for the device.</td> </tr> <tr> <td>1</td> <td>PPRC active for the device.</td> </tr> <tr> <td>2</td> <td>PPRC primary or secondary volume: 1 Volume is PPRC secondary. 0 Volume is PPRC primary.</td> </tr> <tr> <td>3</td> <td>Volume in XRC suspended or quiesced state.</td> </tr> <tr> <td>4</td> <td>PPRC volume is State Change pending.</td> </tr> <tr> <td>5</td> <td>Concurrent Copy is active.</td> </tr> <tr> <td>6</td> <td>Flash Copy is active.</td> </tr> <tr> <td>7</td> <td>Reserved and set to zero.</td> </tr> </table>	Bit	Meaning when set	0	XRC active for the device.	1	PPRC active for the device.	2	PPRC primary or secondary volume: 1 Volume is PPRC secondary. 0 Volume is PPRC primary.	3	Volume in XRC suspended or quiesced state.	4	PPRC volume is State Change pending.	5	Concurrent Copy is active.	6	Flash Copy is active.	7	Reserved and set to zero.
Bit	Meaning when set																					
0	XRC active for the device.																					
1	PPRC active for the device.																					
2	PPRC primary or secondary volume: 1 Volume is PPRC secondary. 0 Volume is PPRC primary.																					
3	Volume in XRC suspended or quiesced state.																					
4	PPRC volume is State Change pending.																					
5	Concurrent Copy is active.																					
6	Flash Copy is active.																					
7	Reserved and set to zero.																					
29	1D SMF22PCY	1	binary	State of copy services functions previous (the bit meanings are the same as SMF22CYS).																		
30	1E SMF22CYL	4	binary	Device high cylinders.																		
34	22 SMF22CYP	4	binary	Previous device high cylinders.																		

Storage Element Extension

The following section contains the storage flags, storage identifier, and contiguous storage information.

This section is generated in place of the Storage Section (ID= 3) when the storage frame number, reported in field SMF22XGL, is larger than a full word (X'FFFFFFFF'). W

Offsets	Name	Length	Format	Description								
0	0 SMF22XFL	1	binary	Storage flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Central storage frames are interleaved</td> </tr> <tr> <td>1</td> <td>Real storage status could not be obtained.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Central storage frames are interleaved	1	Real storage status could not be obtained.	2-7	Reserved.
Bit	Meaning when set											
0	Central storage frames are interleaved											
1	Real storage status could not be obtained.											
2-7	Reserved.											
1	1 SMF22TXD	1	binary	Storage section identification (this field is always 12).								
2	2 SMF22XGL	8	binary	Block number of the first online frame reported in this storage element.								

Record type 22

Offsets	Name	Length	Format	Description
10	A *	4		Reserved
14	E SMF22XPG	4	binary	The number of online frames reported in this storage element.

I/O Configuration Change Element

The following maps the I/O configuration change element which is only contained in an ACTIVATE record event (SMF22IND=9) for processors that support dynamic I/O. You can perform software-only configuration changes that write type 22 records on processors not supporting dynamic I/O, but the configuration change elements only contain software entries. In that case, the device (except SMF22DVN), physical control unit, and CHPID entries all contain zeros.

The I/O configuration change element consists of a header section, followed by an array containing a variable number of entries. Each entry identifies an I/O component (device, control unit, or CHPID) that has been added, deleted, or modified.

I/O Configuration Change Element Header Section

Offsets	Name	Length	Format	Description								
0	0	1		Reserved.								
1	1 SMF22OID	1	binary	I/O configuration change element ID (this field is always 11).								
2	2 SMF22R#	1	binary	Record number of this record.								
3	3 SMF22TR	1	binary	Total number of records for this I/O configuration change. For example, if there are 3 records total, and this record is the first, SMF22R# would contain 1, and SMF22TR would contain 3 (indicating record 1 of 3).								
4	4 SMF22OFF	2	binary	Offset of first entry in this record.								
6	6 SMF22ELN	2	binary	Length of each entry in the array of I/O configuration change elements.								
8	8 SMF22T#E	4	binary	Total number of entries for this I/O configuration change.								
12	C SMF22#E	4	binary	Number of entries in this record.								
16	10 SMF22FLS	1	binary	Flags <table border="1" data-bbox="812 1291 1380 1533"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Requestor of the ACTIVATE specified the SOFT option. This indicates that only software configuration changes are to be made.</td> </tr> <tr> <td>1</td> <td>Requestor of the ACTIVATE specified the FORCE option.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Requestor of the ACTIVATE specified the SOFT option. This indicates that only software configuration changes are to be made.	1	Requestor of the ACTIVATE specified the FORCE option.	2-7	Reserved.
Bit	Meaning when set											
0	Requestor of the ACTIVATE specified the SOFT option. This indicates that only software configuration changes are to be made.											
1	Requestor of the ACTIVATE specified the FORCE option.											
2-7	Reserved.											
17	11	1		Reserved.								
18	12 SMF22IDN	44	EBCDIC	Name of IODF data set that contains the new I/O configuration definition.								
62	3E	4		Reserved.								
66	42 SMF22EDT	2	EBCDIC	ID of the eligible device table (EDT) or '***' if the new EDT could not be rebuilt during dynamic activation of the I/O configuration.								
68	44 SMF22CFI	8	EBCDIC	Operating system configuration ID for new configuration.								
76	4C SMF22HCT	64	binary	Hardware configuration token that represents the new I/O configuration.								
140	8C SMF22#UA	4	binary	Number of unit control blocks (UCB) added for this I/O configuration change.								

Offsets	Name	Length	Format	Description
144	90 SMF22#UD	4	binary	Number of unit control blocks (UCB) deleted for this I/O configuration change.
148	94 SMF22FNC	1	binary	Activate function requested. See Note 1 on page 248 for possible values of this field.
149	95	3		Reserved.

Entry Array in the I/O Configuration Change Element Section

Offsets	Name	Length	Format	Description																		
0	0 SMF22EHD	4	EBCDIC	Entry header.																		
0	0 SMF22ETY	1	binary	Entry type. See Note 2 on page 248 for possible values of this field.																		
1	1 SMF22ERQ	1	binary	Entry request. For the possible values of this field, see Note 3 on page 248, 4 on page 248, 5 on page 249, 6 on page 249, and 7 on page 249.																		
2	2 SMF22EFL	1	binary	Entry flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Hardware change</td> </tr> <tr> <td>1</td> <td>Software change</td> </tr> <tr> <td>2</td> <td>Indicates that this entry was created because an installation-static device is being changed to a dynamic device. This entry represents the delete request (SMF22ERQ=SMF22DDD). There will be another entry that represents the add request.</td> </tr> <tr> <td>3</td> <td>Indicates whether the UCB for the device is connected to a subchannel. Valid only when the entry type is "device" (SMFETY=SMF22DEV) and entry request is "add device" (SMFERQ=SMF22DAD).</td> </tr> <tr> <td>4</td> <td>Indicates that this entry represents a change affecting the current logical channel subsystem (LCSS).</td> </tr> <tr> <td>5</td> <td>Reserved.</td> </tr> <tr> <td>6</td> <td>Indicates that the activating partition will lose access to the device because either the device is deleted from the configuration or the activating partition is to be removed from the candidate list of the device.</td> </tr> <tr> <td>7</td> <td>Indicates that this entry was created because the candidate list of the device was changed. When SMF22ETY=SMF22DEV, SMF22ERQ=SMF22DDD and SMF22ECC is on, one or more partitions were deleted from the device candidate list. When SMF22ETY=SMF22DEV, SMF22ERQ=SMF22DAD and SMF22ECC is on, one or more partitions were added to the device candidate list.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Hardware change	1	Software change	2	Indicates that this entry was created because an installation-static device is being changed to a dynamic device. This entry represents the delete request (SMF22ERQ=SMF22DDD). There will be another entry that represents the add request.	3	Indicates whether the UCB for the device is connected to a subchannel. Valid only when the entry type is "device" (SMFETY=SMF22DEV) and entry request is "add device" (SMFERQ=SMF22DAD).	4	Indicates that this entry represents a change affecting the current logical channel subsystem (LCSS).	5	Reserved.	6	Indicates that the activating partition will lose access to the device because either the device is deleted from the configuration or the activating partition is to be removed from the candidate list of the device.	7	Indicates that this entry was created because the candidate list of the device was changed. When SMF22ETY=SMF22DEV, SMF22ERQ=SMF22DDD and SMF22ECC is on, one or more partitions were deleted from the device candidate list. When SMF22ETY=SMF22DEV, SMF22ERQ=SMF22DAD and SMF22ECC is on, one or more partitions were added to the device candidate list.
Bit	Meaning when set																					
0	Hardware change																					
1	Software change																					
2	Indicates that this entry was created because an installation-static device is being changed to a dynamic device. This entry represents the delete request (SMF22ERQ=SMF22DDD). There will be another entry that represents the add request.																					
3	Indicates whether the UCB for the device is connected to a subchannel. Valid only when the entry type is "device" (SMFETY=SMF22DEV) and entry request is "add device" (SMFERQ=SMF22DAD).																					
4	Indicates that this entry represents a change affecting the current logical channel subsystem (LCSS).																					
5	Reserved.																					
6	Indicates that the activating partition will lose access to the device because either the device is deleted from the configuration or the activating partition is to be removed from the candidate list of the device.																					
7	Indicates that this entry was created because the candidate list of the device was changed. When SMF22ETY=SMF22DEV, SMF22ERQ=SMF22DDD and SMF22ECC is on, one or more partitions were deleted from the device candidate list. When SMF22ETY=SMF22DEV, SMF22ERQ=SMF22DAD and SMF22ECC is on, one or more partitions were added to the device candidate list.																					
3	3 SMF22ECSS	1	binary	Logical channel subsystem (LCSS) ID																		
4	4 SMF22ESI	28	EBCDIC	Entry type specific information follows.																		

Device Entry Section (SMF22ETY=SMF22DEV or SMF22MDEV or SMF22SDEV)

For I/O devices in subchannel set 0, use SMF22ETY=SMF22DEV. For I/O devices in subchannel set 1, use SMF22ETY=SMF22SDEV.

Offsets	Name	Length	Format	Description
0	0 SMF22DVN	2	binary	Device number.

Record type 22

Offsets	Name	Length	Format	Description
2	2 SMF22DCM	1	binary	Mask of channel path IDs (CHPID) contained in SMF22DCH that were added to or deleted from this device. Valid only under one of the following conditions (zero otherwise): Entry request SMF22ERQ value Modify to add CHPIDs SMF22DAH Modify to remove CHPIDs SMF22DDH
3	3 SMF22DPM	1	binary	Mask of physical control unit numbers in SMF22DPC that were added to or deleted from this device. Valid only under one of the following conditions (zero otherwise): Entry request SMF22ERQ value Modify to add CUs SMF22DAP Modify to remove CUs SMF22DDP
4	4 SMF22DCH	8	EBCDIC	Array of one-byte elements that represent channel path IDs (CHPID) that were added to or deleted from this device. Valid only under one of the following conditions (zero otherwise): Entry request SMF22ERQ value Modify to add CHPIDs SMF22DAH Modify to remove CHPIDs SMF22DDH
12	C SMF22DPC	16	EBCDIC	Array of two-byte elements that represent physical control unit numbers that were added to or deleted from this device. Valid only under one of the following conditions (zero otherwise): Entry request SMF22ERQ value Modify to add CUs SMF22DAP Modify to remove CUs SMF22DDP

Optional device expansion entry (SMF22ETY=SMF22DEVE)

This entry will immediately follow an SMF22SDEV entry. It is provided to fully qualify the device with the subchannel set ID when necessary.

Offsets	Name	Length	Format	Description
0	0 SMF22SSID	1	binary	Subchannel set ID
1	1 SMF22DCM	27	char	Reserved.

Physical Control Unit Entry Section (SMF22ETY=SMF22PCU or SMF22MP)

Offsets	Name	Length	Format	Description
0	0 SMF22PCN	2	binary	Physical control unit number.
2	2	1		Reserved.

Offsets	Name	Length	Format	Description
3	3 SMF22PCM	1	binary	Mask of channel path IDs in SMF22PCH that were added to or deleted from this control unit. Valid only under one of the following conditions (zero otherwise): Entry request SMF22ERQ value Modify to add CHPIDs SMF22PAH Modify to remove CHPIDs SMF22PDH
4	4 SMF22PCH	8	EBCDIC	Array of 1-byte elements that represent channel path IDs (CHPID) that were added to or deleted from this control unit. Valid only under one of the following conditions (zero otherwise): Entry request SMF22ERQ value Modify to add CHPIDs SMF22PAH Modify to remove CHPIDs SMF22PDH
12	C SMF22PUA	4	EBCDIC	Range of unit addresses that were added to or deleted from this control unit. Valid only under one of the following conditions (zero otherwise): Entry request SMF22ERQ value Modify to add unit address SMF22PAU range Modify to remove unit address SMF22PDU range
16	10	1		Reserved.
17	11 SMF22PUC	1	binary	Count of unit addresses.
18	12	1		Reserved.
19	13 SMF22PSU	1	binary	Starting unit address.
20	14	8		Reserved.

CHPID entry section (SMF22ETY=SMF22CH)

Offsets	Name	Length	Format	Description
0	0 SMF22CCH	1	binary	Channel path ID (CHPID).
1	1	27		Reserved.

Logical Partition Entry Section (SMF22ETY=SMF22LP)

Offsets	Name	Length	Format	Description
0	0 SMF22LP_Name	8	EBCDIC	Logical partition name.
8	8 SMF22LP_MIFID	8	binary	Multiple Image Facility (MIF) identifier.

PCI Function Entry Section (SMF22ETY=SMF22PF)

Offsets	Name	Length	Format	Description
0	0 SMF22PF_PFID	4	binary	PCIe function ID.

Continuation Section

If this record is filled (length exceeds 32,756 bytes), this section is present to indicate the next record is a continuation of this one.

Offsets	Name	Length	Format	Description
0	0 SMF22L99	1	binary	Length of this section.
1	1 SMF22CON	1	binary	Identifies next record as a continuation (this field is always 99).

Note:

- The following constants identify the function in **SMF22FNC**.

Constant	Value	Description
SMF22ACT	X'01'	Activate function.
SMF22PCU	X'02'	Recover function.

- The following constants identify the entry type in **SMF22ETY**.

Constant	Value	Description
SMF22DEV SMF22SDEV SMF22DEVE	X'01'	Device entry.
SMF22PCU	X'02'	Control unit entry.
SMF22CH	X'03'	Channel path ID (CHPID) entry.
SMF22MDEV	X'04'	Coupling facility device entry.
SMF22MP	X'05'	Coupling facility control unit.
SMF22LP	X'06'	Logical partition entry.
SMF22PF	X'09'	PCIe function

- The following constants define **SMF22ERQ** when the entry type is “device” (SMF22ETY equals SMF22DEV or SMF22SDEV).

Constant	Value	Description
SMF22DDD	X'01'	Delete device.
SMF22DAD	X'02'	Add device.
SMF22DDH	X'03'	Modify to remove channel path IDs (CHPID).
SMF22DAH	X'04'	Modify to add channel path IDs (CHPID).
SMF22DDP	X'05'	Modify to remove CUs.
SMF22DAP	X'06'	Modify to add CUs.
SMF22DMC	X'07'	Modify subchannel characteristics (illegal status detection, and/or interface timeout).
SMF22DMP	X'08'	Modify preferred path.

- The following constants define **SMF22ERQ** when the entry type is “control unit” (SMF22ETY equals SMF22PCU).

Constant	Value	Description
SMF22PDP	X'01'	Delete control unit.
SMF22PAP	X'02'	Add control unit.
SMF22PDH	X'03'	Modify to delete channel path IDs (CHPID).
SMF22PAH	X'04'	Modify to add channel path IDs (CHPID).
SMF22PDU	X'05'	Modify to delete unit address range.

Constant	Value	Description
SMF22PAU	X'06'	Modify to add unit address range.
SMF22PNM	X'07'	Modify to change the number of managed CHPIDs.
SMF22PDM	X'08'	Modify to delete a managed CHPID.
SMF22PAS	X'09'	Modify to delete a managed CHPID in order to add a static CHPID.

5. The following constants define **SMF22ERQ** when the entry type is “CHPID” (SMF22ETY equals SMF22CH).

Constant	Value	Description
SMF22CDH	X'01'	Delete channel path ID (CHPID).
SMF22CAH	X'02'	Add channel path ID (CHPID).
SMF22CDI	X'03'	Modify to delete partitions from the channel path candidate list.
SMF22CAI	X'04'	Modify to add partitions to the channel path candidate list.

6. The following constants define **SMF22ERQ** when the entry type is “logical partition” (SMF22ETY equals SMF22LP).

Constant	Value	Description
SMF22LDEL	X'01'	Delete logical partition.
SMF22LADD	X'02'	Add logical partition.

7. The following constants define **SMF22ERQ** when the entry type is “PCIe FUNCTION” (SMF22ETY equals SMF22PF).

Constant	Value	Description
SMF22FDEL	X'01'	Delete PCIe function.
SMF22FADD	X'02'	Add PCIe function.
SMF22FDI	X'03'	Modify to delete access for one or more logical partitions to the specified PCIe function.
SMF22FAI	X'04'	Modify to add access for one or more logical partitions to the specified PCIe function.

Record Type 23 (17) — SMF Status

Record type 23 is written at the interval specified by the STATUS keyword in SMFPRMxx. It records SMF statistics collected during the reporting interval.

Record environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Record type 23

Offsets	Name	Length	Format	Description								
0	0 SMF23LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF23SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF23FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for details.)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)											
7	Reserved.											
5	5 SMF23RTY	1	binary	Record type 23 (X'17').								
6	6 SMF23TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved to the SMF buffer.								
10	A SMF23DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF23SID	4	EBCDIC	System identification (from the SID parameter).								
18	12	2		Reserved.								
20	14 SMF23POF	4	binary	Offset to product section from start of record, including the record descriptor word (RDW).								
24	18 SMF23PLN	2	binary	Length of product section.								
26	1A SMF23PON	2	binary	Number of product sections.								
28	1C SMF23SOF	4	binary	Offset to system section from start of record, including the record descriptor word (RDW).								
32	20 SMF23SLN	2	binary	Length of system section.								
34	22 SMF23SON	2	binary	Number of system sections.								
36	24 SMF23ROF	4	binary	Offset to SMF statistics section from start of record, including the record descriptor word (RDW).								
40	28 SMF23RLN	2	binary	Length of SMF statistics section.								
42	2A SMF23RON	2	binary	Number of SMF statistics sections.								
44	2C SMF23LOF	4	binary	Offset to SMF logstream statistics section.								
48	30 SMF23LLN	2	binary	Length of SMF logstream statistics section.								
50	32 SMF23LON	2	binary	Number of SMF logstream statistics sections.								
52	34 SMF23NOF	4	binary	Offset to spin lock instrumentation data section from start of record, including the record descriptor word (RDW).								
56	38 SMF23NLN	2	binary	Length of spin lock instrumentation data section.								
58	3A SMF23NON	2	binary	Number of spin lock instrumentation data sections.								
60	3C SMF23BOF	4	binary	Offset to bind break instrumentation data section from start of record, including the record descriptor word (RDW).								
64	40 SMF23BLN	2	binary	Length of bind break instrumentation data section.								
66	42 SMF23BON	2	binary	Number of bind break instrumentation data sections.								

Product section

Offsets	Name	Length	Format	Description
0	0 SMF23TID	2	binary	Subtype identification — '0'.
2	2 SMF23RVN	2	character	Record version number — '02'.
4	4 SMF23PNM	8	EBCDIC	Product name — 'SMF'.

System section

Offsets	Name	Length	Format	Description
0	0 SMF23INT	6	EBCDIC	Length of measurement interval.
6	6 SMF23FLS	4	EBCDIC	Operating system release level.
10	A SMF23OSL	8	character	MVS product name (taken from CVTPRODN).
18	12 SMF23TOD	8	binary	Time and date that the interval ended for the STATUS function, in time-of-day (TOD) format, an unsigned 64-bit fixed-point number where bit 51 is equivalent to 1 microsecond. If you requested synchronized interval recording for SMF statistics, a field in other records, similar to this field, contains the same time so you can compare this record with other records generated at the end of the same interval.
26	1A SMF23SYN	8	EBCDIC	System name (from the SYSNAME parameter in the IEASYSxx parmlib member).
34	22 SMF23SYP	8	EBCDIC	Sysplex name (from the SYSPLEX parameter in the COUPLExx parmlib member).

SMF statistics section

Offsets	Name	Length	Format	Description
0	0 SMF23BFW	4	binary	Number of buffers written.
4	4 SMF23BFQ	4	binary	Maximum number of buffers used at one time.
8	8 SMF23SUS	4		Reserved.
12	C SMF23RCW	4	binary	Number of records written.
16	10 SMF23BFA	4	binary	Amount of each buffer allocation request.
20	14 SMF23BFT	4	binary	Total amount of buffer storage currently allocated (and recently used).
24	18 SMF23BFH	4	binary	'High water mark' of buffer storage allocation.
28	1C SMF23BFM	4	binary	Buffer storage maximum in effect (BUFSIZMAX binary value).
32	20 SMF23BFL	4	binary	Buffer storage usage warning level in effect (BUFUSEWARN binary value).

Record type 23

Offsets	Name	Length	Format	Description
36	24 SMF23SFG	4	binary	<p>Statistics section flags.</p> <p>Bit Meaning when set</p> <p>0 When bit 0 is on, it indicates that a 4-byte field, FIXED(32), is used for the accumulator for SMF23NGR. For example, field wraps at four gigabytes.</p> <p>When bit 0 is off, it indicates that an 8-byte field, FIXED(64), is used for the accumulator for SMF23NGR.</p> <p>1 When bit 1 is on, it indicates that a 4-byte field, FIXED(32), is used for the accumulator for SMF23PBG. For example, field wraps at four gigabytes.</p> <p>When bit 1 is off, it indicates that an 8-byte field, FIXED(64), is used for the accumulator for SMF23PBG.</p> <p>2 When bit 2 is on, it indicates that a 4-byte field, FIXED(32), is used for the accumulator for SMF23NFR. For example, field wraps at four gigabytes.</p> <p>When bit 2 is off, it indicates that an 8-byte field, FIXED(64), is used for the accumulator for SMF23NFR.</p> <p>3 When bit 3 is on, it indicates that a 4-byte field, FIXED(32), is used for the accumulator for SMF23PFX. For example, field wraps at four gigabytes.</p> <p>When bit 3 is off, it indicates that an 8-byte field, FIXED(64), is used for the accumulator for SMF23PFX.</p> <p>4 When bit 4 is on, it indicates that a 4-byte field, FIXED(32), is used for the accumulator for SMF231RF. For example, field wraps at four gigabytes.</p> <p>When bit 4 is off, it indicates that an 8-byte field, FIXED(64), is used for the accumulator for SMF231RF.</p>

Offsets	Name	Length	Format	Description
36	24 SMF23SFG (continued)	4	binary	Continued: Bit Meaning when set 5 When bit 5 is on, it indicates that a 4-byte field, FIXED(32), is used for the accumulator for SMF23NRF. For example, field wraps at four gigabytes. When bit 5 is off, it indicates that an 8-byte field, FIXED(64), is used for the accumulator for SMF23NRF. 6 When bit 6 is on, it indicates that 4-byte fields, FIXED(32), are used for the accumulators (one accumulator for each CPU) for SMF23NIO . For example, value decreases from the last interval value, if one of the accumulators wrap at four gigabytes. When bit 6 is off, it indicates that 8-byte fields, FIXED(64), are used for the accumulators (one accumulator for each CPU) for SMF23NIO. 7 When bit 7 is on, it indicates that 4-byte fields, FIXED(32), are used for the accumulators (one accumulator for each CPU) for SMF23TCB. For example, value decreases from the last interval value, if one of the accumulators wrap at four gigabytes. When bit 7 is off, it indicates that 8-byte fields, FIXED(64), are used for the accumulators (one accumulator for each CPU) for SMF23TCB. 8 When bit 8 is on, it indicates that 4-byte fields, FIXED(32), are used for the accumulators (one accumulator for each CPU) for SMF23SRB. For example, value decreases from the last interval value, if one of the accumulators wrap at four gigabytes. When bit 8 is off, it indicates that 8-byte fields, FIXED(64), are used for the accumulators (one accumulator for each CPU) for SMF23SRB. 9–31 Reserved. Note: For bits 0–8, all accumulators are never reset for the life of the system.
40	28 SMF23NGR	8	binary	Total number of getmain requests that have been issued. For more details, see the explanation of SMF23SFG bit 0.
48	30 SMF23PBG	8	binary	Total number of pages backed during getmain requests that have been issued. For more details, see the explanation of SMF23SFG bit 1.
56	38 SMF23NFR	8	binary	Total number of fix requests that have been issued for the storage whose address space is below two gigabytes. For more details, see the explanation of SMF23SFG bit 2.
64	40 SMF23PFX	8	binary	Total number of frames that were requested to be fixed for the storage whose address space is below two gigabytes. For more details, see the explanation of SMF23SFG bit 3.

Record type 23

Offsets	Name	Length	Format	Description
72	48 SMF231RF	8	binary	Total number of first reference faults. For more details, see the explanation of SMF23SFG bit 4.
80	50 SMF23NRF	8	binary	Total number of non-first reference faults. For more details, see the explanation of SMF23SFG bit 5.
88	58 SMF23NIO	8	binary	Total number of I/Os for this interval. For more details, see the explanation of SMF23SFG bit 6.
96	60 SMF23TCB	8	binary	Total number of unlocked TCB dispatches. For more details, see the explanation of SMF23SFG bit 7.
104	68 SMF23SRB	8	binary	Total number of SRB dispatches. For more details, see the explanation of SMF23SFG bit 8.
112	70 SMF23NGD	4	binary	Total number of getmain requests that have been issued for this interval. For the cumulative total, see the explanation of SMF23NGR.
116	74 SMF23PBD	4	binary	Total number of pages backed during GETMAIN requests that have been issued for this interval. For the cumulative total, see the explanation of SMF23PBG.
120	78 SMF23NFD	4	binary	Total number of fix requests that have been issued for storage (address space only) below two gigabytes for this interval. For the cumulative total, see the explanation of SMF23NFR.
124	7C SMF23PFD	4	binary	Total number of frames that were requested to be fixed for storage (address space only) below two gigabytes for this interval. For the cumulative total, see the explanation of SMF23PFX.
128	80 SMF231RD	4	binary	Total number of first reference faults taken for this interval. For the cumulative total, see the explanation of SMF231RF.
132	84 SMF23NRD	4	binary	Total number of non-first reference faults taken for this interval. For the cumulative total, see the explanation of SMF23NRF.
136	88 SMF23NID	8	binary	Total number of I/Os for this interval. For the cumulative total, see the explanation of SMF23NIO.
144	90 SMF23TCD	8	binary	Total number of unlocked TCB dispatches for this interval. For the cumulative total, see the explanation of SMF23TCB.
152	98 SMF23SRD	8	binary	Total number of SRB dispatches for this interval. For the cumulative total, see the explanation of SMF23SRB.

Logstream statistics section

Offsets	Name	Length	Format	Description
0	0 SMF23LSL	2	binary	Length of the logstream name in SMF23LSN.
2	2 SMF23LSN	26	character	Logstream name.
28	1C SMF23LFA	4	binary	Amount of each buffer allocation.
32	20 SMF23LFT	4	binary	Total amount of buffer storage currently used (in bytes).
36	24 SMF23LFH	4	binary	Binary high water mark of the buffer allocation (in bytes).
40	28 SMF23LFM	4	binary	Buffer storage maximum in effect (DSPSIZMAX value in bytes).

Offsets	Name	Length	Format	Description														
44	2C SMF23LFL	4	binary	Binary buffer warning level in effect (BUFUSEWARN binary value).														
48	30 SMF23LFG	4	binary	<p>Various flags:</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>When on, the buffer warning level in effect was from the global option.</td> </tr> <tr> <td>1</td> <td>When on, the buffer size (DSPSIZMAX) in effect was from the global option.</td> </tr> <tr> <td>2</td> <td>When on, compression is requested for records written to this log stream by SMF configuration. When off, compression is not requested.</td> </tr> <tr> <td>3</td> <td>When on, compression is prepared. This log stream is ready to compress records, or in other words, hardware is capable of using zEDC, and all setup for compression succeeded. When off, hardware is not capable of using zEDC or compression setup failed. See message IFA730I.</td> </tr> <tr> <td>4</td> <td>When on, compression is available. The last use of zEDC was successful, and it indicated zEDC Express features were available to satisfy compression requests. When off, at the last request, zEDC Express features were not available to satisfy compression requests.</td> </tr> <tr> <td>5</td> <td>The current PERMFIX value for this log stream is the global PERMFIX value. In the SMF configuration, a log stream PERMFIX value was not specified.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	When on, the buffer warning level in effect was from the global option.	1	When on, the buffer size (DSPSIZMAX) in effect was from the global option.	2	When on, compression is requested for records written to this log stream by SMF configuration. When off, compression is not requested.	3	When on, compression is prepared. This log stream is ready to compress records, or in other words, hardware is capable of using zEDC, and all setup for compression succeeded. When off, hardware is not capable of using zEDC or compression setup failed. See message IFA730I.	4	When on, compression is available. The last use of zEDC was successful, and it indicated zEDC Express features were available to satisfy compression requests. When off, at the last request, zEDC Express features were not available to satisfy compression requests.	5	The current PERMFIX value for this log stream is the global PERMFIX value. In the SMF configuration, a log stream PERMFIX value was not specified.
Bit	Meaning when set																	
0	When on, the buffer warning level in effect was from the global option.																	
1	When on, the buffer size (DSPSIZMAX) in effect was from the global option.																	
2	When on, compression is requested for records written to this log stream by SMF configuration. When off, compression is not requested.																	
3	When on, compression is prepared. This log stream is ready to compress records, or in other words, hardware is capable of using zEDC, and all setup for compression succeeded. When off, hardware is not capable of using zEDC or compression setup failed. See message IFA730I.																	
4	When on, compression is available. The last use of zEDC was successful, and it indicated zEDC Express features were available to satisfy compression requests. When off, at the last request, zEDC Express features were not available to satisfy compression requests.																	
5	The current PERMFIX value for this log stream is the global PERMFIX value. In the SMF configuration, a log stream PERMFIX value was not specified.																	

SMF configuration parameter PERMFIX defines the maximum storage SMF can keep registered to zEDC. The following fields represent amounts of storage registered to zEDC for this log stream.

Offsets	Name	Length	Format	Description
52	34 SMF23PFT	4	binary	Total storage SMF is currently using for zEDC for this log stream. Value does not account for 1MB needed by each log stream using zEDC. Value may be up to 2MB greater than the defined PERMFIX value depending on usage.
56	38 SMF23PFM	4	binary	Max storage SMF can use for zEDC for this log stream. Configuration-defined PERMFIX value.
60	3C SMF23PFH	4	binary	High water mark of storage SMF has used for zEDC for this log stream connection.
64	40 SMF23CWN	4	binary	Number of log blocks written containing compressed records during this interval.
68	44 SMF23NCN	4	binary	Number of log blocks written containing non-compressed records during this interval.
72	48 SMF23BBC	8	binary	zEDC uncompressed bytes total. For logstreams with compressed data, this field contains the total number of uncompressed bytes that zEDC successfully compressed during the interval. For logstreams with no compressed data, this field contains zeros.

Record type 23

Offsets	Name	Length	Format	Description
80	50 SMF23BAC	8	binary	zEDC compressed bytes total. For logstreams with compressed data, this field contains the total number of compressed bytes that were written to the logstream during the interval. For logstreams with no compressed data, this field contains zeros.

Spin lock instrumentation section

Offsets	Name	Length	Format	Description
0	0 SMF23SPN	*	binary	For internal use only.

Bind break instrumentation section

Offsets	Name	Length	Format	Description
0	0 SMF23BND	*	binary	For internal use only.

Record Type 24 (18) — JES2 Spool Offload

Record type 24 is written whenever a job or SYSOUT data set is transmitted to or received from an offload data set. JES2 writes one type 24 record for each pre-processing job that is transmitted to an offload data set or received back to spool. Because one type 24 record is written for each SYSOUT data set header that is transmitted or received, multiple type 24 records can be expected for each post-processing job.

This record identifies the name, time and date of each job that has been transmitted or received. It includes specific information about jobs in a record subtype. For jobs not yet run, it reports job-related information such as job class and system affinity in both the job selection criteria section and in the system affinity section. For jobs that have already run, it reports information about SYSOUT data sets such as output group id and forms name in the SYSOUT selection criteria section. Record type 24 never contains both the job selection criteria section and the SYSOUT selection criteria section.

This record can be used with the subtype selectivity function. Refer to “SYS and SUBSYS with TYPE and NOTYPE — Selecting subtypes for SMF recording” on page 70 for a description of subtype selectivity.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number) that locate the other sections on the record.

This triplet information should be checked prior to accessing a section of the record. All three fields being non-zero mean that the section exists on the record; conversely any of the fields being zero indicates that the section does not exist on the record. The ‘number’ triplet field is the primary indication of the existence of the field.

Offsets	Name	Length	Format	Description										
0	0 SMF24LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.										
2	2 SMF24SEG	2	binary	Segment descriptor (see record length field).										
4	4 SMF24FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.		
Bit	Meaning when set													
0-2	Reserved													
3-6	Version indicators*													
7	Reserved.													
5	5 SMF24RTY	1	binary	Record type 24 (X'18').										
6	6 SMF24TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.										
10	A SMF24DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.										
14	E SMF24SID	4	EBCDIC	System identification (from the SID parameter).										
18	12 SMF24SSI	4	EBCDIC	Subsystem identification.										
22	16 SMF24SUB	2	binary	Record subtype <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Job transmitted</td> </tr> <tr> <td>2</td> <td>Job received</td> </tr> <tr> <td>3</td> <td>SYSOUT transmitted</td> </tr> <tr> <td>4</td> <td>SYSOUT received.</td> </tr> </tbody> </table>	Value	Meaning	1	Job transmitted	2	Job received	3	SYSOUT transmitted	4	SYSOUT received.
Value	Meaning													
1	Job transmitted													
2	Job received													
3	SYSOUT transmitted													
4	SYSOUT received.													
24	18 SMF24NTR	2	binary	Number of triplets. A triplet is a set of offsets/length/numbers values that define a section of the record.										
26	1A SMF24RSV	2		Reserved.										
28	1C SMF24OPS	4	binary	Offset to product section.										
32	20 SMF24LPS	2	binary	Length of product section.										
34	22 SMF24NPS	2	binary	Number of product sections.										
36	24 SMF24OGN	4	binary	Offset to general sections.										
40	28 SMF24LGN	2	binary	Length of general section.										
42	2A SMF24NGN	2	binary	Number of general sections.										
44	2C SMF24OSP	4	binary	Offset to job or SYSOUT selection criteria section.										
48	30 SMF24LSP	2	binary	Length of job or SYSOUT selection criteria section.										
50	32 SMF24NSP	2	binary	Number of job or SYSOUT selection criteria sections.										
52	34 SMF24OSW	4	binary	Offset to enhanced SYSOUT support (ESS) section.										
56	38 SMF24LSW	2	binary	Length of enhanced SYSOUT support (ESS) section.										
58	3A SMF24NSW	2	binary	Number of enhanced SYSOUT support (ESS) section.										
60	3C SMF24OSA	4	binary	Offset to system affinity section.										
64	40 SMF24LSA	2	binary	Length of system affinity section.										
66	42 SMF24NSA	2	binary	Number of system affinity sections.										

Record type 24

Product Section

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset SMF24OPS

Length
SMF24LPS

Number
SMF24NPS

Offsets	Name	Length	Format	Description
0	0 SMF24PVR	2	EBCDIC	Record version number.
2	2 SMF24PNM	8	EBCDIC	Product name 'JES2'.
10	A SMF24RS2	2		Reserved.

General Section

This section contains the statistics for spool offload devices.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset SMF24OGN

Length
SMF24LGN

Number
SMF24NGN

Offsets	Name	Length	Format	Description
0	0 SMF24GLN	2	binary	Length of general section.
2	2 SMF24BCF	1	binary	Buffer continuation flags Bit Meaning when set 0 First SMF buffer for job 1 Continuation of SMF buffer 2 Last SMF buffer for job 3-7 Reserved.
3	3 SMF24EOJ	1	binary	End of job flags Bit Meaning when set 0 Completed job offloaded 1 Job completed with skipped data sets 2 Uncompleted job offloaded 3 Job cancelled by operator 4-7 Reserved.
4	4 SMF24JBN	8	EBCDIC	Job name.
12	C SMF24JID	8	EBCDIC	Original job identification.
20	14 SMF24CJD	8	EBCDIC	Current identification.
28	1C SMF24SYS	4	EBCDIC	System identification.
32	20 SMF24DSN	44		Offload data set name.
76	4C SMF24CNT	4	binary	Number of records transmitted or received.

Offsets	Name	Length	Format	Description
80	50 SMF24TDS	4	binary	Time since midnight, in hundredths of a second, that offload data set was allocated.
84	54 SMF24DDS	4	packed	Date when the offload data set was allocated, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
88	58 SMF24ORG	8	EBCDIC	Node of origin.
96	60 SMF24TRD	4	binary	Time on reader since midnight, in hundredths of a second.
100	64 SMF24DRD	4	binary	Date on the reader, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.

Job Selection Criteria Section

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset SMF24OSP

Length
SMF24LSP

Number
SMF24NSP

Offsets	Name	Length	Format	Description
0	0 SMF24LN1	2	binary	Length of job section.
2	2 SMF24JFG	1	binary	Job Flags Bit Meaning when set 0 Held job 1 Affinity = any 2-7 Reserved.
3	3 SMF24JCL	1	EBCDIC	Job class.
4	4 SMF24JND	8	EBCDIC	Node name.
12	C SMF24JAF	28	EBCDIC	Affinity system identification.

System Affinity Section

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset SMF24OSA

Length
SMF24LSA

Number
SMF24NSA

Offsets	Name	Length	Format	Description
0	0 SMF24LSA	2	binary	Length of system affinity section.
2	2 SMF24SAN	4	binary	Number of system affinities.
6	6 SMF24LN4	4	binary	Length of system name.
10	A SMF24SAC	*	binary	Start of system affinity names.

Record type 24

Note: *The length of the SMF24SAC field is variable and depends on the amount of system affinity names.

SYSOUT Selection Criteria Section

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset SMF24OSP

Length
SMF24LSP

Number
SMF24NSP

Offsets	Name	Length	Format	Description														
0	0 SMF24LN2	2	binary	Length of SYSOUT section.														
2	2 SMF24SFG	1	binary	SYSOUT flags <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0</td><td>Held SYSOUT</td></tr><tr><td>1</td><td>Bursted SYSOUT</td></tr><tr><td>2</td><td>Held job</td></tr><tr><td>3</td><td>Incomplete data set</td></tr><tr><td>4</td><td>Multi-destination data set</td></tr><tr><td>5-7</td><td>Reserved.</td></tr></tbody></table>	Bit	Meaning when set	0	Held SYSOUT	1	Bursted SYSOUT	2	Held job	3	Incomplete data set	4	Multi-destination data set	5-7	Reserved.
Bit	Meaning when set																	
0	Held SYSOUT																	
1	Bursted SYSOUT																	
2	Held job																	
3	Incomplete data set																	
4	Multi-destination data set																	
5-7	Reserved.																	
3	3 SMF24SCL	1	EBCDIC	SYSOUT class.														
4	4 SMF24SND	8	EBCDIC	Node name.														
12	C SMF24SRN	8	EBCDIC	Remote name.														
20	14 SMF24FCB	4	EBCDIC	Forms control buffer (FCB).														
24	18 SMF24FOR	8	EBCDIC	Forms overlay name.														
32	20 SMF24FLS	4	EBCDIC	Flash cartridge name.														
36	24 SMF24PRM	8	EBCDIC	Print data set (PR) mode.														
44	2C SMF24UCS	4	EBCDIC	Universal character set (UCS).														
48	30 SMF24WID	8	EBCDIC	Writer.														
56	38 SMF24REC	4	binary	Data set record count.														
60	3A SMF24PRY	1	binary	Output selection priority.														

Enhanced SYSOUT Support (ESS) Section

This section contains the output descriptor (if any) for first offloaded data set in this record.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset SMF24OSW

Length
SMF24LSW

Number
SMF24NSW

Offsets	Name	Length	Format	Description						
0	0 SMF24LN3	2	binary	Length of ESS section (including this field).						
2	2 SMF24SGT	4	binary	Segment identifier.						
6	6 SMF24IND	1	binary	Section indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present	1-7	Reserved.
Bit	Meaning when set									
0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present									
1-7	Reserved.									
7	7	1		Reserved.						
8	8 SMF24JDT	8	EBCDIC	JCL definition table (JDT) name in JCL definition vector table (JDTV).						
16	10 SMF24TUL	2	binary	Text unit (SWBTU) data area length.						
18	12 SMF24TU	VAR	binary	Text unit (SWBTU) data area. The data area can be processed using the SWBTUREQ macro.						

Record Type 25 (19) — JES3 Device Allocation

Record type 25 is written for each job that completed JES3 converter/interpreter (C/I) processing. One type 25 record is written for each job, whether the job contains DD statements. A separate type 25 record is written for each job that uses a private catalog. A separate type 25 record is written for each main device scheduling (MDS) dynamic unallocation request.

This record contains allocation-related information such as the number of tape and disk volumes fetched and mounted, and the time and date of JES3 device verification. The job name, time, and date that the reader recognized the JOB card (for the job) constitute the job log identification.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency

31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF25LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF25SEG	2	binary	Segment descriptor (see record length field).

Record type 25

Offsets	Name	Length	Format	Description								
4	4 SMF25FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF25RTY	1	binary	Record type 25 (X'19').								
6	6 SMF25TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF25DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF25SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF25JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF25RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF25RSD	4	packed	Date when the reader recognized the JOB card for this job, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF25UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								

Descriptor Section

Offsets	Name	Length	Format	Description										
42	2A SMF25IND	2	binary	Allocation indicators <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>If zero, allocation by user's DD statements. If 1, dynamic allocation.</td> </tr> <tr> <td>1</td> <td>If zero, non-catalog allocation by JES3. If 1, catalog allocation by JES3.</td> </tr> <tr> <td>2</td> <td>If zero, manual allocation by operator. If 1, automatic allocation by JES3 (see the ALLOCATE= keyword on the JES3 SETPARAM initialization statement in <i>z/OS JES3 Initialization and Tuning Reference</i>).</td> </tr> <tr> <td>3-15</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	If zero, allocation by user's DD statements. If 1, dynamic allocation.	1	If zero, non-catalog allocation by JES3. If 1, catalog allocation by JES3.	2	If zero, manual allocation by operator. If 1, automatic allocation by JES3 (see the ALLOCATE= keyword on the JES3 SETPARAM initialization statement in <i>z/OS JES3 Initialization and Tuning Reference</i>).	3-15	Reserved.
Bit	Meaning when set													
0	If zero, allocation by user's DD statements. If 1, dynamic allocation.													
1	If zero, non-catalog allocation by JES3. If 1, catalog allocation by JES3.													
2	If zero, manual allocation by operator. If 1, automatic allocation by JES3 (see the ALLOCATE= keyword on the JES3 SETPARAM initialization statement in <i>z/OS JES3 Initialization and Tuning Reference</i>).													
3-15	Reserved.													
44	2C SMF25NTF	4	binary	Number of IAT5110 GET messages for tape volumes issued for the job.										
48	30 SMF25NDF	4	binary	Number of IAT5110 GET messages for disk volumes issued for the job.										

Offsets	Name	Length	Format	Description
52	34 SMF25FST	4	binary	Time since midnight, in hundredths of a second, that the fetch processing ended. That is, the time that the first phase of MDS ended. (During this phase, messages are issued to inform the operator of the volumes required for the job to run.)
56	38 SMF25FSD	4	packed	Date when the fetch processing ended, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
60	3C SMF25SST	4	binary	If manual allocation, the time when the *START SETUP operator command was issued. If automatic allocation, this field contains zeroes.
64	40 SMF25SSD	4	packed	If manual allocation, the date when the *START SETUP operator command was issued. If automatic allocation, this field contains zeroes.
68	44 SMF25NTM	4	binary	Number of tape volumes mounted by MDS.
72	48 SMF25NDM	4	binary	Number of disk volumes mounted by MDS.
76	4C SMF25MST	4	binary	Time since midnight, in hundredths of a second, when all JES3 volume mount messages have been issued. If no mounts were required, this field equals the time of JES3 allocation.
80	50 SMF25MSD	4	packed	Date when all JES3 volume mount messages have been issued, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description. If no mounts were required, this field equals the date of JES3 allocation.
84	54 SMF25VVT	4	binary	Time since midnight, in hundredths of a second, of JES3 device verification.
88	58 SMF25VVD	4	packed	Date of JES3 device verification, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
92	5C SMF25NMV	4	binary	Number of Mass Storage Volume requests allocated by MDS for the job. Note: As of MVS/SP4.1, this field is no longer valid.

Record Type 26 (1A) — JES2 Job Purge

When all SYSOUT for a job is processed, JES2 invokes exit IEFUJP to allow an installation to decide whether to write record type 26. Then, JES2 writes this record at job purge. This record identifies the job-by-job log identification, JES2-assigned job number, and programmer's name. JES2 can be induced to not write this record on a job class basis.

Record type 26 contains operating information such as:

- Message class
- Job class
- JES2 job selection priority
- JES2 logical input device name
- Output lines
- Output punched cards
- Print/punch route codes
- Start and stop times for:
 - The reader
 - The Converter

Record type 26

- The Execution processor
- The output processor.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF26LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF26SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF26FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF26RTY	1	binary	Record type 26 (X'1A').								
6	6 SMF26TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF26DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF26SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF26JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF26RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB statement (for this job).								
30	1E SMF26RSD	4	packed	Date when the reader recognized the JOB statement (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF26UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A SMF26RSV	4		Reserved.								
46	2E SMF26SBS	2	binary	Subsystem identification — X'0002' signifies JES2.								

Offsets	Name	Length	Format	Description																				
48	30 SMF26IND	2	binary	Entry type indicator																				
				<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Descriptor section present</td> </tr> <tr> <td>1</td> <td>Events section present</td> </tr> <tr> <td>2</td> <td>Actuals section present</td> </tr> <tr> <td>3</td> <td>JES2 network section present</td> </tr> <tr> <td>4</td> <td>JES2 routing section present</td> </tr> <tr> <td>5</td> <td>Print section present</td> </tr> <tr> <td>6</td> <td>Reserved</td> </tr> <tr> <td>7</td> <td>Triplet section present</td> </tr> <tr> <td>8-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Descriptor section present	1	Events section present	2	Actuals section present	3	JES2 network section present	4	JES2 routing section present	5	Print section present	6	Reserved	7	Triplet section present	8-15	Reserved.
Bit	Meaning when set																							
0	Descriptor section present																							
1	Events section present																							
2	Actuals section present																							
3	JES2 network section present																							
4	JES2 routing section present																							
5	Print section present																							
6	Reserved																							
7	Triplet section present																							
8-15	Reserved.																							

Descriptor Section

Offsets	Name	Length	Format	Description																		
50	32 SMF26LN1	2	binary	Length of descriptor section, including this field.																		
52	34 SMF26RV1	2		Reserved.																		
54	36 SMF26IN2	1	binary	Job information indicator																		
				<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Background batch job</td> </tr> <tr> <td>1</td> <td>Foreground TSO/E user</td> </tr> <tr> <td>2</td> <td>System task</td> </tr> <tr> <td>3</td> <td>No journal option</td> </tr> <tr> <td>4</td> <td>No output option</td> </tr> <tr> <td>5</td> <td>TYPRUN=SCAN was specified</td> </tr> <tr> <td>6</td> <td>TYPRUN=COPY was specified</td> </tr> <tr> <td>7</td> <td>RESTART = Y was specified.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Background batch job	1	Foreground TSO/E user	2	System task	3	No journal option	4	No output option	5	TYPRUN=SCAN was specified	6	TYPRUN=COPY was specified	7	RESTART = Y was specified.
Bit	Meaning when set																					
0	Background batch job																					
1	Foreground TSO/E user																					
2	System task																					
3	No journal option																					
4	No output option																					
5	TYPRUN=SCAN was specified																					
6	TYPRUN=COPY was specified																					
7	RESTART = Y was specified.																					
55	37 SMF26INF	1	binary	Job information indicator																		
				<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>/*PRIORITY statement present or keyword 'PRTY =' was specified on JOB statement</td> </tr> <tr> <td>1</td> <td>/*SETUP statement(s) present</td> </tr> <tr> <td>2</td> <td>TYPRUN=HOLD was specified</td> </tr> <tr> <td>3</td> <td>No job log option</td> </tr> <tr> <td>4</td> <td>Execution batching</td> </tr> <tr> <td>5</td> <td>Job was entered on internal reader</td> </tr> <tr> <td>6</td> <td>Job was rerun by JES2</td> </tr> <tr> <td>7</td> <td>Job was canceled by the operator.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	/*PRIORITY statement present or keyword 'PRTY =' was specified on JOB statement	1	/*SETUP statement(s) present	2	TYPRUN=HOLD was specified	3	No job log option	4	Execution batching	5	Job was entered on internal reader	6	Job was rerun by JES2	7	Job was canceled by the operator.
Bit	Meaning when set																					
0	/*PRIORITY statement present or keyword 'PRTY =' was specified on JOB statement																					
1	/*SETUP statement(s) present																					
2	TYPRUN=HOLD was specified																					
3	No job log option																					
4	Execution batching																					
5	Job was entered on internal reader																					
6	Job was rerun by JES2																					
7	Job was canceled by the operator.																					
56	38 SMF26JNM	4	EBCDIC	JES2-assigned job number if less than 10,000. If the job number is greater or equal to 10,000, this field is zeroes and the job number is in the SMF26JID field.																		
60	3C SMF26JID	8	EBCDIC	8-character job identifier																		
68	44 SMF26NAM	20	EBCDIC	Programmer's name (taken from JOB statement).																		

Record type 26

Offsets	Name	Length	Format	Description										
88	58 SMF26MSG	1	EBCDIC	Message class (taken from JOB statement).										
89	59 SMF26CLS	1	EBCDIC	Job class (taken from JOB statement).										
90	5A SMF26XPI	1	binary	JES2 job selection priority when the job was initially read.										
91	5B SMF26XPS	1	binary	JES2 job selection priority when the job was selected.										
92	5C SMF26IX2	1	Binary	Job information indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Job delayed due to duplicate job name</td> </tr> <tr> <td>1</td> <td>Job purged as a result of spool offload</td> </tr> <tr> <td>2</td> <td>Job went through unspun in its lifetime</td> </tr> <tr> <td>3</td> <td>Job had at least one JOE purged due to PSO/SAPI</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Job delayed due to duplicate job name	1	Job purged as a result of spool offload	2	Job went through unspun in its lifetime	3	Job had at least one JOE purged due to PSO/SAPI
Bit	Meaning when set													
0	Job delayed due to duplicate job name													
1	Job purged as a result of spool offload													
2	Job went through unspun in its lifetime													
3	Job had at least one JOE purged due to PSO/SAPI													
93	5D SMF26OPS	1		Reserved.										
94	5E SMF26LOC	2	binary	Input route code. These fields are defined as follows: X'0100' indicates local routing; X'nnrr' is remote routing; and X'00nn' indicates special local routing. If more than 255 remotes are specified for the system, this field is set to zero. See the Routing Section described later in this record.										
96	60 SMF26DEV	8	EBCDIC	JES2 logical input device name as defined in JESPARMS.										
104	68 SMF26ACT	4	EBCDIC	Programmer's accounting number. JES2-defined sub-field from the accounting information field in the JOB statement or default values assigned for this job or from /*JOBPARM, JES2 control statement.										
108	6C SMF26ROM	4	EBCDIC	Programmer's room number. JES2-defined sub-field from the accounting information field in the JOB statement or default values assigned for this job or from /*JOBPARM, JES2 control statement.										
112	70 SMF26XTM	4	binary	Estimated processing time, in seconds. JES2-defined sub-field from the accounting information field in the JOB statement or default values assigned for this job or from /*JOBPARM, JES2 control statement.										
116	74 SMF26ELN	4	binary	Estimated output lines. JES2-defined sub-field from the accounting information field in the JOB statement or default values assigned for this job or from /*JOBPARM, JES2 control statement.										
120	78 SMF26EPU	4	binary	Estimated output punched cards. JES2-defined sub-field from the accounting information field in the JOB statement or default values assigned for this job or from /*JOBPARM, JES2 control statement.										
124	7C SMF26FRM	4	EBCDIC	Output form number. If the source field contain four or fewer characters, SMF26FRM is set. Otherwise, this field is set to blanks, and the contents of the source field appear only in SMF26EFM, described under the Routing Section later in this record.										
128	80 SMF26CYP	2	binary	Job print copy count. JES2-defined sub-field from the accounting information field in the JOB statement or default values assigned for this job or from /*JOBPARM, JES2 control statement.										
130	82 SMF26LIN	2	binary	Lines per page. JES2-defined sub-field from the accounting information field in the JOB statement or default values assigned for this job or from /*JOBPARM, JES2 control statement.										
132	84 SMF26PRR	2	binary	Job print route code. These fields are defined as follows: X'0100' indicates local routing; X'nnrr' is remote routing; and X'00nn' indicates special local routing. If more than 255 remotes are specified for the system, this field is set to zero. See the Routing Section described later in this record.										

Offsets	Name	Length	Format	Description
134	86 SMF26PUR	2	binary	Job punch route code. These fields are defined as follows: X'0100' indicates local routing; X'nnrr' is remote routing; and X'00nn' indicates special local routing. If more than 255 remotes are specified for the system, this field is set to zero. See the Routing Section described later in this record.
136	88 SMF26PDD	8	EBCDIC	Procedure data definition name (DDNAME) used for JCL conversion.

Events Section

Offsets	Name	Length	Format	Description
50	32 SMF26LN2	2	binary	Length of events section, including this field.
52	34 SMF26RV2	2		Reserved.
54	36 SMF26RPT	4	binary	Reader stop time, in hundredths of a second.
58	3A SMF26RPD	4	packed	Reader stop date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
62	3E SMF26CST	4	binary	Converter start time since midnight, in hundredths of a second.
66	42 SMF26CSD	4	packed	Converter start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
70	46 SMF26CPT	4	binary	Converter stop time since midnight, in hundredths of a second.
74	4A SMF26CPD	4	packed	Converter stop date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
78	4E SMF26XST	4	binary	Execution processor start time since midnight, in hundredths of a second.
82	52 SMF26XSD	4	packed	Execution processor start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
86	56 SMF26XPT	4	binary	Execution processor stop time since midnight, in hundredths of a second.
90	5A SMF26XPD	4	packed	Execution processor stop date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
94	5E SMF26OST	4	binary	Output processor start time since midnight, in hundredths of a second.
98	62 SMF26OSD	4	packed	Output processor start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
102	66 SMF26OPT	4	binary	Output processor stop time since midnight, in hundredths of a second.
106	6A SMF26OPD	4	packed	Output processor stop date, in the form <i>0cyydddF</i> . see "Standard SMF record header" on page 162 for a detailed description.

Actuals section

Offsets	Name	Length	Format	Description
50	32 SMF26LN3	2	binary	Length of actuals section, including this field.
52	34 SMF26RV4	2		Reserved.
54	36 SMF26ICD	4	binary	Number of input statements for job. This field includes JCL and SYSIN statements.

Record type 26

Offsets	Name	Length	Format	Description
58	3A SMF26XLN	4	binary	Number of output lines generated to spool.
62	3E SMF26XPU	4	binary	Number of punched cards generated to spool.
66	42 SMF26RID	4	EBCDIC	Input processor system (CPU) identification.
70	46 SMF26CID	4	EBCDIC	Conversion processor system (CPU) identification.
74	4A SMF26XID	4	EBCDIC	Execution processor system (CPU) identification.
78	4E SMF26OID	4	EBCDIC	Output processor system (CPU) identification.

Network Section

Offsets	Name	Length	Format	Description
50	32 SMF26LN4	2	binary	Length of network section including this field.
52	34 SMF26RV5	2		Reserved.
54	36 SMF26NID	4	EBCDIC	Job transmitter system identifier.
58	3A SMF26NST	4	binary	Job transmitter start time since midnight, in hundredths of a second.
62	3E SMF26NSD	4	packed	Job transmitter start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
66	42 SMF26NPT	4	binary	Job transmitter stop time since midnight, in hundredths of a second.
70	46 SMF26NPD	4	packed	Job transmitter stop date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
74	4A SMF26NAC	8	EBCDIC	Network accounting number.
82	52 SMF26NJB	8	EBCDIC	Original job identification.
90	5A SMF26NDV	8	EBCDIC	Job transmitter device name.
98	62 SMF26NON	8	EBCDIC	Original node name.
106	6A SMF26NXN	8	EBCDIC	Processing node name.
114	72 SMF26NNM	8	EBCDIC	Next node name.
122	7A SMF26NLN	8	EBCDIC	Last node name.
130	82 SMF26SUI	8	EBCDIC	Submitting userid.
138	8A SMF26NN	8	EBCDIC	Job end execution notify node.
146	92 SMF26NU	8	EBCDIC	Job end execution notify userid.

Routing Section

Offsets	Name	Length	Format	Description
50	32 SMF26LN5	2	binary	Length of routing section (including this field).
52	34 SMF26INR	4	binary	Input route code. These fields are defined as follows: X'00010000' indicated local routing; X'nnrrnnnn' indicates remote routing; and X'0000nnnn' indicates special local routing. This field is always set regardless of the number of remotes specified for the system.
56	38 SMF26PRD	4	binary	Default print route code. These fields are defined as follows: X'00010000' indicated local routing; X'nnrrnnnn' indicates remote routing; and X'0000nnnn' indicates special local routing. This field is always set regardless of the number of remotes specified for the system.

Offsets	Name	Length	Format	Description
60	3C SMF26PUD	4	binary	Default punch route code. These fields are defined as follows: X'00010000' indicated local routing; X'nnrrnnnn' indicates remote routing; and X'0000nnnn' indicates special local routing. This field is always set regardless of the number of remotes specified for the system.

Print Section

Offsets	Name	Length	Format	Description
50	32 SMF26LN6	2	binary	Length of print section including this field.
52	34 SMF26EBT	4	binary	Estimated SYSOUT byte count.
56	38 SMF26XBT	4	binary	Actual SYSOUT byte count.
60	3C SMF26EPG	4	binary	Estimated page count.
64	40 SMF26XPG	4	binary	Actual page count. For page mode data sets, JES2 updates the page count when it encounters a "begin page" indicator in the data stream header.
68	44 SMF26EFM	8	EBCDIC	Output form number. This field is set regardless of the number of characters in the forms field.

Triplet Section

Offsets	Name	Length	Format	Description
50	32 SMF26LN7	2	binary	Length of triplet section.
52	34 SMF26OAG	4		Offset of accounting section.
56	38 SMF26LAG	2	binary	Length of accounting section (including length of field SMF26LN8).
58	3A SMF26NAG	2	binary	Number of accounting sections.
60	3C SMF26OWL	4		Offset of Workload Management section.
64	40 SMF26LWL	2	binary	Length of Workload Management section.
66	42 SMF26NWL	2	binary	Number of Workload Management sections.
68	44 SMF26OJC	4		Offset of Job Correlator section.
72	48 SMF26LJC	2	binary	Length of Job Correlator section.
74	4A SMF26NJC	2	binary	Number of Job Correlator sections.

Accounting section

Offsets	Name	Length	Format	Description
0	0 SMF26LN8	2	binary	Length of accounting section.
2	2 SMF26NRA	1	binary	Number of accounting pairs.
3	3 SMF26AC1	variable	EBCDIC	An accounting pair consists of a 1-byte length field, which contains the length of the following string. The string contains accounting data. If the length field is zero, there is no following string.

Workload Management Section

Offsets	Name	Length	Format	Description
0	0 SMF26WCL	8	EBCDIC	Service class name at the time of execution.
8	8 SMF26WOC	8	EBCDIC	Original service class (assigned by WLM classification when the job finished conversion).

Record type 26

Offsets	Name	Length	Format	Description	
16	10 SMF26WIN		1	binary	Indicators
					Bit Meaning when set
					0 Job ran in MODE=WLM
					1 Job ran because of \$S J
					2-7 Reserved
17	11 SMF26WJC		8	EBCDIC	Eight character job class (padded on right with blanks).
25	19 SMF26WSE		16	EBCDIC	Sixteen character scheduling environment (padded on right with blanks).

Job Correlator Section

Offsets	Name	Length	Format	Description
0	0 SMF26JCR	64	EBCDIC	Job correlator of the job being purged.

Record Type 26 (1A) — JES3 Job Purge

Record type 26 is written at job purge after all SYSOUT for the job is processed. This record identifies the job by job log identification, JES3-assigned job number, and programmer's name. Record type 26 contains operating information such as:

- Message class
- Job class
- JES3 job selection priority
- JES3 logical input device name
- Processing time
- Output lines
- Output punched cards
- Deadline schedule type
- Deadline schedule time and date
- Start and stop times for:
 - The reader
 - The Converter
 - The Execution processor
 - The output processor.

Note: The format of all fields in this record are binary unless data is entered in the field.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency

24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description																		
0	0 SMF26LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for details.																		
2	2 SMF26SEG	2	binary	Segment descriptor (see record length field).																		
4	4 SMF26FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for details.)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)	7	Reserved.										
Bit	Meaning when set																					
0-2	Reserved																					
3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)																					
7	Reserved.																					
5	5 SMF26RTY	1	binary	Record type 26 (X'1A').																		
6	6 SMF26TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.																		
10	A SMF26DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details.																		
14	E SMF26SID	4	EBCDIC	System identification (from the SID parameter).																		
18	12 SMF26JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).																		
26	1Q SMF26RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB statement (for this job).																		
30	1E SMF26RSD	4	packed	Date when the reader recognized the JOB statement (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details.																		
34	22 SMF26UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).																		
42	2A SMF26RSV	4		Reserved.																		
46	2E SMF26SBS	2	binary	Subsystem identification — X'0005' signifies JES3.																		
48	30 SMF26IND	2	binary	Entry type indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Descriptor section present</td> </tr> <tr> <td>1</td> <td>Events section present</td> </tr> <tr> <td>2</td> <td>Actuals section present</td> </tr> <tr> <td>3-4</td> <td>Reserved</td> </tr> <tr> <td>5</td> <td>Print section present</td> </tr> <tr> <td>6</td> <td>Reserved.</td> </tr> <tr> <td>7</td> <td>Triplet section present</td> </tr> <tr> <td>8-15</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	Descriptor section present	1	Events section present	2	Actuals section present	3-4	Reserved	5	Print section present	6	Reserved.	7	Triplet section present	8-15	Reserved
Bit	Meaning when set																					
0	Descriptor section present																					
1	Events section present																					
2	Actuals section present																					
3-4	Reserved																					
5	Print section present																					
6	Reserved.																					
7	Triplet section present																					
8-15	Reserved																					

Descriptor Section

Offsets	Name	Length	Format	Description
50	32 SMF26LN1	2	binary	Length of descriptor section, including this field.
52	34 SMF26RV1	2		Reserved.

Record type 26

Offsets	Name	Length	Format	Description																
54	36 SMF26IN3	1	binary	Job information indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Dependent job (/* NET statement processed)</td> </tr> <tr> <td>1</td> <td>Deadline scheduling (DEADLINE parameter was specified on /* MAIN statement)</td> </tr> <tr> <td>2</td> <td>Deadline job met deadline</td> </tr> <tr> <td>3</td> <td>Process job (/* PROCESS statement processed)</td> </tr> <tr> <td>4-5</td> <td>Reserved</td> </tr> <tr> <td>6</td> <td>Job left system by way of DJ (dump job)</td> </tr> <tr> <td>7</td> <td>Job entered system by way of DJ (dump job).</td> </tr> </table>	Bit	Meaning when set	0	Dependent job (/* NET statement processed)	1	Deadline scheduling (DEADLINE parameter was specified on /* MAIN statement)	2	Deadline job met deadline	3	Process job (/* PROCESS statement processed)	4-5	Reserved	6	Job left system by way of DJ (dump job)	7	Job entered system by way of DJ (dump job).
Bit	Meaning when set																			
0	Dependent job (/* NET statement processed)																			
1	Deadline scheduling (DEADLINE parameter was specified on /* MAIN statement)																			
2	Deadline job met deadline																			
3	Process job (/* PROCESS statement processed)																			
4-5	Reserved																			
6	Job left system by way of DJ (dump job)																			
7	Job entered system by way of DJ (dump job).																			
55	37 SMF26INF	1	binary	Job information indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Job priority (taken from PRTY=parameter on JOB statement)</td> </tr> <tr> <td>1</td> <td>Job processed by preexec setup</td> </tr> <tr> <td>2</td> <td>TYPRUN=HOLD was specified on JOB statement</td> </tr> <tr> <td>3-4</td> <td>Reserved</td> </tr> <tr> <td>5</td> <td>Job was entered on internal reader</td> </tr> <tr> <td>6</td> <td>Job was rerun on a JES3 reader</td> </tr> <tr> <td>7</td> <td>Job was canceled by the operator.</td> </tr> </table>	Bit	Meaning when set	0	Job priority (taken from PRTY=parameter on JOB statement)	1	Job processed by preexec setup	2	TYPRUN=HOLD was specified on JOB statement	3-4	Reserved	5	Job was entered on internal reader	6	Job was rerun on a JES3 reader	7	Job was canceled by the operator.
Bit	Meaning when set																			
0	Job priority (taken from PRTY=parameter on JOB statement)																			
1	Job processed by preexec setup																			
2	TYPRUN=HOLD was specified on JOB statement																			
3-4	Reserved																			
5	Job was entered on internal reader																			
6	Job was rerun on a JES3 reader																			
7	Job was canceled by the operator.																			
56	38 SMF26JNM	4	EBCDIC	JES3-assigned job number if less than 10,000. If the job number is greater or equal to 10,000, this field contains zeros and the job number is in the SMF26JID field.																
60	3C SMF26JID	8	EBCDIC	8-character job identifier																
68	44 SMF26NAM	20	EBCDIC	Programmer's name (taken from JOB statement).																
88	58 SMF26MSG	1	EBCDIC	Message class (taken from MSGCLASS=parameter on JOB statement).																
89	59 SMF26CLS	1	EBCDIC	Job class (taken from CLASS= parameter on JOB statement). This field is blank if the default is used or if a valid CLASS= parameter is specified on the /* MAIN statement (see SMF26CLN at offset 176).																
90	5A SMF26XPI	1	binary	JES3 job selection priority when the job was initially read (taken from: 1) PRTY= parameter on JOB statement, 2) class default priority from main processor job class table, or 3) default JES3 job priority).																
91	5B SMF26XPS	1	binary	JES3 job selection priority when the job was selected (taken from job's RESQ).																
92	5C SMF26RV8	4		Reserved.																
96	60 SMF26DEV	8	EBCDIC	JES3 logical input device name, or user identification if TSO/E job.																
104	68 SMF26RVA	8		Reserved.																
112	70 SMF26XTM	4	binary	Estimated processing time, in seconds.																
116	74 SMF26ELN	4	binary	Estimated output lines (taken from LINES= parameter on /* MAIN statement or JES3 complex-wide default, which is in units of 1000).																
120	78 SMF26EPU	4	binary	Estimated output punched cards (taken from CARDS= parameter on /* MAIN statement or JES3 complex-wide default, which is in units of 100).																
124	7C SMF26DTY	1	EBCDIC	Deadline schedule type (taken from DEADLINE parameter on /* MAIN statement). Valid types are A-Z and 0-9.																
125	70 SMF26RV6	3		Reserved.																
128	80 SMF26IGP	8	EBCDIC	JES3 logical input device group name.																
136	88 SMF26PD3	8	EBCDIC	Procedure data definition name (DDNAME) used for JCL conversion (taken from PROC= parameter on /* MAIN statement or default).																
144	90 SMF26NJO	8	EBCDIC	Name of system to which the job is sent.																

Offsets	Name	Length	Format	Description
152	98 SMF26NJI	8	EBCDIC	Name of local terminal supplied by the JES3 initialization deck.
160	A0 SMF26NET	8	EBCDIC	Identification of dependent job net to which this job belongs (taken from /* NET statement).
168	A8 SMF26DTM	4	binary	Deadline schedule time, in hundredths of a second (taken from DEADLINE parameter on /* MAIN statement).
172	AC SMF26DDT	4	packed	Deadline schedule date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. This is taken from the DEADLINE parameter on /* MAIN statement.
176	B0 SMF26CLN	8	EBCDIC	Job class (taken from CLASS= parameter on /* MAIN statement if valid, or the default (JES3BATCH)).

Events Section

Offsets	Name	Length	Format	Description
184	B4 SMF26LN2	2	binary	Length of events section, including this field.
186	BA SMF26RV2	2		Reserved.
188	BC SMF26RPT	4	binary	Reader stop time, in hundredths of a second. This field is filled in during JOB statement processing.
192	C0 SMF26RPD	4	packed	Reader stop date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. This field is filled in during JOB statement processing.
196	C4 SMF26CST	4	binary	Converter start time, in hundredths of a second. This field is filled in following the JES3 LOGIN of the interpreter job.
200	C8 SMF26CSD	4	packed	Converter start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. This field is filled in following the JES3 LOGIN of the interpreter job.
204	CC SMF26CPT	4	binary	Converter stop time, in hundredths of a second. This field is filled in at the end of the interpreter function.
208	D0 SMF26CPD	4	packed	Converter stop date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. This field is filled in at the end of the interpreter function.
212	D4 SMF26XST	4	binary	Execution processor start time, in hundredths of a second. This field is filled in when the job is scheduled to run on a JES3 local or logical processor.
216	D8 SMF26XSD	4	packed	Execution processor start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. This field ID is filled in when the job is scheduled to run on a JES3 local or logical processor.
220	DC SMF26XPT	4	binary	Execution processor stop time, in hundredths of a second. This field is filled in when the job ends on a JES3 local or global processor.
224	E0 SMF26XPD	4	packed	Execution processor stop date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. This field is filled in when the job ends on a JES3 local or global processor.
228	E4 SMF26OST	4	binary	Output processor start time, in hundredths of a second. This field is filled in when output service starts to process the job's data sets.
232	E8 SMF26OSD	4	packed	Output processor start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details. This field is filled in when output service starts to process the job's data sets.

Record type 26

Offsets	Name	Length	Format	Description
236	EC SMF26OPT	4	binary	Output processor stop time, in hundredths of a second. This field is filled in when: 1) an RQ is removed from the writer queue, 2) all output OSEs are deleted/released, and 3) a request from the SYSOUT interface is processed.
240	F0 SMF26OPD	4	packed	Output processor stop date, in the form <i>0cyyyddF</i> . See "Standard SMF record header" on page 162 for details. This field is filled in when: 1) an RQ is removed from the writer queue, 2) all output OSEs are deleted/released, and 3) a request from the SYSOUT interface is processed.

Actuals section

Offsets	Name	Length	Format	Description
244	F4 SMF26LN3	2	binary	Length of actuals section, including this field.
246	F6 SMF26RV4	2		Reserved.
248	F8 SMF26ICD	4	binary	Number of input statements for the job. This field includes JCL and SYSIN statements.
252	FC SMF26XLN	4	binary	Number of output lines generated to spool. This field is filled in when the job is ended on a JES3 local or global processor.
256	100 SMF26XPU	4	binary	Number of punched cards generated to spool. This field is filled in when the job is ended on a JES3 local or global processor.
260	104 SMF26RID	4	EBCDIC	Input processor system (CPU) identification.
264	108 SMF26CID	4	EBCDIC	Conversion processor system (CPU) identification.
268	10C SMF26XID	4	EBCDIC	Execution processor system (CPU) identification.
272	110 SMF26OID	4	EBCDIC	Output processor system (CPU) identification.
276	114 SMF26JAF	42		Reserved for job accounting fields.
318	13E NJEJMRID	8	EBCDIC	Networking identifier 'NJEJMR'.
326	146 NJEJMRLN	2	binary	Length of data that follows, including this field.
328	148 NJEJOBNO	2		Reserved.
330	14A NJEJOBNM	8	EBCDIC	Job name.
338	152 NJEXEQM	8	EBCDIC	Processing node name.
346	15A NJEPRGMR	20	EBCDIC	Programmer name.
366	16E NJEUSRID	8	EBCDIC	Origin or notify identification.
374	176 NJEACCT	8	EBCDIC	Networking account number.
382	17E NJEDEPT	8	EBCDIC	Programmer's department number.
390	186 NJEBLDG	8	EBCDIC	Programmer's building number.
398	18E NJEROOM	8	EBCDIC	Programmer's room number.
406	196 NJEXEQU	8	EBCDIC	Processing user identifier.
414	19E NJEJOBNX	4	EBCDIC	Origin node job number.
418	1A2 SMF26SRC	4	binary	Number of spool records.

Print Section

Offsets	Name	Length	Format	Description
0	0 SMF26LN6	2	binary	Length of print section, including this field.
2	2 SMF26EBT	4	binary	Estimated SYSOUT byte count.
6	6 SMF26XBT	4	binary	Actual SYSOUT byte count.
10	A SMF26EPG	4	binary	Estimated page count.

Offsets	Name	Length	Format	Description
14	E SMF26XPG	4	binary	Actual page count. For page mode data sets, JES3 updated the page count when it encounters a "begin page" indicator in the data stream header.
18	12 SMF26EFM	8	EBCDIC	Output form number. This field is set regardless of the number of characters in the forms field.

Triplet Section

Offsets	Name	Length	Format	Description
50	32 SMF26LN7	2	binary	Length of triplet section.
52	34 SMF26OAG	4	binary	Offset of accounting section.
56	38 SMF26LAG	2	binary	Length of accounting section.
58	3A SMF26NAG	2	binary	Number of accounting section.
60	3C SMF26OWL	4		Offset of Workload Management section.
64	40 SMF26LWL	2	binary	Length of Workload Management section.
66	42 SMF26MWL	2	binary	Number of Workload Management sections.

Accounting Section

Offsets	Name	Length	Format	Description
0	0 SMF26LN8	2	binary	Length of accounting section.
2	2 SMF26NRA	1	binary	Number of accounting pairs.
3	3 SMF26AC1	variable	EBCDIC	An accounting pair consists of a 1-byte length field, which contains the length of the following string. The string contains accounting data. If the length field is zero, there is no following string.

Workload Management Section

Offsets	Name	Length	Format	Description								
0	0 SMF26WCL	8	EBCDIC	Service class name at the time of execution.								
8	8 SMF26WOC	8	EBCDIC	Original service class (assigned by WLM classification when the job finished conversion).								
16	10 SMF26WIN	1	binary	Indicators <table border="0"> <tr> <td>Bit</td> <td>Meaning When Set</td> </tr> <tr> <td>0</td> <td>Job ran in MODE=WLM</td> </tr> <tr> <td>1</td> <td>Job ran because of F J=job, RUN</td> </tr> <tr> <td>2-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning When Set	0	Job ran in MODE=WLM	1	Job ran because of F J=job, RUN	2-7	Reserved
Bit	Meaning When Set											
0	Job ran in MODE=WLM											
1	Job ran because of F J=job, RUN											
2-7	Reserved											
17	11 SMF26WJC	8	EBCDIC	Eight character job class (padded on right with blanks).								
25	19 SMF26WSE	16	EBCDIC	Sixteen character scheduling environment (padded on right with blanks).								

Record Type 28 (1C) — NPM Statistics

The NetView[®] Performance Monitor (NPM) writes record type 28 at user-specified intervals and contains network statistics. For more information about the type 28 record, see *NPM Installation and Customization Guide*.

Record Type 30 (1E) — Common address space work

SMFPRMxx parameters are described in *z/OS MVS Initialization and Tuning Reference*.

Information on system address spaces and full function start are described in *z/OS MVS Initialization and Tuning Guide*.

The type 30 SMF record provides accounting information. It consolidates data that is found in record types 4, 5, 20, 34, 35, and 40 (which simplifies accounting by installation-written post processing routines), and it provides additional information. Use record type 30, because the record types that it replaces are generally not being updated with new measurement data. SMF writes record type 30 when:

- A work unit (such as a TSO/E session, APPC/MVS transaction program, OMVS forked or spawned address space, started task, or batch job) starts. This subtype 1 record identifies the work unit but contains no resource data.
- An SMF interval ends, if you requested interval accounting.

If this is the first interval since the work unit started, then this subtype 2 record contains the total resources used from the start of the work unit until the end of the current interval. With interval synchronization, this span of time is normally shorter than the length of the SMF global recording interval. For global interval recording without interval synchronization, this span of time is the same as the length of the SMF global recording interval.

For other intervals, this subtype 2 record contains the total resources used from the end of the previous interval until the end of the current interval.

For system address spaces that do not go through full function start, SMF generates a subtype 6 record that contains the total resources used since the start of the address space. Note that the data in the subtype 6 record is cumulative, unlike the subtype 2 record.

- A work unit (such as a TSO/E session, APPC/MVS transaction program, OMVS forked or spawned address space, started task, or batch job) completes.

If you requested interval accounting, SMF generates a subtype 3 record that contains the total resources used from the end of the previous recording interval until the end of the work unit. This span of time is normally shorter than the length of the specified recording interval.

For a job step, SMF generates a subtype 4 record that contains the total resources used from the time when the job step started until the time when the job step completed. If you requested interval recording, then this subtype 4 record generally contains the accumulated totals of the data in the interval subtype 2 and subtype 3 records that were generated for the step.

For a job, SMF generates a subtype 5 record that contains the total resources used from the time when the job started until the time when the job completed. This subtype 5 record generally contains the accumulated totals of the data in the step total subtype 4 records that were generated for the job.

For a description of the use of record type 30 for interval accounting, see “INTVAL and SYNCVAL — Performing interval accounting” on page 71.

The type 30 record contains operation information such as the job and step start and end times, step CPU time, step termination status, number of records in DD DATA and DD * data sets processed by the step and job, device allocation start time, problem program start time, and storage protect key. The record contains the number of page-ins, page-outs, swap-ins, and swap-outs for both virtual input

output (VIO) and non-VIO data sets. The record contains information on the number of hiperspace page moves and the movement of pages between expanded storage and central storage. This data can be used in resource planning. Information is added to account for time spent in hiperspace processing on a step or interval basis. The record contains an entry for each data set defined by a DD statement or dynamic allocation. Each entry lists the device class, unit type, device number, the execute channel program (EXCP) count, and device connect time for the data set. The usage data section contains information that can be used to attribute usage of a product to the address space.

The type 30 record can be used with subtype selectivity function. Refer to “SYS and SUBSYS with TYPE and NOTYPE — Selecting subtypes for SMF recording” on page 70 for a description of subtype selectivity. The subtypes are:

Subtype

Meaning

- | | |
|---|--|
| 1 | Job start or start of other work unit |
| 2 | Activity since previous interval ended |
| 3 | Activity for the last interval before step termination |
| 4 | Step total |
| 5 | Job termination or termination of other work unit |
| 6 | System address space, which did not go through full function start. See System address space creation in <i>z/OS MVS Initialization and Tuning Guide</i> for information about system address spaces. When you select subtype 6 for record type 30, the following fields may contain zeros or blank: |

SMF30PGM

SMF30STM

SMF30PSN

SMF30CL8

SMF30UIF

SMF30USR

SMF30JNM

Information in specific fields may differ for different subtypes. For example, the record identifies the job (and job step) by the:

- Job log identification (job name, time and date that the reader recognized the job card for this job).
- Step name
- Number of the step within the job
- User identification
- Program name
- Performance group number or service class name
- JES job number.

If accounting numbers (which can be alphanumeric) are specified in the JOB or EXEC statements, they are included. For subtype 1 and subtype 5, the accounting numbers are taken from the JOB statement. For all other subtypes, the accounting numbers are taken from the EXEC statement.

Record type 30

Because some of the information necessary to complete a field is not always available when a type 30 record is written, some fields might be empty. For example, the SMF30AST, SMF30PPS, SMF30SIT, and SMF30STD fields are not filled in for a subtype 1 record.

Because system address spaces do not use full function start, the subtype 6 record is incomplete; that is, only certain fields in each section are valid. All unused fields are set to zero or blank.

The subtype 6 records are written only at the expiration of an interval; the values are cumulative and indicate data collected since the initialization of the address space. If a system address space later goes through full function start, data is not reported for the period between the expiration of the previous interval and the time that the address space goes through full function start. The subtype 6 record contains data for the APPC/MVS Cumulative Resource section, but data in the APPC/MVS Resource section is not reported in subtype 6.

The length of record type 30 is variable. The maximum length of the type 30 record is 32,756 bytes. If the volume of data in the type 30 record is such that the length would exceed the maximum length, one or more additional type 30 records are produced. The additional records contain only the header/self-defining, subsystem, identification, and one or more sections that can repeat. An example of a section that can repeat is the execute channel program (EXCP) section.

Rules: The following rules apply to all subtypes (except subtype 1). When examining a type 30 record

- A record is the first record if at least one of the following fields is non-zero:
 - SMF30AON
 - SMF30ARN
 - SMF30CON
 - SMF30DRN
 - SMF30OON
 - SMF30PON
 - SMF30RON
 - SMF30TON
 - SMF30UON
- A record is an additional record if the following fields are all zero:
 - SMF30AON
 - SMF30ARN
 - SMF30CON
 - SMF30DRN
 - SMF30OON
 - SMF30PON
 - SMF30RON
 - SMF30TON
 - SMF30UON
- In either a **first** or **additional** record:
 - There are more records to follow if at least one of the following fields is non-zero:
 - SMF30EOS
 - SMF30MOS
 - SMF30OPM
 - SMF30RMS
 - SMF30UDS
 - This is the **last** record if the following fields are all zero:

SMF30EOS
 SMF30MOS
 SMF30OPM
 SMF30RMS
 SMF30UDS

The IEFACRT exit will be called, at step and job termination, for each type 30 (subtype 4 and subtype 5) record written to the SMF data set. A separate call to IEFACRT is made for each additional record.

Notes:

1. Data sets are recorded in the order of the DD statements; they are not identified by name. However, the data definition name (ddname) is included in the record. (An installation-written IEFUJV exit routine can record this order as each statement is validated). For concatenated DD statements, the ddname is the same on each entry, respectively.
2. CPU time is not expected to be constant between different runs of the same job step. For more information on EXCP count and CPU time, see Chapter 10, "EXCP count," on page 131 and Chapter 11, "CPU time," on page 133.
3. If the SMFPRMxx parameter DDCONS(YES) is specified, then duplicate execute channel program (EXCP) entries are consolidated. If DDCONS(NO) is specified, then duplicate EXCP entries are not consolidated. SMFPRMxx parameters are described in *z/OS MVS Initialization and Tuning Reference*.
4. If a section is not included in the record, the "number of" entry is zero. For example, subtype 1 does not have a completion segment, and SMF30TON is set to zero to indicate this.
5. If the IEFUSI exit changes the size of the private area, a flag is set in SMF30SFL in the paging and storage section.
6. Specifying the DETAIL parameter of the SMFPRMxx parmlib member for STC includes all EXCP sections in subtypes 4 and 5 for the step or job.
7. Specifying the NODETAIL parameter excludes EXCP sections from subtypes 4 and 5 for STC class subsystem jobs, but not for batch or TSO/E subsystems. NODETAIL is enforced for the master address space.

For OMVS, the OMVS address space is considered a started task (STC), so NODETAIL is honored for processes running in the OMVS address space. However, processes that run under a BPXAS initiator are considered batch work, so NODETAIL has no effect.

8. Considerations for jobs that are evicted via the \$EJxx,STEP (or equivalent) command:
 - SMF30CNR (bit 14 of SMF30STI) is set in the subtype 4 record of the last step that executed prior to the eviction.
 - A subtype 5 record is not generated for a job that is evicted until the job resumes and completes execution.
 - Except for the following fields, subtype 5 fields that contain aggregated data will not include data from all steps in a job that resumes and completes execution following an eviction. In this case, subtype 5 fields will contain data aggregated from the steps that ran after the job resumes execution up until the job completes execution. In the subtype 5 record of an evicted job, these fields will contain data aggregated from all of the steps in the job:
 - SMF30CPT
 - SMF30CPS
 - SMF30_TIME_ON_IFA
 - SMF30_TIME_IFA_ON_CP

Record type 30

SMF30_TIME_ON_SUP
SMF30_TIME_SUP_ON_CP

9. While a job is executing, SMF writes the type 30, subtype 1, 4, and 5 records associated with each job step to the job's EVENTLOG data set. You can use the Job Step panel of the Spool Display and Search Facility (SDSF) to view these records. To control access to this information, the EVENTLOG is protected with two SAF resources in the JESSPOOL class:
nodeid.userid.jobname.jobid.EVENTLOG.SMFSTEP and
nodeid.userid.jobname.jobid.EVENTLOG.STEPDATA. See Jobs, job groups, output groups, and SYSIN/SYSOUT data sets in *z/OS SDSF Operation and Customization* for more information.

When you use the SMF30CPT field in the Accounting section:

Note that a workload may generate different values for SMF30CPT, if some eligible work for the IBM zEnterprise® Application Assist Processor (zAAP) or IBM z Integrated Information Processor (zIIP) running on a standard processor. If a repeatable value is more desirable than the possible performance benefits of letting zAAP or zIIP eligible work run on both specialty CPs and standard processors, specify IFAHONORPRIORITY=NO or IIPHONORPRIORITY=NO in the IEAOPTxx parmlib member.

Interval records may show this number to be hundredth (1/100) of a second less than other related SMF30 fields (such as SMF30_TIME_IFA_ON_CP). This difference is due to rounding differentials while calculating delta values, and will not occur for step end or job end.

If SMF30CPT is zero, and you would like to understand how much CPU time was used by the address space or you require more precise values in general, you can calculate the CPU and SRB time in microseconds ($1 / 10^{-6}$) using the following formulas:

- **CPU time:**

$$(SMF30CSU * 10) / SMF30CPC * SMF30SUS / 16 = \text{CPU time in microseconds}$$

- **SRB time:**

$$(SMF30SRB * 10) / SMF30SRC * SMF30SUS / 16 = \text{SRB time in microseconds}$$

The CPU and SRB times computed from service units include zAAP time and zIIP time in addition to CP time. The time derived from CPU service is comparable to the sum of fields SMF30CPT, SMF30_TIME_ON_IFA and SMF30_TIME_ON_zIIP for work with no enclave activity. If the zAAP or zIIP processors are faster than the CP, zAAP or zIIP time is normalized to the time expected on the slower CP before service units are computed. Therefore, the derived time contains normalized zAAP or zIIP time. Field SMF30ZNF contains the normalization factor used. The normalization factor is 256 when the standard CPs are of the same speed as the zAAP/zIIP. Enclave time is summed with address space time in SMF30CPT. The preceding CPU time formula includes dependent enclave time but does not include independent enclave time. To compute independent enclave time, substitute SMF30ESU for SMF30CSU in the formula.

If you use derived processor times, you determine

$$\text{derived CP time} = CPT / (CPT + zAAPNT + zIIPNT) * \text{derived CPU time}$$

$$\text{derived Normalized zIIP time} = zIIPNT / (CPT + zAAPNT + zIIPNT) * \text{derived CPU time}$$

$$\text{derived Normalized zAAP time} = zAAPNT / (CPT + zAAPNT + zIIPNT) * \text{derived CPU time}$$

where:

CPT = SMF30CPT

zAAPNT = SMF30_TIME_ON_IFA * (SMF30ZNF / 256)

zIIPNT = SMF30_TIME_ON_ZIIP * (SMF30SNF / 256)

assuming the denominator is not zero.

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro SMFEWTM, BRANCH=YES (record exit: IEFU84)

Mode

Subtype	Mode
---------	------

1,3,4,5	Task
---------	------

2, 6	SRB
------	-----

Storage Residency

31-bit

SUBSYS

Current value for address space being reported on (see SMF30WID field)

Record Mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number) that locate the other sections on the record.

This triplet information should be checked prior to accessing a section of the record. All three fields being non-zero mean that the section exists on the record; conversely any of the fields being zero indicates that the section does not exist on the record. The "Number of" triplet field is the primary indication of the existence of the field.

Offsets	Name	Length	Format	Description												
0	0 SMF30LEN	2	binary	Record Length. This field along with the next, are referred to as the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF30SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF30FLG	1	binary	System indicator: <table> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem identification follows system identification</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Subsystem identification follows system identification	1	Subtypes used	2	Reserved	3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)	7	Reserved.
Bit	Meaning when set															
0	Subsystem identification follows system identification															
1	Subtypes used															
2	Reserved															
3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)															
7	Reserved.															
5	5 SMF30RTY	1	binary	Record type 30 (X'1E').												

Record type 30

Offsets	Name	Length	Format	Description
6	6 SMF30TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved to the SMF buffer.
10	A SMF30DTE	4	packed	Date that the record was moved to the SMF buffer, in the form <i>0cyydddF</i> (in local time). See "Standard SMF record header" on page 162 for a detailed description.
14	E SMF30SID	4	EBCDIC	System identification (from the SID parameter).
18	12 SMF30WID	4	EBCDIC	Work type indicator for the address space. The value identifies the type of address space that is being reported on (for example: "STC" for started tasks and system address spaces, "TSO" for TSO/E users, etc).
22	16 SMF30STP	2	binary	Record subtype. For a list of the record subtypes, see "Record Type 30 (1E) — Common address space work" on page 276.
24	18 SMF30SOF	4	binary	Offset to subsystem section from start of record, including the record descriptor word (RDW).
28	1C SMF30SLN	2	binary	Length of subsystem section.
30	1E SMF30SON	2	binary	Number of subsystem sections.
32	20 SMF30IOF	4	binary	Offset to identification section from start of record, including the record descriptor word (RDW).
36	24 SMF30ILN	2	binary	Length of identification section.
38	26 SMF30ION	2	binary	Number of identification sections.
40	28 SMF30UOF	4	binary	Offset to I/O activity section from start of record, including the record descriptor word (RDW).
44	2C SMF30ULN	2	binary	Length of I/O activity section.
46	2E SMF30UON	2	binary	Number of I/O activity sections.
48	30 SMF30TOF	4	binary	Offset to completion section from start of record, including the record descriptor word (RDW).
52	34 SMF30TLN	2	binary	Length of completion section.
54	36 SMF30TON	2	binary	Number of completion sections.
56	38 SMF30COF	4	binary	Offset to processor section from start of record, including the record descriptor word (RDW).
60	3C SMF30CLN	2	binary	Length of processor section.
62	3E SMF30CON	2	binary	Number of processor sections.
64	40 SMF30AOF	4	binary	Offset to accounting section from start of record, including the record descriptor word (RDW).
68	44 SMF30ALN	2	binary	Total length of the single accounting section.
70	46 SMF30AON	2	binary	Number of variable length text segments.
72	48 SMF30ROF	4	binary	Offset to storage section from start of record, including the record descriptor word (RDW).
76	4C SMF30RLN	2	binary	Length of storage section.
78	4E SMF30RON	2	binary	Number of storage sections.
80	50 SMF30POF	4	binary	Offset to performance section from start of record, including the record descriptor word (RDW).
84	54 SMF30PLN	2	binary	Length of the performance section.
86	56 SMF30PON	2	binary	Number of performance sections.
88	58 SMF30OOF	4	binary	Offset to operator section from start of record, including the record descriptor word (RDW).
92	5C SMF30OLN	2	binary	Length of the operator section.
94	5E SMF30OON	2	binary	Number of operator sections.
96	60 SMF30EOF	4	binary	Offset to the execute channel program (EXCP) section from start of record, including the record descriptor word (RDW).

Offsets	Name	Length	Format	Description
100	64 SMF30ELN	2	binary	Length of the execute channel program (EXCP) section, in this record.
102	66 SMF30EON	2	binary	Number of execute channel program (EXCP) sections in this record.
104	68 SMF30EOR	2	binary	Number of execute channel program (EXCP) sections in subsequent records. When this number exceeds two bytes, it is not valid. See SMF30EOS for the correct value.
106	6A SMF30RVD	2		Reserved.
108	6C SMF30EOS	4	binary	Number of execute channel program (EXCP) sections in subsequent records.
112	70 SMF30DRO	4	binary	Offset to APPC/MVS resource section from start of record, including the record descriptor word (RDW).
116	74 SMF30DRL	2	binary	Length of APPC/MVS resource section.
118	76 SMF30DRN	2	binary	Number of APPC/MVS resource sections in this record (this number is 0 or 1).
120	78 SMF30ARO	4	binary	Offset to APPC/MVS cumulative resource section from start of record, including the record descriptor word (RDW).
124	7C SMF30ARL	2	binary	Length of APPC/MVS cumulative resource section.
126	7E SMF30ARN	2	binary	Number of APPC/MVS cumulative resource sections in this record (this number is 0 or 1).
128	80 SMF30OPO	4	binary	Offset to OpenMVS process section.
132	84 SMF30OPL	2	binary	Length of z/OS UNIX process section.
134	86 SMF30OPN	2	binary	Number of z/OS UNIX process sections on current record.
136	88 SMF30OPM	4	binary	Number of z/OS UNIX process sections on subsequent records.
140	8C SMF30UDO	4	binary	Offset to first usage data section from the start of the record, including the record descriptor word (RDW).
144	90 SMF30UDL	2	binary	Length of each usage data section - '76'.
146	92 SMF30UDN	2	binary	Number of usage data sections in this record.
148	94 SMF30UDS	4	binary	Number of usage data sections in subsequent records.
152	98 SMF30RMO	4	binary	Offset to first automatic restart management section.
156	9C SMF30RML	2	binary	Length of automatic restart management section.
158	9E SMF30RMN	2	binary	Number of automatic restart management sections.
160	A0 SMF30RMS	4	binary	Number of automatic restart management sections in subsequent records.
164	A4 SMF30MOF	4	binary	Offset to the Multisystem Enclave Remote Data section.
168	A8 SMF30MLN	2	binary	Length of MultiSystem Enclave Remote System Data section.
170	AA SMF30MNO	2	binary	Number of MultiSystem Enclave Remote System Data sections in this record.
172	AC SMF30MOS	4	binary	Number of MultiSystem Enclave Remote System Data sections in subsequent records.
176	B0 SMF30CDO	4	binary	Offset to the Counter Data Section.
180	B4 SMF30CDL	2	binary	Length of a Counter Data Section.
182	B6 SMF30CDN	2	binary	Number of Counter Data Sections.
184	B8 SMF30USO	4	binary	Offset to the zEDC usage statistics section.
188	BC SMF30USL	2	binary	Length of the zEDC usage statistics section.
190	BE SMF30USN	2	binary	Number of zEDC usage statistics sections.

Record type 30

Subsystem Section

This section contains general record and system identification information that you can use to determine the level of information on the rest of the record.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30SOF

Length
SMF30SLN

Number
SMF30SON - This field will always be '1' as this section is on each of the Type 30 records that is generated.

Offsets	Name	Length	Format	Description
0	0 SMF30TYP	2	binary	Subtype identification Value Meaning 1 Job start or start of other work unit. 2 Activity since previous interval ended. Produced only when interval recording is active. 3 Activity for the last interval before step termination. Produced only when interval recording is active. 4 Step total 5 Job termination or termination of other work unit. 6 System address space.
2	2 SMF30RS1	2		Reserved.
4	4 SMF30RVN	2	EBCDIC	Record version number Value Meaning '05' MVS/SP Version 5 '04' MVS/SP Version 4 '03' MVS/SP Version 3 '02' MVS/SP Version 2 '01' VS2
6	6 SMF30PNM	8	EBCDIC	Subsystem or product name, for example SMF.
14	E SMF30OSL	8	EBCDIC	Code string for the operating system level to represent the version, release, and modification level as described for CVTPROD. Guaranteed to be larger in each release.
22	16 SMF30SYN	8	EBCDIC	System name (from the SYSNAME parameter in the IEASYSxx parmlib member).
30	1E SMF30SYP	8	EBCDIC	Sysplex name (from the SYSPLEX parameter in the COUPLExx parmlib member).

Identification Section

This section contains general address space and user information which can be used to identify the address space that the data is being reported for or to merge this record with other records that are generated for this address space.

Triplet information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30IOF

Length

SMF30ILN

Number

SMF30ION - This field will always be '1' as this section is on each of the Type 30 records that are generated.

Offsets	Name	Length	Format	Description						
0	0 SMF30JBN	8	EBCDIC	Job or session name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification.						
8	8 SMF30PGM	8	EBCDIC	Program name (taken from PGM= parameter on EXEC card). If a backward reference was used, this field contains PGM=*.DD.						
16	10 SMF30STM	8	EBCDIC	Step name (taken from name on EXEC card).						
24	18 SMF30UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).						
32	20 SMF30JNM	8	EBCDIC	JES job identifier. Jobs scheduled by the APPC/MVS transaction scheduler (ASCH) start with an "A" followed by a seven-digit number.						
40	28 SMF30STN	2	binary	Step number (first step = 1, and so on).						
42	2A SMF30CLS	1	binary	Job class (blank for TSO/E session or started tasks).						
43	2B SMF30JF1	1	binary	Flag word <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Job/Session ID section flag.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Job/Session ID section flag.	1-7	Reserved.
Bit	Meaning when set									
0	Job/Session ID section flag.									
1-7	Reserved.									
44	2C SMF30PGN	2	binary	Beginning with z/OS V1R3, this field is always zero.						
46	2E SMF30JPT	2	binary	JES input priority. If no value is specified for the PRTY parameter (on the JOB card), this field contains: <ul style="list-style-type: none"> For JES3, the default priority specified on the JES3 STANDARDS initialization card For JES2, a zero. <p>Note that JES2 does not use the priority value reported in the field. (The JES2 job selection priority is requested using the JES2 PRIORITY control statement.)</p>						
48	30 SMF30AST	4	binary	Device allocation start time, in hundredths of a second.						
52	34 SMF30PPS	4	binary	Problem program start time, in hundredths of a second.						
56	38 SMF30SIT	4	binary	Time since midnight, in hundredths of a second, that the initiator selected this step or job.						
60	3C SMF30STD	4	packed	Date that the initiator selected this step, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.						
64	40 SMF30RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).						
68	44 SMF30RSD	4	packed	Date that the reader recognized the JOB card (for this job), in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.						
72	48 SMF30RET	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the end of the JCL being read for the job or started task (reader stop time). For TSO/E this is the logon enqueue time.						

Record type 30

Offsets	Name	Length	Format	Description
76	4C SMF30RED	4	packed	Date that the reader recognized the end of the JCL being read for the job or started task (reader stop date), in the form 0 <i>cydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
80	50 SMF30USR	20	EBCDIC	Programmer's name.
100	64 SMF30GRP	8	EBCDIC	RACF group ID. 0 = RACF is not active.
108	6C SMF30RUD	8	EBCDIC	RACF user ID. 0 = RACF is not active.
116	74 SMF30TID	8	EBCDIC	RACF terminal ID. This field is zero if RACF is not active (or the user is not a terminal user).
124	7C SMF30TSN	8	EBCDIC	Terminal symbolic name.
132	84 SMF30PSN	8	EBCDIC	The name of the step that invoked the procedure. This field contains blanks if not part of a procedure.
140	8C SMF30CL8	8	EBCDIC	8-character job class (left justified, padded with blanks). For JES2, taken from the SMF30CLS field (if not specified), blank for TSO session or started tasks. For JES3, taken from CLASS= parameter on /* MAIN card (if valid), or the default (JES3BATCH).
148	94 SMF30ISS	8	binary	Time and date that the interval started for subtype 2 and 3 records, in time-of-day (TOD) format, an unsigned 64-bit fixed-point number where bit 51 is equivalent to 1 microsecond. The representation of this value in local time is stored in SMF30IST and SMF30IDT. Variations in setting the local time can make the times appear to be out of synchronization.
156	9C SMF30IET	8	binary	Time and date that the interval ended for subtype 2 and 3 records, in time-of-day (TOD) format, an unsigned 64-bit fixed-point number where bit 51 is equivalent to 1 microsecond. If you requested synchronized interval recording, you can use this field to compare this record with other records generated at the end of the same interval. If the address space being reported was not swapped in when the interval ended, then the time contained in this field might be earlier than the time that the record was generated.
164	A4 SMF30SSN	4	binary	Substep number. This field is set to zero for non-z/OS UNIX steps. When the z/OS UNIX exec function is requested, a new substep is begun and this value is incremented.
168	A8 SMF30EXN	16	binary	Program name. For a z/OS UNIX program, this contains the name, for up to 16 bytes, starting after the last slash in the file name, of the program that was run. The z/OS UNIX name ends with the null character X'00'. For an MVS program, it is an unqualified name of up to 8 characters of the program that was executed. The MVS program name is padded with blanks to a length of 16 characters. For example, for a z/OS UNIX name of /usr/joe/somepgm, the field in SMF record type 30 is somepgm ended by X'00'. For a z/OS UNIX name of /usr/joe/someverylongprogramname, the field is truncated to someverylongprog.
184	B8 SMF30ASI	2	binary	Address space identifier.
186	BA SMF30COR	64	EBCDIC	JES job correlator.

I/O Activity Section

This section contains the summary I/O information at the address space level. This differs from the I/O information in the EXCP sections of the record which present the data at a DD Name/Device level.

Triplet information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30UOF

Length
SMF30ULN

Number
SMF30UON - Reports the number of I/O activity sections on the current record. Because only one I/O activity section can appear on the record, this field is '1' (if the section exists) or '0' (if it doesn't).

Offsets	Name	Length	Format	Description										
0	0 SMF30INP	4	binary	Number of card-image records in DD DATA and DD* data sets read by the reader for the map. This field is not set for subtypes 2 or 3.										
4	4 SMF30TEP	4	binary	Total blocks transferred (accumulated execute channel program (EXCP) counts - valid up to X'FFFFFFFFE', zero and invalid when SMF30TEF is set)										
8	8 SMF30TPT	4	binary	Number of TPUTS (terminal writes) for a TSO/E session. If a batch job or a started task successfully processes TPUTS, this field might be non-zero for batch jobs or started tasks.										
12	C SMF30TGT	4	binary	Number of TGETS (terminal reads) for a TSO/E session.										
16	10 SMF30RDR	1	binary	Reader device class as defined in JESPARMS. 0 — for TSO/E sessions or started tasks.										
17	11 SMF30RDT	1	binary	Reader device type as defined in JESPARMS. 0 — for TSO/E sessions or started tasks.										
18	12 SMF30TCN	4	binary	Total device connect time (in 128 micro-second units) for this address space. For a DIV object, this field contains total device connect time for reads, writes, and re-reads.										
22	16 SMF30DCF	4	binary	Flag word <table border="0" style="margin-left: 20px;"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Device connect time may be incorrect If this flag is set, the system resources manager (SRM) disabled the channel measurement while the job was running. If channel measurement is disabled, device connect time is not recorded. Thus, if this bit is set, SMF30TCN and SMF30DCT reflect less than the actual total connect time.</td> </tr> <tr> <td>1</td> <td>If this bit is on, the following fields contain incomplete data: (SRM could not deliver deltas or values for this interval) SMF30AIC SMF30EIC SMF30AID SMF30EID SMF30AIW SMF30EIW SMF30AIS SMF30EIS</td> </tr> <tr> <td>2</td> <td>Field SMF30TEP is invalid</td> </tr> <tr> <td>3-31</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Device connect time may be incorrect If this flag is set, the system resources manager (SRM) disabled the channel measurement while the job was running. If channel measurement is disabled, device connect time is not recorded. Thus, if this bit is set, SMF30TCN and SMF30DCT reflect less than the actual total connect time.	1	If this bit is on, the following fields contain incomplete data: (SRM could not deliver deltas or values for this interval) SMF30AIC SMF30EIC SMF30AID SMF30EID SMF30AIW SMF30EIW SMF30AIS SMF30EIS	2	Field SMF30TEP is invalid	3-31	Reserved.
Bit	Meaning when set													
0	Device connect time may be incorrect If this flag is set, the system resources manager (SRM) disabled the channel measurement while the job was running. If channel measurement is disabled, device connect time is not recorded. Thus, if this bit is set, SMF30TCN and SMF30DCT reflect less than the actual total connect time.													
1	If this bit is on, the following fields contain incomplete data: (SRM could not deliver deltas or values for this interval) SMF30AIC SMF30EIC SMF30AID SMF30EID SMF30AIW SMF30EIW SMF30AIS SMF30EIS													
2	Field SMF30TEP is invalid													
3-31	Reserved.													
26	1A SMF30RSB	2		Reserved.										
28	1C SMF30TRR	4	binary	Total address space REREAD count.										

Record type 30

Offsets	Name	Length	Format	Description
32	20 SMF30AIC	4	binary	DASD I/O connect time, in 128-microsecond units, for address space plus dependent enclaves. Note that the value of RqsvAIC for FICON [®] channel utilization cannot be calculated. For more information, see the footnote.
36	24 SMF30AID	4	binary	DASD I/O disconnect time, in 128-microsecond units, for address space plus dependent enclaves.
40	28 SMF30AIW	4	binary	DASD I/O pending plus control unit queue time, in 128-microsecond units, for address space plus dependent enclaves.
44	2C SMF30AIS	4	binary	DASD I/O start subchannel count for address space plus dependent enclaves.
48	30 SMF30EIC	4	binary	DASD I/O connect time, in 128-microsecond units, for independent enclaves owned by the address space. Note that the value of RqsvEIC for FICON channel utilization cannot be calculated. For more information, see the footnote.
52	34 SMF30EID	4	binary	DASD I/O disconnect time, in 128-microsecond units, for independent enclaves owned by the address space.
56	38 SMF30EIW	4	binary	DASD I/O pending plus control unit queue time, in 128-microsecond units, for independent enclaves owned by the address space.
60	3C SMF30EIS	4	binary	DASD I/O start subchannel count for independent enclaves.
64	40 SMF30TEX	8	binary	Total blocks transferred - accumulated EXCP counts. This field is the 8-byte equivalent of SMF30TEP, but this field remains valid after SMF30TEP is invalid.
72	48 SMF30DAS	4	binary	Number of DDs that had their DD accounting information suppressed.

Note: The system adjusts the connect time for FICON DASD to be 1 millisecond per request. This value differs from the channel reported connect time.

Completion Section

This section contains the completion information for the step on the Step Termination record (Subtype-4) and for the job on the Job Termination record (Subtype-5).

This section does not appear on the Job Initialization (Subtype-1) or Interval (Subtype-2 and 3) records.

Note: The SMF30STI field also contains some general record indicator flags which are not necessarily completion in nature. The system may fail a step or job even if the return code is zero. This could happen, for example, as a result of specifying CATLG_ERR FAILJOB(YES) and incurring that type of post execution error. (A return code is generated by the application program and is never changed by the operating system.) A user can deduce that a step failed due to a “post execution error” if bit SMF30SYE in the two-byte SMF30STI field in the SMF30 subtype 4 record is on.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the ‘header/self-defining’ section:

Offset SMF30TOF

Length
SMF30TLN

Number
SMF30TON - Reports the number of completion sections on the current

record. Because only one completion section can appear on the record, this field is '1' (if the section exists) or '0' (if it doesn't).

Offsets	Name	Length	Format	Description
0	0 SMF30SCC	2	binary	<p>Step completion code:</p> <p>X'0ccc' indicates system abnormal end of task (abend) in the job step where <i>ccc</i> is the system abend code. (See <i>z/OS MVS System Codes</i>.)</p> <p>X'8ccc' indicates user abend in the job step where <i>ccc</i> is the user abend code.</p> <p>X'nnnn' indicates normal completion where <i>nnnn</i> is the contents of the two low-order bytes in register 15 at termination.</p> <p>X'0000' indicates one of the following:</p> <ul style="list-style-type: none"> • The job step was flushed (not processed) because of an error during allocation or in a preceding job step. • The job step terminated with an abend code ending in X'0D'. In this case, SMF30SCC contains the value from the low-order two bytes of the TCBCMPC field, which may contain zeros. • Normal job completion with a return code of 0. <p>Use this field in conjunction with the job/step termination indicator field, SMF30STI.</p> <p>Job completion code:</p> <p>X'0ccc' indicates system ABEND in the last job step where <i>ccc</i> is the system abend code. (See <i>z/OS MVS System Codes</i>.)</p> <p>X'8ccc' indicates user abend in the job step where <i>ccc</i> is the user abend code.</p> <p>X'nnnn' indicates normal completion where <i>nnnn</i> is the contents of the two low-order bytes in register 15 at termination.</p> <p>X'0000' indicates one of the following (see note):</p> <ul style="list-style-type: none"> • The last job step was flushed (not processed) because of an error during allocation or in a preceding job step. • The job step terminated with an abend code ending in X'0D'. In this case, SMF30SCC contains the value from the low-order two bytes of the TCBCMPC field, which may contain zeros. • Normal job completion with a return code of 0. <p>Use this field in conjunction with the job/step termination indicator field, SMF30STI.</p> <p>Note: When a step in a multi-step job terminates abnormally, the subsequent steps, whether executed or flushed, do not propagate the step abend code for processing this record. The code appears in the step termination record (subtype 4). In this case, the field, SMF30SCC, can contain X'nnnn' or X'0000'. If an abend occurred in the job, the job termination indicator (bit 7 in the SMF30STI field).</p> <p>Bit Meaning when set</p> <p>0 SMF30UAB - User abend</p>

Record type 30

Offsets	Name	Length	Format	Description																																		
2	2 SMF30STI	2	binary	Step/Job termination indicator																																		
				<table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Canceled by exit IEFUJV.</td> </tr> <tr> <td>2</td> <td>Canceled by exit IEFUJI.</td> </tr> <tr> <td>3</td> <td>Canceled by exit IEFUSI.</td> </tr> <tr> <td>4</td> <td>Canceled by exit IEFACTRT.</td> </tr> <tr> <td>5</td> <td>Step is to be restarted.</td> </tr> <tr> <td>6</td> <td>If zero, then normal completion. If 1, then abnormal end of task (abend). If step completion code equals 0322 or 0522, then IEFUTL caused the abend. If step completion code equals 0722, then IEFUSO caused the abend.</td> </tr> <tr> <td>7</td> <td>If zero, then normal completion. If 1, then step was flushed.</td> </tr> <tr> <td>8</td> <td>EXCP counts might be incorrect because the record did not include all the DD statements.</td> </tr> <tr> <td>9</td> <td>Previous interval record was not written because an error occurred. The cumulative count might be incorrect because the counters were cleared.</td> </tr> <tr> <td>10</td> <td>EXCP sections were not merged from the interval to the step record or from the step to the job record.</td> </tr> <tr> <td>11</td> <td>Step completed with a "post execution" error. Post-execution errors include a failure that occurred because the ALLOCxx parmlib member specified CATLG_ERR FAILJOB(YES).</td> </tr> <tr> <td>12</td> <td>Step completed due to z/OS UNIX exec function request.</td> </tr> <tr> <td>13</td> <td>JOB abnormally ended because of COND= condition on the JOB card. This flag will be set on in the subtype 5 job termination record only.</td> </tr> <tr> <td>14</td> <td>Job was evicted via the \$EJm,STEP,HOLD or equivalent command. This bit is set for subtype 4 (step end) records only.</td> </tr> <tr> <td>15</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved	1	Canceled by exit IEFUJV.	2	Canceled by exit IEFUJI.	3	Canceled by exit IEFUSI.	4	Canceled by exit IEFACTRT.	5	Step is to be restarted.	6	If zero, then normal completion. If 1, then abnormal end of task (abend). If step completion code equals 0322 or 0522, then IEFUTL caused the abend. If step completion code equals 0722, then IEFUSO caused the abend.	7	If zero, then normal completion. If 1, then step was flushed.	8	EXCP counts might be incorrect because the record did not include all the DD statements.	9	Previous interval record was not written because an error occurred. The cumulative count might be incorrect because the counters were cleared.	10	EXCP sections were not merged from the interval to the step record or from the step to the job record.	11	Step completed with a "post execution" error. Post-execution errors include a failure that occurred because the ALLOCxx parmlib member specified CATLG_ERR FAILJOB(YES).	12	Step completed due to z/OS UNIX exec function request.	13	JOB abnormally ended because of COND= condition on the JOB card. This flag will be set on in the subtype 5 job termination record only.	14	Job was evicted via the \$EJm,STEP,HOLD or equivalent command. This bit is set for subtype 4 (step end) records only.	15	Reserved.
Bit	Meaning when set																																					
0	Reserved																																					
1	Canceled by exit IEFUJV.																																					
2	Canceled by exit IEFUJI.																																					
3	Canceled by exit IEFUSI.																																					
4	Canceled by exit IEFACTRT.																																					
5	Step is to be restarted.																																					
6	If zero, then normal completion. If 1, then abnormal end of task (abend). If step completion code equals 0322 or 0522, then IEFUTL caused the abend. If step completion code equals 0722, then IEFUSO caused the abend.																																					
7	If zero, then normal completion. If 1, then step was flushed.																																					
8	EXCP counts might be incorrect because the record did not include all the DD statements.																																					
9	Previous interval record was not written because an error occurred. The cumulative count might be incorrect because the counters were cleared.																																					
10	EXCP sections were not merged from the interval to the step record or from the step to the job record.																																					
11	Step completed with a "post execution" error. Post-execution errors include a failure that occurred because the ALLOCxx parmlib member specified CATLG_ERR FAILJOB(YES).																																					
12	Step completed due to z/OS UNIX exec function request.																																					
13	JOB abnormally ended because of COND= condition on the JOB card. This flag will be set on in the subtype 5 job termination record only.																																					
14	Job was evicted via the \$EJm,STEP,HOLD or equivalent command. This bit is set for subtype 4 (step end) records only.																																					
15	Reserved.																																					
4	4 SMF30ARC	4	binary	Abend reason code.																																		

Processor Accounting Section

This section contains various Processor times for the address space for the period that the record represents.

Triplet information: This section is located on the record using the following triplet fields, which are located in the "header/self-defining" section:

Offset SMF30COF

Length
SMF30CLN

Number

SMF30CON - Reports the number of processor accounting sections on the current record. Because only one processor accounting section can appear on the record, this field is "1" (if the section exists) or "0" (if it does not exist).

Offsets	Name	Length	Format	Description
0	0 SMF30PTY	2	binary	Reserved.

Offsets	Name	Length	Format	Description																																		
2	2 SMF30TFL	2	binary	Invalid timer flags: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Indicates that timer flags are used.</td> </tr> <tr> <td>1</td> <td>SMF30CPT has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>2</td> <td>SMF30CPS has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>3</td> <td>SMF30JVU has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>4</td> <td>SMF30JVA has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>5</td> <td>SMF30ISB has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>6</td> <td>SMF30ICU has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>7</td> <td>SMF30IVU has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>8</td> <td>SMF30IVA has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>9</td> <td>SMF30IIP has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>10</td> <td>SMF30HPT has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>11</td> <td>SMF30RCT has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>12</td> <td>SMF30ASR has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>13</td> <td>SMF30ENC has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>14</td> <td>SMF30DET has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Indicates that timer flags are used.	1	SMF30CPT has an invalid value due to a timer value calculation error.	2	SMF30CPS has an invalid value due to a timer value calculation error.	3	SMF30JVU has an invalid value due to a timer value calculation error.	4	SMF30JVA has an invalid value due to a timer value calculation error.	5	SMF30ISB has an invalid value due to a timer value calculation error.	6	SMF30ICU has an invalid value due to a timer value calculation error.	7	SMF30IVU has an invalid value due to a timer value calculation error.	8	SMF30IVA has an invalid value due to a timer value calculation error.	9	SMF30IIP has an invalid value due to a timer value calculation error.	10	SMF30HPT has an invalid value due to a timer value calculation error.	11	SMF30RCT has an invalid value due to a timer value calculation error.	12	SMF30ASR has an invalid value due to a timer value calculation error.	13	SMF30ENC has an invalid value due to a timer value calculation error.	14	SMF30DET has an invalid value due to a timer value calculation error.	15	Reserved.
Bit	Meaning when set																																					
0	Indicates that timer flags are used.																																					
1	SMF30CPT has an invalid value due to a timer value calculation error.																																					
2	SMF30CPS has an invalid value due to a timer value calculation error.																																					
3	SMF30JVU has an invalid value due to a timer value calculation error.																																					
4	SMF30JVA has an invalid value due to a timer value calculation error.																																					
5	SMF30ISB has an invalid value due to a timer value calculation error.																																					
6	SMF30ICU has an invalid value due to a timer value calculation error.																																					
7	SMF30IVU has an invalid value due to a timer value calculation error.																																					
8	SMF30IVA has an invalid value due to a timer value calculation error.																																					
9	SMF30IIP has an invalid value due to a timer value calculation error.																																					
10	SMF30HPT has an invalid value due to a timer value calculation error.																																					
11	SMF30RCT has an invalid value due to a timer value calculation error.																																					
12	SMF30ASR has an invalid value due to a timer value calculation error.																																					
13	SMF30ENC has an invalid value due to a timer value calculation error.																																					
14	SMF30DET has an invalid value due to a timer value calculation error.																																					
15	Reserved.																																					
4	4 SMF30CPT	4	binary	All standard CPU step time in hundredths of a second. Includes enclave time, preemptable class SRB time, client SRB time. Also includes time consumed by zAAP or zIIP eligible work running on a standard processor. This value includes the value in field SMF30OST.																																		
8	8 SMF30CPS	4	binary	Step CPU time under the service request block (SRB), in hundredths of a second. You can calculate the SRB time in microseconds (1/100 of a second) using the following formula: $(SMF30SRB * 10) / SMF30SRC * SMF30SUS / 16 = \text{SRB time in microseconds}$ This value includes the value in field SMF30OST.																																		
12	C SMF30ICU	4	binary	Initiator CPU time under the task control block (TCB), in hundredths of a second. This field is set at step termination. $SMF30ICU = SMF30ICU_STEP_INIT \text{ (for this step)} + SMF30ICU_STEP_TERM \text{ (from the previous step)}$																																		
16	10 SMF30ISB	4	binary	Initiator CPU time under the service request block (SRB), in hundredths of a second. This field is set at step termination. $SMF30ISB = SMF30ISB_STEP_INIT \text{ (for this step)} + SMF30ISB_STEP_TERM \text{ (from the previous step)}$																																		
20	14 SMF30JVU	4	binary	Step vector CPU time, in hundredths of a second.																																		
24	18 SMF30IVU	4	binary	Initiator vector CPU time, in hundredths of a second. This field is set at step termination.																																		
28	1C SMF30JVA	4	binary	Step vector affinity time, in hundredths of a second.																																		
32	20 SMF30IVA	4	binary	Initiator vector affinity time, in hundredths of a second. This field is set at step termination.																																		
36	24 SMF30IST	4	binary	Interval start time for type 30 subtype 2 and 3 records, in hundredths of a second.																																		
40	28 SMF30IDT	4	packed	Interval start date for type 30 subtype 2 and 3 records, in the form <i>0cyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.																																		
44	2C SMF30IIP	4	binary	Amount of CPU time used to process I/O interrupts, in hundredths of a second.																																		

Record type 30

Offsets	Name	Length	Format	Description																		
48	30 SMF30RCT	4	binary	Amount of CPU time used by the region control task (RCT), in hundredths of a second.																		
52	34 SMF30HPT	4	binary	CPU time consumed for the step, in hundredths of a second, to support requests for data to be transferred between a hiperspace and an address space, when the hiperspace is backed by expanded storage. The CPU time may vary depending on the availability of expanded storage.																		
56	38 SMF30CSC	4	binary	Integrated Cryptographic Service Facility/MVS (ICSF/MVS) service count. This is the number of cryptographic instructions executed on behalf of caller (within caller's address space).																		
60	3C SMF30DMI	4	binary	ADMF-Number of pages moved with ADMF WRITE operation.																		
64	40 SMF30DMO	4	binary	ADMF-Number of pages moved with ADMF READ operation.																		
68	44 SMF30ASR	4	binary	Additional CPU time accumulated by the preemptible SRBs and client SRBs for this job, in hundredths of a second. This value is also included in the value in SMF30CPT.																		
72	48 SMF30ENC	4	binary	CPU time used by the independent enclave, but only when in the WLM enclave. Note that independent enclave time on an IFA is not included. See field SMF30_ENCLAVE_TIME_ON_IFA for that value. SMF30ENC is also part of the value in SMF30CPT.																		
76	4C SMF30DET	4	binary	CPU time used by the dependent enclave, but only when in the WLM enclave. Note that dependent enclave time on an IFA is not included - see field SMF30_DEP_ENCLAVE_TIME_ON_IFA for that value. SMF30DET is also part of the value in SMF30CPT.																		
80	50 SMF30CEP	4	binary	Cumulative CPU time consumed for an address space or job while enqueue promoted (in 1.024 millisecond units).																		
84	54 SMF30TF2	1	binary	Additional timer flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>SMF30_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>1</td> <td>SMF30_ENCLAVE_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>2</td> <td>SMF30_DEP_ENCLAVE_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>3</td> <td>SMF30_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>4</td> <td>SMF30_ENCLAVE_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>5</td> <td>SMF30_DEP_ENCLAVE_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.</td> </tr> <tr> <td>6</td> <td>SMF30_CEPL_F indicates failure in SMF30CEPI.</td> </tr> <tr> <td>7</td> <td>SMF30CRP_F indicates failure in SMF30CRP.</td> </tr> </table>	Bit	Meaning when set	0	SMF30_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.	1	SMF30_ENCLAVE_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.	2	SMF30_DEP_ENCLAVE_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.	3	SMF30_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.	4	SMF30_ENCLAVE_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.	5	SMF30_DEP_ENCLAVE_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.	6	SMF30_CEPL_F indicates failure in SMF30CEPI.	7	SMF30CRP_F indicates failure in SMF30CRP.
Bit	Meaning when set																					
0	SMF30_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.																					
1	SMF30_ENCLAVE_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.																					
2	SMF30_DEP_ENCLAVE_TIME_ON_IFA_F has an invalid value due to a timer value calculation error.																					
3	SMF30_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.																					
4	SMF30_ENCLAVE_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.																					
5	SMF30_DEP_ENCLAVE_TIME_IFA_ON_CP_F has an invalid value due to a timer value calculation error.																					
6	SMF30_CEPL_F indicates failure in SMF30CEPI.																					
7	SMF30CRP_F indicates failure in SMF30CRP.																					
85	55 SMF30T32	1	binary	Additional failure flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>SMF30_TIME_ON_zIIP_FSMF30_TIME_ON_SUP_F</td> </tr> <tr> <td>1</td> <td>SMF30_ENCLAVE_TIME_ON_zIIP_FSMF30_ENCLAVE_TIME_ON_SUP_F</td> </tr> <tr> <td>2</td> <td>SMF30_DEP_ENCLAVE_TIME_ON_zIIP_FSMF30_DEP_ENCLAVE_TIME_ON_SUP_F</td> </tr> <tr> <td>3</td> <td>SMF30_TIME_zIIP_ON_CP_FSMF30_TIME_SUP_ON_CP_F</td> </tr> <tr> <td>4</td> <td>SMF30_ENCLAVE_TIME_zIIP_ON_CP_FSMF30_ENCLAVE_TIME_SUP_ON_CP_F</td> </tr> <tr> <td>5</td> <td>SMF30_DEPENC_TIME_zIIP_ON_CP_FSMF30_DEPENC_TIME_SUP_ON_CP_F</td> </tr> </table>	Bit	Meaning when set	0	SMF30_TIME_ON_zIIP_FSMF30_TIME_ON_SUP_F	1	SMF30_ENCLAVE_TIME_ON_zIIP_FSMF30_ENCLAVE_TIME_ON_SUP_F	2	SMF30_DEP_ENCLAVE_TIME_ON_zIIP_FSMF30_DEP_ENCLAVE_TIME_ON_SUP_F	3	SMF30_TIME_zIIP_ON_CP_FSMF30_TIME_SUP_ON_CP_F	4	SMF30_ENCLAVE_TIME_zIIP_ON_CP_FSMF30_ENCLAVE_TIME_SUP_ON_CP_F	5	SMF30_DEPENC_TIME_zIIP_ON_CP_FSMF30_DEPENC_TIME_SUP_ON_CP_F				
Bit	Meaning when set																					
0	SMF30_TIME_ON_zIIP_FSMF30_TIME_ON_SUP_F																					
1	SMF30_ENCLAVE_TIME_ON_zIIP_FSMF30_ENCLAVE_TIME_ON_SUP_F																					
2	SMF30_DEP_ENCLAVE_TIME_ON_zIIP_FSMF30_DEP_ENCLAVE_TIME_ON_SUP_F																					
3	SMF30_TIME_zIIP_ON_CP_FSMF30_TIME_SUP_ON_CP_F																					
4	SMF30_ENCLAVE_TIME_zIIP_ON_CP_FSMF30_ENCLAVE_TIME_SUP_ON_CP_F																					
5	SMF30_DEPENC_TIME_zIIP_ON_CP_FSMF30_DEPENC_TIME_SUP_ON_CP_F																					
86	56 SMF30T33	1	binary	Additional failure flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>6</td> <td>SMF30_ENCLAVE_TIME_zIIP_QUAL_FSMF30_ENCLAVE_TIME_SUP_QUAL_F</td> </tr> <tr> <td>7</td> <td>SMF30_DEPENC_TIME_zIIP_QUAL_FSMF30_DEPENC_TIME_SUP_QUAL_F</td> </tr> </table>	Bit	Meaning when set	6	SMF30_ENCLAVE_TIME_zIIP_QUAL_FSMF30_ENCLAVE_TIME_SUP_QUAL_F	7	SMF30_DEPENC_TIME_zIIP_QUAL_FSMF30_DEPENC_TIME_SUP_QUAL_F												
Bit	Meaning when set																					
6	SMF30_ENCLAVE_TIME_zIIP_QUAL_FSMF30_ENCLAVE_TIME_SUP_QUAL_F																					
7	SMF30_DEPENC_TIME_zIIP_QUAL_FSMF30_DEPENC_TIME_SUP_QUAL_F																					
87	57	1	binary	Reserved.																		
88	58 SMF30_TIME_ON_IFA	4	binary	Accumulation of CPU time spent on zAAP. Time is in hundredths of a second (includes enclave time).																		
92	5C SMF30_ENCLAVE_TIME_ON_IFA	4	binary	Accumulation of enclave time spent on zAAP. Time is in hundredths of a second.																		

Offsets	Name	Length	Format	Description
96	60 SMF30_DEP_ENCLAVE_TIME_ON_IFA	4	binary	Accumulation of dependent enclave time spent on zAAP. Time is in hundredths of a second.
100	64 SMF30_TIME_IFA_ON_CP	4	binary	Accumulation of CPU time spent running zAAP eligible work on a standard CP. Time is in hundredths of a second (includes enclave time).
104	68 SMF30_ENCLAVE_TIME_IFA_ON_CP	4	binary	Accumulation of zAAP enclave time spent on a standard CP. Time is in hundredths of a second.
108	6C SMF30_DEP_ENCLAVE_TIME_IFA_ON_CP	4	binary	Accumulation of zAAP dependent enclave time spent on a standard CP. Time is in hundredths of a second.
112	70 SMF30CEPI	4	binary	CPU time consumed for an address space or job while enqueue promoted (in 1.024 millisecond units). Contains only the time consumed during the interval (not cumulative).
116	74 SMF30_TIME_ON_zIIP SMF30_TIME_ON_SUP	4	binary	Accumulation of time spent on zIIP. Time is in hundredths of a second (includes enclave time).
120	78 SMF30_ENCLAVE_TIME_ON_zIIP SMF30_ENCLAVE_TIME_ON_SUP	4	binary	Accumulation of enclave time spent on zIIP. Time is in hundredths of a second.
124	7C SMF30_DEPENC_TIME_ON_zIIP SMF30_DEPENC_TIME_ON_SUP	4	binary	Accumulation of dependent enclave time spent on zIIP. Time is in hundredths of a second.
128	80 SMF30_TIME_zIIP_ON_CP SMF30_TIME_SUP_ON_CP	4	binary	Accumulation of CPU time spent running zIIP eligible work on a standard CP. Time is in hundredths of a second (includes enclave time).
132	84 SMF30_ENCLAVE_TIME_zIIP_ON_CP SMF30_ENCLAVE_TIME_SUP_ON_CP	4	binary	Accumulation of zIIP enclave time spent on a standard CP. Time is in hundredths of a second.
136	88 SMF30_DEPENC_TIME_zIIP_ON_CP SMF30_DEPENC_TIME_SUP_ON_CP	4	binary	Accumulation of zIIP dependent enclave time spent on a standard CP. Time is in hundredths of a second.
140	8C SMF30_ENCLAVE_TIME_zIIP_QUAL SMF30_ENCLAVE_TIME_SUP_QUAL	4	binary	Normalized enclave time qualified to be on zIIP in hundredths of a second. Note that qualified time is the SRB time for an enclave that a program (DB2, for example) has identified to Workload Management for zIIP eligibility. The program also indicates the portion of the SRB time intended for eligibility to the zIIP(s). The eligible time achieved is reported in xxx_TIME_ON_ZIIP and xxx_TIME_ZIIP_ON_CP fields.
144	90 SMF30_DEPENC_TIME_zIIP_QUAL SMF30_DEPENC_TIME_SUP_QUAL	4	binary	Normalized dependent enclave time qualified to be on zIIP in hundredths of a second. Note that qualified time is the SRB time for an enclave that a program (DB2, for example) has identified to Workload Management for zIIP eligibility. The program also indicates the portion of the SRB time intended for eligibility to the zIIP(s). The eligible time achieved is reported in xxx_TIME_ON_ZIIP and xxx_TIME_ZIIP_ON_CP fields.
148	94 SMF30CRP	4	binary	CPU time consumed for an address space or job while promoted because of chronic resource contention (in 1.024 millisecond units). For interval records, this field contains only the time consumed during the interval itself.
152	98 SMF30ICU_Step_Term	4	binary	CPU TCB time spent by the Initiator during job step termination processing. This field is the step termination portion of SMF30ICU that is reported in the next step end record.
156	9C SMF30ICU_Step_Init	4	binary	CPU TCB time spent by the Initiator during job step initialization processing. This field is the step initialization portion of SMF30ICU for this step end record.
160	A0 SMF30ISB_Step_Term	4	binary	CPU SRB time spent by the Initiator during job step termination processing. This field is the step termination portion of SMF30ISB that is reported in the next step end record.
164	A4 SMF30ISB_Step_Init	4	binary	CPU SRB time spent by the Initiator during job step initialization processing. This field is the step initialization portion of SMF30ISB for this step end record.

Record type 30

Offsets	Name	Length	Format	Description
168	A8 SMF30_Missed_SMF30BLK	4	binary	Accumulated value of I/O block counts when serialization could not be obtained for accumulating the value to SMF30BLK. This value is maintained at the job step level as opposed to the DD level of its SMF30BLK counterpart.
172	AC SMF30_Missed_SMF30DCT	4	binary	Accumulated value of device connect time when serialization could not be obtained for accumulating the value to SMF30DCT. This value is maintained at the job step level as opposed to the DD level of its SMF30DCT counterpart.
176	B0 SMF30_Highest_Task_CPU_Percent	2	binary	For interval records, the largest percentage of CPU time used by any task in the address space, rounded to the nearest integer. The percentage value is calculated as: TCB time * 100 / interval time. For step-end and job-end records, the value is the largest reported interval value.
178	B2 SMF30_Highest_Task_CPU_Program	8	EBCDIC	Name of the program loaded by the task that used the largest percentage of CPU time in this address space. This field corresponds to SMF30_Highest_Task_CPU_Percent. A value of blanks indicates that no task reported any CPU time in the address space, or that the CPU time could not be obtained. A value of ??????? indicates that the program name could not be obtained for the task that reported the highest percentage of CPU time.

Execute Channel Program (EXCP) Section

This section contains the I/O information for a specific DD Name/Device address pair for the address space. There can be multiple EXCP sections for a given address space.

With the SMFPRMxx parameter EMPTYEXCPSEC(NOSUPPRESS) specified, the system generates one EXCP section for each SMS candidate volume. The SMS candidate volume EXCP section contains only the DD name, SMF30DDN. All other fields in the EXCP section are zeros. This is the default behavior. Also by default, SMF generates a similarly empty EXCP section for non-dataset allocations like DD DUMMY or spool file allocations.

With SMFPRMxx parameter EMPTYEXCPSEC(SUPPRESS) specified, no empty EXCP sections are created for non-allocated candidate volume in the SMS storage group, or for empty EXCP sections that are generated for non-dataset allocations like DD DUMMY or spool file allocations.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30EOF

Length
SMF30ELN

Number
SMF30EON - Reports the number of EXCP sections on the current record.

This section also has additional control fields in the 'header/self-defining' section:

- SMF30EOS reports the number of EXCP sections for the current period on Subsequent Type 30 records. These are known as the 'chained' Type 30 records.
- SMF30EOR also reports this same information but is only a 2 byte field which can overflow so SMF30EOS is the preferred field for processing this data.

Offsets	Name	Length	Format	Description						
0	0 SMF30EXP	30	structure	<p>Data set access information.</p> <p>Note: Virtual I/O devices are identified by the following:</p> <p>Device Class 0</p> <p>Unit Type 0</p> <p>Device Number X'7FFF'</p> <p>It is important to understand the following:</p> <ul style="list-style-type: none"> Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname. SMF records will show VIO unit addresses as X'7FFF'. The actual in-storage UCB built for VIO will show address X'3FFF'. <p>For example, the followin messages indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.</p> <ul style="list-style-type: none"> IEF237I X'3FFF' ALLOCATED TO ddname IEF237I X'7FFF' ALLOCATED TO ddname 						
0	0 SMF30DEV	1	binary	Device class.						
1	1 SMF30UTP	1	binary	Unit type.						
2	2 SMF30CUA	2	binary	Device number.						
4	4 SMF30DDN	8	EBCDIC	DD Name used to access the data set.						
12	C SMF30BLK	4	binary	Count of blocks issued for the device against the data set. This field has a maximum value of X'FFFFFFFF' = 4,294,967,295. If it exceeds that value it will wrap to zero and then continue to increase again for additional blocks transferred.						
16	10 SMF30BSZ	2	binary	<p>Largest blocksize of the data set</p> <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Indicated changed blocksize for the data set. Post processors should use this field to avoid the possibility of negative numbers.</td> </tr> <tr> <td>1-15</td> <td>Largest blocksize of the data set.</td> </tr> </table>	Bit	Meaning when set	0	Indicated changed blocksize for the data set. Post processors should use this field to avoid the possibility of negative numbers.	1-15	Largest blocksize of the data set.
Bit	Meaning when set									
0	Indicated changed blocksize for the data set. Post processors should use this field to avoid the possibility of negative numbers.									
1-15	Largest blocksize of the data set.									
18	12 SMF30DCT	4	binary	Device connect time for this data set (in 128 micro-second units). For DIV object, device connect time is not collected by SMF; however, this field may not always be zero. For example, if a user is using a DIV data set and calls a VSAM utility to process it using the same DD statement, this will result in device connect time being charged by VSAM to the DIV object.						
22	16 SMF30XBS	8	binary	Block size value.						

Accounting section

This section contains the user accounting information for the address space and the unit of work that is being reported on. Job-level accounting information from the ACCT parameter of the JOB statement is presented on the Job records for the address space (subtypes 1 and 5). Step-level accounting information from the ACCT parameter of the EXEC statement is presented on the Step records for the address space (subtypes 2, 3, and 4).

Record type 30

Note that accounting information for work running in forked or spawned WLM-managed BPXAS address spaces is reported at the job level (subtypes 1 and 5) only.

The format of the data in the section is continuous internal text, which is:

Length:

1 byte; 0 indicates no associated accounting field

Field Variable; length defined by previous Length field

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30AOF

Length

SMF30ALN

Number

SMF30AON - This field will contain the number of 'subsections' in the accounting section.

Offsets	Name	Length	Format	Description
0	0 SMF30ACL	1	binary	Length of accounting section (excluding this field).
1	1 SMF30ACT	<i>variable</i>	EBCDIC	Job or step accounting field.

Storage and Paging Section

This section contains the statistics on the use of different kinds of storage by the address space and the different kinds of paging activity for the address space.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30ROF

Length

SMF30RLN

Number

SMF30RON - Reports the number of storage and paging sections on the current record. Because only one storage and paging section can appear on the record, this field is '1' (if the section exists) or '0' (if it doesn't).

Offsets	Name	Length	Format	Description
0	0 SMF30RSV	2		Reserved. Note that SMF30RGN, formerly a two-byte field at this offset, has been increased to four bytes and moved to the end of the Storage and Paging Section.

Offsets	Name	Length	Format	Description
2	2 SMF30SFL	1	binary	Storage Flags. If storage was not allocated (job step was flushed), these fields equal zero. Bit Meaning when set 0 V=R is specified. This bit has no meaning for subtype 5 records. 1 IEFUSI changed region limit values for the extended private area 2 IEFUSI set MEMLIMIT value (even if IEFUSI did not change the value). 3 If this bit is on, the following fields contain incomplete data: (SRM could not deliver deltas or values for this interval) SMF30ERS SMF30KIE SMF30POA SMF30BIA SMF30K0A SMF30POE SMF30BIE SMF30K0E SMF30PSC SMF30BOA SMF30LPI SMF30PSF SMF30BOE SMF30NSW SMF30PSO SMF30CPI SMF30PAI SMF30PST SMF30CPM SMF30PEI SMF30VPI SMF30HPI SMF30PIA SMF30VPO SMF30HP0 SMF30PIE SMF30VPR SMF30KIA 4-7 Reserved.
3	3 SMF30SPK	1	binary	Storage protect key, in the form xxxx0000 , where xxxx is the key.
4	4 SMF30PRV	2	binary	Largest amount of storage used from bottom of private area, in 1 K units. This storage area includes subpools 0-127, 129-132, 244, 251 and 252. If ADDRSPC=REAL is specified, this field equals the amount of contiguous real storage that was used.
6	6 SMF30SYS	2	binary	Largest amount of storage used from top of private area, in 1K units. This storage area includes the local system queue area (LSQA) and the SWA — subpools 229, 230, 236, 237, 249, and 253-255. If ADDRSPC=REAL is specified, this field equals the amount of storage used that was not from the contiguous real storage reserved for the program.
8	8 SMF30PGI (SMF30PIA)	4	binary	Number of pages that were paged in from auxiliary storage.
12	C SMF30PGO (SMF30POA)	4	binary	Number of pages that were paged out to auxiliary storage.
16	10 SMF30CPM	4	binary	Number of attempts to read data from an ESO hiperspace that were not satisfied because the data has been deleted.
20	14 SMF30NSW	4	binary	Number of address space swap sequences. (A swap sequence consists of an address space swap-out and swap-in. Logical swap-out and swap-in are not included.)
24	18 SMF30PSI	4	binary	Number of pages swapped in from auxiliary storage to central storage. This field includes: (local system queue area (LSQA), fixed pages, and pages that the real storage manager determined to be active when the address space was swapping in. It does not include page reclaims or pages found in storage during the swap-in process (such as pages brought in by the service request blocks (SRB), started after completion of swap-in Stage 1 processing).
28	1C SMF30PSO	4	binary	Number of pages swapped out from central storage to auxiliary storage. This field includes: local system queue area (LSQA), private area fixed pages, and private area non-fixed changed pages.

Record type 30

Offsets	Name	Length	Format	Description
32	20 SMF30VPI	4	binary	Number of VIO page-ins from auxiliary storage to central storage for this step. This field includes page-ins resulting from page faults or specific page requests on a VIO window. It does not include VIO swap-ins or page-ins for the common area.
36	24 SMF30VPO	4	binary	Number of VIO page-outs from central storage to auxiliary storage for this step. This field includes page-outs resulting from specific page requests on a VIO window as well as those pages stolen by the paging supervisor through infrequent use. It does not include VIO swap-outs or page-outs for the common area.
40	28 SMF30VPR	4	binary	Number of VIO reclaims.
44	2C SMF30CPI	4	binary	Number of common area page-ins (LPA + CSA) from auxiliary storage to central storage.
48	30 SMF30HPI	4	binary	Number of hyperspace page-ins from auxiliary to processor storage.
52	34 SMF30LPI	4	binary	Number of LPA page-ins from auxiliary storage to central storage.
56	38 SMF30HPO	4	binary	Number of hyperspace page-outs from processor to auxiliary storage.
60	3C SMF30PST	4	binary	Number of pages stolen from this address space.
64	40 SMF30PSC	8	binary	Number of CPU page seconds for this address space, in page millisecond units. (A page millisecond unit equals 1.024 milliseconds.)
72	48 SMF30RGB	4	binary	Private area size in bytes (less than 16 megabytes).
76	40 SMF30ERG	4	binary	Private area size in bytes (greater than 16 megabytes).
80	50 SMF30ARB	4	binary	Maximum virtual storage in bytes allocated from the local system queue area (LSQA) and the SWA subpools (less than 16 megabytes).
84	54 SMF30EAR	4	binary	Maximum virtual storage in bytes allocated from the local system queue area (LSQA) and the SWA subpools (greater than 16 megabytes).
88	58 SMF30URB	4	binary	Maximum virtual storage in bytes allocated from the user subpools (less than 16 megabytes).
92	5C SMF30EUR	4	binary	Maximum virtual storage in bytes allocated from the user subpools (greater than 16 megabytes).

Offsets	Name	Length	Format	Description
96	60 SMF30RGN	4	binary	<p>Region size established, in 1K units, rounded up to a 4K boundary. The contents of this field is determined as follows:</p> <ul style="list-style-type: none"> • If the ADDRSPC=REAL parameter is specified in the JCL, the contents of this field equals the amount of contiguous central storage reserved for the program. • If the REGION= parameter value in the JCL exceeds 16 megabytes: <ul style="list-style-type: none"> – If the IEFUSI exit changes the region limit or size above 16 megabytes, the contents of this field equals the changed region limit or size – Otherwise, the contents of this field equals the REGION parameter value (minimum value of 32 megabytes). • If the REGION= parameter value in the JCL equals or is less than 16 megabytes: <ul style="list-style-type: none"> – If the IEFUSI exit changes the region limit or size below 16 megabytes, the contents of this field equals the changed region limit or size – Otherwise, the contents of this field equals the REGION parameter value. <p>Note: If both the region limit and size are changed, but do not match, the contents of this field equals the smaller of the changed region limit or size.</p>
100	64 SMF30DSV	4	binary	Amount of user key data space and hiperspace virtual storage (high water mark) used during the step/job (in megabytes). Must be in key 8 or higher, and the creator of the dataspace must be in problem program state. If these two conditions are not true, this field contains zeros.
104	68 SMF30PIE	4	binary	Number of unblocked pages that were paged in from expanded storage.
108	6C SMF30POE	4	binary	Number of unblocked pages that were paged out to expanded storage.
112	70 SMF30BIA	4	binary	Number of blocked pages that were paged in from auxiliary storage.
116	74 SMF30BOA	4	binary	Number of blocked pages that were paged out to auxiliary storage.
120	78 SMF30BIE	4	binary	Number of blocked pages that were paged in from expanded storage.
124	7C SMF30BOE	4	binary	Number of blocked pages that were paged out to expanded storage.
128	80 SMF30KIA	4	binary	Number of blocks that were paged in from auxiliary storage.
132	84 SMF30KOA	4	binary	Number of blocks that were paged out to auxiliary storage.
136	88 SMF30KIE	4	binary	Number of blocks that were paged in from expanded storage.
140	8C SMF30KOE	4	binary	Number of blocks that were paged out to expanded storage.
144	90 SMF30PSF	8	binary	Number of CPU page seconds for the IARVSERV shared central storage frames in use by this address space, in page milliseconds.
152	98 SMF30PAI	4	binary	Number of IARVSERV shared pages that were paged in from auxiliary storage in this address space.
156	9C SMF30PEI	4	binary	Number of IARVSERV shared pages that were paged in from expanded storage in this address space.
160	A0 SMF30ERS	8	binary	Expanded storage page residency time in page-milliseconds.

Record type 30

Offsets	Name	Length	Format	Description														
168	A8 SMF30MEM	8	binary	MEMLIMIT value in 1MB units as determined at step initialization time, after IEFUSI processing. An increase in the system default memlimit value is not reflected here. The maximum value of this field is '0000FFFFFFFF000'x that is equivalent to MEMLIMIT having no limit.														
176	B0 SMF30MES	1	binary	Source of Memlimit, which is one of the following: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'01'</td> <td>MEMLIMIT set by SMF.</td> </tr> <tr> <td>X'02'</td> <td>MEMLIMIT set explicitly in the JCL with MEMLIMIT parameter on JOB or EXEC statement.</td> </tr> <tr> <td>X'03'</td> <td>MEMLIMIT is unlimited based on REGION=0 specification.</td> </tr> <tr> <td>X'04'</td> <td>MEMLIMIT set by IEFUSI (even if IEFUSI did not change the value).</td> </tr> <tr> <td>X'0A'</td> <td>System provided a default for MEMLIMIT based on REGION=0 specification and a subsequent curtailment of REGION in the IEFUSI exit.</td> </tr> </tbody> </table>	Value	Meaning	X'01'	MEMLIMIT set by SMF.	X'02'	MEMLIMIT set explicitly in the JCL with MEMLIMIT parameter on JOB or EXEC statement.	X'03'	MEMLIMIT is unlimited based on REGION=0 specification.	X'04'	MEMLIMIT set by IEFUSI (even if IEFUSI did not change the value).	X'0A'	System provided a default for MEMLIMIT based on REGION=0 specification and a subsequent curtailment of REGION in the IEFUSI exit.		
Value	Meaning																	
X'01'	MEMLIMIT set by SMF.																	
X'02'	MEMLIMIT set explicitly in the JCL with MEMLIMIT parameter on JOB or EXEC statement.																	
X'03'	MEMLIMIT is unlimited based on REGION=0 specification.																	
X'04'	MEMLIMIT set by IEFUSI (even if IEFUSI did not change the value).																	
X'0A'	System provided a default for MEMLIMIT based on REGION=0 specification and a subsequent curtailment of REGION in the IEFUSI exit.																	
177	B1 SMF30SLM	1	binary	Flags that indicate the actions taken on the job step region or MEMLIMIT due to a rule defined in the SMFLIMxx member of parmlib. For subtype 5, this will be a copy of the SMF30SLM value for the last executed job step. <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>SMFLIM REGIONBELOW acted on the non-extended REGION for this step.</td> </tr> <tr> <td>X'40'</td> <td>SMFLIM REGIONABOVE acted on the extended REGION for this step.</td> </tr> <tr> <td>X'20'</td> <td>SMFLIM SYSRESVBELOW acted on the non-extended REGION for this step.</td> </tr> <tr> <td>X'10'</td> <td>SMFLIM SYSRESVABOVE acted on the extended REGION for this step.</td> </tr> <tr> <td>X'08'</td> <td>SMFLIM MEMLIMIT acted on the MEMLIMIT for this step.</td> </tr> <tr> <td>X'04'</td> <td>The IEFUSI exit set the output flag that caused all SMFLIM decision making to be bypassed.</td> </tr> </tbody> </table>	Value	Meaning	X'80'	SMFLIM REGIONBELOW acted on the non-extended REGION for this step.	X'40'	SMFLIM REGIONABOVE acted on the extended REGION for this step.	X'20'	SMFLIM SYSRESVBELOW acted on the non-extended REGION for this step.	X'10'	SMFLIM SYSRESVABOVE acted on the extended REGION for this step.	X'08'	SMFLIM MEMLIMIT acted on the MEMLIMIT for this step.	X'04'	The IEFUSI exit set the output flag that caused all SMFLIM decision making to be bypassed.
Value	Meaning																	
X'80'	SMFLIM REGIONBELOW acted on the non-extended REGION for this step.																	
X'40'	SMFLIM REGIONABOVE acted on the extended REGION for this step.																	
X'20'	SMFLIM SYSRESVBELOW acted on the non-extended REGION for this step.																	
X'10'	SMFLIM SYSRESVABOVE acted on the extended REGION for this step.																	
X'08'	SMFLIM MEMLIMIT acted on the MEMLIMIT for this step.																	
X'04'	The IEFUSI exit set the output flag that caused all SMFLIM decision making to be bypassed.																	
178	B2	6		Reserved.														
184	B8 SMF30HVR	8	binary	High water mark for the number of real storage frames that is used to back 64-bit private storage.														
192	C0 SMF30HVA	8	binary	High water mark for the amount of auxiliary storage that is used to back 64-bit private storage. This value is a total of the number of paging data set slots and storage-class memory (SCM) blocks.														
200	C8 SMF30HVO	8	binary	Amount of 64-bit private storage in bytes that is obtained by this step or job. This includes guarded virtual storage.														
208	D0 SMF30HVH	8	binary	High water mark for the number of usable bytes of 64-bit private storage that is obtained by this step or job. This does not include guarded virtual storage.														
216	D8 SMF30HSO	8	binary	Amount of 64-bit shared storage in bytes, which this step or job has addressability or access to.														
224	E0 SMF30HSH	8	binary	High water mark for the number of usable bytes of 64-bit shared storage, which this step or job has access to.														

Performance Section

This section contains the SRM service units used by the address space for the period being reported on. For more information on SRM service units, see *z/OS MVS Initialization and Tuning Guide*.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30POF

Length
SMF30PLN

Number
SMF30PON - Reports the number of performance sections on the current record. Because only one performance section can appear on the record, this field is '1' (if the section exists) or '0' (if it doesn't).

Offsets	Name	Length	Format	Description
0	0 SMF30SRV	4	binary	Total service units. This field grows to X'FFFFFFFF' and then wraps back to zero and continues growing. When wrapping occurs, SMF30SRV_INV is set to on. SMF30SRV_L is the 8-byte equivalent of this field.
4	4 SMF30CSU	4	binary	CPU service units. This field grows to X'FFFFFFFF' and then wraps back to zero and continues growing. When wrapping occurs, SMF30CSU_INV is set to on. SMF30CSU_L is the 8-byte equivalent of this field.
8	8 SMF30SRB	4	binary	Service request block (SRB) service units. This field grows to X'FFFFFFFF' and then wraps back to zero and continues growing. When wrapping occurs, SMF30SRB_INV is set to on. SMF30SRB_L is the 8-byte equivalent of this field.
12	C SMF30IO	4	binary	I/O service units. This field grows to X'FFFFFFFF' and then wraps back to zero and continues growing. When wrapping occurs, SMF30IO_INV is set to on. SMF30IO_L is the 8-byte equivalent of this field.
16	10 SMF30MSO	4	binary	Main storage occupancy (MSO) service units. This field grows to X'FFFFFFFF' and then wraps back to zero and continues growing. When wrapping occurs, SMF30MSO_INV is set to on. SMF30MSO_L is the 8-byte equivalent of this field.
20	14 SMF30TAT	4	binary	System resources manager (SRM) transaction active time, in 1024-microsecond units.
24	18 SMF30SUS	4	binary	Copy of RmctAdjC when this SMF record was produced, number of sixteenths of one CPU microsecond per CPU service unit.
28	1C SMF30RES	4	binary	System resources manager (SRM) transaction residency time, in 1024-microsecond units. That is the amount of time the SRM transaction was in real storage.
32	20 SMF30TRS	4	binary	Number of system resources manager (SRM) transactions.
36	24 SMF30WLM	8	EBCDIC	Workload name. This field is blank (X'40') when in workload management compatibility mode.
44	2C SMF30SCN	8	EBCDIC	Service class name. This field will contain SYSOTHER during the time of a WLM POLICY switch.
52	34 SMF30GRN	8	EBCDIC	Resource group name.
60	3C SMF30RCN	8	EBCDIC	Report class name. This field is blank (X'40') during the time of a WLM POLICY switch.
68	44 SMF30ETA	4	binary	Independent enclave transaction active time in 1024-microsecond units.

Record type 30

Offsets	Name	Length	Format	Description
72	48 SMF30ESU	4	binary	Independent enclave CPU service units. This field grows to X'FFFFFFFF' and then wraps back to zero and continues growing. When wrapping occurs, SMF30ESU_INV is set to on. SMF30ESU_L is the 8-byte equivalent of this field.
76	4C SMF30ETC	4	binary	Independent enclave transaction count.
80	50 SMF30PFL	16	EBCDIC	Scheduling environment name. Binary zeros if no scheduling environment is specified.
96	60 SMF30JQT	4	binary	Job preparation time. This is the elapsed time before the job was first queued for execution. It excludes time to read the job into the system. It includes delays incurred waiting for and during conversion, such as when eligible systems are not active to convert the job. If the JOB statement specified TYPRUN=JCLHOLD, this time is 0. The time is in 1024-microsecond units.
100	64 SMF30RQT	4	binary	Time following job preparation when the job was ineligible for execution due to either the job's eligible systems being inactive or the job's scheduling environment not being available. The time is in 1024-microsecond units.
104	68 SMF30HQT	4	binary	Time following job preparation when the job was ineligible for execution for reasons not included in SMF30RQT. This includes job hold, job class hold, job queue hold, duplicate job name serialization, and job class execution limits. If the JOB statement specified TYPRUN=HOLD, the time that the job is held for this reason is not included. The time is in 1024-microsecond units.
108	6C SMF30SQT	4	binary	Time the job was eligible for execution. This is the amount of time between the end of job conversion and Problem Program Start time (SMF30PPS). The time is in 1024-microsecond units. For JES3, this field includes time the job was ineligible for execution.
112	70 SMF30PF1	1	EBCDIC	Performance section flag byte: Value (Name) Meaning X'80' (SMF30PFJ) Job service class association was modified by a system operator prior to job initiation. X'40' (SMF30PFR) Job service class association was modified by a system operator during job execution. X'20' (SMF30PFF) Job initiation forced by a system operator. X'10' (SMF30RTR) Job has been restarted. There is one set of SMF30 records for each time the job is restarted. X'08' (SMF30MSI) Remote system data is incomplete. X'04' (SMF30WMI) Job is executing in a workload manager batch initiator. X'02' (SMF30CCP) Service class assigned to the address space was designated CPU-critical in the WLM service definition. X'01' (SMF30CSP) Service class assigned to the address space was designated storage-critical in the WLM service definition.

Offsets	Name	Length	Format	Description
113	71 SMF30PF2	1	EBCDIC	<p>Performance section flag byte:</p> <p>Value (Name) Meaning</p> <p>X'80' (SMF30ASP) Address space was designated storage-critical.</p> <p>X'40' (SMF30SME) Address space cannot be managed to transaction goals, because "manage region to goals of region" was specified in the WLM service definition.</p> <p>X'20' (SMF30CPR) Address space is currently CPU-protected.</p> <p>X'10' (SMF30SPR) Address space is currently storage-protected.</p> <p>X'08' (SMF30PIN) If this bit is on, the following fields contain incomplete data: (SRM could not deliver deltas or values for this interval)</p> <p>SMF30CSU SMF30MSO SMF30SPR SMF30ESU SMF30PFL SMF30SQT SMF30ETA SMF30PFR SMF30SRB SMF30ETC SMF30RCN SMF30SRV SMF30GRN SMF30RES SMF30SUS SMF30HQT SMF30RQT SMF30TAT SMF30IO SMF30RTR SMF30TRS SMF30JPN SMF30SCN SMF30WLM SMF30JQT SMF30SME SMF30CRM SMF30SRV_L SMF30CSU_L SMF30SRB_L SMF30IO_L SMF30MSO_L SMF30ESU_L</p> <p>X'04' (SMF30CRM) If this bit is on, it indicates that the address space matched a classification rule that specified "manage region using goals of both", which means it is managed towards the velocity goal of the region. But, transaction completions are reported and used for management of the transaction service classes with response time goals. This option must only be used with CICS TORs. The associated AORs must remain at the default "manage region using goals of transaction".</p>

Record type 30

Offsets	Name	Length	Format	Description
114	72 SMF30INV	1	EBCDIC	<p>Performance section flag byte:</p> <p>Value (Name) Meaning</p> <p>X'80' (SMF30SRV_INV) When this bit is on, it indicates that the value in SMF30SRV has grown past its four byte maximum value capacity of X'FFFFFFFF' and has wrapped back to zero. SMF30SRV_L is the 8-byte equivalent of SMF30SRV.</p> <p>X'40' (SMF30CSU_INV) When this bit is on, it indicates that the value in SMF30CSU has grown past its four byte maximum value capacity of X'FFFFFFFF' and has wrapped back to zero. SMF30CSU_L is the 8-byte equivalent of SMF30CSU.</p> <p>X'20' (SMF30SRB_INV) When this bit is on, it indicates that the value in SMF30SRB has grown past its four byte maximum value capacity of X'FFFFFFFF' and has wrapped back to zero. SMF30SRB_L is the 8-byte equivalent of SMF30SRB.</p> <p>X'10' (SMF30IO_INV) When this bit is on, it indicates that the value in SMF30IO has grown past its four byte maximum value capacity of X'FFFFFFFF' and has wrapped back to zero. SMF30IO_L is the 8-byte equivalent of SMF30IO.</p> <p>X'08' (SMF30MSO_INV) When this bit is on, it indicates that the value in SMF30MSO has grown past its four byte maximum value capacity of X'FFFFFFFF' and has wrapped back to zero. SMF30MSO_L is the 8-byte equivalent of SMF30MSO.</p> <p>X'04' (SMF30ESU_INV) When this bit is on, it indicates that the value in SMF30ESU has grown past its four byte maximum value capacity of X'FFFFFFFF' and has wrapped back to zero. SMF30ESU_L is the 8-byte equivalent of SMF30ESU.</p>
115	73 SMF30ZEP	1	binary	Contains information associated with a potential future function and no further details are available at this time.
116	74 SMF30JPN	8	EBCDIC	Subsystem collection name from IWMCLSFY SUBCOLN.
124	7C SMF30MSC	4	binary	MSO Service Definition Coefficient (SDC) scaled by 10000.
128	80 SMF30CPC	2	binary	CPU Service Definition Coefficient (SDC) scaled by 10.
130	82 SMF30LOC	2	binary	IOC Service Definition Coefficient (SDC) scaled by 10.
132	84 SMF30SRC	2	binary	SRB Service Definition Coefficient (SDC) scaled by 10.
134	86 SMF30ZNF	2	binary	Normalization factor for IFA service time. Used to convert between real IFA times and "normalized" IFA times, that is, the equivalent time on a standard CP. Multiply SMF30_TIME_ON_IFA by this value and divide by 256 to calculate the normalized IFA time.
136	88 SMF30SNF	2	binary	Normalization factor for zIIP service time. Used to convert between real zIIP times and normalized zIIP times, that is, the equivalent time on a standard CP. Multiply SMF30_TIME_ON_zIIP by this value and divide by 256 to calculate the normalized zIIP time.
138	8A SMF30RS6	6	EBCDIC	Reserved.

Offsets	Name	Length	Format	Description								
144	90 SMF30SRV_L	8	binary	Total service units. This is the 8-byte equivalent of SMF30SRV. The value of this field continues to grow after SMF30SRV_INV is set.								
152	98 SMF30CSU_L	8	binary	CPU service units. This is the 8-byte equivalent of SMF30CSU. The value of this field continues to grow after SMF30CSU_INV is set.								
160	A0 SMF30SRB_L	8	binary	SRB service units. This is the 8-byte equivalent of SMF30SRB. The value of this field continues to grow after SMF30SRB_INV is set.								
168	A8 SMF30IO_L	8	binary	I/O service units. This is the 8-byte equivalent of SMF30IO. The value of this field continues to grow after SMF30IO_INV is set.								
176	B0 SMF30MSO_L	8	binary	MSO service units. This is the 8-byte equivalent of SMF30MSO. The value of this field continues to grow after SMF30MSO_INV is set.								
184	B8 SMF30ESU_L	8	binary	ESU service units. This is the 8-byte equivalent of SMF30ESU. The value of this field continues to grow after SMF30ESU_INV is set.								
192	C0 SMF30ACB	1	binary	Contains information associated with a potential future function, no further details are provided at this time.								
193	C1 SMF30CR	1	binary	Contains information associated with a potential future function, no further details are provided at this time.								
194	C2 SMF30_Capacity_Change_Cnt	2	binary	The number of processor capacity changes that occurred since the previous interval or event interval. This number will be greater than 1 when the number of processor capacity changes exceeded the number specified in the MAXEVENTINTRECS parmlib option.								
196	C4 SMF30_RCTPCPUA_Actual	4	binary	Physical CPU adjustment factor (this is the adjustment factor for converting CPU time to equivalent service, in basic-mode with all processors online). Based on model capacity rating.								
200	C8 SMF30_RCTPCPUA_Nominal	4	binary	Physical CPU adjustment factor (this is the adjustment factor for converting CPU time to equivalent service in basic-mode with all processors online). Based on nominal model capacity rating.								
204	CC SMF30_RCTPCPUA_scaling_factor	4	binary	Scaling factor for SMF30_RCTPCPUA_actual and SMF30_RCTPCPUA_nominal.								
208	D0 SMF30_Capacity_Adjustment_Ind	1	binary	Field values and meanings are: <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The indication is not reported.</td> </tr> <tr> <td>1-99</td> <td>Some amount of reduction is indicated.</td> </tr> <tr> <td>100</td> <td>The machine is operating in normal capacity.</td> </tr> </tbody> </table> Primary CPUs and all secondary-type CPUs are similarly affected.	Value	Meaning	0	The indication is not reported.	1-99	Some amount of reduction is indicated.	100	The machine is operating in normal capacity.
Value	Meaning											
0	The indication is not reported.											
1-99	Some amount of reduction is indicated.											
100	The machine is operating in normal capacity.											
209	D1 SMF30_Capacity_Change_Rsn	1	binary	Indicates the reason that is associated with the present value contained in SMF30_Capacity_Adjustment_Ind. The bit values of this field correspond to those described in RMCTZ_Capacity_Adjustment_Indication of the IRARMCTZ mapping macro. (See <i>MVS Data Areas.</i>)								

Record type 30

Offsets	Name	Length	Format	Description
210	D2 SMF30_Capacity_Flags	1	binary	<p>Processor capacity flags.</p> <p>Bit (Name) Meaning when set</p> <p>0 (SMF30_Event_Driven_Intvl_Rec) Indicates that the current interval record was generated as a result of an event, rather than as a result of standard interval expiration based on time.</p> <p>1 (SMF30_RQSVSUS_Err) Indicates that an error occurred while collecting the data for SMF30SUS following a change in processor capacity. If this bit is found to be on when the record is being written, an additional attempt to collect the data from SRM is made. If that attempt is successful, the data is filled in at that time and the SMF30PIN error bit will be off.</p> <p>2 (SMF30_Capacity_Data_Err) Indicates that error occurred while collecting the processor capacity data, therefore the following fields are unreliable: SMF30_RCTPCPUA_Actual SMF30_RCTPCPUA_Nominal SMF30_RCTPCPUA_scaling_factor SMF30_Capacity_Adjustment_Ind SMF30_Capacity_Change_Rsn</p> <p>3 (SMF30_PCD_Rsvd_Exists) Indicates records generated on systems running z/OS V1R7 through z/OS V1R9. When off, this bit indicates records generated on systems running z/OS V1R10 and later.</p>
212	D4 SMF30_RMCTADJN_Nominal	4	binary	Nominal CPU rate adjustment.

Operator Section

This section contains the actions performed by the operator for this address space during the period being reported.

Counts are increased by one when the mount is verified. If an incorrect volume is mounted, the count is not increased even though another mount message is issued.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30OOF

Length
SMF30OLN

Number
SMF30OON - Reports the number of operator sections on the current record. Because only one operator section can appear on the record, this field is '1' (if the section exists) or '0' (if it doesn't).

Offsets	Name	Length	Format	Description
0	0 SMF30PDM	4	binary	Number of non-specific DASD mounts.
4	4 SMF30PRD	4	binary	Number of specific DASD mounts.
8	8 SMF30PTM	4	binary	Number of non-specific tape mounts.
12	C SMF30TPR	4	binary	Number of specific tape mounts.

Offsets	Name	Length	Format	Description
16	10 SMF30MTM	4	binary	Number of non-specific MSS mounts. As of MVS/SP4.1, this field is no longer valid, and contains zeroes.
20	14 SMF30MSR	4	binary	Number of specific MSS mounts. As of MVS/SP4.1, this field is no longer valid, and contains zeroes.

APPC/MVS Resource Section

This section contains summary data related to how an address space uses APPC/MVS resources. For information about cumulative summary data, see the "APPC/MVS Cumulative Resource Section". For more information about APPC/MVS, see Chapter 7, "APPC/MVS accounting," on page 109. This section will appear on the record only if the address space has used APPC/MVS services and there is data to be reported.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30DRO

Length
SMF30DRL

Number

SMF30DRN - Reports the number of APPC/MVS resource sections on the current record. Because only one APPC/MVS resource section can appear on the record, this field is '1' (if the section exists) or '0' (if it doesn't).

Offsets	Name	Length	Format	Description
0	0 SMF30DC	4	binary	Number of conversations, both currently active and deallocated, associated with the transaction program ID.
4	4 SMF30DCA	4	binary	Number of all conversations allocated.
8	8 SMF30DSC	4	binary	Number of times the transaction program issued a Send call. Note: Because an interval or step might end in the middle of a Send call, this field might contain zero while SMF30DDS contains a nonzero value.
12	C SMF30DDS	8	long floating point hex	Amount of data, in bytes, sent by the transaction program.
20	14 SMF30DRC	4	binary	Number of times the transaction program issued a Receive call. Note: Because an interval or step might end in the middle of a Receive call, this field might contain zero while SMF30DDR contains a nonzero value.
24	18 SMF30DDR	8	long floating point hex	Amount of data, in bytes, received by the transaction program.
32	20 SMF30DAC	4	binary	Number of active conversations.
36	24 SMF30DTR	4	binary	Number of APPC/MVS transactions programs scheduled by the APPC/MVS transaction scheduler (ASCH).

APPC/MVS Cumulative Resource Section

This section contains cumulative summary data related to how an address space uses APPC/MVS resources. Regardless of whether the record is an interval, step termination, or step total record, this section represents cumulative data since the start of the job. This section will only appear on the record if the address space has used APPC/MVS services and there is data to be reported.

Record type 30

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30ARO

Length
SMF30ARL

Number
SMF30ARN - This field will be '1' (if the section is on the record) or '0' (if it isn't)

Offsets	Name	Length	Format	Description
0	0 SMF30CN	4	binary	Total number of conversations associated with the transaction program (TP) ID, both currently active and deallocated.
4	4 SMF30CNA	4	binary	Total number of all conversations allocated.
8	8 SMF30SEN	4	binary	Total number of times the transaction program (TP) issued a Send call.
12	C SMF30DAT	8	long floating point hex	Total amount of data sent by the transaction program (TP) in bytes (long floating point).
20	14 SMF30REC	4	binary	Total number of times the transaction program (TP) issued a Receive call.
24	18 SMF30DAR	8	long floating point hex	Total amount of data received by the transaction program (TP) in bytes (long floating point).
32	20 SMF30TAC	4	binary	Total number of active conversations.
36	24 SMF30ATR	4	binary	Total number of APPC/MVS transactions programs scheduled by the APPC/MVS transaction scheduler (ASCH).

z/OS UNIX Process Section

Reports on the use of z/OS UNIX by z/OS UNIX processes.

Offsets	Name	Length	Format	Description
0	0 SMF30OPI	4	binary	z/OS UNIX process ID.
4	4 SMF30OPG	4	binary	z/OS UNIX process group ID.
8	8 SMF30OUI	4	binary	z/OS UNIX process user ID.
12	C SMF30OUG	4	binary	z/OS UNIX process user group ID.
16	10 SMF30OSI	4	binary	z/OS UNIX process session ID.
20	14 SMF30OSC	4	binary	Number of z/OS UNIX services requested by the process. When the z/OS UNIX parmlib option SYSCALL_COUNTS is set to NO, there is no collection of data for the count of syscalls. When gathering syscall counts for a job, do not switch between SYSCALL_COUNTS=YES and SYSCALL_COUNTS=NO because doing so can lead to inaccurate values in the SMF30OSC field.
24	18 SMF30OST	4	binary	Total CPU time (in hundredths of a second) accumulated by z/OS UNIX services requested by the process. Note that the value in SMF30OST is already included in fields SMF30CPT or SMF30CPS. When the z/OS UNIX parmlib option SYSCALL_COUNTS is set to NO, there is no collection of data for CPU usage. When gathering CPU usage for a job, do not switch between SYSCALL_COUNTS=YES and SYSCALL_COUNTS=NO because doing so can lead to inaccurate values in the SMF30OST field.
28	1C SMF30ODR	4	binary	Number of z/OS UNIX directory reads for the process.
32	20 SMF30OFR	4	binary	Read I/O block count for z/OS UNIX regular files.
36	24 SMF30OFW	4	binary	Write I/O block count for z/OS UNIX regular files.

Offsets	Name	Length	Format	Description
40	28 SMF30OPR	4	binary	Read I/O block count for z/OS UNIX pipes and AF_UNIX sockets.
44	2C SMF30OPW	4	binary	Write I/O block count for z/OS UNIX pipes and AF_UNIX sockets.
48	30 SMF30OSR	4	binary	Reserved.
52	34 SMF30OSW	4	binary	Reserved.
56	38 SMF30OLL	4	binary	Number of pathname lookup calls to the logical file system.
60	3C SMF30OLP	4	binary	Number of pathname lookup calls to the physical file system.
64	40 SMF30OGL	4	binary	Number of pathname generation calls to the logical file system.
68	44 SMF30OGP	4	binary	Number of pathname generation calls to the physical file system to determine a pathname.
72	48 SMF30OPP	4	binary	Parent process ID.
76	4C SMF30OKR	4	binary	Reserved.
80	50 SMF30OKW	4	binary	Reserved.
84	54 SMF30OMS	4	binary	Reserved.
88	58 SMF30OMR	4	binary	Reserved.
92	5C SMF30OSY	4	binary	Number of times the <code>sync()</code> function was called.

Automatic Restart Management Section

This section contains information related to a batch job or started task that registers as an element of automatic restart management. The element name, element type, and timestamps of the completion of various events are recorded. If the timestamp for an event is zero, then that particular event had not been completed by the time the record was generated.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30RMO

Length
SMF30RML

Number
SMF30RMN

Offsets	Name	Length	Format	Description
0	0 SMF30RNM	16	EBCDIC	Element name.
16	10 SMF30RTP	8	EBCDIC	Element type.
24	18 SMF30RRG	16	EBCDIC	Restart group for element in SMF30RNM.
40	28 SMF30RSN	8	EBCDIC	The system name for the system on which the element was initially started; blank, for the initial start. Note: The current system name is in the SMF30SYN field.
48	30 SMF30RGT	4	binary	The time (local) when the element issued the IXCARM macro with the REGISTER parameter, in hundredths of a second.
52	34 SMF30RGD	4	binary	The date when the element issued the REGISTER request, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.

Record type 30

Offsets	Name	Length	Format	Description
56	38 SMF30RWT	4	binary	The time (local) when the element issued the IXCARM macro with the WAITPRED parameter, in hundredths of a second. This field will be zero if this function was not requested.
60	3C SMF30RWD	4	binary	The date when the element issued IXCARM with the WAITPRED parameter, in the form <i>0cyydddF</i> (where 'F' is the sign). This field will be zero if this function was not requested.
64	40 SMF30RYT	4	binary	The time (local) when the element issued the IXCARM macro with the READY parameter, in hundredths of a second.
68	44 SMF30RYD	4	binary	The date when this element issued the IXCARM macro with the READY parameter, in the format <i>0cyydddF</i> (where 'F' is the sign).
72	48 SMF30RTT	4	binary	The time (local) when the element was deregistered, in hundredths of a second. This field will be zero if this element is not yet deregistered or if it ended abnormally.
76	4C SMF30RTD	4	binary	The date when this element was deregistered, in the format <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description. This field will be zero if this element is not yet deregistered or if it ended abnormally.

Usage Data Section

This section contains the product ID information (specified on the REGISTER request of the IFAUSAGE macro) and the usage data that has been collected for the time period (interval, step, or job), for the product in the current address space only.

For registered products with a domain of TASK and a scope of ALL (example, IMS), there will be one usage section in the record for each unique product that is actively registered at the time the specified interval ended (as opposed to any part of the specified interval). In addition, there will be one section in the record for each unique product ID that has deregistered at least once during the specified interval.

Note: The data for deregistered products with a domain of TASK and a scope of FUNCTION is consolidated into one section in the record by unique product ID. This is only performed at the specified interval level.

For all other registered products, there will be one section in the record for each unique product ID (owner, name, version, qualifier) that is actively registered for any part of that specified interval.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30UDO

Length
SMF30UDL

Number
SMF30UDN

Offsets	Name	Length	Format	Description
0	0 SMF30UPO	16	EBCDIC	Product owner or vendor name (specified on the PRODOWNER option of the IFAUSAGE macro).

Offsets	Name	Length	Format	Description										
16	10 SMF30UPN	16	EBCDIC	Product name (specified on the PRODNAM option of the IFAUSAGE macro).										
32	20 SMF30UPV	8	EBCDIC	Product version (if specified on the PRODVERS option of the IFAUSAGE macro or 'NONE').										
40	28 SMF30UPQ	8	EBCDIC	Product qualifier (if specified on the PRODQUAL option of the IFAUSAGE macro or 'NONE').										
48	30 SMF30UPI	8	EBCDIC	Product ID (if specified on the PROPID option of the IFAUSAGE macro or 'NONE').										
56	38 SMF30UCT	4	binary	Product TCB Time (in hundredths of a second).										
60	3C SMF30UCS	4	binary	Product SRB Time (in hundredths of a second).										
64	40 SMF30URD	8	various	Product specific resource data (specified on the DATA option on the IFAUSAGE macro FUNCTIONDATA request). SMF30URD identifies the format of the data in this field.										
72	48 SMF30UDF	1	binary	Data format of value in SMF30URD <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No data specified.</td> </tr> <tr> <td>1</td> <td>CPU time in long floating Point (in hundredths of a second).</td> </tr> <tr> <td>2</td> <td>Binary (64-bit).</td> </tr> <tr> <td>3</td> <td>Long floating point.</td> </tr> </tbody> </table>	Value	Meaning	0	No data specified.	1	CPU time in long floating Point (in hundredths of a second).	2	Binary (64-bit).	3	Long floating point.
Value	Meaning													
0	No data specified.													
1	CPU time in long floating Point (in hundredths of a second).													
2	Binary (64-bit).													
3	Long floating point.													
73	49 SMF30UFG	1	binary	Usage entry flags <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Unauthorized register</td> </tr> <tr> <td>1-7</td> <td>Unused</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Unauthorized register	1-7	Unused				
Bit	Meaning when set													
0	Unauthorized register													
1-7	Unused													
74	4A	2		Reserved.										

Multisystem Enclave Remote System Data Section

This section contains remote system data for each system that executed work under a multisystem enclave.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'header/self-defining' section:

Offset SMF30MOF

Length
SMF30MLN

Number
SMF30MNO

Offsets	Name	Length	Format	Description
0	0 SMF30MRS	8	EBCDIC	System name on which enclaves created by this address space executed.
8	8 SMF30MRA	4	binary	CPU rate adjustment factor for the system named by SMF30MRS. This is the number of sixteenths of one microsecond of CPU time per CPU service unit.
12	C SMF30MRD	4	binary	CPU time, in hundredths of a second, accumulated by dependent enclaves that executed on the system named by SMF30MRS.
16	10 SMF30MRI	4	binary	CPU time, in hundredths of a second, accumulated by independent enclaves that executed on the system named by SMF30MRS.

Counter data section

This section contains various counters for the address space for the period that the record represents. This section is only produced when **SMF30COUNT** has been specified in the SMFPRMxx member or via the **SETSMF** command. The data is only collected when Hardware Instrumentation Services (HIS) has enabled the appropriate counter set that the data is derived from. Currently, all data is derived from the Instruction Counter in the Basic Counter Set. Therefore, HIS must have enabled the Basic Counter Set for collection to be accurate.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the "header/self-defining" section:

Offset SMF30CDO

Length
SMF30CDL

Number
SMF30CDN - Reports the number of counter data sections on the current record. This can be "0", indicating the counter data section does not exist.

Offsets	Name	Length	Format	Description						
0	0 SMF30InstFlgs1MRS	1	binary	Instruction Counter related flags. If a bit in this byte is on in the subtype 2/3 record, it is on in the subtype 4 record. Similarly, this holds between subtype 4 and subtype 5 records. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>When on, there was a disruption in the collection of instruction counts or the counts could not be obtained.</td> </tr> <tr> <td>1</td> <td>The following fields contain incomplete data (SRM could not deliver deltas or values for this interval): <ul style="list-style-type: none"> • SMF30_Inst_CP_Enclave • SMF30_Inst_Offload_Enclave • SMF30_Inst_OffloadOnCP_Enclave • SMF30_Inst_CP_DepEnc • SMF30_Inst_Offload_DepEnc • SMF30_Inst_OffloadOnCP_DepEnc </td> </tr> </table>	Bit	Meaning when set	0	When on, there was a disruption in the collection of instruction counts or the counts could not be obtained.	1	The following fields contain incomplete data (SRM could not deliver deltas or values for this interval): <ul style="list-style-type: none"> • SMF30_Inst_CP_Enclave • SMF30_Inst_Offload_Enclave • SMF30_Inst_OffloadOnCP_Enclave • SMF30_Inst_CP_DepEnc • SMF30_Inst_Offload_DepEnc • SMF30_Inst_OffloadOnCP_DepEnc
Bit	Meaning when set									
0	When on, there was a disruption in the collection of instruction counts or the counts could not be obtained.									
1	The following fields contain incomplete data (SRM could not deliver deltas or values for this interval): <ul style="list-style-type: none"> • SMF30_Inst_CP_Enclave • SMF30_Inst_Offload_Enclave • SMF30_Inst_OffloadOnCP_Enclave • SMF30_Inst_CP_DepEnc • SMF30_Inst_Offload_DepEnc • SMF30_Inst_OffloadOnCP_DepEnc 									
1	1	7	binary	Reserved						
8	8 SMF30_Inst_CP_Task	8	binary	The number of instructions executed while running on a standard processor as a task when it is not eligible for an offload processor and it is not associated with an enclave.						
16	10 SMF30_Inst_CP_NonPreemptSRB	8	binary	The number of instructions executed while running on a standard processor as a non-preemptable SRB.						
24	18 SMF30_Inst_CP_PreemptSRB	8	binary	The number of instructions executed while running on a standard processor as a preemptable or client SRB when it is not associated with an enclave.						
32	20 SMF30_Inst_Offload	8	binary	The number of instructions executed while running on an offload processor when not associated with an enclave.						
40	28 SMF30_Inst_OffloadOnCP	8	binary	The number of instructions executed while running on a standard processor as eligible for an offload processor while not associated with an enclave.						
48	30 SMF30_Inst_CP_Enclave	8	binary	The number of instructions executed while running on a standard processor as not eligible for an offload processor for an independent enclave.						
56	38 SMF30_Inst_Offload_Enclave	8	binary	The number of instructions executed while running on an offload processor for an independent enclave.						
64	40 SMF30_Inst_OffloadOnCP_Enclave	8	binary	The number of instructions executed while running on a standard processor as eligible for an offload processor for an independent enclave.						
72	48 SMF30_Inst_CP_DepEnc	8	binary	The number of instructions executed while running on a standard processor as not eligible for an offload processor for a dependent enclave.						
80	50 SMF30_Inst_Offload_DepEnc	8	binary	The number of instructions executed while running on an offload processor for a dependent enclave.						
88	58 SMF30_Inst_OffloadOnCP_DepEnc	8	binary	The number of instructions executed while running on a standard processor as eligible for an offload processor for a dependent enclave.						

zEDC usage statistics section

This section contains various counters for the zEDC usage statistics for the period that the record represents. This section is only produced when zEDC compression and decompression activities occur during the period.

Triplet information: This section is located on the record using the following triplet fields, which are located in the header/self-defining section:

Offset SMF30USO — Offset of the zEDC usage statistics section.

Length

SMF30USL — Length of the zEDC usage statistics section.

Number

SMF30USN — Number of zEDC usage statistics sections on the current record. This can be zero, indicating that the zEDC usage statistics section does not exist.

Offsets	Name	Length	Format	Description
0	0 SMF30_US_ComprReq	8	binary	Total number of compression and decompression requests (both supervisor-state and problem-state requests)
8	8 SMF30_US_ComprReq_Prob	8	binary	Total number of problem-state compression and decompression requests.
16	10 SMF30_US_QueueTime	8	binary	Total queue time. The amount of time, in microseconds, from when the request was submitted until the adapter started executing the request.
24	18 SMF30_US_ExecTime	8	binary	Total execution time, in microseconds.
32	20 SMF30_US_Def_UncomprIn	8	binary	Total number, in bytes, of uncompressed data input.
40	28 SMF30_US_Def_ComprOut	8	binary	Total number, in bytes, of compressed data output.
48	30 SMF30_US_Inf_ComprIn	8	binary	Total number, in bytes, of compressed data input.
56	38 SMF30_US_Inf-DecomprOut	8	binary	Total number, in bytes, of decompressed data output.

Record Type 31 (1F) — TIOC Initialization

Note: While record type 31 is no longer generated because telecommunications access method (TCAM) was withdrawn from service in 2002, record type 31 remains as a placeholder.

Record type 31 is written when a MODIFY TCAM operator command is issued. This record contains the number of time-sharing buffers, buffer size, maximum number of output and input buffers allowed per terminal before OWAIT or LWAIT, OWAIT and RESTART thresholds, number of buffers reserved on the free queue, and the size of one terminal status block. OWAIT is the suspension of the program during input/output processing to the terminal because no output buffers are available. LWAIT is the locking of the terminal's keyboard because the terminal user filled all of the available input buffers.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Record type 31

Offsets	Name	Length	Format	Description								
0	0 TTI31LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 TTI31SEG	2	binary	Segment descriptor (see record length field).								
4	4 TTIRFLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 TTIRCDTY	1	binary	Record type 31 (X'1F').								
6	6 TTIRCDTS	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A TTIRCDTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E TTICPUID	4	EBCDIC	System identification (from the SID parameter).								
18	12 TTINBF	2	binary	Number of time-sharing buffers.								
20	14 TTIBUFSE	2	binary	Time-sharing buffer size, in bytes.								
22	16 TTIRSVRD	2		Reserved.								
24	18 TTIOMAX	2	binary	Maximum number of output buffers allowed per terminal before OWAIT.								
26	1A TTIIMAX	2	binary	Maximum number of input buffers allowed per terminal before LWAIT.								
28	1C TTIOWTH	2	binary	OWAIT threshold. The number of buffers that must be freed in order to be freed from OWAIT.								
30	1E TTIRSTH	2	binary	RESTART threshold. The number of buffers that must be freed in order to be freed from LWAIT.								
32	20 TTIUSLW	2	binary	Number of buffers reserved on the free queue (less than this number results in a system-wide LWAIT).								
34	22 TTIUSSL	2		Reserved.								
36	24 TTITSBS	1	binary	Size of one terminal status block (TSB).								
37	25 TTIUSCH	21		Reserved.								

Record Type 32 (20) — TSO/E User Work Accounting

Record type 32 is written at normal or abnormal termination of a TSO/E session. It is written at the expiration of a TSO/E accounting interval. For more information on using this information see "Transaction billing" on page 7 and "DETAIL or NODETAIL — Performing TSO/E command accounting" on page 75.

To use the type 32 record, you must have installed MVS TSO/E. Type 32 records are produced for TSO/E sessions only, TSO/E commands entered from batch jobs are not counted. You can monitor the TSO/E commands users issue and record the number of times a user issues a specific command or subcommand. For example, you can:

- Keep track of and compare how frequently certain commands at your installation are used. You may want to provide better performance for the more commonly used commands by placing them in LPALIB.

- Keep track of the number of times users issue TSO/E commands so you can bill users for their computer use.
- Audit the commands users issue to ensure they do not violate security practices at your installation.

The record contains the names of the commands and the number of times each command was used during the session and the device connect times for each command. Only those commands included in CSECT IEEMB846 (and entered at least once) are used. Aliases of commands are counted in separate entries in the record. For instance SEND and SE are counted as separate commands. Statistics for all other commands is included in '***OTHER'. Incorrect or unknown commands appear under 'EXEC'.

The subtype is indicated in the SMF32TYP field. For information on subtype selectivity see "SYS and SUBSYS with TYPE and NOTYPE — Selecting subtypes for SMF recording" on page 70.

- Subtypes 1 and 3 contain data on TSO/E activity since the start of the session or since the last interval record was produced.
- Subtypes 2 and 4 contain data on the cumulative TSO/E activity for the entire session. If there is no activity during an interval, no interval record is produced.

If DETAIL is specified in SMFPRM xx , the resource data found under logon represents the resources used from the start of the session to the time when the first command is obtained.

The length of the record is variable.

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro SMFEWTM, BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF32LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF32SEG	2	binary	Segment descriptor (see record length field).

Record type 32

Offsets	Name	Length	Format	Description												
4	4 SMF32FLG	1	binary	System indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Subsystem name follows system identification</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0	Subsystem name follows system identification	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set															
0	Subsystem name follows system identification															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	Reserved.															
5	5 SMF32RTY	1		Record type 32 (X'20').												
6	6 SMF32TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF32DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF32SID	4		System identification (from the SID parameter).												
18	12 SMF32WID	4	EBCDIC	Subsystem identifier.												
22	16 SMF32STP	2	binary	Record subtype.												
24	18 SMF32POF	4	binary	Offset to product section from start of record, including the record descriptor word (RDW).												
28	1C SMF32PLN	2	binary	Length of product section.												
30	1E SMF32PON	2	binary	Number of product sections.												
32	20 SMF32IOF	4	binary	Offset to the identification section from start of record, including the record descriptor word (RDW).												
36	24 SMF32ILN	2	binary	Length of the identification section.												
38	26 SMF32ION	2	binary	Number of identification sections.												
40	28 SMF32COF	4	binary	Offset to the TSO/E command section from start of record, including the record descriptor word (RDW).												
44	2C SMF32CLN	2	binary	Length of the TSO/E command section.												
46	2E SMF32CON	2	binary	Number of TSO/E command sections.												

Product Section

Offsets	Name	Length	Format	Description
0	0 SMF32TYP	2	binary	Subtype identification for the record: <ul style="list-style-type: none"> • 1 — TSO/E user interval record • 2 — TSO/E user session end record • 3 — TSO/E user interval record (with detail) • 4 — TSO/E user session end record (with detail).
2	2 SMF32RVN	2	EBCDIC	Record version number.
4	4 SMF32PNM	8	EBCDIC	Product name.
12	C SMF32OSL	8	EBCDIC	MVS product name.
20	14 SMF32SYN	8	EBCDIC	System name (from the SYSNAME parameter in the IEASYSxx parmlib member).
28	1C SMF32SYP	8	EBCDIC	Sysplex name (from the SYSPLEX parameter in the COUPLExx parmlib member).

Identification Section

Offsets	Name	Length	Format	Description
0	0 SMF32JBN	8	EBCDIC	TSO user id session name.
8	8 SMF32PGM	8	EBCDIC	Program Name.
16	10 SMF32STM	8	EBCDIC	Step name.
24	18 SMF32UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
32	20 SMF32JNM	8	EBCDIC	JES job number.
40	28 SMF32STN	2	binary	Step number.
42	2A	2		Reserved.
44	2C SMF32PGN	2	binary	Reserved.
46	2E SMF32JPT	2	binary	JES input priority at initiation.
48	30 SMF32AST	4	binary	Device allocation start time from midnight, in hundredths of seconds.
52	34 SMF32PPS	4	binary	Problem program start time from midnight, in hundredths of a second.
56	38 SMF32SIT	4	binary	Step initiation time from midnight, in hundredths of a second.
60	3C SMF32STD	4	packed	Step initiation date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
64	40 SMF32RST	4	binary	Reader start time from midnight, in hundredths of second.
68	44 SMF32RSD	4	packed	Reader start date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
72	48 SMF32RET	4	binary	Time from midnight, in hundredths of a second, that the reader recognized the end of the job or started task. For TSO/E, this is the logon enqueue time.
76	4C SMF32RED	4	packed	Date when the reader recognized the end of the batch job or started task, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description. For TSO/E, it is the logon enqueue date.
80	50 SMF32USR	20	EBCDIC	Programmer name.
100	64 SMF32GRP	8	EBCDIC	RACF group ID.
108	6C SMF32RUD	8	EBCDIC	RACF user ID.
116	74 SMF32TID	8	EBCDIC	RACF terminal ID. This field is zero if RACF is not active or if user is not a terminal user.

TSO/E Command Segment (subtypes 1 and 2)

This section contains subtypes 1 and 2.

Offsets	Name	Length	Format	Description
0	0 SMF32CMD	8	EBCDIC	TSO/E command name. See "DETAIL or NODETAIL — Performing TSO/E command accounting" on page 75 for additional information.
8	8 SMF32CNT	4	binary	Number of TSO/E commands.

Record type 32

TSO/E Command Segment (subtypes 3 and 4)

This section contains subtypes 3 and 4.

Offsets	Name	Length	Format	Description
0	0 SMF32CMD		8	EBCDIC TSO/E command name. See “DETAIL or NODETAIL — Performing TSO/E command accounting” on page 75 for additional information.
8	8 SMF32CNT		4	binary Number of times the TSO/E command was entered.
12	C SMF32TCB		4	binary Total task control block (TCB) time, in hundredths of a second, for the command.
16	10 SMF32SRB		4	binary Total service request block (SRB) time, in hundredths of a second, for the command.
20	14 SMF32TGT		4	binary Total TGET (terminal read) count for the command.
24	18 SMF32TPT		4	binary Total TPUT (terminal output) count for the command.
28	1C SMF32TRN		4	binary Total transaction count for the command. Note: See the <i>z/OS MVS Initialization and Tuning Guide</i> for a definition of this field.
32	20 SMF32EXP		4	binary Total execute channel program (EXCP) count for the command. (Valid up to X'FFFFFFFE', zero and invalid when SMF32EXF is set)
36	24 SMF32TCT		4	binary Total device connect time (in 128 micro-second units) for this command.
40	28 SMF32FLG		4	binary Detail section flags
	SMF32TCF			Bit Meaning when set
	SMF32EXF			0 Count in SMF32TRN is not valid.
				1 Count in SMF32EXP is not valid.
44	2C		4	Reserved
48	30 SMF32EXX		8	binary EXCPs for command. This is the 8-byte equivalent of SMF32EXP. This field remains valid after SMF32EXP is invalid.

Record Type 33 (21) — APPC/MVS TP Accounting

When APPC/MVS inbound conversations create work scheduled by the APPC/MVS transaction scheduler, SMF writes a type 33 subtype 1 record. When an APPC/MVS inbound or outbound conversation is deallocated, SMF writes a type 33 subtype 2 record. See Chapter 7, “APPC/MVS accounting,” on page 109 for more detailed information about APPC/MVS accounting.

The subtype is indicated in the SMF33TYP field. For information on subtype selectivity, see “SYS and SUBSYS with TYPE and NOTYPE — Selecting subtypes for SMF recording” on page 70.

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro

Subtype

Macro

- 1 SMFEWTM,BRANCH=YES (record exit: IEFU84)
- 2 SMFEWTM,BRANCH=YES,MODE=XMEM (record exit: IEFU85)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF33LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF33SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF33FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem name follows standard header</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	Subsystem name follows standard header	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set															
0	Subsystem name follows standard header															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	Reserved.															
5	5 SMF33RTY	1	binary	Record type 33 (X'21')												
6	6 SMF33TME	4	packed	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF33DTE	4	packed	Date that the record was moved into the SMF buffer, in the form <i>OcyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF33SID	4	EBCDIC	System identification (from the SID parameter).												
18	12 SMF33WID	4	EBCDIC	Subsystem identifier (ASCH for APPC/MVS-scheduled TPs).												
22	16 SMF33STP	2	binary	Record subtype <ul style="list-style-type: none"> • 1 — APPC/MVS transaction record. • 2 — APPC/MVS conversation record. 												
Self-Defining Section:																
24	18 SMF33SDL	4	binary	Length of Self-defining Section.												
28	1C SMF33POF	4	binary	Offset to Product section.												
32	20 SMF33PLN	2	binary	Length of Product section.												
34	22 SMF33PON	2	binary	Number of Product Sections in this record.												
36	24 SMF33IOF	4	binary	Offset to TP Identification Section.												
40	28 SMF33ILN	2	binary	Length of TP Identification Section.												
42	2A SMF33ION	2	binary	Number of TP Identification Sections in this record.												
44	2C SMF33UOF	4	binary	Offset to TP Usage Section.												
48	30 SMF33ULN	2	binary	Length of TP Usage Section.												
50	32 SMF33UON	2	binary	Number of TP Usage Sections in this record.												
52	34 SMF33SOF	4	binary	Offset to Address Space ID Section.												
56	38 SMF33SLN	2	binary	Length of Address Space ID Section.												
58	3A SMF33SON	2	binary	Number of Address Space ID Sections in this record.												
60	3C SMF33COF	4	binary	Offset to Conversation ID Section.												
64	40 SMF33CLN	2	binary	Length of Conversation ID Section.												

Record type 33

Offsets	Name	Length	Format	Description
66	42 SMF33CON	2	binary	Number of Conversation ID Sections in this record.
68	44 SMF33FOF	4	binary	Offset to User Data Field Section.
72	48 SMF33FLN	2	binary	Length of User Data Field Section.
74	8A SMF33FON	2	binary	Number of User Data Field Sections in this record.

Product Section

This section contains the product that generated the record.

Offsets	Name	Length	Format	Description
0	0 SMF33TYP	2	binary	Record Subtype <ul style="list-style-type: none">• 1 — APPC/MVS transaction record.• 2 — APPC/MVS conversation record.
2	2 SMF33RVN	2	EBCDIC	Record version number — 01.
4	4 SMF33PNM	8	EBCDIC	Product name — ASCH for APPC/MVS-scheduled TPs. APPC for APPC/MVS Conversion Records. If you use your own scheduler, you will not have access to IBM's APPC/MVS accounting support.
12	C SMF33OSL	8	EBCDIC	MVS operating system name.
20	14 SMF33SYN	8	EBCDIC	System name (from the SYSNAME parameter in the IEASYSxx parmlib member).
28	1C SMF33SYP	8	EBCDIC	Sysplex name (from the SYSPLEX parameter in the COUPLExx parmlib member).

Address space ID section

Offsets	Name	Length	Format	Description
0	0 SMF33JID	8	EBCDIC	Job or session name.
8	8 SMF33RST	4	binary	Time since midnight, in hundredths of a second, reader recognized this job.
12	C SMF33RSD	4	binary	Date when the reader recognized this job, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.
16	10 SMF33STN	8	EBCDIC	Step name (taken from the name on the EXEC card).

Subtype 1

TP Identification Section

Offsets	Name	Length	Format	Description						
0	0 SMF33TPO	4	binary	Offset to TP name section.						
4	4 SMF33TPC	8	EBCDIC	TP Class — a general grouping of TPs with related scheduling properties (like the MVS Job Class — CPU Time limit, shift execution requirements, etc).						
12	C SMF33TSC	4	binary	APPC/MVS TP schedule type <table><thead><tr><th>Value</th><th>Schedule Type</th></tr></thead><tbody><tr><td>0</td><td>Standard</td></tr><tr><td>1</td><td>Multi-trans.</td></tr></tbody></table>	Value	Schedule Type	0	Standard	1	Multi-trans.
Value	Schedule Type									
0	Standard									
1	Multi-trans.									
16	10 SMF33TPF	8	EBCDIC	TP profile name.						

TP Program Name Section

Offsets	Name	Length	Format	Description
0	0 SMF33TPL	2	binary	Length of TP name in SMF33TPN field.
2	2 SMF33TPN	255 (max)	binary	TP name.

TP Usage Section

This section identifies the user requesting the TP being reported on. This section contains the general user identification information.

Offsets	Name	Length	Format	Description						
0	0 SMF33UID	8	EBCDIC	RACF user ID (of the requesting user).						
8	8 SMF33GRP	8	EBCDIC	RACF group ID (of the requesting user).						
16	10 SMF33UST	4	binary	Type of user <table border="0"> <thead> <tr> <th>Value</th> <th>User</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Standard</td> </tr> <tr> <td>1</td> <td>Multi-trans shell.</td> </tr> </tbody> </table>	Value	User	0	Standard	1	Multi-trans shell.
Value	User									
0	Standard									
1	Multi-trans shell.									
20	14 SMF33AOF	4	binary	Offset to Accounting Section.						
24	18 SMF33ALN	2	binary	Length of Accounting Section.						
26	1A SMF33AON	2	binary	Number of Accounting Sections in this record.						
28	1C SMF33UCT	4	binary	Count of uses of this TP (by this user).						
32	20 SMF33TDO	4	binary	Offset to TP Usage Detail Section.						
36	24 SMF33TDL	2	binary	Length of TP Usage Detail Section.						
38	26 SMF33TDN	2	binary	Number of TP Usage Detail Sections.						

TP Usage Accounting Section

This section identifies the variable length accounting information for the user requesting the TP being reported on.

Offsets	Name	Length	Format	Description
0	0 SMF33ACL	1	binary	First accounting sub-field length (this field is set to zero for no accounting data).
1	1 SMF33ACT	175 (max)	EBCDIC	Accounting sub-fields.

TP Usage Detail Section

This section identifies detailed information about the specific execution of TP that is being reported on:

Offsets	Name	Length	Format	Description
0	0 SMF33TSO	4	binary	Offset to TP Usage Scheduler Section.
4	4 SMF33TSL	2	binary	Length of TP Usage Scheduler Section.
6	6 SMF33TSN	2	binary	Number of TP Usage Scheduler Sections.
8	8 SMF33CN	4	binary	Total number of conversations for this request.
12	C SMF33CNA	4	binary	Total number of conversations allocated by this request.
16	10 SMF33SEN	4	binary	Total number of sends issued by this request.
20	14 SMF33DAS	8	long floating point hex	Total number of bytes sent by this request.

Record type 33

Offsets	Name	Length	Format	Description
28	1C SMF33REC	4	binary	Total number of receives issued by this request.
32	20 SMF33DAR	8	long floating point hex	Total number of bytes received by this request.
40	28 SMF33TCB	4	binary	Task control block (TCB) time for this request, in hundredths of a second.
44	2C SMF33SRB	4	binary	Service request block (SRB) time for this request, in hundredths of a second.
48	30 SMF33EXP	4	binary	Execute channel programs (EXCP) for this request. Valid up to X'FFFFFFFE', zero and invalid when SMF33EXP is set.
52	34 SMF33DCT	4	binary	Total accumulated device connect time for the address during the life of the transaction. The field reported (in 128 micro-second units) of I/O activity in the address space by some chargeback schemes. See SMF30TCN in the 'I/O Activity' section of SMF type 30 record.
56	38 SMF33DSF SMF33EXF	1	binary	Detail section flags Bit Meaning when set 0 Count in SMF32EXP is not valid.
57	39	7		Reserved
64	40 SMF33EXF	8	binary	EXCPs for this request. This is the 8-byte equivalent of SMF33EXP. This field remains valid after SMF33EXP is invalid.

TP Usage Scheduler Section

This section identifies scheduler data about the specific execution of TP that is being reported on. This section does not appear for a multi-trans shell.

Offsets	Name	Length	Format	Description
0	0 SMF33LLU	17	EBCDIC	Local logical unit (LU) name for the TP.
17	11 SMF33PLU	17	EBCDIC	Partner logical unit (LU) name for this user's use of this TP (format = node.LUname).
34	22 SMF33RV2	2		Reserved.
36	24 SMF33FMT	4	binary	Time since midnight, in hundredths of a second, request recognized by functional manager header (FMH) 5.
40	28 SMF33FMD	4	packed	Date request recognized by functional manager header (FMH) 5, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
44	2C SMF33TQT	4	binary	Time since midnight, in hundredths of a second, that the request was placed on scheduler work queue.
48	30 SMF33TQD	4	packed	Date that the request was placed on scheduler work queue, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
52	34 SMF33TST	4	binary	Time since midnight, in hundredths of a second, that the request started execution.
56	38 SMF33TSD	4	packed	Date that the request started execution, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
60	3C SMF33TET	4	binary	Time since midnight, in hundredths of a second, that the request ended execution.
64	40 SMF33TED	4	packed	Date that the request ended execution, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.

Subtype 2

Conversation ID section

Offsets	Name	Length	Format	Description
0	0 SMF33CID	8	binary	The conversation ID. This ID uniquely identifies a particular conversation.
8	8 SMF33CCO	8	binary	The conversation correlator. This field contains zeroes when there is no conversation correlator.
16	10 SMF33CLO	4	binary	Offset to the logical unit of work ID (LUWID) section.
20	14 SMF33CIO	1	binary	Conversation inbound / outbound indicator. Possible values are: 0 When conversation is outbound 1 When conversation is inbound.
21	15 SMF33CLR	1	binary	Conversation partner LU location. Possible values are: 0 When partner LU is local 1 When partner LU is remote.
22	16 SMF33CKD	1	binary	Conversation kind. For inbound conversations, this field indicates whether this conversation was processed by an APPC/MVS transaction scheduler or an APPC/MVS server. Possible values are: 0 Transaction scheduler 1 APPC/MVS server For outbound conversations, this field is always set to zero.
23	17 SMF33CSL	1		Sync level of the conversation. Possible values are: 0 None - Specifies that the programs will not perform confirmation processing on this conversation. The programs will not call any services and will not recognize any returned parameters relating to confirmation. 1 Confirm - Specifies that the programs can perform confirmation processing on this conversation. The programs can call services and will recognize returned parameters relating to confirmation. 2 Syncpt - Specifies that the programs can perform sync point processing on this conversation. The programs can call services and will recognize returned parameters relating to sync point processing.
24	18 SMF33CLL	17	EBCDIC	Conversation local LU name (not fully qualified).
41	29 SMF33CPL	17	EBCDIC	Conversation partner LU name (fully qualified).
58	3A SMF33RS2	2		Reserved.
60	3C SMF33CSH	8	EBCDIC	Conversation scheduler name (for example, 'ASCH'). When there is no scheduler for this conversation (because an APPC/MVS server is processing the conversation), this field contains blanks.
68	44 SMF33CPO	4	binary	Offset (from beginning of record) to Partner TP Name Section.
72	48 SMF33CTO	4	binary	Offset (from beginning of record) to Local TP Name Section.
76	4C SMF33RS1	10	EBCDIC	Reserved.

Record type 33

Offsets	Name	Length	Format	Description
86	56 SMF33CPU	10	EBCDIC	Partner user ID.
96	60 SMF33CRT	8	binary	Date/Time (in STCK format) allocate request was received for the conversation. The field is zero for outbound requests.
104	68 SMF33CQT	8	binary	Date/Time (in STCK format) conversation was put on allocate queue. The field is zero for outbound requests and for scheduled inbound requests.
112	6C SMF33CST	8	binary	Inbound Requests: Date/Time (in STCK format) when the conversation was associated with a new address space for processing. If an APPC/MVS server processed this conversation, this field shows the time when the server received the conversation through the Receive_Allocate service. Outbound Requests: Date/Time (in STCK format) when the local program called the Allocate service.
120	78 SMF33CET	8	binary	Date/time (in STCK format) when the conversation was deallocated.
128	80 SMF33CMN	8	EBCDIC	Mode name of the conversation.
136	88 SMF33CSN	4	binary	Number of Send calls issued during the conversation.
140	88 SMF33CDS	8	long floating point hex	Amount of data (in bytes) sent through the conversation.
148	90 SMF33CRE	4	binary	Number of Receive calls issued during the conversation.
152	98 SMF33CDR	8	long floating point hex	Amount of data (in bytes) received during the conversation.
160	A0 SMF33CVB	4	binary	Number of callable service requests issued during the conversation.
164	A4 SMF33CRC	4	binary	Return code from the last callable service on this conversation (Possible return codes are documented in the APPC/MVS publications.)
168	A8 SMF33CRS	4	binary	Last reason code from a callable service in this conversation (Possible reason codes are documented in the APPC/MVS publications.)
172	AC SMF33CSA	4	binary	Conversation state. Possible values are: 1 Reset 2 Initialize 3 Send 4 Receive 5 Send pending 6 Confirm 7 Confirm send 8 Confirm deallocate
176	B0 SMF33CSS	8	binary	Date/Time (in STCK format) when the last APPC/MVS callable service was requested during the conversation.
184	B8 SMF33CSE	8	binary	Date/Time (in STCK format) when the last APPC/MVS callable service completed during the conversation.

Partner TP Program Name Section

Offsets	Name	Length	Format	Description
0	0 SMF33TPL	2	binary	Length of the partner TP name field (SMF33TPN).

Offsets	Name	Length	Format	Description
2	2 SMF33TPN	64 (max)	binary	Partner transaction program name. If this conversation is inbound, this field contains the name of the program that initiated the conversation (through the Allocate service). If this conversation is outbound, this field contains the name of the program that was attached on this LU as a result of an Allocate call.

Local TP Program Name Section

Offsets	Name	Length	Format	Description
0	0 SMF33TPL	2	binary	Length of the local TP name field (SMF33TPN).
2	2 SMF33TPN	64 (max)	binary	Local transaction program name. If this conversation is inbound, this field contains the name of the program that was attached on this LU in response to an Allocate call. If this conversation is outbound, this field contains the name of the program that initiated the conversation (that is, issued the Allocate call).

Logical Unit of Work ID (LUWID) Section

Offsets	Name	Length	Format	Description
0	0 SMF33LUL	2	binary	Length of logical unit of work ID (SMF33LUW).
2	2 SMF33LUW	26 (max)	binary	Logical unit of work ID (LUW_ID).

User Data Field Section

Offsets	Name	Length	Format	Description
0	0 SMF33UDL	2	binary	Length of data in user data field (SMF33UDF).
2	2 SMF33UDF	255 (max)	binary	User data field. This is user-defined data that one of the partner programs wrote to this record, through the Set_Conversation_Accounting_Information service.

Record type 34 (22) — TS-Step termination

Reference information:

For more information on service, transaction active time, and performance group number, see *z/OS MVS Initialization and Tuning Guide*.

Record type 34 is written when the TSO/E logoff function processes a job step termination.

Note: IBM recommends that you use record type 30 rather than record types 4, 5, 20, 34, 35, and 40. Use of this record may cause missing key workload indicators.

This record identifies the job by job name, logon time and date, user identification, program name, and performance group number. If accounting numbers (which can be alphanumeric) were specified on the EXEC card, they are included.

This record contains operating information such as:

- Initiator start time
- Number of TPUTs issued

Record type 34

- Number of TGETs satisfied
- Termination status
- Device allocation start time
- Problem program start time
- Step CPU time
- Step service
- Storage protect key
- Number of page-ins
- Number of page-outs
- Number of swap-ins
- Number of swap-outs (for both VIO and non-VIO data sets).

Record type 34 has an entry for each non-spooled data set that was defined by a DD statement. Each entry lists the device class, unit type, device number, and execute channel program (EXCP) count for the data set.

Note:

1. Data sets are recorded in order of the step DD statements; they are not identified by name. (An installation-written IEFUJV exit routine can record this order as each statement is validated.)
2. For data sets that are dynamically unallocated, the data set entry information is in record type 40 — not in record type 34.
3. For more information on EXCP count and CPU time, see Chapter 10, “EXCP count,” on page 131 and Chapter 11, “CPU time,” on page 133 respectively.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record header fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 TIVRLEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See “Standard SMF record header” on page 162 for a detailed description.								
2	2 TIVRSEG	2	binary	Segment descriptor (see record length field).								
4	4 TIVRFLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See “Standard SMF record header” on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 TIVRCDTY	1	binary	Record type 34 (X'22').								

Offsets	Name	Length	Format	Description
6	6 TIVRCDTS	4	binary	Time since midnight, in hundredths of a second, that the record is passed to the SMF writer. This is the time the step ended.
10	A TIVRCDTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description. This is the date the step ended.
14	E TIVCPUID	4	EBCDIC	System identification (from the SID parameter).
18	12 TIVUIF	8	EBCDIC	Job name.
26	1A TIVONTME	4	binary	Logon time, in hundredths of a second.
30	1E TIVONDTE	4	packed	Logon date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
34	22 TIVUDATA	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
42	2A TIVINVSQ	1	binary	Step number (this field always equals 1).
43	2B TIVSIT	4	binary	Time since midnight, in hundredths of a second, that the initiator selected this step.
47	2F TIVOUTCT	4	binary	Number of lines of terminal output, that is, number of TPUTs issued.
51	33 TIVINCT	4	binary	Number of lines of terminal input, that is, number of TGETs satisfied.
55	37 TIVSTAT	2	binary	Step completion code: X'0ccc' indicates system ABEND where <i>ccc</i> is the system ABEND code. (See <i>z/OS MVS System Codes</i> .) X'8ccc' indicates user ABEND where <i>ccc</i> is the user ABEND code. X'nnn' indicates normal completion where <i>nnn</i> is the contents of the two low-order bytes in register 15 at end. X'000' indicates either: (1) the job step was flushed (not processed) because of an error during allocation, or (2) normal job completion with a return code of 0. Use this field in conjunction with the step-termination indicator field (offset 87).
57	39 TIVPRI	1	binary	Address space dispatching priority (taken from DPRTY=parameter on the EXEC card or the default APG value).
58	3A TIVPRGNM	8	EBCDIC	Program name (taken from PGM=parameter on EXEC card). If a backward reference was used, then this field contains *.DD.
66	42 TIVINVNM	8	EBCDIC	Step name (taken from name on EXEC card).
74	4A TIVRSV5	2		Reserved. Note that TIVEFRGN, formerly a two-byte field at this offset, has been increased to four bytes and moved to offset 82.
76	4C TIVSYST	2	binary	Largest amount of storage used from top of private area, in 1K units. This storage area includes the local system queue area (LSQA) and SWA (subpools 229, 230, 236, 237, 249, and 253-255). If ADDRSPC=REAL is specified, this field equals the amount of storage used that was <i>not</i> from this contiguous real storage reserved for the program. See offsets 82 and 102.

Record type 34

Offsets	Name	Length	Format	Description																		
78	4E TIVMCRE	2	binary	Largest amount of storage used from bottom of private area, in 1K units. This storage area includes sub-pool 0-127, 129-132, 244, 251 and 252. If ADDRSPC=REAL is specified, this field equals the amount of contiguous real storage that was used. See offsets 82 and 102. If storage was not allocated (job step was flushed), these fields equal zero.																		
80	50 TIVRVC	2		Reserved.																		
82	52 TIVEFRGN	4	binary	Region size established, in 1K units taken from the REGION=parameter in the JCL, and rounded up to a four K boundary. If ADDRSPC=REAL is specified, this field equals the amount of contiguous real storage reserved for the program. If the region requested was greater than 16 megabytes, the region established resides above 16 megabytes, and this field will contain a minimum value of 32 megabytes.																		
86	56 TIVSPK	1	binary	Storage protect key, in the form xxxx0000 where xxxx is the key.																		
87	57 TIVSTI	1	binary	Step termination indicator <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Canceled by exit IEFUJV.</td> </tr> <tr> <td>2</td> <td>Canceled by exit IEFUJI. Job steps canceled by IEFUJI and IEFUSI will not be processed; therefore bit 7 will be on.</td> </tr> <tr> <td>3</td> <td>Canceled by exit IEFUSI Job steps canceled by IEFUJI and IEFUSI will not be processed; therefore bit 7 will be on.</td> </tr> <tr> <td>4</td> <td>Reserved</td> </tr> <tr> <td>5</td> <td>Step is to be restarted.</td> </tr> <tr> <td>6</td> <td>If zero, then normal completion. If 1, then and abnormal end of task (abend) will occur. If step completion code (offset 55) equals 0322 or 0522, IEFUTL caused the abend. If step completion code equals 0722, IEFUSO caused the abend.</td> </tr> <tr> <td>7</td> <td>If zero, then normal completion. If 1, step was flushed.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved.	1	Canceled by exit IEFUJV.	2	Canceled by exit IEFUJI. Job steps canceled by IEFUJI and IEFUSI will not be processed; therefore bit 7 will be on.	3	Canceled by exit IEFUSI Job steps canceled by IEFUJI and IEFUSI will not be processed; therefore bit 7 will be on.	4	Reserved	5	Step is to be restarted.	6	If zero, then normal completion. If 1, then and abnormal end of task (abend) will occur. If step completion code (offset 55) equals 0322 or 0522, IEFUTL caused the abend. If step completion code equals 0722, IEFUSO caused the abend.	7	If zero, then normal completion. If 1, step was flushed.
Bit	Meaning when set																					
0	Reserved.																					
1	Canceled by exit IEFUJV.																					
2	Canceled by exit IEFUJI. Job steps canceled by IEFUJI and IEFUSI will not be processed; therefore bit 7 will be on.																					
3	Canceled by exit IEFUSI Job steps canceled by IEFUJI and IEFUSI will not be processed; therefore bit 7 will be on.																					
4	Reserved																					
5	Step is to be restarted.																					
6	If zero, then normal completion. If 1, then and abnormal end of task (abend) will occur. If step completion code (offset 55) equals 0322 or 0522, IEFUTL caused the abend. If step completion code equals 0722, IEFUSO caused the abend.																					
7	If zero, then normal completion. If 1, step was flushed.																					
88	58 TIVRV1	2		Reserved.																		
90	5A TIVAST	4	binary	Device allocation start time, in hundredths of a second.																		
94	5E TIVPPST	4	binary	Problem program start time, in hundredths of a second.																		
98	62 TIVRV2	1		Reserved.																		
99	63 TIVSRBT	3	binary	Step CPU time under SRBs, in hundredths of a second. This field includes the CPU time for various supervisory routines that are dispatched from SRBs: locking routines, page resolution, swap control, cross-memory communications (WAIT, POST, I/O POST), and TQE scheduling. CPU time is not expected to be constant between different runs of the same job step. (See Chapter 11, "CPU time," on page 133.)																		

Offsets	Name	Length	Format	Description														
102	66 TIVRIN	2	binary	Record indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Reserved.</td> </tr> <tr> <td>4</td> <td>Field TIVCPUTM is not valid. An overflow condition is when the length of the value for the step CPU time under TCBs is greater than 3 bytes. This condition is not recorded in the type 34 record (TIVCPUTM). The time is available in the type 30 record (SMF30CPT). If your installation uses an accounting program that does not use the type 30 record to gather step CPU time, you must update that program. Only the type 30 record should be considered valid.</td> </tr> <tr> <td>5</td> <td>Device data not recorded. When there are more than 1635 DD statements, device data is not collected for the type 34 record. The data is available in the type 30 record.</td> </tr> <tr> <td>6</td> <td>EXCP count may be wrong. For more information on EXCP count, see Chapter 10, "EXCP count," on page 131.</td> </tr> <tr> <td>7</td> <td>If zero, storage is virtual (if 1, storage is real).</td> </tr> <tr> <td>8-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-3	Reserved.	4	Field TIVCPUTM is not valid. An overflow condition is when the length of the value for the step CPU time under TCBs is greater than 3 bytes. This condition is not recorded in the type 34 record (TIVCPUTM). The time is available in the type 30 record (SMF30CPT). If your installation uses an accounting program that does not use the type 30 record to gather step CPU time, you must update that program. Only the type 30 record should be considered valid.	5	Device data not recorded. When there are more than 1635 DD statements, device data is not collected for the type 34 record. The data is available in the type 30 record.	6	EXCP count may be wrong. For more information on EXCP count, see Chapter 10, "EXCP count," on page 131.	7	If zero, storage is virtual (if 1, storage is real).	8-15	Reserved.
Bit	Meaning when set																	
0-3	Reserved.																	
4	Field TIVCPUTM is not valid. An overflow condition is when the length of the value for the step CPU time under TCBs is greater than 3 bytes. This condition is not recorded in the type 34 record (TIVCPUTM). The time is available in the type 30 record (SMF30CPT). If your installation uses an accounting program that does not use the type 30 record to gather step CPU time, you must update that program. Only the type 30 record should be considered valid.																	
5	Device data not recorded. When there are more than 1635 DD statements, device data is not collected for the type 34 record. The data is available in the type 30 record.																	
6	EXCP count may be wrong. For more information on EXCP count, see Chapter 10, "EXCP count," on page 131.																	
7	If zero, storage is virtual (if 1, storage is real).																	
8-15	Reserved.																	
104	68 TIVRLCT	2	binary	Offset from the beginning of the record header to relocate section.														
106	6A TIVVAR	2	binary	Length of execute channel program (EXCP) count fields.														

Execute Channel Program (EXCP) Section

For each device assigned to each *non-spoiled* data set, there is an eight-byte entry with the following format:

Record type 34

Offsets	Name	Length	Format	Description
0	0 TIVEXCP	8	Structure	<p>Data set access information.</p> <p>Note: Virtual I/O devices are identified by the following:</p> <p>Device Class 0</p> <p>Unit Type 0</p> <p>Device Number X'7FFF'</p> <p>It is important to understand the following:</p> <p>Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname.</p> <p>SMF records will show VIO unit addresses as X'7FFF'.</p> <p>The actual in-storage UCB built for VIO will show address X'3FFF'.</p> <p>For example, the messages:</p> <ul style="list-style-type: none"> • IEF237I X'3FFF' ALLOCATED TO ddname • IEF237I X'7FFF' ALLOCATED TO ddname <p>indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.</p>
0	0 TIVDEVC	1	binary	Device class.
1	1 TIVUTYP	1	binary	Unit type.
2	2 TIVCUAD	2	binary	Device number.
4	4 TIVNEXCP	4	binary	Execute channel program (EXCP) count. See offset 102 — TIVRIN.

Accounting section

Offsets	Name	Length	Format	Description
0	0 TIVVARA	1	binary	Length of accounting section (excluding this field).
1	1 TIVCPUTM	3		Step CPU time under task control blocks (TCB), in hundredths of a second. This field includes the CPU time for all tasks that are dispatched from TCBs below the level of RCT. CPU time is not expected to be constant between different runs of the same job step. (See Chapter 11, "CPU time," on page 133.)
4	4 TIVNBRAC	1	binary	Number of accounting fields.
5	5 TIVACFLD	<i>variable</i>	EBCDIC	Accounting fields. Each entry for an accounting field contains the length of the field (one byte, binary) followed by the field (EBCDIC). A zero indicates an omitted field.

Relocate Section

Offsets	Name	Length	Format	Description
0	0 TIVPGIN	4	binary	Number of non-VIO (virtual input/output) page-ins for this step. This field includes page-ins required through page faults, specific page requests, and page fixes. It does not include page reclaims, page-ins for VIO data sets, and page-ins for the common area.

Offsets	Name	Length	Format	Description
4	4 TIVPGOUT	4	binary	Number of non-VIO (virtual input/output) page-outs for this step. This field includes page-outs required through specific page requests including those pages "stolen" by the paging supervisor through infrequent use. It does not include page-outs for VIO data sets, and page-outs for the common area.
8	8 TIVRGNS	4	binary	Number of address space swap sequences. A swap sequence consists of a swap-out and swap-in of an address space.
12	C TIVSIN	4	binary	Number of pages swapped in. This field includes: local system queue area (LSQA), fixed pages, and those pages that the real storage manager determined to be active when the address space was swapped out. It does not include page reclaims nor pages found in storage during the swap-in process (such as pages brought in from SRBs started after completion of swap-in Stage 1 processing).
16	10 TIVSOUT	4	binary	Number of pages swapped out. This field includes: local system queue area (LSQA), private area fixed pages, and private area non-fixed changed pages.
20	14 TIVVPI	4	binary	Number of virtual input/output (VIO) page-ins for this step. This field includes page-ins resulting from page faults or specific page requests on a VIO window. It does not include VIO swap-ins or page-ins for the common area.
24	18 TIVVPO	4	binary	Number of virtual input/output (VIO) page-outs for this step. This field includes page-outs resulting from specific page requests on a VIO window, and includes those pages "stolen" by the paging supervisor through infrequent use. It does not include VIO swap-outs or page-outs for the common area.
28	1C TIVSST	4	binary	Step service, in service units. This field is calculated as total job service minus the accumulated job service before this step's initialization.
32	20 TIVACT (TIVTAT)	4	binary	Step transaction active time, in 1024-microsecond units. Calculated as total job transaction active time minus the accumulated transaction active time before this step's initialization.
36	24 TIVPGNO	2	binary	Beginning with z/OS V1R3, this field is always zero.
38	26 TIVTRANT	4	binary	Step transaction residency time, in 1024-microsecond units. That is the amount of time the transaction was in real storage.
42	2A TIVCPM	4	binary	Number of attempts to read data from an ESO hiperspace that were not satisfied because the data has been deleted.
46	2E TIVRCLAM	4	binary	Number of virtual input/output (VIO) reclaims for this step.
50	32 TIVCPGIN	4	binary	Number of common area page-ins for this step (link pack area (LPA) + CSA).
54	36 TIVHSPI	4	binary	Number of hiperspace page-ins from auxiliary to processor storage.
58	3A TIVPGSTL	4	binary	Number of pages "stolen" from the storage for this step.
62	3E TIVPGSEC	8	binary	Number of page seconds for this step, in page millisecond units. Calculated as: the number of pages used by this step times the processing time it held that number of pages.
70	46 TIVLPAI	4	binary	Number of link pack area (LPA) page-ins for the step.
74	4A TIVHSPO	4	binary	Number of hiperspace page-outs from processor to auxiliary storage.
78	4E TIVCPUS	4	binary	Step CPU service, in service units.

Record type 34

Offsets	Name	Length	Format	Description
82	52 TIVIOCS	4	binary	Step I/O service, in service units.
86	56 TIVMSOS	4	binary	Step main storage service, in service units.
90	5A TIVSRBS	4	binary	Step SRB service, in service units.
94	5E TIVTSN	8	EBCDIC	Terminal symbolic name.

Record type 35 (23) — LOGOFF

Reference information:

For information on service, transaction active time and performance group number, see *z/OS MVS Initialization and Tuning Guide*.

For information on ABEND codes, see *z/OS MVS System Codes*.

Record type 35 is written when a TSO logoff process is completed.

Note: IBM recommends that you use record type 30 rather than record types 4, 5, 20, 34, 35, and 40. Use of this record may cause missing key workload indicators.

This record identifies the job by job name, logoff time and date, logon time and date, user identification, and performance group number. If accounting numbers (which can be alphameric) were specified on the JOB card, they are included.

This record contains operating information such as number of TPUTs issued, number of TGETs satisfied, termination status, storage protect key, job service, transaction active time, number of transactions, and job CPU time. For more information on CPU time, see Chapter 11, "CPU time," on page 133.

Note: If the terminal I/O controller (TIOC) does not attempt to send output (for example, a message) to a terminal whose line has been disconnected, it will not detect a line disconnect. To SMF, a terminal session interrupted by a line disconnect is considered to be executing and a type 35 record will not be issued until:

- The disconnect situation is detected, the reconnect time limit expires, and the system cancels the session (with a completion code of 622); or
- The disconnect situation is detected, the user reconnects, and subsequently issues a LOGOFF command.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 TLGRLEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 TLGRSEG	2	binary	Segment descriptor.								
4	4 TLGRFLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 TLGRCDTY	1	binary	Record type 35 (X'23').								
6	6 TLGRCDTS	4	binary	Time since midnight, in hundredths of a second, that the record was moved to the SMF writer. This is the logoff time.								
10	A TLGRCDTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description. This is the logoff date.								
14	E TLGPUID	4	EBCDIC	System identification (taken from SID parameter).								
18	12 TLGUIF	8	EBCDIC	Job name.								
26	1A TLGONTME	4	binary	Logon time, in hundredths of a second.								
30	1E TLGONDTE	4	packed	Logon date, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
34	22 TLGUDATA	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A TLGSTPCT	1	binary	Number of steps in session. (This field always equals 1.)								
43	2B TLGCRTME	4		Reserved.								
47	2F TLGOUTCT	4	binary	Number of lines of terminal output, that is, number of TPUTs issued.								
51	33 TLGINCT	4	binary	Number of lines of terminal input, that is, number of TGETs satisfied.								
55	37 TLGSTAT	2	binary	Job completion code: X'0ccc' indicates system ABEND where ccc is the system (See <i>z/OS MVS System Codes</i> .) X'8ccc' indicates user ABEND where ccc is the user ABEND code. X'nnnn' indicates normal completion where nnnn is the contents of the two low-order bytes in register 15 at termination. X'0000' indicates normal job completion with return code of 0. Use this field in conjunction with the job termination indicator field (offset 66).								

Record type 35

Offsets	Name	Length	Format	Description																
57	39 TLGPRI	1	binary	Logon priority. This field normally equals the user-assigned priority of 0-13, but if the job fails while being scheduled, this field equals 14 (taken from the PRTY parameter on the JOB card). If no value is specified for the PRTY parameter on the JOB card, this field contains: <ul style="list-style-type: none"> • For JES3, the default priority specified on the JES3 STANDARDS initialization card • For JES2, a zero <p>JES2 does not use the priority value reported in this field. (The JES2 job selection priority is requested by the JES2 /*PRIORITY control statement.)</p>																
58	3A TLGNQTME	4	binary	Logon enqueue time, in hundredths of a second.																
62	3E TLGNQDTE	4	packed	Logon enqueue date, in the form <i>OcyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.																
66	42 TLGTRMI	1	binary	Job termination indicator <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Canceled at exit IEFUJV</td> </tr> <tr> <td>2</td> <td>Canceled at exit IEFUJI</td> </tr> <tr> <td>3</td> <td>Canceled at exit IEFUSI</td> </tr> <tr> <td>4-5</td> <td>Reserved</td> </tr> <tr> <td>6</td> <td>If 0, normal completion. If 1, abnormal termination</td> </tr> <tr> <td>7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Canceled at exit IEFUJV	2	Canceled at exit IEFUJI	3	Canceled at exit IEFUSI	4-5	Reserved	6	If 0, normal completion. If 1, abnormal termination	7	Reserved
Bit	Meaning when set																			
0	Reserved																			
1	Canceled at exit IEFUJV																			
2	Canceled at exit IEFUJI																			
3	Canceled at exit IEFUSI																			
4-5	Reserved																			
6	If 0, normal completion. If 1, abnormal termination																			
7	Reserved																			
67	43 TLGOUTCL	1		Reserved.																
68	44 TLGTRANT	4	binary	Job transaction residency time, in 1024-microsecond units. That is the total amount of time all transactions were in central storage.																
72	48 TLGRVC	4		Reserved.																
76	4C TLGSPK	1	binary	Storage protect key, in the form xxxx0000 where xxxx is the key.																
77	4D TLGSRBT	3	binary	Job CPU time under SRBs, in hundredths of a second. This field includes the CPU time for various supervisory routines that are dispatched from SRB: locking routines, page resolution, swap control, cross-memory communications (WAIT, POST, I/O POST), and TQE scheduling. CPU time may not be constant between different runs of the same job.																
80	50 TLGTJS	4	binary	Job service, in service units.																
84	54 TLGTTAT	4	binary	Job transaction active time, in 1024-microsecond units.																
88	58 TLGNTSN	4	binary	Number of transactions.																
92	5C TLGPGNO	2	binary	Beginning with z/OS V1R3, this field is always zero.																
94	5E TLGRV2	2		Reserved.																
96	60 TLGVAR	1	binary	Length of rest of record, excluding this field.																
97	61 TLGRVB	20		Reserved.																
117	75 TLGCPUTM	3	binary	Job CPU time under TCBS, in hundredths of a second. This field includes the CPU time for all tasks that are dispatched from TCBS below the level of RCT.																
120	78 TLGNBRAC	1	binary	Number of accounting fields.																

Offsets	Name	Length	Format	Description
121	79 TLGACFLD	variable	EBCDIC	Accounting fields. Each entry for an accounting field contains the length of the field (one byte, binary) followed by the field (EBCDIC). A zero indicates an omitted field.

Relocate Section

Offsets	Name	Length	Format	Description
0	TLGCPUS	4	binary	Job CPU service, in service units.
4	4 TLGIOCS	4	binary	Job I/O service, in service units.
8	8 TLGMSOS	4	binary	Job main storage service, in service units.
12	12 TLGSRBS	4	binary	Job SRB service, in service units.
16	10 TLGTSN	8	EBCDIC	Terminal symbolic name.

Record Type 36 (24) — Integrated Catalog Facility Catalog

Record type 36 is partially built when an integrated catalog facility catalog is exported; it is then compiled and written. The record contains information to identify the catalog being exported, the time of export, and information necessary to allocate the portable data set for subsequent import. It identifies the job-by-job log identification and user identification.

The SMF record is only written upon successful completion of the EXPORT command. The record contains the standard header and is formatted for the product and data sections.

Macro to Symbolically Address Record Type 36: The SMF record mapping macro for record types 36, 60, 61, 65, and 66 is IFASMF16. The mapping macro, IFASMF16, resides in SYS1.MACLIB.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF36LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF36SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF36SYS	1	binary	System indicator: <table border="0" style="margin-left: 20px;"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF36RTY	1	binary	Record type 36 (X'24').								

Record type 36

Offsets	Name	Length	Format	Description
6	6 SMF36TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.
10	A SMF36DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
14	E SMF36CPU	4	EBCDIC	System identification.
18	12 SMF36SBS	4	EBCDIC	Subsystem identification.
22	16 SMF36SUB	2	EBCDIC	Record subtype '00' — Export integrated catalog facility catalog.
24	18 SMF36NOT	2	binary	Number of triplets.
26	1A	2		Reserved.
28	1C SMF36POF	4	binary	Offset to product section.
32	20 SMF36PLN	2	binary	Length of product section.
34	22 SMF36PNO	2	binary	Number of product sections.
36	24 SMF36DOF	4	binary	Offset to data section.
40	28 SMF36DLN	2	binary	Length of data section.
42	2A SMF36DNO	2	binary	Number of data sections.

Product Section

Offsets	Name	Length	Format	Description
44	2C SMF36PVN	2	EBCDIC	Product version.
46	2E SMF36PNM	8	EBCDIC	Product name.
54	36 SMF36PRL	2	EBCDIC	Record type 36 level.

Data Section

Offsets	Name	Length	Format	Description
56	38 SMF36JNM	8	EBCDIC	Job name.
64	40 SMF36RST	4	binary	Time from midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).
68	44 SMF36RDT	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
72	48 SMF36UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
80	50 SMF36PGM	8	EBCDIC	Program name.
88	58 SMF36CNM	44	EBCDIC	Integrated catalog facility catalog name.
132	84 SMF36CVS	6	EBCDIC	Catalog volume serial, if available.
138	8A SMF36CDT	4	binary	Catalog UCB device type, if available.
142	8E SMF36EDT	8	EBCDIC	Date of export (<i>mm/dd/yy</i>).
150	96 SMF36ETM	8	EBCDIC	Time of export (<i>hh:mm:ss</i>).
158	9E SMF36PDS	44	EBCDIC	Portable data set name.
202	CA SMF36PVS	6	EBCDIC	Portable data set volume.
208	D0 SMF36PDT	4	binary	Portable data set UCB device type (associated with the first/only volume), if available.

Offsets	Name	Length	Format	Description
212	D4 SMF36EIN	2	EBCDIC	Export Indicator. 'AE' — Aliases were exported. 'NE' — No aliases exported.

Record Type 37 (25) — NetView Hardware Monitor

Record type 37 is written by NetView whenever the NPDA REPORTS option is invoked and each time a NetView Problem Determination Application (NPDA) input record passes the NPDA recording filters. For more information, see *NetView Administration Reference*.

Record Type 38 (26) — NetView Health Check and User Authorization Monitor

Record type 38 is written by NetView to record system utilization data for NetView itself and for user authorization checking. Record type 38 contains the following subtype information:

- **Subtype 1** — NetView command authorization table external log record
The NetView command authorization table external log record (SMF type 38 subtype 1) is generated when auditing the NetView command authorization table. It includes information such as the name of the command authorization table, the time when it was loaded, the name of the NetView domain, the command in question, the user ID whose authority is being checked, etc. Auditing is controlled globally by the CATAUDIT keyword of the NetView DEFAULTS command or specifically by using the AUDIT keyword on the PROTECT and EXEMPT statements in the NetView command authorization table. For more information about the PROTECT and EXEMPT statements, see *IBM Tivoli NetView Security Reference*.
- **Subtype 2** — NetView task resource-utilization-data external log record
The NetView task resource-utilization-data external log record (SMF type 38 subtype 2) logs data on utilization of system resources by specific NetView tasks. These records contain CPU, storage, message queuing, and DASD I/O utilization statistics. Records are made for logoff, task abend, and NetView ending events, and for interval requests when the LOGTSTAT command is used. Logging is determined by the LOGTSTAT command and the LOGTSTAT option of the DEFAULTS command and the OVERRIDE command. NetView initially starts with a value of YES.
- **Subtype 3** — NetView span authorization table external log record
The NetView span authorization table external log record (SMF type 38 subtype 3) is generated by auditing NetView span of control authorization checking. This record subtype provides information about successful and unsuccessful access attempts for both commands and NMC resources and views. The type of auditing that is performed is controlled by the LOGSPNCF, LOGSPNCP, LOGSPNVF and LOGSPNVP keywords of the DEFAULTS command and can be changed with the OVERRIDE command.

For more information, see *NetView Security Reference* and *NetView Command Reference*.

Record Type 39 (27) — NetView (NLDM) Response Time

Record type 39 is written by NetView's network logical data manager (NLDM) component. NLDM writes to the external log if the response time data function (RTM) or the network accounting and availability measurement function is active.

The response time data function writes record type 39 when the COLLECT command with the LOG parameter is issued or at session end for an logical unit (LU) attached to a 3274 with the RTM feature.

The network accounting and availability measurement data function writes record type 39 when a session is started, a session ends, or when a RECORD command with the SESSTATS parameter is issued.

For more information, see *NetView Administration Reference*.

Record type 40 (28) — Dynamic DD

Tip: IBM suggests that you use record type 30, rather than record types 4, 5, 20, 34, 35, and 40.

Record type 40 is written when an unallocation, concatenation, or deconcatenation request is processed. For an unallocation request, this record contains a device entry only for the data set unallocated. For a concatenation or deconcatenation request, this record contains a device entry for each DD entry.

Record type 40 contains the job log identification, user identification, step number, functional indicator, and device entries. Each device entry consists of the device class, unit type, device number, and execute channel program (EXCP) count for the data set.

For more information on EXCP count and CPU time, see Chapter 10, "EXCP count," on page 131 and Chapter 11, "CPU time," on page 133 respectively.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTMM (record exit: IEFU83)

Mode Task

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 TDDRLEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 TDDRSEG	2	binary	Segment descriptor (see record length field).

Offsets	Name	Length	Format	Description								
4	4 TDDRFLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 TDDRCDTY	1	binary	Record type 40 (X'28').								
6	6 TDDRCDS	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A TDDRCDE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E TDDCPUID	4	EBCDIC	System identification (from the SID parameter).								
18	12 TDDUIF	8	EBCDIC	Job name.								
26	1A TDDONTME	4	binary	Logon time, in hundredths of a second. (If a background job, this field contains the time the reader recognized the JOB card.)								
30	1E TDDONDTE	4	packed	Logon date, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description. (If a background job, this field contains the date the reader recognized the JOB card.)								
34	22 TDDUDATA	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A TDDINVSQ	1	binary	Step number (first step = 1, etc).								
43	2B TDDFLG	1	binary	Functional indicator <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>Unallocation</td> </tr> <tr> <td>3</td> <td>Concatenation</td> </tr> <tr> <td>4</td> <td>Deconcatenation.</td> </tr> </tbody> </table>	Value	Meaning	2	Unallocation	3	Concatenation	4	Deconcatenation.
Value	Meaning											
2	Unallocation											
3	Concatenation											
4	Deconcatenation.											
44	2C TDDRIN	2	binary	Record indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-6</td> <td>Reserved</td> </tr> <tr> <td>7</td> <td>EXCP count may be wrong</td> </tr> <tr> <td>8-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-6	Reserved	7	EXCP count may be wrong	8-15	Reserved.
Bit	Meaning when set											
0-6	Reserved											
7	EXCP count may be wrong											
8-15	Reserved.											
46	2E TDDRCIND	2	binary	Index of record in sequence of records. Note: In releases prior to 4.2.2, this field is zero.								
48	30 TDDRCTOT	2	binary	Total number of records in sequence of records. Note: In releases prior to 4.2.2, this field is zero.								
50	32 TDDRVA	14		Reserved.								
64	40 TDDVAR	2	binary	Length of device entry portion of this record. Calculated as: (8 times the number of devices) + 2.								

Record type 40

Execute Channel Program (EXCP) Section

For each device, there is an eight-byte entry with the following format:

Offsets	Name	Length	Format	Description
0	0 TDDEXCP	8	Structure	Data set access information. Note: Virtual I/O devices are identified by the following: Device Class 0 Unit Type 0 Device Number X'7FFF' It is important to understand the following: Allocation messages for VIO data sets will show VIO ALLOCATED TO ddname. SMF records will show VIO unit addresses as X'7FFF'. The actual in-storage UCB built for VIO will show address X'3FFF'. For example, the messages: <ul style="list-style-type: none">• IEF237I X'3FFF' ALLOCATED TO ddname• IEF237I X'7FFF' ALLOCATED TO ddname indicate that ddname is not allocated to a Virtual I/O device, but is instead allocated to a real device whose unit address is X'3FFF' or X'7FFF' respectively.
0	0 TDDDEVC	1	binary	Device class.
1	1 TDDUTYP	1	binary	Unit type.
2	2 TDDCUAD	2	binary	Device number.
4	4 TDDNEXCP	4	binary	EXCP count (see offset 44).

Record type 41 (29) — DIV objects and VLF statistics

Reference information:

COFVLFxx parmlib member is described in *z/OS MVS Initialization and Tuning Reference*.

Record type 41 provides resource usage information regarding data-in-virtual (DIV) objects and VLF statistics. This record is written when a DIV object is accessed, and when the object is unaccessed.

Note: ACCESS and UNACCESS is similar to OPEN and CLOSE. This record is also written to record VLF statistics.

Record type 41 has the following subtypes; each contains a common section with header and product information portions, and a subtype section unique for each record. The subtypes are:

- **Subtype 1** — ACCESS record. The ACCESS data section is written when a DIV object is accessed.
- **Subtype 2** — UNACCESS record. The counts for the I/O Activity Section are accumulated by data-in-virtual while the object is in use and are reported at the time of the UNACCESS request. The subtype 2 record is written whenever a data-in-virtual object is unaccessed.

- **Subtype 3** — collects virtual lookaside facility (VLF) statistics. It is written every 15 minutes. The data is repeated for each VLF class defined in the COFVLFxx parmlib member.

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro

- **Subtype 1, 2:** SMFEWTM,BRANCH=YES (record exit: IEFU84)
- **Subtype 3:** SMFEWTM,BRANCH=NO (record exit: IEFU83)

Mode

Task

Storage residency

- **Subtype 1, 2:** 24-bit
- **Subtype 3:** 31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF41LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF41SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF41FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem identification follows system identification</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	Subsystem identification follows system identification	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set															
0	Subsystem identification follows system identification															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	Reserved.															
5	5 SMF41RTY	1	binary	Record type 41 (X'29').												
6	6 SMF41TME	4	binary	Time since midnight, in hundredths of a second, when the record was written.												
10	A SMF41DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF41SID	4	EBCDIC	System identification (from the SID parameter).												
18	12 SMF41SSI	4	EBCDIC	Subsystem identification (EBCDIC blanks).												

Record type 41

Offsets	Name	Length	Format	Description								
22	16 SMF41STY	2	binary	Record subtype <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ACCESS</td> </tr> <tr> <td>2</td> <td>UNACCESS</td> </tr> <tr> <td>3</td> <td>VLF statistics.</td> </tr> </tbody> </table>	Value	Meaning	1	ACCESS	2	UNACCESS	3	VLF statistics.
Value	Meaning											
1	ACCESS											
2	UNACCESS											
3	VLF statistics.											
24	18 SMF41TRP	2	binary	Number of triplets. A triplet is a set of offset/length/number values that defines a section of the record.								
26	1A SMF41xxx	2		Reserved.								
28	1C SMF41OPD	4	binary	Offset to product section.								
32	20 SMF41LPD	2	binary	Length of product section.								
34	22 SMF41NPD	2	binary	Number of product sections.								
36	24 SMF41OD1	4	binary	Offset of object ACCESS data section.								
40	28 SMF41LD1	2	binary	Length of object ACCESS data section.								
42	2A SMF41ND1	2	binary	Number of object ACCESS data sections.								
44	2C SMF41OD2	4	binary	Offset of object UNACCESS data section.								
48	30 SMF41LD2	2	binary	Length of object UNACCESS data section.								
50	32 SMF41ND2	2	binary	Number of object UNACCESS data sections.								
52	34 SMF41OD3	4	binary	Offset of I/O activity section.								
56	38 SMF41LD3	2	binary	Length of I/O activity section.								
58	3A SMF41ND3	2	binary	Number of I/O activity sections.								
60	3C SMF41OD4	4	binary	Offset to the VLF statistics section.								
64	40 SMF41LD4	2	binary	Length of the VLF statistics section.								
66	42 SMF41ND4	2	binary	Number of VLF statistics sections.								

Product Section

Offsets	Name	Length	Format	Description
0	0 SMF41PL	8	EBCDIC	Product level.
8	2 SMF41PN	16	EBCDIC	Product name ('DATA-IN-VIRTUAL').

Object ACCESS Data Section

This section is present for record subtypes 1 and 2 only.

Offsets	Name	Length	Format	Description						
0	0 SMF41DDA	8	EBCDIC	Object data definition name (ddname).						
8	8 SMF41AZA	4	binary	Object size, in units of blocks, when accessed.						
12	C SMF41ATA	4	binary	Time since midnight, in seconds, when the object was accessed.						
16	10 SMF41TYA	1	binary	Object type <table border="0"> <thead> <tr> <th>Code</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>DA.</td> </tr> </tbody> </table>	Code	Meaning	1	DA.		
Code	Meaning									
1	DA.									
17	11 SMF41AMA	1	binary	ACCESS mode <table border="0"> <thead> <tr> <th>Code</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Read</td> </tr> <tr> <td>2</td> <td>Update.</td> </tr> </tbody> </table>	Code	Meaning	1	Read	2	Update.
Code	Meaning									
1	Read									
2	Update.									

Offsets	Name	Length	Format	Description
18	12 SMF41JBN	8	EBCDIC	Job name (initiator or started task).

Object UNACCESS Data Section

This section is present for record subtype 2 only.

Offsets	Name	Length	Format	Description
0	0 SMF41UZU	4	binary	Object size, in units of blocks, when unaccessed.
4	4 SMF41UTU	4	binary	Time since midnight, in seconds, when the object was unaccessed.

Object I/O Activity Section

This section is present for record subtype 2 only.

Offsets	Name	Length	Format	Description
0	0 SMF41BRD	4	binary	Total reads, including re-reads (number of blocks read from object).
4	4 SMF41BWR	4	binary	Total writes (number of blocks written to object).
8	8 SMF41BRR	4	binary	Total re-reads (number of blocks re-read from object).
12	C SMF41INC	4	binary	Total I/O calls for reads.
16	10 SMF41OUC	4	binary	Total I/O calls for writes.

VLF Statistics Section

This section is present for record subtype 3 only.

Offsets	Name	Length	Format	Description
0	0 SMF41CLS	8	EBCDIC	Class name.
8	8 SMF41MVT	4	binary	MAXVIRT specified, in 4K blocks. MAXVIRT is a VLF parameter specified in the COFVLFxx parmlib member.
12	C SMF41USD	4	binary	Amount of virtual storage currently being used, in 4K blocks.
16	10 SMF41SRC	4	binary	Number of times the cache was searched in this interval.
20	14 SMF41FND	4	binary	Number of objects found in the cache in this interval.
24	18 SMF41ADD	4	binary	Number of objects added to the cache in this interval.
28	1C SMF41DEL	4	binary	Number of objects deleted from the cache in this interval.
32	20 SMF41TRM	4	binary	Number of objects trimmed from the cache in this interval.
36	24 SMF41LRG	4	binary	Largest object attempted to put in the cache.

Record type 42 (2A) — DFSMS statistics and configuration

Reference information:

- For information about the IGDSMSxx parmlib member, see *z/OS MVS Initialization and Tuning Reference*.
- For information about the SETSMS and VARY SMS commands, see *z/OS MVS System Commands*.

Record type 42 contains the following subtype information:

- **Subtype 1** is created on a timed interval to collect device statistics. The time interval is specified in the IGDSMSxx parmlib member. Subtype 1 summarizes,

Record type 42

on a storage-class basis, the buffer manager 'hits' (number of page-read requests handled by the buffer manager). A Buffer Manager Facility (BMF) totals section (64 bytes) enables analysis of overall BMF performance. There is one storage-class summary section (64 bytes) for each storage class.

- **Subtype 2** has one section (88 bytes) for each cache control unit (Model 3990-3) having at least one Storage Management Subsystem- (SMS-) managed device attached. There is one section (16 bytes) for each SMS-managed volume attached to such a control unit.
- **Subtype 3** is written each time the SMS configuration is changed. The following events cause subtype 3 to be generated:
 - The operator issued a VARY SMS command.
 - An 'ACTIVATE' occurred, either by issuing an ACTIVATE command in ISMF or a SETSMS command on the console.
 - An event notification facility (ENF) event occurred, because the operator issued a VARY command to an SMS-managed volume.
 - The status of a LIBRARY or DRIVE has been UPDATED by the Object Access Method (OAC).
- **Subtype 4** is written to collect System Data Mover session statistics for a concurrent copy session or for an extended sequential data set when interfacing with the backup program. Concurrent copy records contain the identifier 'CC'; extended sequential data set records contain 'EXT'.
 - The CC SMF record is issued when the concurrent copy session completes.
 - The EXT SMF record is issued at the close of the processing for the extended sequential data set as follows:
 - If the backup program requested that the extended sequential data set be dumped to tape, one EXT SMF record is issued for reading the entire extended sequential data set.
 - If the backup program requested that the extended sequential data set be copied to DASD, one EXT SMF record is issued for reading the entire extended sequential data set and one EXT SMF record is issued for writing the entire extended sequential data set to DASD.
 - If the backup program requested that the extended sequential data set be processed using a concurrent copy session, then the CC SMF record contains the statistics for reading the extended sequential data set(s) and no EXT SMF record(s) is issued for reading the extended sequential data set(s). If the concurrent copy session was for a copy to DASD, one EXT SMF record is issued for writing each extended sequential data set to DASD.

For additional information about SMF record 42 subtype 4, see *Implementing Concurrent Copy*.

- **Subtype 5** includes storage class VTOC and VVDS I/O statistics. Subtype 5 is written when the global SMF interval expires. The global SMF interval is specified from the INTVAL parameter in the SMF parmlib member.

Note: Record type 30 records may also be synchronized to the global interval. See "INTVAL and SYNCVAL — Performing interval accounting" on page 71 for more information on the use of record type 30.

- **Subtype 6** records DASD data set level I/O statistics. There are two events that cause subtype 6 to be generated:
 - Close, or
 - Immediately after the recording of the type 30 interval record. There is one type 42 subtype 6 record for each type 30 interval record.

For the SMSPDSE and SMSPDSE1 address spaces, type 42 subtype 6 records are recorded at the BMFTIME interval immediately after the type 42 subtype 1 records.

Type 42 subtype 6 records are not recorded when there are no I/O statistics.

- **Subtype 7** is used by Network File System (NFS). See *z/OS Network File System Guide and Reference* for additional information.
- **Subtype 8** is used by Network File System (NFS). See *z/OS Network File System Guide and Reference* for additional information.
- **Subtype 9** is written each time a B37/D37/E37 abend is issued. It includes information about the data set, UCB, JFCB and job that is abending.
- **Subtype 10** is written at the time of volume selection failure because of insufficient space when allocating a data set.
- **Subtype 11** is written for extended remote copy (XRC) session statistics whenever the SMF timer interval ends.
- **Subtype 14** is written to report ADSTAR Distributed Storage Manager (ADSM) accounting for server resources used during a session.
- **Subtype 15** can be created on a timed interval or whenever the SMF timer ends to collect data about VSAM record-level sharing (RLS) storage class response time. This data includes information for each system and a sysplex-wide summary.
- **Subtype 16** can be created on a timed interval or whenever the SMF timer ends to collect data about VSAM RLS data set response time. This data includes information for each system and a sysplex-wide summary.
- **Subtype 17** can be created on a timed interval or whenever the SMF timer ends to collect data about VSAM RLS coupling facility (CF) lock structure usage. This data includes information for each system and a sysplex-wide summary.
- **Subtype 18** can be created on a timed interval or whenever the SMF timer ends to collect data about VSAM RLS CF cache partition usage. This data includes information for each system and a sysplex-wide summary.
- **Subtype 19** can be created on a timed interval or whenever the SMF timer ends to collect data about VSAM RLS Local Buffer Manager LRU Statistics Summary. This data includes information for each system and a sysplex-wide summary.

For **Subtypes 15, 16, 17, 18 and 19**, specify the time interval in the IGDSMSxx parmlib member and activate recording on one system in the sysplex. Because data is collected across the sysplex, it is unnecessary to merge SMF records from all the systems in the sysplex.

- **Subtype 20** is written when STOW INITIALIZE is used to delete all the members from a PDSE to indicate who or what (job, started task, or TSO user) issued the STOW INITIALIZE. It contains the name of the data set and the volume serial of the volume on which it resided.
- **Subtype 21** is written when a member is deleted from a PDS or a PDSE to indicate who or what (job, started task, or TSO user) deleted the member. It contains the name of the data set and the volume serial of the volume on which it resided, including all the aliases of the member that will fit in the SMF record.
- **Subtype 22** is used by DFSMSrmm for audit records. Use the IBM assigned record type 42 subtypes 22 to avoid DFSMSrmm SMF records requiring record types from the user-written range.
- **Subtype 23** is used by DFSMSrmm for security records. Use the IBM assigned record type 42 subtypes 23 to avoid DFSMSrmm SMF records requiring record types from the user-written range.

Record type 42

- **Subtype 24** is written when a member is added or replaced from a PDS or a PDSE to indicate who or what (job, started task, or TSO user) added or replaced the member. It contains the name of the data set and the volume serial of the volume on which it resided. If the member replaced is a primary name in a PDSE, the SMF record will also include any alias names associated with the replaced member. The number of alias names included will be limited to the maximum size that can be contained in an SMF record.

Only those applications that issue STOW and DESERV calls for PDS or PDSE directory processing will generate Subtype 24 records. Some applications, such as IEBCOPY, do not issue a STOW or DESERV when updating the directory. Thus, a subtype 24 record will not be created.

- **Subtype 25** is written when a member is renamed from a PDS or a PDSE to indicate who or what (job, started task, or TSO user) renamed the member. It contains the name of the data set and the volume serial of the volume on which it resided, including the old name and new name of the member.

Only those applications that issue STOW and DESERV calls for PDS or PDSE directory processing will generate Subtype 25 records. Some applications, such as IEBCOPY, do not issue a STOW or DESERV when updating the directory. Thus, a subtype 25 record will not be created.

- **Subtype 26** is used by Network File System (NFS). See *z/OS Network File System Guide and Reference* for additional information.
- **Subtype 27** is created each time the VTOC is changed. The following events cause subtype 27 to be generated:
 - Data set operations (create, extend, partial release, rename, scratch)
 - Defrag and consolidate
 - DSCB update

Record environment

Macro SMFEWTM (2),WRKAREA=(3),BRANCH=YES (record exit: IEFU84)

Record mapping

Header/Self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF42RCL	2	binary	Record length. This field and the next field (total of four bytes) form the record descriptor word (RDW). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF42SGD	2	binary	Segment descriptor (see record length field). This is zero, if the record is not spanned.												
4	4 SMF42FLG	1	binary	System indicator flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem identification follows system identification.</td> </tr> <tr> <td>1</td> <td>Subtypes are used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0	Subsystem identification follows system identification.	1	Subtypes are used	2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set															
0	Subsystem identification follows system identification.															
1	Subtypes are used															
2	Reserved															
3-6	Version indicators*															
7	Reserved.															
5	5 SMF42RTY	1	binary	Record type 42 (X'2A').												

Offsets	Name	Length	Format	Description																																														
6	6 SMF42TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.																																														
10	A SMF42DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.																																														
14	E SMF42SID	4	EBCDIC	System identification (from the SID parameter).																																														
18	12 SMF42SSI	4	EBCDIC	Subsystem identification.																																														
22	16 SMF42STY	2	binary	Record subtype. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr><td>1</td><td>BMF cache summary</td></tr> <tr><td>2</td><td>Cache control units having SMS-managed device(s) attached.</td></tr> <tr><td>3</td><td>SMS configuration changed</td></tr> <tr><td>4</td><td>System Data Mover session statistics</td></tr> <tr><td>5</td><td>Storage class VTOC and VVDS I/O statistics</td></tr> <tr><td>6</td><td>Data set level I/O statistics</td></tr> <tr><td>9</td><td>B37/D37/E37 abend information</td></tr> <tr><td>10</td><td>Volume selection failure</td></tr> <tr><td>11</td><td>Extended remote copy session statistics</td></tr> <tr><td>14</td><td>ADSM session resource usage</td></tr> <tr><td>15</td><td>VSAM RLS CF storage class response time</td></tr> <tr><td>16</td><td>VSAM RLS CF data set response time</td></tr> <tr><td>17</td><td>VSAM RLS CF lock structure usage</td></tr> <tr><td>18</td><td>VSAM RLS CF cache partition usage</td></tr> <tr><td>19</td><td>VSAM RLS buffer manager LRU activity</td></tr> <tr><td>20</td><td>STOW initialize</td></tr> <tr><td>21</td><td>Member delete</td></tr> <tr><td>22</td><td>DFSMSrmm audit records</td></tr> <tr><td>23</td><td>DFSMSrmm security records</td></tr> <tr><td>24</td><td>Member add/replace</td></tr> <tr><td>25</td><td>Member rename</td></tr> <tr><td>27</td><td>VTOC DSCB audit record</td></tr> </tbody> </table>	Value	Meaning	1	BMF cache summary	2	Cache control units having SMS-managed device(s) attached.	3	SMS configuration changed	4	System Data Mover session statistics	5	Storage class VTOC and VVDS I/O statistics	6	Data set level I/O statistics	9	B37/D37/E37 abend information	10	Volume selection failure	11	Extended remote copy session statistics	14	ADSM session resource usage	15	VSAM RLS CF storage class response time	16	VSAM RLS CF data set response time	17	VSAM RLS CF lock structure usage	18	VSAM RLS CF cache partition usage	19	VSAM RLS buffer manager LRU activity	20	STOW initialize	21	Member delete	22	DFSMSrmm audit records	23	DFSMSrmm security records	24	Member add/replace	25	Member rename	27	VTOC DSCB audit record
Value	Meaning																																																	
1	BMF cache summary																																																	
2	Cache control units having SMS-managed device(s) attached.																																																	
3	SMS configuration changed																																																	
4	System Data Mover session statistics																																																	
5	Storage class VTOC and VVDS I/O statistics																																																	
6	Data set level I/O statistics																																																	
9	B37/D37/E37 abend information																																																	
10	Volume selection failure																																																	
11	Extended remote copy session statistics																																																	
14	ADSM session resource usage																																																	
15	VSAM RLS CF storage class response time																																																	
16	VSAM RLS CF data set response time																																																	
17	VSAM RLS CF lock structure usage																																																	
18	VSAM RLS CF cache partition usage																																																	
19	VSAM RLS buffer manager LRU activity																																																	
20	STOW initialize																																																	
21	Member delete																																																	
22	DFSMSrmm audit records																																																	
23	DFSMSrmm security records																																																	
24	Member add/replace																																																	
25	Member rename																																																	
27	VTOC DSCB audit record																																																	
24	18 SMF42NT	2	binary	Number of triplets in record. A triplet is a set of offset/length/number values that defines a section of the record. (Optional.)																																														
26	1A	2		Reserved.																																														
Product section triplet:																																																		
28	1C SMF42OPS	4	binary	Offset to product section from start of record, including record descriptor word (RDW).																																														
32	20 SMF42LPS	2	binary	Length of product section.																																														
34	22 SMF42NPS	2	binary	Number of product sections.																																														
36	24 SMF42END	0	character	Force header end on word boundary.																																														
The following six fields are only included with subtype 1:																																																		
36	24 SMF42BMO	4	binary	Offset to BMF totals section from start of record, including record descriptor word (RDW).																																														
40	28 SMF42BML	2	binary	Length of BMF totals section.																																														
42	2A SMF42BMN	2	binary	Number of BMF totals sections.																																														
44	2C SMF42SCO	4	binary	Offset to storage class summary section from start of record, including record descriptor word (RDW).																																														
48	30 SMF42SCL	2	binary	Length of storage class summary section.																																														
50	32 SMF42SCN	2	binary	Number of storage class summary sections.																																														
The following six fields are only included with subtype 2:																																																		
36	24 SMF42CUO	4	binary	Offset to control unit cache section from start of record, including record descriptor word (RDW).																																														
40	28 SMF42CUL	2	binary	Length of control unit cache section.																																														

Record type 42

Offsets	Name	Length	Format	Description
42	2A SMF42CUN	2	binary	Number of control unit cache sections.
44	2C SMF42VLO	4	binary	Offset to volume section from start of record, including record descriptor word (RDW).
48	30 SMF42VLL	2	binary	Total length of all volume sections. (Number of volume sections multiplied by the length of one volume section.)
50	32 SMF42VLN	2	binary	Number of volume sections.
The following three fields are only included with subtype 3:				
36	24 SMF42EAO	4	binary	Offset to event audit section from start of record, including record descriptor word (RDW).
40	28 SMF42EAL	2	binary	Length of event audit section.
42	2A SMF42EAN	2	binary	Number of event audit sections.
The following six fields are only included with subtype 4:				
36	24 SMF42CCO	4	binary	Offset to CC statistics.
40	28 SMF42CCL	2	binary	Length of CC statistics.
42	2A SMF42CCN	2	binary	Number of CC sessions.
44	2C SMF42EXO	4	binary	Offset to EXT statistics.
48	30 SMF42EXL	2	binary	Length of EXT statistics.
50	32 SMF42EXN	2	binary	Number of EXT data sets.
52	34 SMF42VCO	4	binary	Offset to VCC statistics.
56	38 SMF42VCL	2	binary	Length of VCC statistics.
58	3A SMF42VCN	2	binary	Number of VCC sessions.
The following six fields are only included with subtype 5:				
36	24 SMF42SRO	4	binary	Offset to storage class response time section from start of record, including record descriptor word (RDW).
40	28 SMF42SRL	2	binary	Length of storage class response time section.
42	2A SMF42SRN	2	binary	Number of storage class response time sections.
44	2C SMF42VHO	4	binary	Offset to volume header section from start of record, including read descriptor word (RDW).
48	30 SMF42VHL	2	binary	Length of volume header section.
50	32 SMF42VHN	2	binary	Number of volume header sections.
The following three fields are only included with subtype 6:				
36	24 SMF42JHO	4	binary	Offset to job header section from start of record, including record descriptor word (RDW).
40	28 SMF42JHL	2	binary	Length of job header section.
42	2A SMF42JHN	2	binary	Number of job header sections.
The following six fields are only included with subtype 9:				
36	24 SMF42ABO	4	binary	Offset to X37 abend data section.
40	28 SMF42ABL	2	binary	Length of X37 abend data section.
42	2A SMF42ABN	2	binary	Number of X37 abend sections (always 1).
44	2C SMF42SMO	4	binary	Offset to SMS data section (0 if data set is not SMS managed).
48	30 SMF42SML	2	binary	Length of SMS data section (0 if data set is not SMS managed).
50	32 SMF42SMN	2	binary	Number of SMS sections (always 1 if data set is SMS managed. Otherwise, 0).
The following three fields are only included with subtype 10:				
36	24 SMF42VSF	4	binary	Offset to volume selection failure record.
40	28 SMF42VSL	4	binary	Length of volume selection failure record.

Offsets	Name	Length	Format	Description
42	2A SMF42VSN	2	binary	Number of volume selection failure records.
The following three fields are only included with subtype 11:				
36	24 SMF42XRO	4	binary	Offset to XRC service.
40	28 SMF42XRL	2	binary	Length of XRC service.
42	2A SMF42XRN	2	binary	Number of XRC sessions.
The following three fields are only included with subtype 14:				
36	24 SMF42T14	4	binary	Offset to ADSM section.
40	28	2	binary	Length of ADSM section.
42	2A	2	binary	Number of ADSM sections, 1.
The following six fields are only included with subtype 15 for buffers below the bar:				
36	24 SMF42FC1	4	binary	Offset to sysplex-wide storage class (SC) summary data section.
40	28 SMF42FC2	2	binary	Length of sysplex-wide SC summary data section.
42	2A SMF42FC3	2	binary	Number of sysplex-wide SC summary data sections.
44	2C SMF42FC4	4	binary	Offset to SC, CF, SYS summary section.
48	30 SMF42FC5	2	binary	Length of SC, CF, SYS summary section.
50	32 SMF42FC6	2	binary	Number of SC, CF, SYS summary sections.
The following six fields are only included with subtype 15 for buffers above the bar:				
52	34 SMF2AFC1	4	binary	Offset to sysplex-wide storage class (SC) summary data section.
56	38 SMF2AFC2	2	binary	Length of sysplex-wide SC summary data section.
58	3A SMF2AFC3	2	binary	Number of sysplex-wide SC summary data sections.
60	3C SMF2AFC4	4	binary	Offset to SC, CF, SYS summary section.
64	40 SMF2AFC5	2	binary	Length of SC, CF, SYS summary section.
66	42 SMF2AFC6	2	binary	Number of SC, CF, SYS summary sections.
The following six fields are only included with subtype 16 for buffers below the bar:				
36	24 SMF42GD1	4	binary	Offset to sysplex-wide data set summary section.
40	28 SMF42GD2	2	binary	Length of sysplex-wide data set summary section.
42	2A SMF42GD3	2	binary	Number of sysplex-wide data set summary sections.
44	2C SMF42GD4	4	binary	Offset to data set, CF, SYS summary section.
48	30 SMF42GD5	2	binary	Total length of all data set, CF, SYS summary sections.
50	32 SMF42GD6	2	binary	Number of data set, CF, SYS summary sections.
The following six fields are only included with subtype 16 for buffers above the bar:				
52	34 SMF2AGD1	4	binary	Offset to sysplex-wide data set summary section.
56	38 SMF2AGD2	2	binary	Length of sysplex-wide data set summary section.
58	3A SMF2AGD3	2	binary	Number of sysplex-wide data set summary sections.
60	3C SMF2AGD4	4	binary	Offset to data set, CF, SYS summary section.
64	40 SMF2AGD5	2	binary	Total length of all data set, CF, SYS summary sections.
66	42 SMF2AGD6	2	binary	Number of data set, CF, SYS summary sections.
The following six fields are only included with subtype 17:				
36	24 SMF42HL1	4	binary	Offset to MVS system CF lock structure activity totals section.
40	28 SMF42HL2	2	binary	Length of MVS system CF lock structure activity totals section.
42	2A SMF42HL3	2	binary	Number of MVS system CF lock structure activity totals sections.
44	2C SMF42HL4	4	binary	Offset to lock structure summary section.

Record type 42

Offsets	Name	Length	Format	Description
48	30 SMF42HL5	2	binary	Length of lock structure summary section.
50	32 SMF42HL6	2	binary	Number of lock structure summary sections.
The following nine fields are only included with subtype 18:				
36	24 SMF42IM1	4	binary	Offset to CF cache partition activity totals section.
40	28 SMF42IM2	2	binary	Length of CF cache partition activity totals section.
42	2A SMF42IM3	2	binary	Number of CF cache partition activity totals sections.
44	2C SMF42IM4	4	binary	Offset to single CF cache partition summary section.
48	30 SMF42IM5	2	binary	Length of single CF cache partition summary section.
50	32 SMF42IM6	2	binary	Number of single CF cache partition summary sections.
52	34 SMF42IM7	4	binary	Offset to directory/element ratio data sections.
56	38 SMF42IM8	2	binary	Length of directory/element ratio data sections.
58	3A SMF42IM9	2	binary	Number of directory/element ratio data sections.
The following six fields are only included with subtype 19 for buffers below the bar:				
36	24 SMF42JN1	4	binary	Offset to Sysplex Buffer Manager LRU activity totals section.
40	28 SMF42JN2	2	binary	Length of Sysplex Buffer Manager LRU activity totals section.
42	2A SMF42JN3	2	binary	Number of Sysplex Buffer Manager LRU activity totals sections.
44	2C SMF42JN4	4	binary	Offset to Local Buffer Manager LRU activity section.
48	30 SMF42JN5	2	binary	Length of Local Buffer Manager LRU activity section.
50	32 SMF42JN6	2	binary	Number of Local Buffer Manager LRU activity sections.
The following six fields are only included with subtype 19 for buffers above the bar:				
52	34 SMF2AJN1	4	binary	Offset to Sysplex Buffer Manager LRU activity totals section.
56	38 SMF2AJN2	2	binary	Length of Sysplex Buffer Manager LRU activity totals section.
58	3A SMF2AJN3	2	binary	Number of Sysplex Buffer Manager LRU activity totals sections.
60	3C SMF2AJN4	4	binary	Offset to Local Buffer Manager LRU activity section.
64	40 SMF2AJN5	2	binary	Length of Local Buffer Manager LRU activity section.
66	42 SMF2AJN6	2	binary	Number of Local Buffer Manager LRU activity sections.
The following six fields are only included with subtype 20:				
36	24 SMF42KN1	4	binary	Offset to STOW Initialize section.
40	28 SMF42KN2	2	binary	Length of STOW Initialize section.
42	2A SMF42KN3	2	binary	Number of STOW Initialize sections.
44	2C SMF42KN4	4	binary	Offset to STOW Initialize additional information section.
48	30 SMF42KN5	2	binary	Length of STOW Initialize additional information section.
50	32 SMF42KN6	2	binary	Number of STOW Initialize additional information section.
The following nine fields are only included with subtype 21:				
36	24 SMF42LN1	4	binary	Offset to Member Delete section.
40	28 SMF42LN2	2	binary	Length of Member Delete section.
42	2A SMF42LN3	2	binary	Number of Member Delete sections.
44	2C SMF42LN4	4	binary	Offset to Deleted Alias Names section.
48	30 SMF42LN5	2	binary	Length of Deleted Alias Names section.
50	32 SMF42LN6	2	binary	Number of Deleted Alias Names sections.
52	34 SMF42LN7	4	binary	Offset to Member Delete additional information section.
56	38 SMF42LN8	2	binary	Length of Member Delete additional information section.
58	3A SMF42LN9	2	binary	Number of Member Delete additional information section.

Offsets	Name	Length	Format	Description
The following six fields are only included with subtype 22:				
36	24 SMF42AUD	4	binary	Offset to audit section
40	28 SMF42LAD	2	binary	Length of audit section.
42	2A SMF42NAD	2	binary	Number of audit sections.
44	2C SMF42REC	4	binary	Offset to record section.
48	30 SMF42LRC	2	binary	Length of record section.
50	32 SMF42NRC	2	binary	Number of record sections.
The following three fields are only included with subtype 23:				
36	24 SMF42SEC	4	binary	Offset to security section.
40	28 SMF42LSC	2	binary	Length of security section.
42	2A SMF42NSC	2	binary	Number of security sections.
The following nine fields are only included with subtype 24:				
36	24 SMF42PN1	4	binary	Offset to Member add/replace header section.
40	28 SMF42PN2	2	binary	Length of Member add/replace header section.
42	2A SMF42PN3	2	binary	Number of Member add/replace header section.
44	2C SMF42PN4	4	binary	Offset to Alias names section.
48	30 SMF42PN5	2	binary	Length of Alias names section.
50	32 SMF42PN6	2	binary	Number of Alias names section.
52	34 SMF42PN7	4	binary	Offset to Member add/replace additional information section.
56	38 SMF42PN8	2	binary	Length of Member add/replace additional information section.
58	3A SMF42PN9	2	binary	Number of Member add/replace additional information section.
The following nine fields are only included with subtype 25:				
36	24 SMF42QN1	4	binary	Offset to Member rename section.
40	28 SMF42QN2	2	binary	Length of Member rename section.
42	2A SMF42QN3	2	binary	Number of Member rename sections.
44	2C SMF42QN4	4	binary	Offset to old member name section.
48	30 SMF42QN5	2	binary	Length of old member name section.
50	32 SMF42QN6	2	binary	Number of old member name sections.
52	34 SMF42QN7	4	binary	Offset to Member rename additional information section.
56	38 SMF42QN8	2	binary	Length of Member rename additional information section.
58	3A SMF42QN9	2	binary	Number of Member rename additional information section.
The following six fields are only included with subtype 27:				
36	24 SMF4227R1	4	binary	Offset to VTOC audit section from start of record, including record descriptor word (RDW).
40	28 SMF4227R2	2	binary	Length of VTOC audit section.
42	2A SMF4227R3	2	binary	Number of VTOC audit sections.
44	2C SMF4227R4	4	binary	Offset to VTOC DSCB section from start of record, including record descriptor word (RDW).
48	30 SMF4227R5	2	binary	Length of VTOC DSCB section.
50	32 SMF4227R6	2	binary	Number of VTOC DSCB sections.

Product section

Offsets	Name	Length	Format	Description
0	0 SMF42PDL	8	EBCDIC	Product level.

Record type 42

Offsets	Name	Length	Format	Description
8	8 SMF42PDN	10	EBCDIC	Product name.
18	12 SMF42PSV	1	binary	Subtype version number 0 Volume header section does not exist 1 Volume header section exists.
19	13 *	1		Reserved.
20	14 SMF42PTS	8	binary	Interval Start or OPEN time of day. This is zero if not available. These values are in time-of-day (TOD) clock format, and reflect GMT time, not local time.
28	1C SMF42PTE	8	binary	Interval End or CLOSE time of day. This is zero if not available. These values are in time-of-day (TOD) clock format, and reflect GMT time, not local time.
36	24 *	4	EBCDIC	Reserved.

Subtype 1

BMF totals section

Offsets	Name	Length	Format	Description
0	0 SMF42TNA	4	binary	Total number of storage classes.
4	4 SMF42TMT	4	binary	Interval length. This is the elapsed time of the measurement period in seconds.
8	8 SMF42TRT	4	binary	Total number of member data page reads.
12	C SMF42TRH	4	binary	Total number of member data page read hits handled by BMF.
16	10 SMF42TDT	4	binary	Total number of directory data page reads.
20	14 SMF42TDH	4	binary	Total number of directory data page read hits handled by BMF.
24	18 SMF42BUF	4	binary	Total number of active BMF 4K buffers.
28	1C SMF42BMX	4	binary	High water mark of BMF buffers.
32	20 SMF42LRU	2	binary	BMF LRU interval time.
34	22 SMF42UIC	2	binary	BMF LRU cycles until inactive buffers are cast out.

Storage class summary section

Offsets	Name	Length	Format	Description
0	0 SMF42PNL	2	binary	Length of storage class name.
2	2 SMF42PNN	30	EBCDIC	Storage class name.
32	20 SMF42SRT	4	binary	Total number of member data page reads.
36	24 SMF42SRH	4	binary	Total number of member data page read hits handled by BMF.
40	28 SMF42SDT	4	binary	Total number of directory data page reads.
44	2C SMF42SDH	4	binary	Total number of directory data page read hits handled by BMF.

Subtype 2

Control unit cache section

Offsets	Name	Length	Format	Description
0	0 SMF42SCS	1	binary	Storage director caching status Format Meaning 000xxxxx Caching is active. 001xxxxx Caching is pending active. 010xxxxx Internal subsystem error. Caching has ended. 100xxxxx Caching deactivated due to explicit host system request. 110xxxxx Pending off is in progress. Command to deactivate cache received, but de-stage is still in progress. 111xxxxx Pending off destage has failed. xxx1xxxx Subsystem storage disabled for maintenance. xxxXXxx Reserved. xxxxx1x IML device is not available. xxxxxx1 Non-retentive data is deactivated.
1	1 SMF42NCS	1	binary	Subsystem non-volatile storage status Format Meaning 00xxxxxx Non-volatile cache is active. 01xxxxxx Internal subsystem error. Non-volatile cache availability is ended. 10xxxxxx Non-volatile cache has been deactivated due to explicit host system request. 11xxxxxx Pending non-volatile unavailable has been received, but destage is still in progress. xxXxxXXX Reserved. xxx1xxxx Non-volatile storage disabled for maintenance. xxxx1xxx Non-volatile storage disabled due to error.
2	2 SMF42CID	2	binary	Subsystem identifier.
4	4 SMF42CSS	4	binary	Configured subsystem storage capacity, in bytes. F'1' means the capacity could not be determined.

Record type 42

Offsets	Name	Length	Format	Description
8	8 SMF42SSA	4	binary	Subsystem storage available, in bytes, for allocation as cache space.
12	C SMF42SAP	4	binary	Subsystem storage allocated, in bytes, for pinned data.
16	10 SMF42SSU	4	binary	Subsystem storage unavailable, in bytes, due to subsystem failures.
20	14 SMF42NSZ	4	binary	Configured non-volatile cache capacity, in bytes. F'1' means the capacity could not be determined.
24	18 SMF42SPR	4	binary	Non-volatile cache allocated, in bytes, for pinned data.
28	1C	4		Reserved.
Statistics gathered from last update period:				
32	20 SMF42LCT	4	binary	I/O count for the subsystem.
36	24 SMF42LFW	4	binary	Fast write bypass count.
40	28 SMF42LRH	4	binary	Cache normal read hit percent, between 0 and 100.
44	2C SMF42LWM	4	binary	Fast write bypasses per minute (an integer).
48	30 SMF42LYY	2	binary	Year, in the form 0cyy, where c is 0 for 19xx and 1 for 20xx, and yy is the current year (0-99).
50	32 SMF42LDD	2	binary	Day of year, in the form dddF, where ddd is the current day (1-366), and F is the sign.
52	34 SMF42LTM	4	binary	Time since midnight, in seconds.
Statistics gathered from current update period:				
56	38 SMF42CCT	4	binary	I/O count for the subsystem.
60	3C SMF42CFW	4	binary	Fast write bypass count.
64	40 SMF42CRH	4	binary	Cache normal read hit percent, between 0 and 100.
68	44 SMF42CWM	4	binary	Fast write bypasses per minute (an integer).
72	48 SMF42CY Y	2	binary	Year, in the form 0cyy, where c is 0 for 19xx and 1 for 20xx, and yy is the current year (0-99).
74	4A SMF42CDD	2	binary	Day of year, in the form dddF, where ddd is the current day (1-366), and F is the sign.
76	4C SMF42CTM	4	binary	Time since midnight, in seconds.
Statistical averages:				
80	50 SMF42IHR	2	binary	Average hit ratio, between 0 and 100.
82	52 SMF42IFW	2	binary	Average fast-write bypasses per minute (an integer).
84	54	4	EBCDIC	Reserved.

Volume status section

Offsets	Name	Length	Format	Description
0	0 SMF42VOL	6	EBCDIC	Volume serial number.
6	6	2		Reserved.
8	8 SMF42DEV	4	binary	Device number.

Offsets	Name	Length	Format	Description
12	C SMF42DB1	1	binary	Device status flags, byte 1
				Bit Indicates
				0-1 Device cache status
				Format Meaning
				00xxxxx Caching is activated.
				01xxxxx Unused.
				10xxxxx Deactivate pending by explicit host system request. Transfer of modified data to DASD has failed.
				11xxxxx Caching deactivated is unavailable.
				2-3 Fast write status
				Format Meaning
				xx00xxx Fast write is activated.
				xx01xxx Unused.
				xx10xxx Fast-write deactivate pending. Transfer of data to DASD has failed.
				xx11xxx Fast write deactivated.
				4-7 Duplex pair flags
				Format Meaning
				xxxx1xxx Primary of duplex pair.
				xxxx1xx Secondary of duplex pair.
				xxxxx00 Duplex pair available.
				xxxxx01 Duplex pair is pending (copy to establish duplex pair is in progress or failed).
				xxxxx10 Failed duplex by command.
				xxxxx11 Failed duplex by subsystem.

Record type 42

Offsets	Name	Length	Format	Description
13	D SMF42DB2	1	binary	Device status flags, byte 2 Format Meaning 00xxxxx No pinned data exists for the device, and fast write was not suspended. 01xxxxx Pinned data exists for the device, but fast write was not suspended. 10xxxxx Reserved. 11xxxxx Pinned data exists for the device, and fast write was suspended. xxXXXXXX Channel connect address for other device in duplex pair.
14	E	2		Reserved.

Subtype 3

Event audit section

Offsets	Name	Length	Format	Description
0	0 SMF42EAC	8	EBCDIC	The action that caused the record to be created, ACTIVATE, ENF, or VARY SMS.
8	8 SMF42ERC	4	binary	Return code from resulting event.
12	C SMF42ERS	4	binary	Reason code from resulting event.
Fields filled in for ENF event:				
16	10 SMF42EUA	4	binary	UCB address for the device.
20	14 SMF42EVO	6	EBCDIC	VOLSER for device is online.
26	1A	2		Reserved.
28	1C SMF42EOS	1	binary	Old MVS volume status. Value Meaning 1 Online. 2 Offline. 3 Pending offline. 4 Boxed. 5 Not ready.
29	1D SMF42ENS	1	binary	New MVS volume status.
30	1E	2		Reserved.
Fields filled in for VARY SMS command:				
32	20 SMF42ETY	8	EBCDIC	Type of VARY or UPDATE request: STORGRP, LIBRARY, DRIVE or VOLUME.
40	28 SMF42ESL	2	binary	Name length.
42	2A SMF42ENM	30	EBCDIC	STORAGE name or LIBRARY name or DRIVE name.
72	48 SMF42EVL	6	EBCDIC	Volume serial.
78	4E	2		Reserved.

Offsets	Name	Length	Format	Description
80	50 SMF42ESY	8	EBCDIC	System name (up to 8 systems, separated by commas) or '(ALL)'.
88	58 SMF42EST	12	EBCDIC	Resulting status: ENABLE or ENABLE,NEW or QUIESCE or QUIESCE,NEW or DISABLE or DISABLE,NEW.
100	64	4		Reserved.
Fields filled in for ACTIVATE command:				
104	68 SMF42ESD	44	EBCDIC	Source control data set name.
148	94 SMF42EAD	44	EBCDIC	Active control data set name.

Subtype 4

Concurrent copy session section

Offsets	Name	Length	Format	Description
0	0 S42CCID	4	binary	Logical session ID.
4	4 S42CCRQS	2	EBCDIC	Request type: 'CC' = Concurrent Copy.
6	6 S42CCTS	1	EBCDIC	Termination status: 'N' = normal 'A' = abnormal.
7	7 *	1		Reserved.
8	8 S42CCJNM	8	EBCDIC	Invoking jobname.
16	10 S42CCJNO	8	EBCDIC	Invoking job number.
24	18 S42CCSST	8	binary	Session start TOD.
32	20 S42CCEIT	8	binary	Initialization end TOD.
40	28 S42CCSET	8	binary	Session end TOD.
48	30 S42CCSSO	4	binary	Offset to first SSID (storage subsystem identifier) header.
52	34 S42CCSSN	2	binary	Number of SSIDs for session.
54	36 S42CCSSL	2	binary	Length of SSID header.
56	38 *	8		Reserved.

Concurrent copy SSID header section

Offsets	Name	Length	Format	Description
0	0 S42CSNXT	4	binary	Offset to next SSID header (0 if last SSID).
4	4 S42CSID	2	binary	SSID.
6	6 S42CSIDP	1	binary	Controller session ID.
7	7 *	1		Reserved.
8	8 S42CSMSF	4	binary	Maximum track threshold reached in storage control buffers.
12	C S42CSVLO	4	binary	Offset to first volume section for this SSID.
16	10 S42CSVLN	2	binary	Number of volume sections.
18	12 S42CSVLL	2	binary	Length of each volume section.
20	14 *	4		Reserved.

Record type 42

Concurrent copy volume section

Offsets	Name	Length	Format	Description
0	0 S42CVLNK	4	binary	Offset to next volume (0 if last volume).
4	4 S42CVLSR	6	EBCDIC	Volume serial number.
10	A	2	*	Reserved.
12	C S42CVLDV	1	binary	Device type.
13	D S42CVLUA	3	EBCDIC	Unit address.
16	10 S42CVLTK	4	binary	Number of tracks to be processed on the volume.
20	14 S42CVLRD	4	binary	Number of tracks read directly from DASD.
24	18 S42CVLRS	4	binary	Number of tracks read from the storage control buffers.
28	1C S42CVLEP	4	binary	Number of concurrent copy I/Os for the volume for the session.
32	20 *	4		Reserved.

Extended format data set section

Offsets	Name	Length	Format	Description
0	0 S42EXID	4	binary	Logical ID.
4	4 S42EXRQS	3	EBCDIC	Request type: 'EXT' = Extended format data set.
7	7	1	*	Reserved.
8	8 S42EXJNM	8	EBCDIC	Invoking jobname.
16	10 S42EXJNO	8	EBCDIC	Invoking job number.
24	18 S42EXSTM	8	binary	Start TOD.
32	20 S42EXETM	8	binary	End TOD.
40	28 S42EXTS	1	EBCDIC	Termination status: 'N' = normal 'A' = abnormal
41	29	3	*	Reserved.
44	2C S42EVLRT	8	binary	Number of tracks read.
52	34 S42EVLWT	8	binary	Number of tracks written.
60	3C	12	*	Reserved.

Virtual concurrent copy (VCC) session section

Offsets	Name	Length	Format	Description
0	0 S42VCID	4	binary	VCC Logical session ID.
4	4 S42VCRQS	3	EBCDIC	Request type: 'VCC' = Virtual Concurrent Copy.
7	7 S42VCTS	1	EBCDIC	Termination status: 'N' = normal 'A' = abnormal.
8	8 S42VCJNM	8	EBCDIC	Invoking jobname.
16	10 S42VCJNO	8	EBCDIC	Invoking job number.
24	18 S42VCSST	8	binary	Session start TOD.
32	20 S42VCEIT	8	binary	Initialization end TOD.

Offsets	Name	Length	Format	Description
40	28 S42VCSET	8	binary	Session end TOD.
48	30 S42VCCTK	8	binary	Total number of tracks processed using concurrent copy.
56	38 S42VCVTK	8	binary	Total number of tracks processed using virtual concurrent copy.
64	40 S42VCDSP	8	binary	Total number of tracks stored in dataspace.
72	48 S42VCSSO	4	binary	Offset to first SSID (storage subsystem identifier) header.
76	4C S42VCSSN	2	binary	Number of SSIDs for session.
78	4E S42VCSSL	2	binary	Length of SSID header.
80	50 *	8		Reserved

Subtype 5

Storage class response time section

I/O response and service time components are recorded in multiples of 128 micro-seconds.

Offsets	Name	Length	Format	Description
0	0 S42SCRNL	2	binary	Storage class name length.
2	2 S42SCRNN	30	EBCDIC	Storage class name.
32	20 S42SCIOR	4	binary	Response time.
36	24 S42SCIOC	4	binary	Average I/O connect time.
40	28 S42SCiop	4	binary	Average I/O pending time.
44	2C S42SCIOD	4	binary	Average I/O disconnect time.
48	30 S42SCIOQ	4	binary	Average control unit queue time.
52	34 S42SCION	4	binary	Total number of I/Os.
3990 Control Unit Cache Statistics:				
56	38 S42SCCND	4	binary	Number of cache candidates.
60	3C S42SCHIT	4	binary	Number of cache hits.
64	40 S42SCWCN	4	binary	Number of write candidates.
68	44 S42SCWHI	4	binary	Number of write hits.
72	48 S42SCSEQ	4	binary	Number of sequential I/O operations.
76	4C S42SCRLC	4	binary	Number of record level cache I/O operations.
80	50 S42SCICL	4	binary	Number of inhibit cache load I/O operations.
84	54 S42SCDA0	4	binary	Average I/O device-active-only time.
88	58 S42SCRDD	4	binary	Average disconnect time for reads.
92	5C S42SCRDT	4	binary	Total number of read operations.
96	60 S42SCHRD	4	binary	Number of zHPF read operations.
100	64 S42SCHWR	4	binary	Number of zHPF write operations.
104	68 S42SCR1U	4	binary	Response time (one microsecond).
108	6C S42SCC1U	4	binary	Average I/O connect time (one microsecond).
112	70 S42SCP1U	4	binary	Average I/O pending time (one microsecond).
116	74 S42SCD1U	4	binary	Average I/O disconnect time (one microsecond).
120	78 S42SCQ1U	4	binary	Average control unit queue time (one microsecond).
124	7C S42SCA1U	4	binary	Average I/O device-active-only time (one microsecond).
128	80 S42SCT1U	4	binary	Average disconnect time for reads (one microsecond).
132	84 S42SCB1U	4	binary	Average device busy time (one microsecond).
136	88 S42SCM1U	4	binary	Average initial command response time (one microsecond).

Record type 42

Offsets	Name	Length	Format	Description
140	8C *	4	-	Reserved.

Volume header section

Offsets to the volume component sections are zero if there are no statistics available to the component.

Offsets	Name	Length	Format	Description								
0	0 S42VTNXT	4	binary	Offset to next volume header section from start of record, including record descriptor word (RDW).								
4	4 S42VTSER	6	EBCDIC	Volume serial identification.								
10	A S42VTADR	2	binary	Binary device number.								
12	C S42VTFL1	1	binary	Device descriptor flags.								
	S42VTONL S42VTSMS			<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1...</td> <td>Device is online</td> </tr> <tr> <td>.1..</td> <td>Device is SMS managed</td> </tr> <tr> <td>..xx xxxx</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning	1...	Device is online	.1..	Device is SMS managed	..xx xxxx	Reserved
Bit	Meaning											
1...	Device is online											
.1..	Device is SMS managed											
..xx xxxx	Reserved											
13	D	7	EBCDIC	Reserved.								
20	14 S42TUNC	4	binary	Count of I/O not captured by the VTOC or VVDS component statistics.								
24	18 S42VTVDO	4	binary	Offset to VTOC Data component section.								
28	1C S42VTVDL	2	binary	Length of VTOC Data component section.								
30	1E *	2	EBCDIC	Reserved.								
32	20 S42VTVXO	4	binary	Offset to VTOC Index component section.								
36	24 S42VTVXL	2	binary	Length of VTOC Index component section.								
38	26 *	2	EBCDIC	Reserved.								
40	28 S42VTVVO	4	binary	Offset to VVDS component section.								
44	2C S42VTVVL	2	binary	Length of VVDS component section.								
42	2E *	2	EBCDIC	Reserved.								

Volume header section - VTOC data component I/O statistics

I/O response and service time components are recorded in multiples of 128 micro-seconds.

Offsets	Name	Length	Format	Description
0	0 S42VDIOR	4	binary	Response time.
4	4 S42VDIOC	4	binary	Average I/O connect time.
8	8 S42VDIOP	4	binary	Average I/O pending time.
12	C S42VDIOD	4	binary	Average I/O disconnect time
16	10 S42VDIOQ	4	binary	Average control unit queue time.
20	14 S42VDION	4	binary	Total number of I/Os.
3990 Control Unit Cache Statistics:				
24	18 S42VDCND	4	binary	Number of cache candidates.
28	1C S42VDHIT	4	binary	Number of cache hits.
32	20 S42VDWCN	4	binary	Number of write candidates.
36	24 S42VDWHI	4	binary	Number of write hits.
40	28 S42VDSEQ	4	binary	Number of sequential I/O operations.
44	2C S42VDRLC	4	binary	Number of record level cache I/O operations.

Offsets	Name	Length	Format	Description
48	30 S42VDICL	4	binary	Number of inhibit cache load I/O operations.
52	34 S42VDDA0	4	binary	Average I/O device-active-only time.
56	38 S42VDRDD	4	binary	Average disconnect time for reads.
60	3C S42VDRDT	4	binary	Total number of read operations.
64	40 S42VDHRD	4	binary	Number of zHPF read operations.
68	44 S42VDHWR	4	binary	Number of zHPF write operations
72	48 S42VDR1U	4	binary	Response time (one microsecond).
76	4C S42VDC1U	4	binary	Average I/O connect time (one microsecond).
80	50 S42VDP1U	4	binary	Average I/O pending time (one microsecond).
84	54 S42VDD1U	4	binary	Average I/O disconnect time (one microsecond).
88	58 S42VDQ1U	4	binary	Average control unit queue time (one microsecond).
92	5C S42VDA1U	4	binary	Average I/O device-active-only time (one microsecond).
96	60 S42VDT1U	4	binary	Average disconnect time for reads (one microsecond).
100	64 S42VDB1U	4	binary	Average device busy time (one microsecond).
104	68 S42VDM1U	4	binary	Average initial command response time (one microsecond).
108	6C *	4	-	Reserved.

Volume header section - VTOC index component I/O statistics

I/O response and service time components are recorded in multiples of 128 micro-seconds.

Offsets	Name	Length	Format	Description
0	0 S42VXIOR	4	binary	Response time.
4	4 S42VXIOC	4	binary	Average I/O connect time.
8	8 S42VXIOP	4	binary	Average I/O pending time.
12	C S42VXIOD	4	binary	Average I/O disconnect time.
16	10 S42VXIOQ	4	binary	Average control unit queue time.
20	14 S42VXION	4	binary	Total number of I/Os.
3990 Control Unit Cache Statistics:				
24	18 S42VXCND	4	binary	Number of cache candidates.
28	1C S42VXHIT	4	binary	Number of cache hits.
32	20 S42VXWCN	4	binary	Number of write candidates.
36	24 S42VXWHI	4	binary	Number of write hits.
40	28 S42VXSEQ	4	binary	Number of sequential I/O operations.
44	2C S42VXRLC	4	binary	Number of record level cache I/O operations.
48	30 S42VXICL	4	binary	Number of inhibit cache load I/O operations.
52	34 S42VXDA0	4	binary	Average I/O device-active-only time.
56	38 S42VXRDD	4	binary	Average disconnect time for reads.
60	3C S42VXRDT	4	binary	Total number of read operations.
64	40 S42VXHRD	4	binary	Number of zHPF read operations (one microsecond).
68	44 S42VXHWR	4	binary	Number of zHPF write operations (one microsecond).
72	48 S42VXR1U	4	binary	Response time (one microsecond).
76	4C S42VXC1U	4	binary	Average I/O connect time (one microsecond).
80	50 S42VXP1U	4	binary	Average I/O pending time (one microsecond).
84	54 S42VXD1U	4	binary	Average I/O disconnect time (one microsecond).
88	58 S42VXQ1U	4	binary	Average control unit queue time (one microsecond).

Record type 42

Offsets	Name	Length	Format	Description
92	5C S42VXA1U	4	binary	Average I/O device-active-only time (one microsecond).
96	60 S42VXT1U	4	binary	Average disconnect time for reads (one microsecond).
100	64 S42VXB1U	4	binary	Average device busy time (one microsecond).
104	68 S42VXM1U	4	binary	Average initial command response time (one microsecond).
108	6C *	4	-	Reserved.

Volume header section - VVDS component I/O statistics

I/O response and service time components are recorded in multiples of 128 micro-seconds

Offsets	Name	Length	Format	Description
0	0 S42VVIOR	4	binary	Response time.
4	4 S42VVIOC	4	binary	Average I/O connect time.
8	8 S42VVIOP	4	binary	Average I/O pending time.
12	C S42VVIOD	4	binary	Average I/O disconnect time.
16	10 S42VVIOQ	4	binary	Average control unit queue time.
20	14 S42VVION	4	binary	Total number of I/Os
3990 Control Unit Cache Statistics:				
24	18 S42VVCND	4	binary	Number of cache candidates.
28	1C S42VVHIT	4	binary	Number of cache hits.
32	20 S42VVWCN	4	binary	Number of write candidates.
36	24 S42VVWHI	4	binary	Number of write hits.
40	28 S42VVSEQ	4	binary	Number of sequential I/O operations.
44	2C S42VVRLC	4	binary	Number of record level cache I/O operations.
48	30 S42VVICL	4	binary	Number of inhibit cache load I/O operations.
52	34 S42VVDA0	4	binary	Average I/O device-active-only time.
56	38 S42VVRDD	4	binary	Average disconnect time for reads.
60	3C S42VVRDT	4	binary	Total number of read operations.
64	40 S42VVHRD	4	binary	Number of zHPF read operations.
68	44 S42VVHWR	4	binary	Number of zHPF write operations.
72	48 S42VVR1U	4	binary	Response time (one microsecond).
76	4C S42VVC1U	4	binary	Average I/O connect time (one microsecond).
80	50 S42VVP1U	4	binary	Average I/O pending time (one microsecond).
84	54 S42VVD1U	4	binary	Average I/O disconnect time (one microsecond).
88	58 S42VVQ1U	4	binary	Average control unit queue time (one microsecond).
92	5C S42VVA1U	4	binary	Average I/O device-active-only time (one microsecond).
96	60 S42VVT1U	4	binary	Average disconnect time for reads (one microsecond).
100	64 S42VVB1U	4	binary	Average device busy time (one microsecond).
104	68 S42VVM1U	4	binary	Average initial command response time (one microsecond).
108	6C *	4	-	Reserved.

Subtype 6

Job header section (data set statistics)

Offsets	Name	Length	Format	Description
0	0 S42JDJNM	8	EBCDIC	Job name.

Offsets	Name	Length	Format	Description
8	8 S42JDRST	4	binary	Time since midnight, in hundreds of a second, reader recognized the JOB card for this job.
12	0C S42JDRSD	4	packed	Date reader recognized the JOB card for this job, in the form 0cyyddF.
16	10 S42JDUID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
24	18 S42JDDSO	4	binary	Offset to first data set header section.
28	1C S42JDDSL	2	binary	Length of data set header section.
30	1E S42JDCOD	1	binary	0=Close, 1=Interval record.
31	1F *			Reserved.
32	20 S42JDPGN	2	binary	Job performance group number.
34	22 S42JDIOL	2	binary	Length of data set I/O statistics section.
36	24 S42JDAML	2	binary	Length of access method statistics section.
38	26 *	2	EBCDIC	Reserved.
40	28 S42JDGMO	4	binary	Greenwich Mean Time (GMT) offset represented in 1.048576 seconds.
44	2C S42JDWSC	8	EBCDIC	Workload Manager (WLM) Service Class Name.
52	32 S42JDWLD	8	EBCDIC	Workload Manager (WLM) workload name.
60	3C *	4	EBCDIC	Reserved.

Data set header section

Offsets	Name	Length	Format	Description																																		
0	0 S42DSNXT	4	binary	Offset to the next data set header section (0 if the last data set).																																		
4	4 S42DSN	44	EBCDIC	Data set name.																																		
48	30 S42DSTYP	1	binary	Data set type. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr><td>0</td><td>Other</td></tr> <tr><td>1</td><td>Physical sequential</td></tr> <tr><td>2</td><td>PDS</td></tr> <tr><td>3</td><td>PDSE</td></tr> <tr><td>4</td><td>Direct access</td></tr> <tr><td>5</td><td>ISAM</td></tr> <tr><td>6</td><td>EXCP</td></tr> <tr><td>7</td><td>Extended physical sequential data set</td></tr> <tr><td>10</td><td>HFS</td></tr> <tr><td>16</td><td>KSDS data component</td></tr> <tr><td>17</td><td>KSDS index component</td></tr> <tr><td>18</td><td>Variable RRDS data component</td></tr> <tr><td>19</td><td>Variable RRDS index component</td></tr> <tr><td>20</td><td>Fixed length RRDS</td></tr> <tr><td>21</td><td>Linear data set</td></tr> <tr><td>22</td><td>ESDS</td></tr> </tbody> </table>	Value	Meaning	0	Other	1	Physical sequential	2	PDS	3	PDSE	4	Direct access	5	ISAM	6	EXCP	7	Extended physical sequential data set	10	HFS	16	KSDS data component	17	KSDS index component	18	Variable RRDS data component	19	Variable RRDS index component	20	Fixed length RRDS	21	Linear data set	22	ESDS
Value	Meaning																																					
0	Other																																					
1	Physical sequential																																					
2	PDS																																					
3	PDSE																																					
4	Direct access																																					
5	ISAM																																					
6	EXCP																																					
7	Extended physical sequential data set																																					
10	HFS																																					
16	KSDS data component																																					
17	KSDS index component																																					
18	Variable RRDS data component																																					
19	Variable RRDS index component																																					
20	Fixed length RRDS																																					
21	Linear data set																																					
22	ESDS																																					

Record type 42

Offsets	Name	Length	Format	Description																								
49	31 S42DSCOD	1	binary	Entry descriptor flag																								
	S42FIRST *			<table border="0"> <tr> <td>Bit</td> <td>Meaning</td> </tr> <tr> <td>1...</td> <td>First data set entry since Open.</td> </tr> <tr> <td>.xxx xxxx</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning	1...	First data set entry since Open.	.xxx xxxx	Reserved.																		
Bit	Meaning																											
1...	First data set entry since Open.																											
.xxx xxxx	Reserved.																											
50	32 S42DSFL1	1	binary	Data set descriptor flags																								
	S42DSGSR S42DSLRSR S42DSRLS S42DSNSR S42DSEXC S42DSFXD S42DSPL S42DSEF S42DSEFC			<table border="0"> <tr> <td>Bit</td> <td>Meaning</td> </tr> <tr> <td>11xx xxxx</td> <td>VSAM buffer flags</td> </tr> <tr> <td>11..</td> <td>GSR</td> </tr> <tr> <td>10..</td> <td>LSR</td> </tr> <tr> <td>01..</td> <td>RLS</td> </tr> <tr> <td>00..</td> <td>NSR</td> </tr> <tr> <td>..x.</td> <td>Reserved</td> </tr> <tr> <td>....1</td> <td>Open for EXCP processing</td> </tr> <tr> <td>.... 1...</td> <td>Non-VSAM fixed length records</td> </tr> <tr> <td>.... .1..</td> <td>Program library</td> </tr> <tr> <td>.... ..1.</td> <td>Extended format</td> </tr> <tr> <td>.... ...1</td> <td>Compressed format</td> </tr> </table>	Bit	Meaning	11xx xxxx	VSAM buffer flags	11..	GSR	10..	LSR	01..	RLS	00..	NSR	..x.	Reserved1	Open for EXCP processing 1...	Non-VSAM fixed length records1..	Program library1.	Extended format1	Compressed format
Bit	Meaning																											
11xx xxxx	VSAM buffer flags																											
11..	GSR																											
10..	LSR																											
01..	RLS																											
00..	NSR																											
..x.	Reserved																											
....1	Open for EXCP processing																											
.... 1...	Non-VSAM fixed length records																											
.... .1..	Program library																											
.... ..1.	Extended format																											
.... ...1	Compressed format																											
51	33 *	1	EBCDIC	Reserved.																								
52	34 S42DSIOO	4	binary	Offset to data set I/O statistics section.																								
56	38 S42DSAMO	4	binary	Offset to access method statistics section.																								
60	3C S42DSVOL	6	EBCDIC	Volume serial number.																								
66	42 S42DSDEV	2	binary	Device number.																								
68	44 S42DSSC	8	EBCDIC	Storage class name.																								
76	4C S42DSBSZ	4	binary	Block size. For concatenated data sets, this data is taken from the first data set.																								
80	50 S42DSTRP	2	binary	Number of stripes																								
82	52 *	6	EBCDIC	Reserved.																								

Data set I/O statistics section

Note: I/O response and service time components are recorded in multiples of 128 micro-seconds.

Offsets	Name	Length	Format	Description
0	0 S42DSIOR	4	binary	Average response time.
4	4 S42DSIOC	4	binary	Average I/O connect time. There is one SMF subtype 6 record per data set, and each record has its own S42DSIOC field.
8	8 S42DSIOP	4	binary	Average I/O pending time.
12	C S42DSIOD	4	binary	Average I/O disconnect time.
16	10 S42DSIOQ	4	binary	Average control unit queue time.
20	14 S42DSION	4	binary	Total number of I/Os. There is one SMF subtype 6 record per data set, and each record has its own S42DSION field.
24	18 S42DSCND	4	binary	Number of cache candidates.
28	1C S42DSSHTS	4	binary	Number of cache hits.

Offsets	Name	Length	Format	Description
32	20 S42DSWCN	4	binary	Number of write candidates.
36	24 S42DSWHI	4	binary	Number of write hits.
40	28 S42DSSEQ	4	binary	Number of sequential I/O operations. Operations counted here are not accumulated in S42DSCND and S42DSWCN.
44	2C S42DSRLC	4	binary	Number of record level cache I/O operations.
48	30 S42DSICL	4	binary	Number of inhibit cache load I/O operations.
52	34 S42SDA0	4	binary	Average I/O device-active-only time.
56	38 S42DSMXR	4	binary	Maximum data set I/O response time.
60	3C S42DSMXS	4	binary	Maximum data set service time.
64	40 S42DSRDD	4	binary	Average disconnect time for reads.
68	44 S42DSRDT	4	binary	Total number of read operations.
72	48 S42DSHRD	4	binary	Number of zHPF read operations.
76	4C S42DSHWR	4	binary	Number of zHPF write operations.
80	50 S42DSR1U	4	binary	Average response time (one microsecond).
84	54 S42DSC1U	4	binary	Average I/O connect time (one microsecond). There is one SMF subtype 6 record per data set, and each record has its own S42DSIOC field.
88	58 S42DSP1U	4	binary	Average I/O pending time (one microsecond).
92	5C S42DSD1U	4	binary	Average I/O disconnect time (one microsecond).
96	60 S42DSQ1U	4	binary	Average control unit queue time (one microsecond).
100	64 S42DSA1U	4	binary	Average I/O device-active-only time (one microsecond).
104	68 S42DST1U	4	binary	Average disconnect time for reads (one microsecond).
108	6C S42DSB1U	4	binary	Average device busy time (one microsecond).
112	70 S42DSM1U	4	binary	Average initial command response time (one microsecond).
116	74 S42DSIOS	4	binary	Total number of read/write operations to Metro Mirror secondary. Note: I/O operations to the Metro Mirror secondary volume are included in the Data Set I/O reporting fields.

Access method statistics section

This section contains information as seen by the Access Method Services component of z/OS.

Notes:

1. All delay values are in units of 128 microseconds.
2. The I/O delay is only calculated by Access Method Services when the application checks whether an I/O buffer is available to be reused (for example, when an access method has issued an I/O request to commit the buffer). The timer starts when the caller makes the check request; it does not start when the I/O is requested. The timer ends when the I/O request completes. Thus, the delay value that is reported is the amount of time that the caller had to wait to reuse a buffer.

Offsets	Name	Length	Format	Description
0	0 S42AMSRB	4	binary	Sequential read: number of blocks
4	4 S42AMSRR	4	binary	Sequential read: I/O delay
8	8 S42AMSWB	4	binary	Sequential write: number of blocks
12	0C S42AMSWR	4	binary	Sequential write: I/O delay
16	10 S42AMDRB	4	binary	Direct read: number of blocks

Record type 42

Offsets	Name	Length	Format	Description
20	14 S42AMDRR	4	binary	Direct read: total I/O delay
24	18 S42AMDWB	4	binary	Direct write: number of blocks
28	1C S42AMDWR	4	binary	Direct write: total I/O delay
32	20 S42AMZRB	4	binary	Number of directory reads
36	24 S42AMZRR	4	binary	Directory read: I/O delay
40	28 S42AMZWB	4	binary	Number of directory writes
44	2C S42AMZWR	4	binary	Directory write: I/O delay

Subtype 9

B37/D37/E37 abend data section

Offsets	Name	Length	Format	Description
0	0 S42ASYID	4	EBCDIC	System ID.
4	4 S42JOBN	8	EBCDIC	Job Name.
12	C S42RDST	4	binary	Reader start time.
16	10 S42RDS D	4	packed	Reader start date (0cyyddf).
20	14 S42AAUID	8	EBCDIC	User identification.
28	1C S42ASTPN	1	binary	Job step number.
29	1D S42FLAGS	1	binary	Flags: Bit (Name) Meaning when set 0 (S42B37) B37 abend 1 (S42D37) D37 abend 2 (S42E37) E37 abend 3-7 Reserved
30	1E *	4		Reserved.
34	22 S42DSORG	2	binary	DSORG (data set organization).
36	24 S42ADISP	1	binary	Disposition.
37	25 S42DSNME	44	EBCDIC	Data set name.
81	51 S42VOLSR	6	EBCDIC	Volume serial number of current volume.
87	57 S42UCBTP	4	binary	UCB type information.
91	5B S42NEXT	1	binary	Number of extends on the current volume for this data set.
92	5C S42TNTRK	4	binary	Total number of tracks for data set on this volume.
96	60 S42ASSAT	4	binary	Secondary allocation amount from the JFCB.
100	64 S42ADRLH	3	binary	Average block length if specified.
103	67 *	5		Reserved.

SMS Data Section

Offsets	Name	Length	Format	Description
0	0 S42MCNME	30	EBCDIC	Management class name.
30	1E S42SCNME	30	EBCDIC	Storage class name.
60	3C S42DCNME	30	EBCDIC	Data class name.

Subtype 10

Volume Selection Failure Section

Offsets	Name	Length	Format	Description
0	0 SMF42JBN	8	EBCDIC	Job name.
8	8 SMF42PGN	8	EBCDIC	Program name.
16	10 SMF42STN	8	EBCDIC	Step name
24	18 SMF42DDN	8	EBCDIC	DD name.
32	20 SMF42DSN	44	EBCDIC	Data set name.
76	4C SMF42RSP	4	binary	Requested space quantity.
80	50 SMF42UNT	2	EBCDIC	Unit of space quantity.
82	52 SMF42DCL	2	binary	Length of data class.
86	56 SMF42DCN	30	EBCDIC	Data class name.
116	74 SMF42MCL	2	binary	Length of management class.
118	76 SMF42MCN	30	EBCDIC	Management class name.
148	94 SMF42SLN	2	binary	Length of storage class.
150	96 SMF42SNM	30	EBCDIC	Storage class name.
180	B4 SMF42SGL	2	binary	Length of storage group.
182	B6 SMF42SGN	30	EBCDIC	Storage group name.
210	D2	4	binary	Length of volume {name list}.
212	D4	30	EBCDIC	Volume {name list}.

Subtype 11

Extended Remote Copy (XRC) Session Section

Offsets	Name	Length	Format	Description
0	0 S42XRID	8	EBCDIC	Logical session ID.
8	8 S42XRTYP	8	EBCDIC	Session type 'XRC' = Extended Remote Copy
16	10 S42XRSSO	4	binary	Offset to first storage subsystem identifier (SSID) data section.
20	14 S42XRSSN	2	binary	Number of SSIDs in the XRC session.
22	16 S42XRSSL	2	binary	Length of SSID data section.
24	18	8		Reserved.

XRC SSID Data Section

Offsets	Name	Length	Format	Description
0	0 S42XRSNX	4	binary	Offset to next SSID data section (0 if last SSID).
4	4 S42XRSID	2	binary	SSID.
6	6 S42XRIDP	1	binary	Controller session ID.
7	7 *	1		Reserved.
8	8 S42XRVSH	4	binary	Number of volumes being shadowed for this SSID that are still active in the XRC session at the end of the SMF interval.
12	C S42XRTPR	4	binary	Total number of primary data mover reads.
16	10 S42XRNWD	4	binary	Number of data mover reads with data.
20	14 S42XRNND	4	binary	Number of data mover reads with no data.

Record type 42

Offsets	Name	Length	Format	Description
24	18 S42XRNL	4	binary	Number of data mover reads left to be read.
28	1C S42XRNF	4	binary	Number of format writes.
32	20 S42XRNU	4	binary	Number of update writes.
36	24 S42XRARS	4	binary	Average record size.
40	28 *	4		Reserved.

Subtype 14

ADSTAR distributed storage manager (ADSM) accounting section

Offsets	Name	Length	Format	Description
0	0 SMF42T14	2	EBCDIC	Product level.
2	2	8	EBCDIC	Product name, ADSM.
10	A	2	N/A	Reserved.
12	C	30	EBCDIC	Node name of ADSM client. If the node name does not fit completely within 30 characters, the client node name is listed as: first...last where <i>first</i> is the first 17 characters of the node name and <i>last</i> is the last 10 characters of the node name.
42	2A	14	EBCDIC	Data and time of accounting (yyyymmddhhmmss).
56	38	4	binary	Duraction of session, in seconds.
60	3C	4	binary	Number of archive database objects inserted during session.
64	40	4	binary	Number of backup database objects inserted during session.
68	44	4	binary	Amount of archived files, in kilobytes, sent by the client to the server.
72	48	4	binary	Amount of backed up files, in kilobytes, sent by the client to the server
76	4C	4	binary	Amount of data, in kilobytes, communicated between a client node and the server during this session.
80	50	8	EBCDIC	Client owner name (UNIX).
88	58	8	EBCDIC	Node type.
96	60	8	EBCDIC	Communication method used for session.
104	68	4	binary	Number of archive database objects retrieved during session.
108	6C	4	binary	Number of backup database objects retrieved during session.
112	70	4	binary	Amount of space, in kilobytes, retrieved by archived objects.
116	74	4	binary	Amount of space, in kilobytes, retrieved by backed up objects.
120	78	4	binary	Amount of Idle Wait time, in seconds, during the session.
124	7C	4	binary	Amount of Communications Wait time, in seconds, during the session.
128	80	4	binary	Amount of Media Wait time, in seconds, during the session.
132	84	4	binary	Amount of CPU time, in seconds, used by the server for basic client activity. This amount includes CPU time to send or receive data from the client but does not include CPU time to place data on, or retrieve it from database storage.
136	88	1	binary	Authentication method used.

Offsets	Name	Length	Format	Description
137	89	1	binary	Normal termination indicator (Normal=X'01').
138	8A	2	N/A	Reserved.
140	8C	4	binary	Number of space managed database objects inserted during session.
144	90	4	binary	Amount of space managed data, in kilobytes, sent by the client to the server.
148	94	4	binary	Number of space managed database objects retrieved during session.
152	98	4	binary	Amount of space, in kilobytes, retrieved by space managed objects.

Subtype 15 — VSAM RLS Storage Class Response Time Summary

Sysplex-wide storage class summary data section for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42FAA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF42F00	12	EBCDIC	Indicates if DFSMS greater than 4K CF caching is active. Value is GT4KACTIVE or GT4KNOTACT.
16	10 SMF42FAB	2	binary	Length of the storage class name.
18	12 SMF42FAC	30	EBCDIC	Storage class name.
48	30 SMF42F01	2	binary	Length of DFSMS cache set name.
50	32 SMF42FAD	30	EBCDIC	DFSMS cache set name.
80	50 SMF42FAE	4	binary	Number of lock requests processed.
84	54 SMF42FAF	4	binary	Number of true contention lock requests.
88	58 SMF42FAG	4	binary	Number of false contention lock requests.
92	5C SMF42F02	2	binary	DFSMS direct weight
94	5E SMF42F12	2	binary	DFSMS sequential weight
96	60 SMF42FAH	7	EBCDIC	Reserved.
103	67 SMF42FY3	1	binary	Bit (Name) Meaning when set 0 (SMF42FSC) CA and CI count valid 1 (SMF42FST) Local contention fields valid
104	68 SMF42FSA	4	binary	Total number of CI splits for this interval (across the sysplex)
108	6C SMF42FSB	4	binary	Total number of CA splits for this interval (across the sysplex)
Sysplex-wide direct access summary section:				
112	70 SMF42FCA	4	binary	Coupling facility cache partition number.
116	74 SMF42FCB	4	binary	Total number of direct access requests.
120	78 SMF42FCC	4	binary	Total number of Read requests - no read integrity.
124	7C SMF42FCD	4	binary	Total number of Read Requests - Consistent reads.
128	80 SMF42FCE	4	binary	Total number of Write requests.
132	84 SMF42FCF	4	binary	Number of direct access BMF requests.
136	88 SMF42FCG	4	binary	Number of direct access BMF Read Requests.

Record type 42

Offsets	Name	Length	Format	Description
140	8C SMF42FCH	4	binary	Number of direct access BMF Write requests.
144	90 SMF42FCI	4	binary	Number of direct access BMF Read hits.
148	94 SMF42FCJ	4	binary	Number of BMF valid Read hits.
152	98 SMF42FCK	4	binary	Number of BMF false invalids.
156	9C SMF42FCL	4	binary	Number of requests processed by the sysplex cache manager.
160	A0 SMF42FCM	4	binary	Number of CF Read requests.
164	A4 SMF42FCN	4	binary	Number of CF Write requests.
168	A8 SMF42FCO	4	binary	Number of CF Read hits
172	AC SMF42FCP	4	binary	Number of Read castins
176	B0 SMF42FCQ	8	binary	Number of bytes transferred into the DFSMS cache structure.
184	B8 SMF42FCR	4	binary	Number of READ real I/O requests to DASD.
188	BC SMF42FCS	4	binary	Number of WRITE real I/O requests to DASD.
192	C0 SMF42FCT	8	binary	Total number of bytes transferred for all direct access requests where the data was retrieved from DASD.
200	C8 SMF42FCU	8	binary	Number of DASD for the write requests.
208	D0 SMF42FCV	16	EBCDIC	Reserved.
224	E0 SMF42FCW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
232	E8 SMF42FCX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
236	EC SMF42FCY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
240	F0 SMF42FCZ	8	EBCDIC	Reserved.
248	F8 SMF42FC7	32	EBCDIC	Reserved.
Sysplex-wide direct access record merge (RE-DO) summary section:				
280	118 SMF42FDA	4	binary	Coupling facility Cache partition number (RE-DO).
284	11C SMF42FDB	4	binary	Total number of requests to DASD (RE-DO).
288	120 SMF42FDC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (RE-DO).
292	124 SMF42FDD	4	binary	Number of read requests - Consistent read protocol (RE-DO).
296	128 SMF42FDE	4	binary	Number of WRITE requests (RE-DO).
300	12C SMF42FDF	4	binary	Number of direct access BMF requests (RE-DO).
304	130 SMF42FDG	4	binary	Number of direct access BMF Read requests (RE-DO).
308	134 SMF42FDH	4	binary	Number of direct access BMF Write requests (RE-DO).
312	138 SMF42FDI	4	binary	Number of direct access BMF read hits (RE-DO).
316	13C SMF42FDJ	4	binary	Number of direct access BMF valid read hits (RE-DO).
320	140 SMF42FDK	4	binary	Number of BMF false invalids (RE-DO).
324	144 SMF42FDL	4	binary	Number of requests processed by the Sysplex Cache Manager
328	148 SMF42FDM	4	binary	Number of CF cache structure Read requests (RE-DO).
332	14C SMF42FDN	4	binary	Number of CF cache structure Write requests (RE-DO).
336	150 SMF42FDO	4	binary	Number of CF cache structure read hits (RE-DO).
340	154 SMF42FDP	4	binary	Number of CF cache structure read castins (RE-DO).
344	158 SMF42FDQ	8	binary	Number of bytes transferred into DFSMS cache structure (RE-DO).

Offsets	Name	Length	Format	Description
352 160	SMF42FDR	4	binary	Number of READ real I/O direct requests to DASD (RE-DO).
356 164	SMF42FDS	4	binary	Number of WRITE real I/O direct requests to DASD (RE-DO).
360 168	SMF42FDT	8	binary	Total number of bytes transferred to DASD for the read requests.
368 170	SMF42FDU	8	binary	Total number of bytes transferred to DASD for the write requests.
376 178	SMF42FDV	16	EBCDIC	Reserved. (RE-DO)
392 188	SMF42FDW	8	binary	Total amount of time, in milli seconds, for all direct access requests in this interval (RE-DO).
400 190	SMF42FDX	4	binary	Average response time for all of the direct access requests in this interval (total time/number of requests) (RE-DO).
404 194	SMF42FDY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K) (RE-DO).
408 198	SMF42FDZ	8	EBCDIC	Reserved.
416 1A0	SMF42FD7	32	EBCDIC	Reserved.
Sysplex-wide sequential access summary section:				
448 1C0	SMF42FEA	4	binary	Coupling facility cache partition number.
452 1C4	SMF42FEB	4	binary	Total number of requests.
456 1C8	SMF42FEC	4	binary	Total number of read requests - NRI protocol (No Read Integrity).
460 1CC	SMF42FED	4	binary	Total number of read requests - Consistent read protocol.
464 1D0	SMF42FEE	4	binary	Total number of WRITE requests.
468 1D4	SMF42FEF	4	binary	Number of sequential access BMF requests.
472 1D8	SMF42FEG	4	binary	Total number of sequential access BMF Read requests.
476 1DC	SMF42FEH	4	binary	Total number of sequential access BMF Write requests.
480 1E0	SMF42FEI	4	binary	Number of sequential access BMF read hits.
484 1E4	SMF42FEJ	4	binary	Number of sequential access BMF valid read hits.
488 1E8	SMF42FEK	4	binary	Number of sequential access BMF false invalids.
492 1EC	SMF42FEL	4	binary	Number of sequential access requests processed by the Sysplex Cache Manager
496 1F0	SMF42FEM	4	binary	Number of sequential access CF cache structure read requests.
500 1F4	SMF42FEN	4	binary	Number of sequential access CF cache structure Write requests.
504 1F8	SMF42FEO	4	binary	Number of sequential access CF cache structure read hits.
508 1FC	SMF42FEP	4	binary	Number of sequential access CF cache structure read castins.
512 200	SMF42FEQ	8	binary	Number of bytes transferred into the DFSMS CF cache structure.
520 208	SMF42FER	4	binary	Number of READ real I/O sequential requests to DASD.
524 20C	SMF42FES	4	binary	Number of WRITE real I/O sequential requests to DASD.
528 210	SMF42FET	8	binary	Total number of bytes transferred to DASD for the read requests.
536 218	SMF42FEU	8	binary	Total number of bytes transferred to DASD for the write requests.
544 220	SMF42FEV	16	EBCDIC	Reserved.
560 230	SMF42FEW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.

Record type 42

Offsets	Name	Length	Format	Description
568	238 SMF42FEX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
572	23C SMF42FEY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
576	240 SMF42FEZ	8	EBCDIC	Reserved.
584	248 SMF42FE7	32	EBCDIC	Reserved.
Sysplex-wide sequential access record merge (RE-DO) summary section:				
616	268 SMF42FFA	4	binary	Coupling facility cache partition number.
620	26C SMF42FFB	4	binary	Total number of sequential access requests. (RE-DO)
624	270 SMF42FFC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (RE-DO).
628	274 SMF42FFD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
632	278 SMF42FFE	4	binary	Number of sequential access Write requests. (RE-DO)
636	27C SMF42FFF	4	binary	Number of sequential access BMF requests. (RE-DO)
640	280 SMF42FFG	4	binary	Number of sequential access BMF Read requests. (RE-DO)
644	284 SMF42FFH	4	binary	Number of sequential access BMF Write requests. (RE-DO)
648	288 SMF42FFI	4	binary	Number of sequential access BMF read hits. (RE-DO)
652	28C SMF42FFJ	4	binary	Number of sequential access BMF valid read hits. (RE-DO)
656	290 SMF42FFK	4	binary	Number of sequential access BMF false invalids. (RE-DO)
660	294 SMF42FFL	4	binary	Number of sequential access requests processed by the Sysplex Cache Manager. (RE-DO)
664	298 SMF42FFM	4	binary	Number of sequential access CF cache structure Read requests. (RE-DO)
668	29C SMF42FFN	4	binary	Number of sequential access CF cache structure Write requests. (RE-DO)
672	2A0 SMF42FFO	4	binary	Number of sequential access CF cache structure read hits. (RE-DO)
676	2A4 SMF42FFP	4	binary	Number of sequential access CF cache structure read castins. (RE-DO)
680	2A8 SMF42FFQ	8	binary	Number of bytes transferred into the DFSMS cache structure (RE-DO).
688	2BO SMF42FFR	4	binary	Total number of READ real I/O sequential requests to DASD. (RE-DO)
692	2B4 SMF42FFS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (RE-DO)
696	2B8 SMF42FFT	8	binary	Total number of bytes transferred to DASD for the read requests.
704	2C0 SMF42FFU	8	binary	Total number of bytes transferred to DASD for the write requests.
712	2C8 SMF42FFV	16	EBCDIC	Reserved.
728	2D8 SMF42FFW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
736	2E0 SMF42FFX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
740	2E4 SMF42FFY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
744	2E8 SMF42FFZ	8	EBCDIC	Reserved.
752	2F0 SMF42FF7	32	EBCDIC	Reserved.
Sysplex-wide sequential access read ahead summary section:				

Offsets	Name	Length	Format	Description
784	310 SMF42FGA	4	binary	Coupling facility cache partition number.
788	314 SMF42FGB	4	binary	Total number of real I/O sequential requests to DASD. (read ahead)
792	318 SMF42FGC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (READ-AHEAD).
796	31C SMF42FGD	4	binary	Number of read requests - Consistent read protocol (READ-AHEAD).
800	320 SMF42FGE	4	binary	Number of Write requests. (READ-AHEAD)
804	324 SMF42FGF	4	binary	Number of sequential access BMF requests. (READ-AHEAD)
808	328 SMF42FGG	4	binary	Number of sequential access BMF Read requests. (READ-AHEAD)
812	32C SMF42FGH	4	binary	Number of sequential access BMF Write requests. (READ-AHEAD)
816	330 SMF42FGI	4	binary	Number of sequential access BMF read hits. (read ahead)
820	334 SMF42FGJ	4	binary	Number of sequential access BMF valid read hits. (read ahead)
824	338 SMF42FGK	4	binary	Number of BMF false invalids. (read ahead)
828	33C SMF42FGL	4	binary	Number of requests processed by the sysplex cache manager. (read ahead)
832	340 SMF42FGM	4	binary	Number of sequential access CF cache structure Read requests. (read ahead)
836	344 SMF42FGN	4	binary	Number of sequential access CF cache structure Write requests. (read ahead)
840	348 SMF42FGO	4	binary	Number of sequential access CF cache structure read hits. (read ahead)
844	34C SMF42FGP	4	binary	Number of sequential access CF cache structure read castins. (read ahead)
848	350 SMF42FGQ	8	binary	Total number of bytes transferred into the DFSMS cache structure for all sequential access requests. (read ahead)
856	358 SMF42FGR	4	binary	Total number of READ real I/O sequential requests to DASD (READ-AHEAD).
860	35C SMF42FGS	4	binary	Total number of WRITE real I/O sequential requests to DASD (READ-AHEAD).
864	360 SMF42FGT	8	binary	Total number of bytes transferred to DASD for the read requests.
868	368 SMF42FGU	8	binary	Total number of bytes transferred to DASD for the write requests.
880	370 SMF42FGV	16	EBCDIC	Reserved.
896	380 SMF42FGW	8	binary	Total amount of time, in milli seconds, for all sequential access (read ahead) requests in this interval.
904	388 SMF42FGX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval. (total time/number of requests)
908	38C SMF42FGY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
912	390 SMF42FGZ	8	EBCDIC	Reserved.
920	398 SMF42FG7	32	EBCDIC	Reserved.
Sysplex-wide sequential access pre-format summary section:				
952	3B8 SMF42FHA	4	binary	Coupling facility cache partition number.
956	3BC SMF42FHB	4	binary	Total number of real I/O sequential requests to DASD. (pre-format)

Record type 42

Offsets	Name	Length	Format	Description
960	3C0 SMF42FHC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (PRE-FORMAT).
964	3C4 SMF42FHD	4	binary	Number of read requests - Consistent read protocol (PRE-FORMAT).
968	3C8 SMF42FHE	4	binary	Number of Write requests. (PRE-FORMAT)
972	3CC SMF42FHF	4	binary	Number of sequential access BMF requests. (PRE-FORMAT)
976	3D0 SMF42FHG	4	binary	Number of sequential access BMF Read requests. (PRE-FORMAT)
980	3D4 SMF42FHH	4	binary	Number of sequential access BMF Write requests. (PRE-FORMAT)
984	3D8 SMF42FHI	4	binary	Number of sequential access BMF read hits. (pre-format)
988	3DC SMF42FHJ	4	binary	Number of sequential access BMF valid read hits. (pre-format)
992	3E0 SMF42FHK	4	binary	Number of BMF false invalids. (pre-format)
996	3E4 SMF42FHL	4	binary	Number of sequential access CF Cache structure Requests. (pre-format)
1000	3E8 SMF42FHM	4	binary	Number of sequential access CF Cache structure Read Requests. (pre-format)
1004	3EC SMF42FHN	4	binary	Number of sequential access CF Cache structure Write Requests. (pre-format)
1008	3F0 SMF42FHO	4	binary	Number of sequential access CF cache structure read hits. (pre-format)
1012	3F4 SMF42FHP	4	binary	Number of sequential access CF cache structure read castins. (pre-format)
1016	3F8 SMF42FHQ	8	binary	Number of sequential access CF cache structure bytes transferred. (pre-format)
1024	400 SMF42FHR	4	binary	Total number of READ real I/O sequential requests to DASD. (pre-format)
1028	404 SMF42FHS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1032	408 SMF42FHT	8	binary	Total number of bytes transferred to DASD for the read requests.
1040	410 SMF42FHU	8	binary	Total number of bytes transferred to DASD for the write requests.
1048	418 SMF42FHV	16	EBCDIC	Reserved.
1064	428 SMF42FHW	8	binary	Total amount of time, in milli seconds, for all sequential access (pre-format) requests in this interval.
1072	430 SMF42FHX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).
1076	434 SMF42FHY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1080	438 SMF42FHZ	8	EBCDIC	Reserved.
1088	440 SMF42FH7	32	EBCDIC	Reserved.
1120	460 SMF42FOA	4	binary	Number of record lock requests (obtain/alter/promote).
1124	464 SMF42FOB	4	binary	Number of record lock requests that cause true contention.
1128	468 SMF42FOC	4	binary	Number of record lock requests that cause false contention.
1132	46C SMF42FOD	4	binary	Number of record lock release requests.
1136	470 SMF42FOE	4	binary	Number of component_1 type lock requests.
1140	474 SMF42FOF	4	binary	Number of component_1 type release lock requests.
1144	478 SMF42FUA	4	binary	Accumulation of waiters for record lock.

Offsets	Name	Length	Format	Description
1148 44C	SMF42FUB	4	binary	Number of record locks hashed to the same hash table entry.
1152 480	SMF42FOH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
1156 484	SMF42FOI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1160 488	SMF42FOJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1164 48C	SMF42FOK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1168 490	SMF42FOL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
1172 494	SMF42FOM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
1176 498	SMF42FON	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1180 49C	SMF42FOO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1184 4A0	SMF42FOP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1188 4A4	SMF42FOQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1192 4A8	SMF42FOR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
1196 4AC	SMF42FOS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1200 4B0	SMF42FOT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1204 4B4	SMF42FOU	4	binary	Number of component_2 locks that cause true contention.
1208 4B8	SMF42FOV	4	binary	Number of component_2 locks that cause false contention.
1212 4BC	SMF42FOW	4	binary	Number of component_2 release lock requests.
1216 4C0	SMF42FUD	4	binary	Accumulation of waiters for DIWA lock.
1220 4C4	SMF42FUE	4	binary	Accumulation of waiters for upgrade lock.
1224 4C8	SMF42FUF	4	binary	Accumulation of waiters for COMP2 lock.
1228 4CC	SMF42FUG	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1232 4D0	SMF42FPH	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1236 4D4	SMF42FPI	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
1240 4D8	SMF42FPJ	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1244 4DC	SMF42FPK	4	binary	Number of component_1 class 4 (Index Record) release lock requests.
1256 4E8	SMF42FPS	4	binary	Total number of all thread requests.
1260 4EC	SMF42FPT	4	binary	Reserved.
1264 4F0	SMF42FPU	4	binary	Average response time for all of the thread requests in the interval. (Total time/number of thread requests).
1268 4F4	SMF42FPV	4	binary	Normalized response time for all of the thread requests in the interval. (Total time/number of bytes transferred/4K).
1272 4F8	SMF42FPW	8	EBCDIC	Reserved.
1280 500	SMF42FAI	16	EBCDIC	Lock structure name.

Record type 42

Offsets	Name	Length	Format	Description
1296 510	SMF42FAJ	8	EBCDIC	Lock set.

SC, CF, SYS summary section for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42FBA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF42F03	12	EBCDIC	Indicates if DFSMS greater than 4K CF caching is active. Value is GT4KACTIVE or GT4KNOTACT.
16	10 SMF42FBB	2	binary	Length of the storage class name.
18	12 SMF42FBC	30	EBCDIC	Storage class name.
48	30 SMF42F04	2	binary	Cache Set Name Length
50	32 SMF42FBD	30	EBCDIC	DFSMS Cache Set name.
80	50 SMF42FBE	8	EBCDIC	MVS system name.
88	58 SMF42F05	8	EBCDIC	Reserved.
96	60 SMF42FBF	2	EBCDIC	Reserved.
98	62 SMF42FBG	30	EBCDIC	DFP CF cache structure name.
128	80 SMF42FBH	4	binary	Number of lock requests processed.
132	84 SMF42FBI	4	binary	Number of true contention lock requests.
136	88 SMF42FBJ	4	binary	Number of false contention lock requests.
140	8C SMF42FB2	2	binary	SMS Direct Weight
142	8E SMF42FB3	2	binary	SMS Sequential Weight
144	90 SMF42FBL	8	EBCDIC	Reserved.
152	98 SMF42FTA	4	binary	Total number of CI splits for this interval.
156	9C SMF42FTB	4	binary	Total number of CA splits for this interval.
Direct access section:				
160	A0 SMF42FIA	4	binary	Coupling facility cache partition number.
164	A4 SMF42FIB	4	binary	Number of direct requests.
168	A8 SMF42FIC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
172	AC SMF42FID	4	binary	Number of read requests - Consistent read protocol.
176	B0 SMF42FIE	4	binary	Number of Write requests.
180	B4 SMF42FIF	4	binary	Number of direct access BMF requests.
184	B8 SMF42FIG	4	binary	Number of direct access BMF Read requests.
188	BC SMF42FIH	4	binary	Number of direct access BMF Write requests.
192	C0 SMF42FII	4	binary	Number of direct access BMF read hits.
196	C4 SMF42FIJ	4	binary	Number of direct access BMF valid read hits.
200	C8 SMF42FIK	4	binary	Number of BMF false invalids.
204	CC SMF42FIL	4	binary	Number of direct access CF Cache structure requests.
208	D0 SMF42FIM	4	binary	Number of direct access CF cache structure Read requests.
212	D4 SMF42FIN	4	binary	Number of direct access CF cache structure Write requests.
216	D8 SMF42FIO	4	binary	Number of direct access CF cache structure read hits.
220	DC SMF42FIP	4	binary	Number of direct access CF cache structure read castins.
224	E0 SMF42FIQ	8	binary	Number of direct access CF cache structure bytes transferred.
232	E8 SMF42FIR	4	binary	Number of READ real I/O direct requests to DASD.
236	EC SMF42FIS	4	binary	Number of WRITE real I/O direct requests to DASD.

Offsets	Name	Length	Format	Description
240	F0 SMF42FIT	8	binary	Total number of bytes transferred to DASD for the read requests.
248	F8 SMF42FIU	8	binary	Total number of bytes transferred to DASD for the write requests.
256	100 SMF42FIV	16	EBCDIC	Reserved.
272	110 SMF42FIW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
280	118 SMF42FIX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
284	11C SMF42FIY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
288	120 SMF42FIZ	8	EBCDIC	Reserved.
296	128 SMF42FI7	32	EBCDIC	Reserved.
Direct access record merge (RE-DO) summary section:				
328	148 SMF42FJA	4	binary	Coupling facility cache partition number.
332	14C SMF42FJB	4	binary	Total number of direct access requests. (RE-DO)
336	150 SMF42FJC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
340	154 SMF42FJD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
344	158 SMF42FJE	4	binary	Number of Write requests. (RE-DO)
348	15C SMF42FJF	4	binary	Number of direct access BMF requests. (RE-DO)
352	160 SMF42FJG	4	binary	Number of direct access BMF Read requests. (RE-DO)
356	164 SMF42FJH	4	binary	Number of direct access BMF Write requests. (RE-DO)
360	168 SMF42FJI	4	binary	Number of direct access BMF read hits. (RE-DO)
364	16C SMF42FJJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
368	170 SMF42FJK	4	binary	Number of BMF false invalids. (RE-DO)
372	174 SMF42FJL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
376	178 SMF42FJM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
380	17C SMF42FJN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)
384	180 SMF42FJO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
388	184 SMF42FJP	4	binary	Number of direct access CF cache structure read castins. (RE-DO)
392	188 SMF42FJQ	8	binary	Number of direct access CF cache structure bytes transferred. (RE-DO)
400	190 SMF42FJR	4	binary	Total number of READ real I/O direct requests to DASD. (RE-DO)
404	194 SMF42FJS	4	binary	Total number of WRITE real I/O direct requests to DASD. (RE-DO)
408	198 SMF42FJT	8	binary	Total number of bytes transferred to DASD for the read requests.
416	1A0 SMF42FJU	8	binary	Total number of bytes transferred to DASD for the write requests.
424	1A8 SMF42FJV	16	EBCDIC	Reserved.
440	1B8 SMF42FJW	8	binary	Total amount of time, in milli seconds, for all direct access. (RE-DO) requests in this interval.
448	1C0 SMF42FJX	4	binary	Average response time for all of the direct access requests in this interval (total time/number of requests). (RE-DO)

Record type 42

Offsets	Name	Length	Format	Description
452	1C4 SMF42FJY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
456	1C8 SMF42FJZ	8	EBCDIC	Reserved.
464	1D0 SMF42FJ7	32	EBCDIC	Reserved.
Sequential access section:				
496	1F0 SMF42FKA	4	binary	Coupling facility cache partition number.
500	1F4 SMF42FKB	4	binary	Total number of sequential access requests.
504	1F8 SMF42FKC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
508	1FC SMF42FKD	4	binary	Number of read requests - Consistent read protocol.
512	200 SMF42FKE	4	binary	Number of Write requests.
516	204 SMF42FKF	4	binary	Number of sequential access BMF requests.
520	208 SMF42FKG	4	binary	Number of sequential access BMF Read requests.
524	20C SMF42FKH	4	binary	Number of sequential access BMF Write requests.
528	210 SMF42FKI	4	binary	Number of sequential access BMF read hits.
532	214 SMF42FKJ	4	binary	Number of sequential access BMF valid read hits.
536	218 SMF42FKK	4	binary	Number of sequential BMF false invalids.
540	21C SMF42FKL	4	binary	Number of sequential access CF cache structure requests.
544	220 SMF42FKM	4	binary	Number of sequential access CF cache structure Read requests.
548	224 SMF42FKN	4	binary	Number of sequential access CF cache structure Write requests.
552	228 SMF42FKO	4	binary	Number of sequential access CF cache structure read hits.
556	22C SMF42FKP	4	binary	Number of sequential access CF cache structure read castins.
560	230 SMF42FKQ	8	binary	Number of sequential access CF cache structure bytes transferred.
568	238 SMF42FKR	4	binary	Total number of READ real I/O sequential requests to DASD.
572	23C SMF42FKS	4	binary	Total number of WRITE real I/O sequential requests to DASD.
576	240 SMF42FKT	8	binary	Total number of bytes transferred to DASD for the read requests.
584	248 SMF42FKU	8	binary	Total number of bytes transferred to DASD for the write requests.
592	250 SMF42FKV	16	EBCDIC	Reserved.
608	260 SMF42FKW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.
616	268 SMF42FKX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
620	26C SMF42FKY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
624	270 SMF42FKZ	8	EBCDIC	Reserved.
632	278 SMF42FK7	32	EBCDIC	Reserved.
Sequential access record merge (RE-DO) summary section:				
664	298 SMF42FLA	4	binary	Coupling facility cache partition number.
668	29C SMF42FLB	4	binary	Total number of sequential access requests. (RE-DO)
672	2A0 SMF42FLC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)

Offsets	Name	Length	Format	Description
676	2A4 SMF42FLD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
680	2A8 SMF42FLE	4	binary	Number of Write requests. (RE-DO)
684	2AC SMF42FLF	4	binary	Number of sequential access BMF requests. (RE-DO)
688	2B0 SMF42FL6	4	binary	Number of sequential access BMF Read requests. (RE-DO)
692	2B4 SMF42FLH	4	binary	Number of sequential access BMF Write requests. (RE-DO)
696	2B8 SMF42FLI	4	binary	Number of sequential access BMF read hits. (RE-DO)
700	2BC SMF42FLJ	4	binary	Number of sequential access BMF valid read hits. (RE-DO)
704	2C0 SMF42FLK	4	binary	Number of BMF false invalids. (RE-DO)
708	2C4 SMF42FLL	4	binary	Total number of sequential access requests. (RE-DO)
712	2C8 SMF42FLM	4	binary	Number of sequential access CF cache structure Read requests. (RE-DO)
716	2CC SMF42FLN	4	binary	Number of sequential access CF cache structure Write requests. (RE-DO)
720	2D0 SMF42FLO	4	binary	Number of sequential access CF cache structure Read hits. (RE-DO)
724	2D4 SMF42FLP	4	binary	Number of sequential access CF cache structure read castins. (RE-DO)
728	2D8 SMF42FLQ	8	binary	Number of sequential access CF cache structure bytes transferred. (RE-DO)
736	2E0 SMF42FLR	4	binary	Total number of READ real I/O sequential requests to DASD. (RE-DO)
740	2E4 SMF42FLS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (RE-DO)
744	2E8 SMF42FLT	8	binary	Total number of bytes transferred to DASD for the read requests.
752	2F0 SMF42FLU	8	binary	Total number of bytes transferred to DASD for the write requests.
760	2F8 SMF42FLV	16	EBCDIC	Reserved.
776	308 SMF42FLW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
784	310 SMF42FLX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
788	314 SMF42FLY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
792	318 SMF42FLZ	8	EBCDIC	Reserved.
800	320 SMF42FL7	32	EBCDIC	Reserved.
Sequential access read ahead summary section:				
832	340 SMF42FMA	4	binary	Coupling facility cache partition number.
836	344 SMF42FMB	4	binary	Total number of sequential access requests. (read ahead)
840	348 SMF42FMC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (read ahead)
844	34C SMF42FMD	4	binary	Number of read requests - Consistent read protocol. (read ahead)
848	350 SMF42FME	4	binary	Number of Write requests. (read ahead)
852	354 SMF42FMF	4	binary	Number of sequential access BMF requests. (read ahead)
856	358 SMF42FMG	4	binary	Number of sequential access BMF Read requests. (read ahead)
860	35C SMF42FMH	4	binary	Number of sequential access BMF Write requests. (read ahead)

Record type 42

Offsets	Name	Length	Format	Description
864	360 SMF42FMI	4	binary	Number of sequential access BMF read hits. (read ahead)
868	364 SMF42FMJ	4	binary	Number of sequential access BMF valid read hits. (read ahead)
872	368 SMF42FMK	4	binary	Number of BMF false invalids. (read ahead)
876	36C SMF42FML	4	binary	Number of sequential access CF cache structure requests. (read ahead)
880	370 SMF42FMM	4	binary	Number of sequential access CF cache structure Read requests. (read ahead)
884	374 SMF42FMN	4	binary	Number of sequential access CF cache structure Write requests. (read ahead)
888	378 SMF42FMO	4	binary	Number of sequential access CF cache structure read hits. (read ahead)
892	37C SMF42FMP	4	binary	Number of sequential access CF cache structure read castins. (read ahead)
896	380 SMF42FMQ	8	binary	Number of sequential access CF cache structure bytes transferred. (read ahead)
904	388 SMF42FMR	4	binary	Total number of READ real I/O sequential requests to DASD. (read ahead)
908	38C SMF42FMS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (read ahead)
912	390 SMF42FMT	8	binary	Total number of bytes transferred to DASD for the read requests.
920	398 SMF42FMU	8	binary	Total number of bytes transferred to DASD for the write requests.
928	3A0 SMF42FMV	16	EBCDIC	Reserved.
944	3B0 SMF42FMW	8	binary	Total amount of time, in milli seconds, for all sequential access (read ahead) requests in this interval.
952	3B8 SMF42FMX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval (total time/number of requests).
956	3BC SMF42FMY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
960	3C0 SMF42FMZ	8	EBCDIC	Reserved.
968	3C8 SMF42FM7	32	EBCDIC	Reserved.
Sequential access pre-format summary section:				
1000	3E8 SMF42FNA	4	binary	Coupling facility cache partition number.
1004	3EC SMF42FNB	4	binary	Total number of sequential access requests. (Pre-format)
1008	3F0 SMF42FNC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (Pre-format)
1012	3F4 SMF42FND	4	binary	Number of read requests - Consistent read protocol. (Pre-format)
1016	3F8 SMF42FNE	4	binary	Number of Write requests. (Pre-format)
1020	3FC SMF42FNF	4	binary	Number of sequential access BMF requests. (Pre-format)
1024	400 SMF42FNG	4	binary	Number of sequential access BMF Read requests. (Pre-format)
1028	404 SMF42FNH	4	binary	Number of sequential access BMF Write requests. (Pre-format)
1032	408 SMF42FNI	4	binary	Number of sequential access BMF read hits. (Pre-format)
1036	40C SMF42FNJ	4	binary	Number of sequential access BMF valid read hits. (Pre-format)
1040	410 SMF42FNK	4	binary	Number of BMF false invalids. (Pre-format)

Offsets	Name	Length	Format	Description
1044	414 SMF42FNL	4	binary	Number of sequential access CF cache structure requests. (Pre-format)
1048	418 SMF42FNM	4	binary	Number of sequential access CF cache structure Read requests. (Pre-format)
1052	41C SMF42FNN	4	binary	Number of sequential access CF cache structure Write requests. (read ahead)
1056	420 SMF42FNO	4	binary	Number of sequential access CF cache structure read hits. (read ahead)
1060	424 SMF42FNP	4	binary	Number of sequential access CF cache structure read castins. (Pre-format)
1064	428 SMF42FNQ	8	binary	Number of sequential access CF cache structure bytes transferred. (Pre-format)
1072	430 SMF42FNR	4	binary	Total number of READ real I/O sequential requests to DASD. (Pre-format)
1076	434 SMF42FNS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1080	438 SMF42FNT	8	binary	Total number of bytes transferred to DASD for the read requests.
1088	440 SMF42FNU	8	binary	Total number of bytes transferred to DASD for the write requests.
1096	448 SMF42FNV	16	EBCDIC	Reserved.
1112	458 SMF42FNW	8	binary	Total amount of time, in milli seconds, for all sequential access (pre-format) requests in this interval.
1120	460 SMF42FNX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).
1124	464 SMF42FNY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1128	468 SMF42FNZ	8	EBCDIC	Reserved.
1136	470 SMF42FN7	32	EBCDIC	Reserved.
1168	490 SMF42FRA	4	binary	Number of record lock requests (obtain/alter/promote).
1172	494 SMF42FRB	4	binary	Number of record lock requests that cause true contention.
1176	498 SMF42FRC	4	binary	Number of record lock requests that cause false contention.
1180	49C SMF42FRD	4	binary	Number of record lock release requests.
1184	4A0 SMF42FRE	4	binary	Number of component_1 type lock requests.
1188	4A4 SMF42FRF	4	binary	Number of component_1 type release lock requests.
1192	4A8 SMF42FVA	4	binary	Accumulation of waiters for record lock.
1196	4AC SMF42FVB	4	binary	Number of record locks hashed to the same hash table entry.
1200	4B0 SMF42FRH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
1204	4B4 SMF42FRI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1208	4B8 SMF42FRJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1212	4BC SMF42FRK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1216	4C0 SMF42FRL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
1220	4C4 SMF42FRM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.

Record type 42

Offsets	Name	Length	Format	Description
1224	4C8 SMF42FRN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1228	4CC SMF42FRO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1232	4D0 SMF42FRP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1236	4D4 SMF42FRQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1240	4D8 SMF42FRR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
1244	4DC SMF42FRS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1248	4E0 SMF42FRT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1252	4E4 SMF42FRU	4	binary	Number of component_2 locks that cause true contention.
1256	4E8 SMF42FRV	4	binary	Number of component_2 locks that cause false contention.
1260	4EC SMF42FRW	4	binary	Number of component_2 release lock requests.
1264	4F0 SMF42FVD	4	binary	Accumulation of waiters for DIWA lock.
1268	4F4 SMF42FVE	4	binary	Accumulation of waiters for UPGRADE lock.
1272	4F8 SMF42FVF	4	binary	Accumulation of waiters for COMP2 lock.
1276	4FC SMF42FVG	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1280	500 SMF42FSH	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1284	504 SMF42FSI	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
1288	508 SMF42FSJ	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1292	50C SMF42FSK	4	binary	Number of component_1 class 4 (Index Record) release lock requests.
1296	510 SMF42FQR	8	EBCDIC	Total time all thread requests.
1304	518 SMF42FQS	4	binary	Total number of all thread requests.
1308	51C SMF42FQT	4	binary	Reserved.
1312	520 SMF42FQU	4	binary	Average response time for all of the thread requests in the interval. (Total time/number of thread requests)
1316	524 SMF42FQV	4	binary	Normalized response time for all of the thread requests in the interval. (Total time/number of bytes transferred/4K)
1320	528 SMF42FQW	8	EBCDIC	Reserved.
1328	530 SMF42FBM	16	EBCDIC	Lock structure name.
1344	540 SMF42FBN	8	EBCDIC	Lock set.

Sysplex-wide storage class summary data section for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AFAA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF2AF00	12	EBCDIC	Indicates if DFSMS greater than 4K CF caching is active. Value is GT4KACTIVE or GT4KNOTACT.
16	10 SMF2AFAB	2	binary	Length of the storage class name.
18	12 SMF2AFAC	30	EBCDIC	Storage class name.

Offsets	Name	Length	Format	Description
48	30 SMF2AF01	2	binary	Length of DFSMS cache set name.
50	32 SMF2AFAD	30	EBCDIC	DFSMS cache set name.
80	50 SMF2AFAE	4	binary	Number of lock requests processed.
84	54 SMF2AFAF	4	binary	Number of true contention lock requests.
88	58 SMF2AFAG	4	binary	Number of false contention lock requests.
92	5C SMF2AF02	2	binary	DFSMS direct weight
94	5E SMF2AF12	2	binary	DFSMS sequential weight
96	60 SMF2AFAH	8	EBCDIC	Reserved.
104	68 SMF42FSAA	4	binary	Total number of CI splits for this interval (across the sysplex).
108	6C SMF42FSBA	4	binary	Total number of CA splits for this interval (across the sysplex).
Sysplex-wide direct access summary section:				
112	70 SMF2AFCA	4	binary	Coupling facility cache partition number.
116	74 SMF2AFCB	4	binary	Total number of direct access requests.
120	78 SMF2AFCC	4	binary	Total number of Read requests - no read integrity.
124	7C SMF2AFCD	4	binary	Total number of Read Requests - Consistent reads.
128	80 SMF2AFCE	4	binary	Total number of Write requests.
132	84 SMF2AFCF	4	binary	Number of direct access BMF requests.
136	88 SMF2AFCG	4	binary	Number of direct access BMF Read Requests.
140	8C SMF2AFCH	4	binary	Number of direct access BMF Write requests.
144	90 SMF2AFCI	4	binary	Number of direct access BMF Read hits.
148	94 SMF2AF CJ	4	binary	Number of BMF valid Read hits.
152	98 SMF2AFCK	4	binary	Number of BMF false invalids.
156	9C SMF2AFCL	4	binary	Number of requests processed by the sysplex cache manager.
160	A0 SMF2AFCM	4	binary	Number of CF Read requests.
164	A4 SMF2AFCN	4	binary	Number of CF Write requests.
168	A8 SMF2AFCO	4	binary	Number of CF Read hits
172	AC SMF2AFCP	4	binary	Number of Read castins
176	B0 SMF2AFCQ	8	binary	Number of bytes transferred into the DFSMS cache structure.
184	B8 SMF2AFCR	4	binary	Number of READ real I/O requests to DASD.
188	BC SMF2AFCS	4	binary	Number of WRITE real I/O requests to DASD.
192	C0 SMF2AFCT	8	binary	Total number of bytes transferred for all direct access requests where the data was retrieved from DASD.
200	C8 SMF2AFCU	8	binary	Number of DASD for the write requests.
208	D0 SMF2AFCV	16	EBCDIC	Reserved.
224	E0 SMF2AFCW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
232	E8 SMF2AFCX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
236	EC SMF2AFCY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
240	F0 SMF2AFCZ	8	EBCDIC	Reserved.
248	F8 SMF2AFC7	32	EBCDIC	Reserved.
Sysplex-wide direct access record merge (RE-DO) summary section:				
280	118 SMF2AFDA	4	binary	Coupling facility Cache partition number (RE-DO).
284	11C SMF2AFDB	4	binary	Total number of requests to DASD (RE-DO).
288	120 SMF2AFDC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (RE-DO).

Record type 42

Offsets	Name	Length	Format	Description
292 124	SMF2AFDD	4	binary	Number of read requests - Consistent read protocol (RE-DO).
296 128	SMF2AFDE	4	binary	Number of WRITE requests (RE-DO).
300 12C	SMF2AFDF	4	binary	Number of direct access BMF requests (RE-DO).
304 130	SMF2AFDG	4	binary	Number of direct access BMF Read requests (RE-DO).
308 134	SMF2AFDH	4	binary	Number of direct access BMF Write requests (RE-DO).
312 138	SMF2AFDI	4	binary	Number of direct access BMF read hits (RE-DO).
316 13C	SMF2AFDJ	4	binary	Number of direct access BMF valid read hits (RE-DO).
320 140	SMF2AFDK	4	binary	Number of BMF false invalids (RE-DO).
324 144	SMF2AFDL	4	binary	Number of requests processed by the Sysplex Cache Manager
328 148	SMF2AFDM	4	binary	Number of CF cache structure Read requests (RE-DO).
332 14C	SMF2AFDN	4	binary	Number of CF cache structure Write requests (RE-DO).
336 150	SMF2AFDO	4	binary	Number of CF cache structure read hits (RE-DO).
340 154	SMF2AFDP	4	binary	Number of CF cache structure read castins (RE-DO).
344 158	SMF2AFDQ	8	binary	Number of bytes transferred into DFSMS cache structure (RE-DO).
352 160	SMF2AFDR	4	binary	Number of READ real I/O direct requests to DASD (RE-DO).
356 164	SMF2AFDS	4	binary	Number of WRITE real I/O direct requests to DASD (RE-DO).
360 168	SMF2AFDT	8	binary	Total number of bytes transferred to DASD for the read requests.
368 170	SMF2AFDU	8	binary	Total number of bytes transferred to DASD for the write requests.
376 178	SMF2AFDV	16	EBCDIC	Reserved. (RE-DO)
392 188	SMF2AFDW	8	binary	Total amount of time, in milli seconds, for all direct access requests in this interval (RE-DO).
400 190	SMF2AFDX	4	binary	Average response time for all of the direct access requests in this interval (total time/number of requests) (RE-DO).
404 194	SMF2AFDY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K) (RE-DO).
408 198	SMF2AFDZ	8	EBCDIC	Reserved.
416 1A0	SMF2AFD7	32	EBCDIC	Reserved.
Sysplex-wide sequential access summary section:				
448 1C0	SMF2AFEA	4	binary	Coupling facility cache partition number.
452 1C4	SMF2AFEB	4	binary	Total number of requests.
456 1C8	SMF2AFEC	4	binary	Total number of read requests - NRI protocol (No Read Integrity).
460 1CC	SMF2AFED	4	binary	Total number of read requests - Consistent read protocol.
464 1D0	SMF2AFEE	4	binary	Total number of WRITE requests.
468 1D4	SMF2AFEF	4	binary	Number of sequential access BMF requests.
472 1D8	SMF2AFEG	4	binary	Total number of sequential access BMF Read requests.
476 1DC	SMF2AFEH	4	binary	Total number of sequential access BMF Write requests.
480 1E0	SMF2AFEI	4	binary	Number of sequential access BMF read hits.
484 1E4	SMF2AFEJ	4	binary	Number of sequential access BMF valid read hits.
488 1E8	SMF2AFEK	4	binary	Number of sequential access BMF false invalids.
492 1EC	SMF2AFEL	4	binary	Number of sequential access requests processed by the Sysplex Cache Manager
496 1F0	SMF2AFEM	4	binary	Number of sequential access CF cache structure read requests.
500 1F4	SMF2AFEN	4	binary	Number of sequential access CF cache structure Write requests.

Offsets	Name	Length	Format	Description
504	1F8 SMF2AFEO	4	binary	Number of sequential access CF cache structure read hits.
508	1FC SMF2AFEP	4	binary	Number of sequential access CF cache structure read castins.
512	200 SMF2AFEQ	8	binary	Number of bytes transferred into the DFSMS CF cache structure.
520	208 SMF2AFER	4	binary	Number of READ real I/O sequential requests to DASD.
524	20C SMF2AFES	4	binary	Number of WRITE real I/O sequential requests to DASD.
528	210 SMF2AFET	8	binary	Total number of bytes transferred to DASD for the read requests.
536	218 SMF2AFEU	8	binary	Total number of bytes transferred to DASD for the write requests.
544	220 SMF2AFEV	16	EBCDIC	Reserved.
560	230 SMF2AFEW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.
568	238 SMF2AFEX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
572	23C SMF2AFEY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
576	240 SMF2AFEZ	8	EBCDIC	Reserved.
584	248 SMF2AFE7	32	EBCDIC	Reserved.
Sysplex-wide sequential access record merge (RE-DO) summary section:				
616	268 SMF2AFFA	4	binary	Coupling facility cache partition number.
620	26C SMF2AFFB	4	binary	Total number of sequential access requests. (RE-DO)
624	270 SMF2AFFC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (RE-DO).
628	274 SMF2AFFD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
632	278 SMF2AFFE	4	binary	Number of sequential access Write requests. (RE-DO)
636	27C SMF2AFFF	4	binary	Number of sequential access BMF requests. (RE-DO)
640	280 SMF2AFFG	4	binary	Number of sequential access BMF Read requests. (RE-DO)
644	284 SMF2AFFH	4	binary	Number of sequential access BMF Write requests. (RE-DO)
648	288 SMF2AFFI	4	binary	Number of sequential access BMF read hits. (RE-DO)
652	28C SMF2AFFJ	4	binary	Number of sequential access BMF valid read hits. (RE-DO)
656	290 SMF2AFFK	4	binary	Number of sequential access BMF false invalids. (RE-DO)
660	294 SMF2AFFL	4	binary	Number of sequential access requests processed by the Sysplex Cache Manager. (RE-DO)
664	298 SMF2AFFM	4	binary	Number of sequential access CF cache structure Read requests. (RE-DO)
668	29C SMF2AFFN	4	binary	Number of sequential access CF cache structure Write requests. (RE-DO)
672	2A0 SMF2AFFO	4	binary	Number of sequential access CF cache structure read hits. (RE-DO)
676	2A4 SMF2AFFP	4	binary	Number of sequential access CF cache structure read castins. (RE-DO)
680	2A8 SMF2AFFQ	8	binary	Number of bytes transferred into the DFSMS cache structure (RE-DO).
688	2B0 SMF2AFFR	4	binary	Total number of READ real I/O sequential requests to DASD. (RE-DO)
692	2B4 SMF2AFFS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (RE-DO)
696	2B8 SMF2AFFT	8	binary	Total number of bytes transferred to DASD for the read requests.

Record type 42

Offsets	Name	Length	Format	Description
704 2C0	SMF2AFFU	8	binary	Total number of bytes transferred to DASD for the write requests.
712 2C8	SMF2AFFV	16	EBCDIC	Reserved.
728 2D8	SMF2AFFW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
736 2E0	SMF2AFFX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
740 2E4	SMF2AFFY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
744 2E8	SMF2AFFZ	8	EBCDIC	Reserved.
752 2F0	SMF2AFF7	32	EBCDIC	Reserved.
Sysplex-wide sequential access read ahead summary section:				
784 310	SMF2AFGA	4	binary	Coupling facility cache partition number.
788 314	SMF2AFGB	4	binary	Total number of real I/O sequential requests to DASD. (read ahead)
792 318	SMF2AFGC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (READ-AHEAD).
796 31C	SMF2AFGD	4	binary	Number of read requests - Consistent read protocol (READ-AHEAD).
800 320	SMF2AFGE	4	binary	Number of Write requests. (READ-AHEAD)
804 324	SMF2AFGF	4	binary	Number of sequential access BMF requests. (READ-AHEAD)
808 328	SMF2AFGG	4	binary	Number of sequential access BMF Read requests. (READ-AHEAD)
812 32C	SMF2AFGH	4	binary	Number of sequential access BMF Write requests. (READ-AHEAD)
816 330	SMF2AFGI	4	binary	Number of sequential access BMF read hits. (read ahead)
820 334	SMF2AFGJ	4	binary	Number of sequential access BMF valid read hits. (read ahead)
824 338	SMF2AFGK	4	binary	Number of BMF false invalids. (read ahead)
828 33C	SMF2AFGL	4	binary	Number of requests processed by the sysplex cache manager. (read ahead)
832 340	SMF2AFGM	4	binary	Number of sequential access CF cache structure Read requests. (read ahead)
836 344	SMF2AFGN	4	binary	Number of sequential access CF cache structure Write requests. (read ahead)
840 348	SMF2AFGO	4	binary	Number of sequential access CF cache structure read hits. (read ahead)
844 34C	SMF2AFGP	4	binary	Number of sequential access CF cache structure read castins. (read ahead)
848 350	SMF2AFGQ	8	binary	Total number of bytes transferred into the DFSMS cache structure for all sequential access requests. (read ahead)
856 358	SMF2AFGR	4	binary	Total number of READ real I/O sequential requests to DASD (READ-AHEAD).
860 35C	SMF2AFGS	4	binary	Total number of WRITE real I/O sequential requests to DASD (READ-AHEAD).
864 360	SMF2AFGT	8	binary	Total number of bytes transferred to DASD for the read requests.
868 368	SMF2AFGU	8	binary	Total number of bytes transferred to DASD for the write requests.
880 370	SMF2AFGV	16	EBCDIC	Reserved.
896 380	SMF2AFGW	8	binary	Total amount of time, in milli seconds, for all sequential access (read ahead) requests in this interval.

Offsets	Name	Length	Format	Description
904 388	SMF2AFGX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval. (total time/number of requests)
908 38C	SMF2AFGY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
912 390	SMF2AFGZ	8	EBCDIC	Reserved.
920 398	SMF2AFG7	32	EBCDIC	Reserved.
Sysplex-wide sequential access pre-format summary section:				
952 3B8	SMF2AFHA	4	binary	Coupling facility cache partition number.
956 3BC	SMF2AFHB	4	binary	Total number of real I/O sequential requests to DASD. (pre-format)
960 3C0	SMF2AFHC	4	binary	Number of read requests - NRI protocol (No Read Integrity) (PRE-FORMAT).
964 3C4	SMF2AFHD	4	binary	Number of read requests - Consistent read protocol (PRE-FORMAT).
968 3C8	SMF2AFHE	4	binary	Number of Write requests. (PRE-FORMAT)
972 3CC	SMF2AFHF	4	binary	Number of sequential access BMF requests. (PRE-FORMAT)
976 3D0	SMF2AFHG	4	binary	Number of sequential access BMF Read requests. (PRE-FORMAT)
980 3D4	SMF2AFHH	4	binary	Number of sequential access BMF Write requests. (PRE-FORMAT)
984 3D8	SMF2AFHI	4	binary	Number of sequential access BMF read hits. (pre-format)
988 3DC	SMF2AFHJ	4	binary	Number of sequential access BMF valid read hits. (pre-format)
992 3E0	SMF2AFHK	4	binary	Number of BMF false invalids. (pre-format)
996 3E4	SMF2AFHL	4	binary	Number of sequential access CF Cache structure Requests. (pre-format)
1000 3E8	SMF2AFHM	4	binary	Number of sequential access CF Cache structure Read Requests. (pre-format)
1004 3EC	SMF2AFHN	4	binary	Number of sequential access CF Cache structure Write Requests. (pre-format)
1008 3F0	SMF2AFHO	4	binary	Number of sequential access CF cache structure read hits. (pre-format)
1012 3F4	SMF2AFHP	4	binary	Number of sequential access CF cache structure read castins. (pre-format)
1016 3F8	SMF2AFHQ	8	binary	Number of sequential access CF cache structure bytes transferred. (pre-format)
1024 400	SMF2AFHR	4	binary	Total number of READ real I/O sequential requests to DASD. (pre-format)
1028 404	SMF2AFHS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1032 408	SMF2AFHT	8	binary	Total number of bytes transferred to DASD for the read requests.
1040 410	SMF2AFHU	8	binary	Total number of bytes transferred to DASD for the write requests.
1048 418	SMF2AFHV	16	EBCDIC	Reserved.
1064 428	SMF2AFHW	8	binary	Total amount of time, in milli seconds, for all sequential access (pre-format) requests in this interval.
1072 430	SMF2AFHX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).

Record type 42

Offsets	Name	Length	Format	Description
1076 434	SMF2AFHY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1080 438	SMF2AFHZ	8	EBCDIC	Reserved.
1088 440	SMF2AFH7	32	EBCDIC	Reserved.
1120 460	SMF2AFOA	4	binary	Number of record lock requests (obtain/alter/promote).
1124 464	SMF2AFOB	4	binary	Number of record lock requests that cause true contention.
1128 468	SMF2AFOC	4	binary	Number of record lock requests that cause false contention.
1132 46C	SMF2AFOD	4	binary	Number of record lock release requests.
1136 470	SMF2AFOE	4	binary	Number of component_1 type lock requests.
1140 474	SMF2AFOF	4	binary	Number of component_1 type release lock requests.
1144 478	SMF42FUAA	4	binary	Accumulation of waiters for record lock.
1148 44C	SMF42FUBA	4	binary	Number of record locks hashed to the same hash table entry.
1152 480	SMF2AFOH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
1156 484	SMF2AFOI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1160 488	SMF2AFOJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1164 48C	SMF2AFOK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1168 490	SMF2AFOL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
1172 494	SMF2AFOM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
1176 498	SMF2AFON	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1180 49C	SMF2AFOO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1184 4A0	SMF2AFOP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1188 4A4	SMF2AFOQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1192 4A8	SMF2AFOR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
1196 4AC	SMF2AFOS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1200 4B0	SMF2AFOT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1204 4B4	SMF2AFOU	4	binary	Number of component_2 locks that cause true contention.
1208 4B8	SMF2AFOV	4	binary	Number of component_2 locks that cause false contention.
1212 4BC	SMF2AFOW	4	binary	Number of component_2 release lock requests.
1216 4C0	SMF42FUDA	4	binary	Accumulation of waiters for DIWA lock.
1220 4C4	SMF42FUEA	4	binary	Accumulation of waiters for UPGRADE lock.
1224 4C8	SMF42FUFA	4	binary	Accumulation of waiters for COMP2 lock.
1228 4CC	SMF42FUGA	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1232 4D0	SMF42FPHA	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1236 4D4	SMF42FPIA	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.

Offsets	Name	Length	Format	Description
1240 4D8	SMF42FPJA	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1244 4DC	SMF42FPKA	4	binary	Number of component_1 class 4 (Index Record) release lock requests.
1248 4E0	SMF2AFPR	8	EBCDIC	Total time all thread requests.
1256 4E8	SMF2AFPS	4	binary	Total number of all thread requests.
1260 4EC	SMF2AFPT	4	binary	Reserved.
1264 4F0	SMF2AFPU	4	binary	Average response time for all of the thread requests in the interval. (Total time/number of thread requests).
1268 4F4	SMF2AFPV	4	binary	Normalized response time for all of the thread requests in the interval. (Total time/number of bytes transferred/4K).
1272 4F8	SMF2AFPW	8	EBCDIC	Reserved.
1280 500	SMF2AFAI	16	EBCDIC	Lock structure name.
1296 510	SMF2AFAJ	8	EBCDIC	Lock set.

SC, CF, SYS summary section for above the bar

Offsets	Name	Length	Format	Description
0 0	SMF2AFBA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4 4	SMF2AF03	12	EBCDIC	Indicates if DFSMS greater than 4K CF caching is active. Value is GT4KACTIVE or GT4KNOTACT.
16 10	SMF2AFBB	2	binary	Length of the storage class name.
18 12	SMF2AFBC	30	EBCDIC	Storage class name.
48 30	SMF2AF04	2	binary	Cache Set Name Length
50 32	SMF2AFBD	30	EBCDIC	DFSMS Cache Set name.
80 50	SMF2AFBE	8	EBCDIC	MVS system name.
88 58	SMF2AF05	8	EBCDIC	Reserved.
96 60	SMF2AFBF	2	EBCDIC	Reserved.
98 62	SMF2AFBG	30	EBCDIC	DFP CF cache structure name.
128 80	SMF2AFBH	4	binary	Number of lock requests processed.
132 84	SMF2AFBI	4	binary	Number of true contention lock requests.
136 88	SMF2AFBJ	4	binary	Number of false contention lock requests.
140 8C	SMF2AFB2	2	binary	SMS Direct Weight
142 8E	SMF2AFB3	2	binary	SMS Sequential Weight
144 90	SMF2AFBL	8	EBCDIC	Reserved.
152 98	SMF42FTAA	4	binary	Total number of CI splits for this interval.
156 9C	SMF42FTBA	4	binary	Total number of CA splits for this interval.
Direct access section:				
160 A0	SMF2AFIA	4	binary	Coupling facility cache partition number.
164 A4	SMF2AFIB	4	binary	Number of direct requests.
168 A8	SMF2AFIC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
172 AC	SMF2AFID	4	binary	Number of read requests - Consistent read protocol.
176 B0	SMF2AFIE	4	binary	Number of Write requests.
180 B4	SMF2AFIF	4	binary	Number of direct access BMF requests.
184 B8	SMF2AFIG	4	binary	Number of direct access BMF Read requests.
188 BC	SMF2AFIH	4	binary	Number of direct access BMF Write requests.

Record type 42

Offsets	Name	Length	Format	Description
192	C0 SMF2AFII	4	binary	Number of direct access BMF read hits.
196	C4 SMF2AFIJ	4	binary	Number of direct access BMF valid read hits.
200	C8 SMF2AFIK	4	binary	Number of BMF false invalids.
204	CC SMF2AFIL	4	binary	Number of direct access CF Cache structure requests.
208	D0 SMF2AFIM	4	binary	Number of direct access CF cache structure Read requests.
212	D4 SMF2AFIN	4	binary	Number of direct access CF cache structure Write requests.
216	D8 SMF2AFIO	4	binary	Number of direct access CF cache structure read hits.
220	DC SMF2AFIP	4	binary	Number of direct access CF cache structure read castins.
224	E0 SMF2AFIQ	8	binary	Number of direct access CF cache structure bytes transferred.
232	E8 SMF2AFIR	4	binary	Number of READ real I/O direct requests to DASD.
236	EC SMF2AFIS	4	binary	Number of WRITE real I/O direct requests to DASD.
240	F0 SMF2AFIT	8	binary	Total number of bytes transferred to DASD for the read requests.
248	F8 SMF2AFIU	8	binary	Total number of bytes transferred to DASD for the write requests.
256	100 SMF2AFIV	16	EBCDIC	Reserved.
272	110 SMF2AFIW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
280	118 SMF2AFIX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
284	11C SMF2AFIY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
288	120 SMF2AFIZ	8	EBCDIC	Reserved.
296	128 SMF2AFI7	32	EBCDIC	Reserved.
Direct access record merge (RE-DO) summary section:				
328	148 SMF2AFJA	4	binary	Coupling facility cache partition number.
332	14C SMF2AFJB	4	binary	Total number of direct access requests. (RE-DO)
336	150 SMF2AFJC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
340	154 SMF2AFJD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
344	158 SMF2AFJE	4	binary	Number of Write requests. (RE-DO)
348	15C SMF2AFJF	4	binary	Number of direct access BMF requests. (RE-DO)
352	160 SMF2AFJG	4	binary	Number of direct access BMF Read requests. (RE-DO)
356	164 SMF2AFJH	4	binary	Number of direct access BMF Write requests. (RE-DO)
360	168 SMF2AFJI	4	binary	Number of direct access BMF read hits. (RE-DO)
364	16C SMF2AFJJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
368	170 SMF2AFJK	4	binary	Number of BMF false invalids. (RE-DO)
372	174 SMF2AFJL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
376	178 SMF2AFJM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
380	17C SMF2AFJN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)
384	180 SMF2AFJO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
388	184 SMF2AFJP	4	binary	Number of direct access CF cache structure read castins. (RE-DO)

Offsets	Name	Length	Format	Description
392	188 SMF2AFJQ	8	binary	Number of direct access CF cache structure bytes transferred. (RE-DO)
400	190 SMF2AFJR	4	binary	Total number of READ real I/O direct requests to DASD. (RE-DO)
404	194 SMF2AFJS	4	binary	Total number of WRITE real I/O direct requests to DASD. (RE-DO)
408	198 SMF2AFJT	8	binary	Total number of bytes transferred to DASD for the read requests.
416	1A0 SMF2AFJU	8	binary	Total number of bytes transferred to DASD for the write requests.
424	1A8 SMF2AFJV	16	EBCDIC	Reserved.
440	1B8 SMF2AFJW	8	binary	Total amount of time, in milli seconds, for all direct access. (RE-DO) requests in this interval.
448	1C0 SMF2AFJX	4	binary	Average response time for all of the direct access requests in this interval (total time/number of requests). (RE-DO)
452	1C4 SMF2AFJY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
456	1C8 SMF2AFJZ	8	EBCDIC	Reserved.
464	1D0 SMF2AFJ7	32	EBCDIC	Reserved.
Sequential access section:				
496	1F0 SMF2AFKA	4	binary	Coupling facility cache partition number.
500	1F4 SMF2AFKB	4	binary	Total number of sequential access requests.
504	1F8 SMF2AFKC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
508	1FC SMF2AFKD	4	binary	Number of read requests - Consistent read protocol.
512	200 SMF2AFKE	4	binary	Number of Write requests.
516	204 SMF2AFKF	4	binary	Number of sequential access BMF requests.
520	208 SMF2AFKG	4	binary	Number of sequential access BMF Read requests.
524	20C SMF2AFKH	4	binary	Number of sequential access BMF Write requests.
528	210 SMF2AFKI	4	binary	Number of sequential access BMF read hits.
532	214 SMF2AFKJ	4	binary	Number of sequential access BMF valid read hits.
536	218 SMF2AFKK	4	binary	Number of sequential BMF false invalids.
540	21C SMF2AFKL	4	binary	Number of sequential access CF cache structure requests.
544	220 SMF2AFKM	4	binary	Number of sequential access CF cache structure Read requests.
548	224 SMF2AFKN	4	binary	Number of sequential access CF cache structure Write requests.
552	228 SMF2AFKO	4	binary	Number of sequential access CF cache structure read hits.
556	22C SMF2AFKP	4	binary	Number of sequential access CF cache structure read castins.
560	230 SMF2AFKQ	8	binary	Number of sequential access CF cache structure bytes transferred.
568	238 SMF2AFKR	4	binary	Total number of READ real I/O sequential requests to DASD.
572	23C SMF2AFKS	4	binary	Total number of WRITE real I/O sequential requests to DASD.
576	240 SMF2AFKT	8	binary	Total number of bytes transferred to DASD for the read requests.
584	248 SMF2AFKU	8	binary	Total number of bytes transferred to DASD for the write requests.

Record type 42

Offsets	Name	Length	Format	Description
592 250	SMF2AFKV	16	EBCDIC	Reserved.
608 260	SMF2AFKW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.
616 268	SMF2AFKX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
620 26C	SMF2AFKY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
624 270	SMF2AFKZ	8	EBCDIC	Reserved.
632 278	SMF2AFK7	32	EBCDIC	Reserved.
Sequential access record merge (RE-DO) summary section:				
664 298	SMF2AFLA	4	binary	Coupling facility cache partition number.
668 29C	SMF2AFLB	4	binary	Total number of sequential access requests. (RE-DO)
672 2A0	SMF2AFLC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
676 2A4	SMF2AFLD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
680 2A8	SMF2AFLE	4	binary	Number of Write requests. (RE-DO)
684 2AC	SMF2AFLF	4	binary	Number of sequential access BMF requests. (RE-DO)
688 2B0	SMF2AFL6	4	binary	Number of sequential access BMF Read requests. (RE-DO)
692 2B4	SMF2AFLH	4	binary	Number of sequential access BMF Write requests. (RE-DO)
696 2B8	SMF2AFLI	4	binary	Number of sequential access BMF read hits. (RE-DO)
700 2BC	SMF2AFLJ	4	binary	Number of sequential access BMF valid read hits. (RE-DO)
704 2C0	SMF2AFLK	4	binary	Number of BMF false invalids. (RE-DO)
708 2C4	SMF2AFLM	4	binary	Total number of sequential access requests. (RE-DO)
712 2C8	SMF2AFLN	4	binary	Number of sequential access CF cache structure Read requests. (RE-DO)
716 2CC	SMF2AFLN	4	binary	Number of sequential access CF cache structure Write requests. (RE-DO)
720 2D0	SMF2AFLO	4	binary	Number of sequential access CF cache structure Read hits. (RE-DO)
724 2D4	SMF2AFLP	4	binary	Number of sequential access CF cache structure read castins. (RE-DO)
728 2D8	SMF2AFLQ	8	binary	Number of sequential access CF cache structure bytes transferred. (RE-DO)
736 2E0	SMF2AFLR	4	binary	Total number of READ real I/O sequential requests to DASD. (RE-DO)
740 2E4	SMF2AFLS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (RE-DO)
744 2E8	SMF2AFLT	8	binary	Total number of bytes transferred to DASD for the read requests.
752 2F0	SMF2AFLU	8	binary	Total number of bytes transferred to DASD for the write requests.
760 2F8	SMF2AFLV	16	EBCDIC	Reserved.
776 308	SMF2AFLW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
784 310	SMF2AFLX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
788 314	SMF2AFLY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
792 318	SMF2AFLZ	8	EBCDIC	Reserved.

Offsets	Name	Length	Format	Description
800 320	SMF2AFL7	32	EBCDIC	Reserved.
Sequential access read ahead summary section:				
832 340	SMF2AFMA	4	binary	Coupling facility cache partition number.
836 344	SMF2AFMB	4	binary	Total number of sequential access requests. (read ahead)
840 348	SMF2AFMC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (read ahead)
844 34C	SMF2AFMD	4	binary	Number of read requests - Consistent read protocol. (read ahead)
848 350	SMF2AFME	4	binary	Number of Write requests. (read ahead)
852 354	SMF2AFMF	4	binary	Number of sequential access BMF requests. (read ahead)
856 358	SMF2AFMG	4	binary	Number of sequential access BMF Read requests. (read ahead)
860 35C	SMF2AFMH	4	binary	Number of sequential access BMF Write requests. (read ahead)
864 360	SMF2AFMI	4	binary	Number of sequential access BMF read hits. (read ahead)
868 364	SMF2AFMJ	4	binary	Number of sequential access BMF valid read hits. (read ahead)
872 368	SMF2AFMK	4	binary	Number of BMF false invalids. (read ahead)
876 36C	SMF2AFML	4	binary	Number of sequential access CF cache structure requests. (read ahead)
880 370	SMF2AFMM	4	binary	Number of sequential access CF cache structure Read requests. (read ahead)
884 374	SMF2AFMN	4	binary	Number of sequential access CF cache structure Write requests. (read ahead)
888 378	SMF2AFMO	4	binary	Number of sequential access CF cache structure read hits. (read ahead)
892 37C	SMF2AFMP	4	binary	Number of sequential access CF cache structure read castins. (read ahead)
896 380	SMF2AFMQ	8	binary	Number of sequential access CF cache structure bytes transferred. (read ahead)
904 388	SMF2AFMR	4	binary	Total number of READ real I/O sequential requests to DASD. (read ahead)
908 38C	SMF2AFMS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (read ahead)
912 390	SMF2AFMT	8	binary	Total number of bytes transferred to DASD for the read requests.
920 398	SMF2AFMU	8	binary	Total number of bytes transferred to DASD for the write requests.
928 3A0	SMF2AFMV	16	EBCDIC	Reserved.
944 3B0	SMF2AFMW	8	binary	Total amount of time, in milli seconds, for all sequential access (read ahead) requests in this interval.
952 3B8	SMF2AFMX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval (total time/number of requests).
956 3BC	SMF2AFMY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
960 3C0	SMF2AFMZ	8	EBCDIC	Reserved.
968 3C8	SMF2AFM7	32	EBCDIC	Reserved.
Sequential access pre-format summary section:				
1000 3E8	SMF2AFNA	4	binary	Coupling facility cache partition number.
1004 3EC	SMF2AFNB	4	binary	Total number of sequential access requests. (Pre-format)

Record type 42

Offsets	Name	Length	Format	Description
1008	3F0 SMF2AFNC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (Pre-format)
1012	3F4 SMF2AFND	4	binary	Number of read requests - Consistent read protocol. (Pre-format)
1016	3F8 SMF2AFNE	4	binary	Number of Write requests. (Pre-format)
1020	3FC SMF2AFNF	4	binary	Number of sequential access BMF requests. (Pre-format)
1024	400 SMF2AFNG	4	binary	Number of sequential access BMF Read requests. (Pre-format)
1028	404 SMF2AFNH	4	binary	Number of sequential access BMF Write requests. (Pre-format)
1032	408 SMF2AFNI	4	binary	Number of sequential access BMF read hits. (Pre-format)
1036	40C SMF2AFNJ	4	binary	Number of sequential access BMF valid read hits. (Pre-format)
1040	410 SMF2AFNK	4	binary	Number of BMF false invalids. (Pre-format)
1044	414 SMF2AFNL	4	binary	Number of sequential access CF cache structure requests. (Pre-format)
1048	418 SMF2AFNM	4	binary	Number of sequential access CF cache structure Read requests. (Pre-format)
1052	41C SMF2AFNN	4	binary	Number of sequential access CF cache structure Write requests. (read ahead)
1056	420 SMF2AFNO	4	binary	Number of sequential access CF cache structure read hits. (read ahead)
1060	424 SMF2AFNP	4	binary	Number of sequential access CF cache structure read castins. (Pre-format)
1064	428 SMF2AFNQ	8	binary	Number of sequential access CF cache structure bytes transferred. (Pre-format)
1072	430 SMF2AFNR	4	binary	Total number of READ real I/O sequential requests to DASD. (Pre-format)
1076	434 SMF2AFNS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1080	438 SMF2AFNT	8	binary	Total number of bytes transferred to DASD for the read requests.
1088	440 SMF2AFNU	8	binary	Total number of bytes transferred to DASD for the write requests.
1096	448 SMF2AFNV	16	EBCDIC	Reserved.
1112	458 SMF2AFNW	8	binary	Total amount of time, in milli seconds, for all sequential access (pre-format) requests in this interval.
1120	460 SMF2AFNX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).
1124	464 SMF2AFNY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1128	468 SMF2AFNZ	8	EBCDIC	Reserved.
1136	470 SMF2AFN7	32	EBCDIC	Reserved.
1168	490 SMF2AFRA	4	binary	Number of record lock requests (obtain/alter/promote).
1172	494 SMF2AFRB	4	binary	Number of record lock requests that cause true contention.
1176	498 SMF2AFRC	4	binary	Number of record lock requests that cause false contention.
1180	49C SMF2AFRD	4	binary	Number of record lock release requests.
1184	4A0 SMF2AFRE	4	binary	Number of component_1 type lock requests.
1188	4A4 SMF2AFRF	4	binary	Number of component_1 type release lock requests.
1192	4A8 SMF42FVAA	4	binary	Accumulation of waiters for record lock.

Offsets	Name	Length	Format	Description
1196 4AC	SMF42FVBA	4	binary	Number of record locks hashed to the same hash table entry.
1200 4B0	SMF2AFRH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
1204 4B4	SMF2AFRI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1208 4B8	SMF2AFRJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1212 4BC	SMF2AFRK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1216 4C0	SMF2AFRL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
1220 4C4	SMF2AFRM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
1224 4C8	SMF2AFRN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1228 4CC	SMF2AFRO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1232 4D0	SMF2AFRP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1236 4D4	SMF2AFRQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1240 4D8	SMF2AFRR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
1244 4DC	SMF2AFRS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1248 4E0	SMF2AFRT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1252 4E4	SMF2AFRU	4	binary	Number of component_2 locks that cause true contention.
1256 4E8	SMF2AFRV	4	binary	Number of component_2 locks that cause false contention.
1260 4EC	SMF2AFRW	4	binary	Number of component_2 release lock requests.
1264 4F0	SMF42FVDA	4	binary	Accumulation of waiters for DIWA lock.
1268 4F4	SMF42FVEA	4	binary	Accumulation of waiters for UPGRADE lock.
1272 4F8	SMF42FVFA	4	binary	Accumulation of waiters for COMP2 lock.
1276 4FC	SMF42FVGA	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1280 500	SMF42FSHA	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1284 504	SMF42FSIA	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
1288 508	SMF42FSJA	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1292 50C	SMF42FSKA	4	binary	Number of component_1 class 4 (Index Record) release lock requests.
1296 510	SMF2AFQR	8	EBCDIC	Total time all thread requests.
1304 518	SMF2AFQS	4	binary	Total number of all thread requests.
1308 51C	SMF2AFQT	4	binary	Reserved.
1312 520	SMF2AFQU	4	binary	Average response time for all of the thread requests in the interval. (Total time/number of thread requests)
1316 524	SMF2AFQV	4	binary	Normalized response time for all of the thread requests in the interval. (Total time/number of bytes transferred/4K)
1320 528	SMF2AFQW	8	EBCDIC	Reserved.

Record type 42

Offsets	Name	Length	Format	Description
1328	530 SMF2AFBM	16	EBCDIC	Lock structure name.
1344	540 SMF2AFBN	8	EBCDIC	Lock set.

Subtype 16 — VSAM RLS Data Set Response Time Summary

The system will produce SMF TYPE 42, subtype 16 records when statistical monitoring is on. Use the following command format to specify which data sets are eligible for CF statistical monitoring.

```
VARY SMS,MONDS(dsname{dsname,...}),{ON|OFF}
```

Sysplex-wide data set summary section for below the bar

Offsets	Name	Length	Format	Description								
0	0 SMF42GAA	4	binary	Interval length. This is the total time, in seconds, of the measurement period.								
4	4 SMF42A00	12	EBCDIC	Reserved.								
16	10 SMF42GAB	44	EBCDIC	Data set name								
60	3C SMF42A01	4	binary	Reserved.								
64	40 SMF42GAC	44	EBCDIC	VSAM sphere name.								
108	6C SMF42A02	4	binary	Reserved.								
112	70 SMF42GAD	2	binary	Length of the storage class name.								
114	72 SMF42GAE	30	EBCDIC	Storage class name.								
144	90 SMF42A03	2	binary	Length of DFSMS CacheSet name.								
146	92 SMF42GAF	30	EBCDIC	DFSMS CacheSet name.								
176	B0 SMF42GAG	2	EBCDIC	Reserved.								
178	B2 SMF42GAH	30	EBCDIC	DFP CF cache structure name.								
208	D0 SMF42GAI	4	binary	Indicator of component being processed. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Data component</td> </tr> <tr> <td>1</td> <td>Index component</td> </tr> <tr> <td>2-31</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Data component	1	Index component	2-31	Reserved.
Bit	Meaning when set											
0	Data component											
1	Index component											
2-31	Reserved.											
212	D4 SMF42GAJ	12	EBCDIC	Indicates DFSMS greater than 4K CF caching status. Value is ALL, NONE, UPDATESONLY, DIRONLY or GT4KNOTACT.								
224	E0 SMF42GAK	4	binary	Reserved.								
228	E4 SMF42GAL	4	binary	Reserved.								
232	E8 SMF42GAM	4	binary	Reserved.								
236	EC SMF42GZ1	2	binary	SMS Direct Weight								
240	EE SMF42GZ2	2	binary	SMS Sequential Weight								
240	F0 SMF42GAN	8	EBCDIC	In DFSMS 1.4 WLM Server class name								
248	F8 SMF42GAO	8	EBCDIC	In DFSMS 1.4 WLM report class name								
256	100 SMF42GAP	16	EBCDIC	SMS data class name								
Sysplex-wide direct access summary section:												
272	110 SMF42GCA	4	binary	Coupling facility cache partition number.								
276	114 SMF42GCB	4	binary	Total number of direct access requests.								
280	118 SMF42GCC	4	binary	Number of read requests - NRI protocol (No Read Integrity).								
284	11C SMF42GCD	4	binary	Number of read requests - Consistent read protocol.								
288	120 SMF42GCE	4	binary	Number of Write requests.								
292	124 SMF42CGF	4	binary	Number of direct access BMF requests.								

Offsets	Name	Length	Format	Description
296	128 SMF42GCG	4	binary	Number of direct access BMF Read requests.
300	12C SMF42GCH	4	binary	Number of direct access BMF Write requests.
304	130 SMF42GCI	4	binary	Number of direct access BMF read hits.
308	134 SMF42GCJ	4	binary	Number of direct access BMF valid read hits.
312	138 SMF42GCK	4	binary	Number of BMF false invalids.
316	13C SMF42GCL	4	binary	Number of direct access CF cache structure requests.
320	140 SMF42GCM	4	binary	Number of direct access CF cache structure Read requests.
324	144 SMF42GCN	4	binary	Number of direct access CF cache structure Write requests.
328	148 SMF42GCO	4	binary	Number of direct access CF cache structure read hits.
332	14C SMF42GCP	4	binary	Number of direct access CF cache structure read castins.
336	150 SMF42GCQ	8	binary	Number of bytes transferred into the DFSMS cache structure.
344	158 SMF42GCR	4	binary	Total number READ of real I/O direct requests to DASD.
348	15C SMF42GCS	4	binary	Total number WRITE of real I/O direct requests to DASD.
352	160 SMF42GCT	8	binary	Total number of bytes transferred to DASD for the read requests.
360	168 SMF42GCU	8	binary	Total number of bytes transferred to DASD for the write requests.
368	170 SMF42GCV	16	EBCDIC	Reserve
384	180 SMF42GCW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
392	188 SMF42GCX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
396	18C SMF42GCY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
400	190 SMF42GCZ	8	EBCDIC	Reserved.
408	198 SMF42GC7	32	EBCDIC	Reserved.
Sysplex-wide direct access record merge (RE-DO) summary section:				
440	1B8 SMF42GDA	4	binary	Coupling facility cache partition number.
444	1BC SMF42GDB	4	binary	Total number of direct access requests. (RE-DO)
448	1C0 SMF42GDC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
452	1C4 SMF42GDD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
456	1C8 SMF42GDE	4	binary	Number of Write requests. (RE-DO)
460	1CC SMF42GDF	4	binary	Number of direct access BMF requests. (RE-DO)
464	1D0 SMF42GDG	4	binary	Number of direct access BMF Read requests. (RE-DO)
468	1D4 SMF42GDH	4	binary	Number of direct access BMF Write requests. (RE-DO)
472	1D8 SMF42GDI	4	binary	Number of direct access BMF read hits. (RE-DO)
476	1DC SMF42GDJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
480	1E0 SMF42GDK	4	binary	Number of BMF false invalids. (RE-DO)
484	1E4 SMF42GDL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
488	1E8 SMF42GDM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
492	1EC SMF42GDN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)
496	1F0 SMF42GDO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)

Record type 42

Offsets	Name	Length	Format	Description
500	1F4 SMF42GDP	4	binary	Number of direct access CF cache structure read castins. (RE-DO)
504	1F8 SMF42GDQ	8	binary	Number of direct access CF cache structure byte transferred. (RE-DO)
512	200 SMF42GDR	4	binary	Total number of READ real I/O direct requests to DASD. (RE-DO)
516	204 SMF42GDS	4	binary	Total number of WRITE real I/O direct requests to DASD. (RE-DO)
520	208 SMF42GDT	8	binary	Total number of bytes transferred to DASD for the read requests.
528	210 SMF42GDU	8	binary	Total number of bytes transferred to DASD for the write requests.
536	218 SMF42GDV	16	EBCDIC	Reserved.
552	228 SMF42GDW	8	binary	Total amount of time, in milli seconds, for all direct access (RE-DO) requests in this interval.
560	230 SMF42GDX	4	binary	Average response time for all of the direct access (RE-DO) requests in this interval (total time/number of requests).
564	234 SMF42GDY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
568	238 SMF42GDZ	8	EBCDIC	Reserved.
576	240 SMF42GD7	32	EBCDIC	Reserved.
Sysplex-wide sequential access summary section:				
608	260 SMF42GEA	4	binary	Coupling facility cache partition number.
612	264 SMF42GEB	4	binary	Total number of sequential access requests.
616	268 SMF42GDC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
620	26C SMF42GED	4	binary	Number of read requests - Consistent read protocol.
624	270 SMF42GEE	4	binary	Number of Write requests.
628	274 SMF42GEF	4	binary	Number of direct access BMF requests.
632	278 SMF42GEG	4	binary	Number of direct access BMF Read requests.
636	27C SMF42GEH	4	binary	Number of direct access BMF Write requests.
640	280 SMF42GEI	4	binary	Number of direct access BMF read hits.
644	284 SMF42GEJ	4	binary	Number of direct access BMF valid read hits.
648	288 SMF42GEK	4	binary	Number of BMF false invalids.
652	28C SMF42GEL	4	binary	Number of direct access CF cache structure requests.
656	290 SMF42GEM	4	binary	Number of direct access CF cache structure Read requests.
660	294 SMF42GEN	4	binary	Number of direct access CF cache structure Write requests.
664	298 SMF42GEO	4	binary	Number of direct access CF cache structure read hits.
668	29C SMF42GEP	4	binary	Number of direct access CF cache structure read castins.
672	2A0 SMF42GEQ	8	binary	Number of direct access CF cache structure byte transferred.
680	2A8 SMF42GER	4	binary	Total number of READ real I/O sequential requests to DASD.
684	2AC SMF42GES	4	binary	Total number of WRITE real I/O sequential requests to DASD.
688	2B0 SMF42GET	8	binary	Total number of bytes transferred to DASD for the read requests.
696	2B8 SMF42GEU	8	binary	Total number of bytes transferred to DASD for the write requests.
704	2C0 SMF42GEV	16	EBCDIC	Reserved.

Offsets	Name	Length	Format	Description
720	2D0 SMF42GEW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.
728	2D8 SMF42GEX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
732	2DC SMF42GEY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
736	2E0 SMF42GEZ	8	EBCDIC	Reserved.
744	2E8 SMF42GE7	32	EBCDIC	Reserved.
Sysplex-wide sequential access record merge (RE-DO) summary section:				
776	308 SMF42GFA	4	binary	Coupling facility cache partition number.
780	30C SMF42GFB	4	binary	Total number of direct access requests. (RE-DO)
784	310 SMF42GFC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
788	314 SMF42GFD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
792	318 SMF42GFE	4	binary	Number of Write requests.(RE-DO)
796	31C SMF42GFF	4	binary	Number of direct access BMF requests. (RE-DO)
800	320 SMF42GFG	4	binary	Number of direct access BMF Read requests. (RE-DO)
804	324 SMF42GFH	4	binary	Number of direct access BMF Write requests. (RE-DO)
808	328 SMF42GFI	4	binary	Number of direct access BMF read hits. (RE-DO)
812	32C SMF42GFJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
816	330 SMF42GFK	4	binary	Number of BMF false invalids. (RE-DO)
820	334 SMF42GFL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
824	338 SMF42GFM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
828	33C SMF42GFN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)
832	340 SMF42GFO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
836	344 SMF42GFP	4	binary	Number of direct access CF cache structure read castins. (RE-DO)
840	348 SMF42GFQ	8	binary	Number of direct access CF cache structure byte transferred. (RE-DO)
848	350 SMF42GFR	4	binary	Total number of real READ I/O sequential requests to DASD. (RE-DO)
852	354 SMF42GFS	4	binary	Total number of real WRITE I/O sequential requests to DASD. (RE-DO)
856	358 SMF42GFT	8	binary	Total number of bytes transferred to DASD for the read requests.
864	360 SMF42GFU	8	binary	Total number of bytes transferred to DASD for the write requests.
872	368 SMF42GFV	16	EBCDIC	Reserved.
888	378 SMF42GFW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
896	380 SMF42GFX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
900	384 SMF42GFY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
904	388 SMF42GFZ	8	EBCDIC	Reserved.

Record type 42

Offsets	Name	Length	Format	Description
912 390	SMF42GF7	32	EBCDIC	Reserved.
Sysplex-wide sequential access read ahead summary section:				
944 3B0	SMF42GGA	4	binary	Coupling facility cache partition number.
948 3B4	SMF42GGB	4	binary	Total number of sequential access requests. (read ahead)
952 3B8	SMF42GGC	4	binary	Number of read requests - NRI protocol (No Read Integrity).(read ahead)
956 3BC	SMF42GGD	4	binary	Number of read requests - Consistent read protocol. (read ahead)
960 3C0	SMF42GGE	4	binary	Number of Write requests.(read ahead)
964 3C4	SMF42GGF	4	binary	Number of direct access BMF requests. (read ahead)
968 3C8	SMF42GGG	4	binary	Number of direct access BMF Read requests. (read ahead)
972 3CC	SMF42GGH	4	binary	Number of direct access BMF Write requests. (read ahead)
976 3D0	SMF42GGI	4	binary	Number of direct access BMF read hits. (read ahead)
980 3D4	SMF42GGJ	4	binary	Number of direct access BMF valid read hits. (read ahead)
984 3D8	SMF42GGK	4	binary	Number of BMF false invalids. (RE-DO)
988 3DC	SMF42GGL	4	binary	Number of direct access CF cache structure requests. (read ahead)
992 3E0	SMF42GGM	4	binary	Number of direct access CF cache structure Read requests. (read ahead)
996 3E4	SMF42GGN	4	binary	Number of direct access CF cache structure Write requests. (read ahead)
1000 3E8	SMF42GGO	4	binary	Number of direct access CF cache structure read hits. (read ahead)
1004 3EC	SMF42GGP	4	binary	Number of direct access CF cache structure read castins. (read ahead)
1008 3F0	SMF42GGQ	8	binary	Number of direct access CF cache structure byte transferred. (read ahead)
1016 3F8	SMF42GGR	4	binary	Total number of READ real I/O sequential requests to DASD. (read ahead)
1020 3FC	SMF42GGS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (read ahead)
1024 400	SMF42GGT	8	binary	Total number of bytes transferred to DASD for the read requests.
1032 408	SMF42GGU	8	binary	Total number of bytes transferred to DASD for the write requests.
1040 410	SMF42GGV	16	EBCDIC	Reserved.
1056 420	SMF42GGW	8	binary	Total amount of time, in milliseconds, for all sequential access (read ahead) requests in this interval.
1064 428	SMF42GGX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval (total time/number of requests).
1068 42C	SMF42GGY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
1072 430	SMF42GGZ	8	EBCDIC	Reserved.
1080 438	SMF42GG7	32	EBCDIC	Reserved.
Sysplex-wide sequential access pre-format summary section:				
1112 458	SMF42GHA	4	binary	Coupling facility cache partition number.
1116 45C	SMF42GHB	4	binary	Total number of sequential access requests. (pre-format)
1120 460	SMF42GHC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (pre-format)

Offsets	Name	Length	Format	Description
1124 464	SMF42GHD	4	binary	Number of read requests - Consistent read protocol. (pre-format)
1128 468	SMF42GHE	4	binary	Number of Write requests. (pre-format)
1132 46C	SMF42GHF	4	binary	Number of direct access BMF requests. (pre-format)
1136 470	SMF42GHG	4	binary	Number of direct access BMF Read requests. (pre-format)
1140 474	SMF42GHH	4	binary	Number of direct access BMF Write requests. (pre-format)
1144 478	SMF42GHI	4	binary	Number of direct access BMF read hits. (pre-format)
1148 47C	SMF42GHJ	4	binary	Number of direct access BMF valid read hits. (pre-format)
1152 480	SMF42GHK	4	binary	Number of BMF false invalids. (pre-format)
1156 484	SMF42GHL	4	binary	Number of direct access CF cache structure requests. (pre-format)
1160 488	SMF42GHM	4	binary	Number of direct access CF cache structure Read requests. (pre-format)
1164 48C	SMF42GHN	4	binary	Number of direct access CF cache structure Write requests. (pre-format)
1168 490	SMF42GHO	4	binary	Number of direct access CF cache structure read hits. (pre-format)
1172 494	SMF42GHP	4	binary	Number of direct access CF cache structure read castins. (pre-format)
1176 498	SMF42GHQ	8	binary	Number of direct access CF cache structure byte transferred. (pre-format)
1184 4A0	SMF42GHR	4	binary	Total number of READ real I/O sequential requests to DASD. (pre-format)
1188 4A4	SMF42GHS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1192 4A8	SMF42GHT	8	binary	Total number of bytes transferred to DASD for the read requests.
1200 4B0	SMF42GHU	8	binary	Total number of bytes transferred to DASD for the write requests.
1208 4B8	SMF42GHV	16	EBCDIC	Reserved.
1224 4C8	SMF42GHW	8	binary	Total amount of time, in milli seconds, for all sequential access (pre-format) requests in this interval.
1232 4D0	SMF42GHX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).
1236 4D4	SMF42GHY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1240 4D8	SMF42GHZ	8	EBCDIC	Reserved.
1248 4E0	SMF42GH7	32	EBCDIC	Reserved.
Sysplex-wide locking statistics summary section:				
1280 500	SMF42GPA	4	binary	Number of record lock requests (obtain/alter/promote)
1284 504	SMF42GPB	4	binary	Number of record lock requests that cause true contention.
1288 508	SMF42GPC	4	binary	Number of record lock requests that cause false contention.
1292 50C	SMF42GPD	4	binary	Number of record lock release requests.
1296 510	SMF42GPE	4	binary	Number of component_1 type lock requests.
1300 514	SMF42GPF	4	binary	Number of component_1 type release lock requests.
1304 518	SMF42GUA	4	binary	Accumulation of waiters for record lock.
1308 51C	SMF42GUB	4	binary	Number of record locks hashed to the same hash table entry.
1312 520	SMF42GPH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).

Record type 42

Offsets	Name	Length	Format	Description
1316 524	SMF42GPI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1320 528	SMF42GPJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1324 52C	SMF42GPK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1328 530	SMF42GPL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
1332 534	SMF42GPM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
1336 538	SMF42GPN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1340 53C	SMF42GPO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1344 540	SMF42GPP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1348 544	SMF42GPQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1352 548	SMF42GPR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
1356 54C	SMF42GPS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1360 550	SMF42GPT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1364 554	SMF42GPU	4	binary	Number of component_2 locks that cause true contention.
1368 558	SMF42GPV	4	binary	Number of component_2 locks that cause false contention.
1372 55C	SMF42GPW	4	binary	Number of component_2 release lock requests.
1376 560	SMF42GUD	4	binary	Accumulation of waiters for DIWA lock.
1380 564	SMF42GUE	4	binary	Accumulation of waiters for UPGRADE lock.
1384 568	SMF42GUF	4	binary	Accumulation of waiters for COMP2 lock.
1388 56C	SMF42GUG	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1392 570	SMF42GSH	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1396 574	SMF42GSI	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
1400 578	SMF42GSJ	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1404 57C	SMF42GSK	4	binary	Number of component_1 class 4 (Index Record) release lock requests.
Sysplex-wide data set BMF LRU statistical section:				
1408 580	SMF42GRA	4	binary	Number of RE-DO's.
1412 584	SMF42GRB	4	binary	Number of recursive RE-DO's.
1416 588	SMF42GRC	4	binary	Number of BMF writes.
1420 58C	SMF42GRD	4	binary	Number of SCM read requests.
1424 590	SMF42GRE	4	binary	Number of SCM read requests that encountered castout lock contention.
1428 594	SMF42GRG	4	binary	RE-DO percentage.
1432 598	SMF42GRH	4	binary	Recursive RE-DO percentage.
1436 59C	SMF42GRI	4	binary	SCM castout lock percentage.
1440 5A0	SMF42GRF	12	EBCDIC	Reserved.

Offsets	Name	Length	Format	Description
1452	5AC SMF42GRJ	4	binary	Total number of CF read requests that encountered retries for cast out locks.
1456	5B0 SMF42GSA	4	binary	Total number of CI splits for this interval (across the sysplex).
1460	5B4 SMF42GSB	4	binary	Total number of CA splits for this interval (across the sysplex).
1464	5B8 SMF42GRK	8	EBCDIC	Reserved.
1472	5C0 SMF42GAQ	16	EBCDIC	Lock structure name.

Data Set, CF, SYS summary section for below the bar

Offsets	Name	Length	Format	Description								
0	0 SMF42GBA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.								
4	4 SMF42A05	12	EBCDIC	Reserved.								
16	10 SMF42GBB	44	EBCDIC	Data set name.								
60	3C SMF42A06	4	binary	Reserved.								
64	40 SMF42GBC	44	EBCDIC	VSAM sphere name.								
108	6C SMF42A07	4	binary	Reserved.								
112	70 SMF42GBD	2	binary	Length of storage class name.								
114	72 SMF42GBE	30	EBCDIC	Storage class name.								
144	90 SMF42A08	2	binary	Length of cache set name.								
146	92 SMF42GBF	30	EBCDIC	Cache set name.								
176	B0 SMF42A12	2	binary	Reserved.								
178	B2 SMF42GBG	30	EBCDIC	Cache structure name.								
208	D0 SMF42GBH	8	EBCDIC	MVS system name.								
216	D8 SMF42A11	8	EBCDIC	Reserved.								
224	E0 SMF42GBI	4	binary	Indicator of component being processed <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Data component</td> </tr> <tr> <td>1</td> <td>Index component</td> </tr> <tr> <td>2-31</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Data component	1	Index component	2-31	Reserved.
Bit	Meaning when set											
0	Data component											
1	Index component											
2-31	Reserved.											
228	E4 SMF42A09	12	EBCDIC	Indicates DFSMS greater than 4K CF caching status. Value is ALL, NONE, UPDATESONLY, DIRONLY or GT4KNOTACT.								
240	F0 SMF42GBK	4	binary	Number of lock requests processed by this MVS system.								
244	F4 SMF42GBL	4	binary	Number of true contention lock requests.								
248	F8 SMF42GBM	4	binary	Number of false contention lock requests.								
252	FC SMF42GZ8	2	binary	SMS DIRECT WEIGHT								
254	FE SMF42GZ9	2	binary	SMS SEQUENTIAL WEIGHT								
256	100 SMF42GBN	8	EBCDIC	In DFSMS 1.4, WLM SERV Class Name								
264	108 SMF42GBO	8	EBCDIC	In DFSMS 1.4, WLM Report Class Name								
272	110 SMF42GBP	16	EBCDIC	SMS data class name.								
Direct access section:												
288	120 SMF42GIA	4	binary	Coupling facility cache partition number.								
292	124 SMF42GIB	4	binary	Total number of direct access requests.								
296	128 SMF42GIC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (pre-format)								

Record type 42

Offsets	Name	Length	Format	Description
300	12C SMF42GID	4	binary	Number of read requests - Consistent read protocol.
304	130 SMF42GIE	4	binary	Number of Write requests.
308	134 SMF42GIF	4	binary	Number of direct access BMF requests.
312	138 SMF42GIG	4	binary	Number of direct access BMF Read requests.
316	13C SMF42GIH	4	binary	Number of direct access BMF Write requests.
320	140 SMF42GII	4	binary	Number of direct access BMF read hits.
324	144 SMF42GIJ	4	binary	Number of direct access BMF valid read hits.
328	148 SMF42GIK	4	binary	Number of BMF false invalids.
332	14C SMF42GIL	4	binary	Number of direct access CF cache structure requests.
336	150 SMF42GIM	4	binary	Number of direct access CF cache structure Read requests.
340	154 SMF42GIN	4	binary	Number of direct access CF cache structure Write requests.
344	158 SMF42GIO	4	binary	Number of direct access CF cache structure read hits.
348	15C SMF42GIP	4	binary	Number of direct access CF cache structure read castins.
352	160 SMF42GIQ	8	binary	Number of direct access CF cache structure byte transferred.
360	168 SMF42GIR	4	binary	Total number of real READ I/O direct requests to DASD.
364	16C SMF42GIS	4	binary	Total number of real WRITE I/O direct requests to DASD.
368	170 SMF42GIT	8	binary	Total number of bytes transferred to DASD for the read requests.
376	178 SMF42GIU	8	binary	Total number of bytes transferred to DASD for the write requests.
384	180 SMF42GIV	16	EBCDIC	Reserved.
400	190 SMF42GIW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
408	198 SMF42GIX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
412	19C SMF42GIY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
416	1A0 SMF42GIZ	8	EBCDIC	Reserved.
424	1A8 SMF42GI7	32	EBCDIC	Reserved.
Direct access record merge (RE-DO) summary section:				
456	1C8 SMF42GJA	4	binary	Coupling facility cache partition number.
460	1CC SMF42GJB	4	binary	Total number of direct access requests. (RE-DO)
464	1D0 SMF42GJC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
468	1D4 SMF42GJD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
472	1D8 SMF42GJE	4	binary	Number of Write requests. (RE-DO)
476	1DC SMF42GJF	4	binary	Number of direct access BMF requests. (RE-DO)
480	1E0 SMF42GJG	4	binary	Number of direct access BMF Read requests. (RE-DO)
484	1E4 SMF42GJH	4	binary	Number of direct access BMF Write requests. (RE-DO)
488	1E8 SMF42GJI	4	binary	Number of direct access BMF read hits. (RE-DO)
492	1EC SMF42GJJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
496	1F0 SMF42GJK	4	binary	Number of BMF false invalids. (RE-DO)
500	1F4 SMF42GJL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
504	1F8 SMF42GJM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
508	1FC SMF42GJN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)

Offsets	Name	Length	Format	Description
512	200 SMF42GJO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
516	204 SMF42GJP	4	binary	Number of direct access CF cache structure read castins.
520	208 SMF42GJQ	8	binary	Number of direct access CF cache structure bytes transferred.
528	210 SMF42GJR	4	binary	Total number of READ real I/O direct requests to DASD. (RE-DO)
532	214 SMF42GJS	4	binary	Total number of WRITE real I/O direct requests to DASD. (RE-DO)
536	218 SMF42GJT	8	binary	Total number of bytes transferred to DASD for the read requests.
544	220 SMF42GJU	8	binary	Total number of bytes transferred to DASD for the write requests.
552	228 SMF42GJV	16	EBCDIC	Reserved.
568	238 SMF42GJW	8	binary	Total amount of time, in milli seconds, for all direct access (RE-DO) requests in this interval.
576	240 SMF42GJX	4	binary	Average response time for all of the direct access (RE-DO) requests in this interval (total time/number of requests).
580	244 SMF42GJY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
584	248 SMF42GJZ	8	EBCDIC	Reserved.
592	250 SMF42GJ7	32	EBCDIC	Reserved.
Sequential access section:				
624	270 SMF42GKA	4	binary	Coupling facility cache partition number.
628	274 SMF42GKB	4	binary	Total number of sequential access requests.
632	278 SMF42GKC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
636	27C SMF42GKD	4	binary	Number of read requests - Consistent read protocol.
640	280 SMF42GKE	4	binary	Number of Write requests.
644	284 SMF42GKF	4	binary	Number of direct access BMF requests.
648	288 SMF42GKG	4	binary	Number of direct access BMF Read requests.
652	28C SMF42GKH	4	binary	Number of direct access BMF Write requests.
656	290 SMF42GKI	4	binary	Number of direct access BMF read hits.
660	294 SMF42GKJ	4	binary	Number of direct access BMF valid read hits.
664	298 SMF42GKK	4	binary	Number of BMF false invalids.
668	29C SMF42GKL	4	binary	Number of direct access CF cache structure requests.
672	2A0 SMF42GKM	4	binary	Number of direct access CF cache structure Read requests.
676	2A4 SMF42GKN	4	binary	Number of direct access CF cache structure Write requests.
680	2A8 SMF42GKO	4	binary	Number of direct access CF cache structure read hits.
684	2AC SMF42GKP	4	binary	Number of direct access CF cache structure read castins.
688	2B0 SMF42GKQ	8	binary	Number of direct access CF cache structure byte transferred.
696	2B8 SMF42GKR	4	binary	Total number of READ real I/O sequential requests to DASD.
700	2BC SMF42GKS	4	binary	Total number of WRITE real I/O sequential requests to DASD.
704	2C0 SMF42GKT	8	binary	Total number of bytes transferred for all sequential access requests where the data was retrieved from DASD. (real I/O DASD)

Record type 42

Offsets	Name	Length	Format	Description
712	2C8 SMF42GKU	8	binary	Total number of bytes transferred for all sequential access requests where the data was retrieved from DASD or a coupling facility cache structure. (real I/O DASD)
720	2D0 SMF42GKV	16	EBCDIC	Reserved.
736	2E0 SMF42GKW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.
744	2E8 SMF42GKX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
748	2EC SMF42GKY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
752	2F0 SMF42GKZ	8	EBCDIC	Reserved.
760	2F8 SMF42GK7	32	EBCDIC	Reserved.
Sequential access record merge (RE-DO) summary section:				
792	318 SMF42GLA	4	binary	Coupling facility cache partition number.
796	31C SMF42GLB	4	binary	Total number of sequential access requests. (RE-DO)
800	320 SMF42GLC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
804	324 SMF42GLD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
808	328 SMF42GLE	4	binary	Number of Write requests. (RE-DO)
812	32C SMF42GLF	4	binary	Number of direct access BMF requests. (RE-DO)
816	330 SMF42GLG	4	binary	Number of direct access BMF Read requests.
820	334 SMF42GLH	4	binary	Number of direct access BMF Write requests.
824	338 SMF42GLI	4	binary	Number of direct access BMF read hits.
828	33C SMF42GLJ	4	binary	Number of direct access BMF valid read hits.
832	340 SMF42GLK	4	binary	Number of BMF false invalids. (RE-DO)
836	344 SMF42GLL	4	binary	Number of direct access CF cache structure requests.
840	348 SMF42GLM	4	binary	Number of direct access CF cache structure Read requests.
844	34C SMF42GLN	4	binary	Number of direct access CF cache structure Write requests.
848	350 SMF42GLO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
852	354 SMF42GLP	4	binary	Number of direct access CF cache structure read castins.
856	358 SMF42GLQ	8	binary	Number of direct access CF cache structure bytes transferred.
864	360 SMF42GLR	4	binary	Total number of READ real I/O sequential requests to DASD. (RE-DO)
868	364 SMF42GLS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (RE-DO)
872	368 SMF42GLT	8	binary	Total number of bytes transferred to DASD for the read requests.
880	370 SMF42GLU	8	binary	Total number of bytes transferred to DASD for the write requests.
888	378 SMF42GLV	16	EBCDIC	Reserved.
904	388 SMF42GLW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
912	390 SMF42GLX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
916	394 SMF42GLY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)

Offsets	Name	Length	Format	Description
920	398 SMF42GLZ	8	EBCDIC	Reserved.
928	3A0 SMF42GL7	32	EBCDIC	Reserved.
Sequential access read ahead summary section:				
960	3C0 SMF42GMA	4	binary	Coupling facility cache partition number.
964	3C4 SMF42GMB	4	binary	Total number of sequential access requests. (read ahead)
968	3C8 SMF42GMC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (read-ahead)
972	3CC SMF42GMD	4	binary	Number of read requests - Consistent read protocol. (read-ahead)
976	3D0 SMF42GME	4	binary	Number of Write requests. (read-ahead)
980	3D4 SMF42GMF	4	binary	Number of direct access BMF requests. (read-ahead)
984	3D8 SMF42GMG	4	binary	Number of direct access BMF Read requests.
988	3DC SMF42GMH	4	binary	Number of direct access BMF Write requests.
992	3E0 SMF42GMI	4	binary	Number of direct access BMF read hits.
996	3E4 SMF42GMJ	4	binary	Number of direct access BMF valid read hits.
1000	3E8 SMF42GMK	4	binary	Number of BMF false invalids. (read-ahead)
1004	3EC SMF42GML	4	binary	Number of direct access CF cache structure requests.
1008	3F0 SMF42GMM	4	binary	Number of direct access CF cache structure Read requests.
1012	3F4 SMF42GMN	4	binary	Number of direct access CF cache structure Write requests.
1016	3F8 SMF42GMO	4	binary	Number of direct access CF cache structure read hits. (read-ahead)
1020	3FC SMF42GMP	4	binary	Number of direct access CF cache structure read castins.
1024	400 SMF42GMQ	8	binary	Number of direct access CF cache structure byte transferred.
1032	408 SMF42GMR	4	binary	Total number of real READ I/O sequential requests to DASD. (read ahead)
1036	40C SMF42GMS	4	binary	Total number of real WRITE I/O sequential requests to DASD. (read ahead)
1040	410 SMF42GMT	8	binary	Total number of bytes transferred to DASD for the read requests.
1048	418 SMF42GMU	8	binary	Total number of bytes transferred to DASD for the write requests.
1056	420 SMF42GMV	16	EBCDIC	Reserved.
1072	430 SMF42GMW	8	binary	Total amount of time, in milli seconds, for all sequential access (read ahead) requests in this interval.
1080	438 SMF42GMX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval (total time/number of requests).
1084	43C SMF42GMY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
1088	440 SMF42GMZ	8	EBCDIC	Reserved.
1096	448 SMF42GM7	32	EBCDIC	Reserved.
Sequential access pre-format summary section:				
1128	468 SMF42GNA	4	binary	Coupling facility cache partition number.
1132	46C SMF42GNB	4	binary	Total number of sequential access requests. (pre-format)
1136	470 SMF42GNC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (pre-format)
1140	474 SMF42GND	4	binary	Number of read requests - Consistent read protocol. (pre-format)
1144	478 SMF42GNE	4	binary	Number of Write requests. (pre-format)

Record type 42

Offsets	Name	Length	Format	Description
1148	47C SMF42GNF	4	binary	Number of direct access BMF requests. (pre-format)
1152	480 SMF42GNG	4	binary	Number of direct access BMF Read requests.
1156	484 SMF42GNH	4	binary	Number of direct access BMF Write requests.
1160	488 SMF42GNI	4	binary	Number of direct access BMF read hits.
1164	48C SMF42GNJ	4	binary	Number of direct access BMF valid read hits.
1168	490 SMF42GNK	4	binary	Number of BMF false invalids. (pre-format)
1172	494 SMF42GNL	4	binary	Number of direct access CF cache structure requests.
1176	498 SMF42GNM	4	binary	Number of direct access CF cache structure Read requests.
1180	49C SMF42GNN	4	binary	Number of direct access CF cache structure Write requests.
1184	4A0 SMF42GNO	4	binary	Number of direct access CF cache structure read hits. (pre-format)
1188	4A4 SMF42GNP	4	binary	Number of direct access CF cache structure read castins.
1192	4A8 SMF42GNQ	8	binary	Number of direct access CF cache structure byte transferred.
1200	4B0 SMF42GNR	4	binary	Total number of READ real I/O sequential requests to DASD. (pre-format)
1204	4B4 SMF42GNS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1208	4B8 SMF42GNT	8	binary	Total number of bytes transferred to DASD for the read requests.
1216	4C0 SMF42GNU	8	binary	Total number of bytes transferred to DASD for the write requests.
1224	4C8 SMF42GNV	16	EBCDIC	Reserved.
1240	4D8 SMF42GNW	8	binary	Total amount of time, in milli seconds, for all sequential access. (pre-format) requests in this interval.
1248	4E0 SMF42GNX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).
1252	4E4 SMF42GNY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1256	4E8 SMF42GNZ	8	EBCDIC	Reserved.
1264	4F0 SMF42GN7	32	EBCDIC	Reserved.
1296	510 SMF42GQA	4	binary	Number of record lock requests (obtain/alter/promote)
1300	514 SMF42GQB	4	binary	Number of record lock requests that cause true contention.
1304	518 SMF42GQC	4	binary	Number of record lock requests that cause false contention.
1308	51C SMF42GQD	4	binary	Number of record lock release requests.
1312	520 SMF42GQE	4	binary	Number of component_1 type lock requests.
1316	524 SMF42GQF	4	binary	Number of component_1 type release lock requests.
1320	528 SMF42GVA	4	binary	Accumulation of waiters for record lock.
1324	52C SMF42GVB	4	binary	Number of record locks hashed to the same hash table entry.
1328	530 SMF42GQH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
1332	534 SMF42GQI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1336	538 SMF42GQJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1340	53C SMF42GQK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1344	540 SMF42GQL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).

Offsets	Name	Length	Format	Description
1348 544	SMF42GQM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
1352 548	SMF42GQN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1356 54C	SMF42GQO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1360 550	SMF42GQP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1364 554	SMF42GQQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1368 558	SMF42GQR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
1372 55C	SMF42GQS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1376 560	SMF42GQT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1380 564	SMF42GQU	4	binary	Number of component_2 locks that cause true contention.
1384 568	SMF42GQV	4	binary	Number of component_2 locks that cause false contention.
1388 56C	SMF42GQW	4	binary	Number of component_2 release lock requests.
1392 570	SMF42GVD	4	binary	Accumulation of waiters for DIWA lock.
1396 574	SMF42GVE	4	binary	Accumulation of waiters for UPGRADE lock.
1400 578	SMF42GVF	4	binary	Accumulation of waiters for COMP2 lock.
1404 57C	SMF42GVG	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1408 580	SMF42GTH	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1412 584	SMF42GTI	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
1416 588	SMF42GTJ	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1420 58C	SMF42GTK	4	binary	Number of component_1 class 4 (Index Record) release lock requests.
1424 590	SMF42GRL	4	binary	Number of RE-DO's.
1428 594	SMF42GRM	4	binary	Number of recursive RE-DO's.
1432 598	SMF42GRN	4	binary	Number of BMF writes.
1436 59C	SMF42GRO	4	binary	Number of SCM read requests.
1440 5A0	SMF42GRP	4	binary	Number of SCM read requests that encountered castout lock contention.
1444 5A4	SMF42GRR	4	binary	RE-DO percentage.
1448 5A8	SMF42GRS	4	binary	Recursive RE-DO percentage.
1452 5AC	SMF42GRT	4	binary	SCM castout lock percentage.
1456 5B0	SMF42GRQ	12	EBCDIC	Reserved.
1468 5BC	SMF42GRU	4	binary	Total number of CF read requests that encountered retries for cast out locks.
1472 5C0	SMF42GTA	4	binary	Total number of CI splits for this interval.
1476 5C4	SMF42GTB	4	binary	Total number of CA splits for this interval.
1480 5C8	SMF42GRV	8	EBCDIC	Reserved.
1488 5D0	SMF42GBQ	16	EBCDIC	Lock structure name.

Sysplex-wide data set summary section for above the bar

Offsets	Name	Length	Format	Description								
0	0 SMF2AGAA	4	binary	Interval length. This is the total time, in seconds, of the measurement period.								
4	4 SMF2AA00	12	EBCDIC	Reserved.								
16	10 SMF2AGAB	44	EBCDIC	Data set name								
60	3C SMF2AA01	4	binary	Reserved.								
64	40 SMF2AGAC	44	EBCDIC	VSAM sphere name.								
108	6C SMF2AA02	4	binary	Reserved.								
112	70 SMF2AGAD	2	binary	Length of the storage class name.								
114	72 SMF2AGAE	30	EBCDIC	Storage class name.								
144	90 SMF2AA03	2	binary	Length of DFSMS CacheSet name.								
146	92 SMF2AGAF	30	EBCDIC	DFSMS CacheSet name.								
176	B0 SMF2AGAG	2	EBCDIC	Reserved.								
178	B2 SMF2AGAH	30	EBCDIC	DFP CF cache structure name.								
208	D0 SMF2AGAI	4	binary	Indicator of component being processed. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Data component</td> </tr> <tr> <td>1</td> <td>Index component</td> </tr> <tr> <td>2-31</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Data component	1	Index component	2-31	Reserved.
Bit	Meaning when set											
0	Data component											
1	Index component											
2-31	Reserved.											
212	D4 SMF2AGAJ	12	EBCDIC	Indicates DFSMS greater than 4K CF caching status. Value is ALL, NONE, UPDATESONLY, DIRONLY or GT4KNOTACT.								
224	E0 SMF2AGAK	4	binary	Reserved.								
228	E4 SMF2AGAL	4	binary	Reserved.								
232	E8 SMF2AGAM	4	binary	Reserved.								
236	EC SMF2AGZ1	2	binary	SMS Direct Weight								
240	EE SMF2AGZ2	2	binary	SMS Sequential Weight								
240	F0 SMF2AGAN	8	EBCDIC	In DFSMS 1.4 WLM Server class name								
248	F8 SMF2AGAO	8	EBCDIC	In DFSMS 1.4 WLM report class name								
256	100 SMF2AGAP	16	EBCDIC	SMS data class name								
Sysplex-wide direct access summary section:												
272	110 SMF2AGCA	4	binary	Coupling facility cache partition number.								
276	114 SMF2AGCB	4	binary	Total number of direct access requests.								
280	118 SMF2AGCC	4	binary	Number of read requests - NRI protocol (No Read Integrity).								
284	11C SMF2AGCD	4	binary	Number of read requests - Consistent read protocol.								
288	120 SMF2AGCE	4	binary	Number of Write requests.								
292	124 SMF2ACGF	4	binary	Number of direct access BMF requests.								
296	128 SMF2AGCG	4	binary	Number of direct access BMF Read requests.								
300	12C SMF2AGCH	4	binary	Number of direct access BMF Write requests.								
304	130 SMF2AGCI	4	binary	Number of direct access BMF read hits.								
308	134 SMF2AGCJ	4	binary	Number of direct access BMF valid read hits.								
312	138 SMF2AGCK	4	binary	Number of BMF false invalids.								
316	13C SMF2AGCL	4	binary	Number of direct access CF cache structure requests.								
320	140 SMF2AGCM	4	binary	Number of direct access CF cache structure Read requests.								
324	144 SMF2AGCN	4	binary	Number of direct access CF cache structure Write requests.								
328	148 SMF2AGCO	4	binary	Number of direct access CF cache structure read hits.								

Offsets	Name	Length	Format	Description
332	14C SMF2AGCP	4	binary	Number of direct access CF cache structure read castins.
336	150 SMF2AGCQ	8	binary	Number of bytes transferred into the DFSMS cache structure.
344	158 SMF2AGCR	4	binary	Total number READ of real I/O direct requests to DASD.
348	15C SMF2AGCS	4	binary	Total number WRITE of real I/O direct requests to DASD.
352	160 SMF2AGCT	8	binary	Total number of bytes transferred to DASD for the read requests.
360	168 SMF2AGCU	8	binary	Total number of bytes transferred to DASD for the write requests.
368	170 SMF2AGCV	16	EBCDIC	Reserve
384	180 SMF2AGCW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
392	188 SMF2AGCX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
396	18C SMF2AGCY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
400	190 SMF2AGCZ	8	EBCDIC	Reserved.
408	198 SMF2AGC7	32	EBCDIC	Reserved.
Sysplex-wide direct access record merge (RE-DO) summary section:				
440	1B8 SMF2AGDA	4	binary	Coupling facility cache partition number.
444	1BC SMF2AGDB	4	binary	Total number of direct access requests. (RE-DO)
448	1C0 SMF2AGDC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
452	1C4 SMF2AGDD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
456	1C8 SMF2AGDE	4	binary	Number of Write requests. (RE-DO)
460	1CC SMF2AGDF	4	binary	Number of direct access BMF requests. (RE-DO)
464	1D0 SMF2AGDG	4	binary	Number of direct access BMF Read requests. (RE-DO)
468	1D4 SMF2AGDH	4	binary	Number of direct access BMF Write requests. (RE-DO)
472	1D8 SMF2AGDI	4	binary	Number of direct access BMF read hits. (RE-DO)
476	1DC SMF2AGDJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
480	1E0 SMF2AGDK	4	binary	Number of BMF false invalids. (RE-DO)
484	1E4 SMF2AGDL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
488	1E8 SMF2AGDM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
492	1EC SMF2AGDN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)
496	1F0 SMF2AGDO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
500	1F4 SMF2AGDP	4	binary	Number of direct access CF cache structure read castins. (RE-DO)
504	1F8 SMF2AGDQ	8	binary	Number of direct access CF cache structure byte transferred. (RE-DO)
512	200 SMF2AGDR	4	binary	Total number of READ real I/O direct requests to DASD. (RE-DO)
516	204 SMF2AGDS	4	binary	Total number of WRITE real I/O direct requests to DASD. (RE-DO)
520	208 SMF2AGDT	8	binary	Total number of bytes transferred to DASD for the read requests.

Record type 42

Offsets	Name	Length	Format	Description
528	210 SMF2AGDU	8	binary	Total number of bytes transferred to DASD for the write requests.
536	218 SMF2AGDV	16	EBCDIC	Reserved.
552	228 SMF2AGDW	8	binary	Total amount of time, in milli seconds, for all direct access (RE-DO) requests in this interval.
560	230 SMF2AGDX	4	binary	Average response time for all of the direct access (RE-DO) requests in this interval (total time/number of requests).
564	234 SMF2AGDY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
568	238 SMF2AGDZ	8	EBCDIC	Reserved.
576	240 SMF2AGD7	32	EBCDIC	Reserved.
Sysplex-wide sequential access summary section:				
608	260 SMF2AGEA	4	binary	Coupling facility cache partition number.
612	264 SMF2AGEB	4	binary	Total number of sequential access requests.
616	268 SMF2AGDC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
620	26C SMF2AGED	4	binary	Number of read requests - Consistent read protocol.
624	270 SMF2AGEE	4	binary	Number of Write requests.
628	274 SMF2AGEF	4	binary	Number of direct access BMF requests.
632	278 SMF2AGEG	4	binary	Number of direct access BMF Read requests.
636	27C SMF2AGEH	4	binary	Number of direct access BMF Write requests.
640	280 SMF2AGEI	4	binary	Number of direct access BMF read hits.
644	284 SMF2AGEJ	4	binary	Number of direct access BMF valid read hits.
648	288 SMF2AGEK	4	binary	Number of BMF false invalids.
652	28C SMF2AGEL	4	binary	Number of direct access CF cache structure requests.
656	290 SMF2AGEM	4	binary	Number of direct access CF cache structure Read requests.
660	294 SMF2AGEN	4	binary	Number of direct access CF cache structure Write requests.
664	298 SMF2AGEO	4	binary	Number of direct access CF cache structure read hits.
668	29C SMF2AGEP	4	binary	Number of direct access CF cache structure read castins.
672	2A0 SMF2AGEQ	8	binary	Number of direct access CF cache structure byte transferred.
680	2A8 SMF2AGER	4	binary	Total number of READ real I/O sequential requests to DASD.
684	2AC SMF2AGES	4	binary	Total number of WRITE real I/O sequential requests to DASD.
688	2B0 SMF2AGET	8	binary	Total number of bytes transferred to DASD for the read requests.
696	2B8 SMF2AGEU	8	binary	Total number of bytes transferred to DASD for the write requests.
704	2C0 SMF2AGEV	16	EBCDIC	Reserved.
720	2D0 SMF2AGEW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.
728	2D8 SMF2AGEX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
732	2DC SMF2AGEY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
736	2E0 SMF2AGEZ	8	EBCDIC	Reserved.
744	2E8 SMF2AGE7	32	EBCDIC	Reserved.
Sysplex-wide sequential access record merge (RE-DO) summary section:				
776	308 SMF2AGFA	4	binary	Coupling facility cache partition number.

Offsets	Name	Length	Format	Description
780	30C SMF2AGFB	4	binary	Total number of direct access requests. (RE-DO)
784	310 SMF2AGFC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
788	314 SMF2AGFD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
792	318 SMF2AGFE	4	binary	Number of Write requests.(RE-DO)
796	31C SMF2AGFF	4	binary	Number of direct access BMF requests. (RE-DO)
800	320 SMF2AGFG	4	binary	Number of direct access BMF Read requests. (RE-DO)
804	324 SMF2AGFH	4	binary	Number of direct access BMF Write requests. (RE-DO)
808	328 SMF2AGFI	4	binary	Number of direct access BMF read hits. (RE-DO)
812	32C SMF2AGFJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
816	330 SMF2AGFK	4	binary	Number of BMF false invalids. (RE-DO)
820	334 SMF2AGFL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
824	338 SMF2AGFM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
828	33C SMF2AGFN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)
832	340 SMF2AGFO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
836	344 SMF2AGFP	4	binary	Number of direct access CF cache structure read castins. (RE-DO)
840	348 SMF2AGFQ	8	binary	Number of direct access CF cache structure byte transferred. (RE-DO)
848	350 SMF2AGFR	4	binary	Total number of real READ I/O sequential requests to DASD. (RE-DO)
852	354 SMF2AGFS	4	binary	Total number of real WRITE I/O sequential requests to DASD. (RE-DO)
856	358 SMF2AGFT	8	binary	Total number of bytes transferred to DASD for the read requests.
864	360 SMF2AGFU	8	binary	Total number of bytes transferred to DASD for the write requests.
872	368 SMF2AGFV	16	EBCDIC	Reserved.
888	378 SMF2AGFW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
896	380 SMF2AGFX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
900	384 SMF2AGFY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
904	388 SMF2AGFZ	8	EBCDIC	Reserved.
912	390 SMF2AGF7	32	EBCDIC	Reserved.
Sysplex-wide sequential access read ahead summary section:				
944	3B0 SMF2AGGA	4	binary	Coupling facility cache partition number.
948	3B4 SMF2AGGB	4	binary	Total number of sequential access requests. (read ahead)
952	3B8 SMF2AGGC	4	binary	Number of read requests - NRI protocol (No Read Integrity).(read ahead)
956	3BC SMF2AGGD	4	binary	Number of read requests - Consistent read protocol. (read ahead)
960	3C0 SMF2AGGE	4	binary	Number of Write requests.(read ahead)
964	3C4 SMF2AGGF	4	binary	Number of direct access BMF requests. (read ahead)

Record type 42

Offsets	Name	Length	Format	Description
968	3C8 SMF2AGGG	4	binary	Number of direct access BMF Read requests. (read ahead)
972	3CC SMF2AGGH	4	binary	Number of direct access BMF Write requests. (read ahead)
976	3D0 SMF2AGGI	4	binary	Number of direct access BMF read hits. (read ahead)
980	3D4 SMF2AGGJ	4	binary	Number of direct access BMF valid read hits. (read ahead)
984	3D8 SMF2AGGK	4	binary	Number of BMF false invalids. (RE-DO)
988	3DC SMF2AGGL	4	binary	Number of direct access CF cache structure requests. (read ahead)
992	3E0 SMF2AGGM	4	binary	Number of direct access CF cache structure Read requests. (read ahead)
996	3E4 SMF2AGGN	4	binary	Number of direct access CF cache structure Write requests. (read ahead)
1000	3E8 SMF2AGGO	4	binary	Number of direct access CF cache structure read hits. (read ahead)
1004	3EC SMF2AGGP	4	binary	Number of direct access CF cache structure read castins. (read ahead)
1008	3F0 SMF2AGGQ	8	binary	Number of direct access CF cache structure byte transferred. (read ahead)
1016	3F8 SMF2AGGR	4	binary	Total number of READ real I/O sequential requests to DASD. (read ahead)
1020	3FC SMF2AGGS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (read ahead)
1024	400 SMF2AGGT	8	binary	Total number of bytes transferred to DASD for the read requests.
1032	408 SMF2AGGU	8	binary	Total number of bytes transferred to DASD for the write requests.
1040	410 SMF2AGGV	16	EBCDIC	Reserved.
1056	420 SMF2AGGW	8	binary	Total amount of time, in milli seconds, for all sequential access (read ahead) requests in this interval.
1064	428 SMF2AGGX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval (total time/number of requests).
1068	42C SMF2AGGY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
1072	430 SMF2AGGZ	8	EBCDIC	Reserved.
1080	438 SMF2AGG7	32	EBCDIC	Reserved.
Sysplex-wide sequential access pre-format summary section:				
1112	458 SMF2AGHA	4	binary	Coupling facility cache partition number.
1116	45C SMF2AGHB	4	binary	Total number of sequential access requests. (pre-format)
1120	460 SMF2AGHC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (pre-format)
1124	464 SMF2AGHD	4	binary	Number of read requests - Consistent read protocol. (pre-format)
1128	468 SMF2AGHE	4	binary	Number of Write requests. (pre-format)
1132	46C SMF2AGHF	4	binary	Number of direct access BMF requests. (pre-format)
1136	470 SMF2AGHG	4	binary	Number of direct access BMF Read requests. (pre-format)
1140	474 SMF2AGHH	4	binary	Number of direct access BMF Write requests. (pre-format)
1144	478 SMF2AGHI	4	binary	Number of direct access BMF read hits. (pre-format)
1148	47C SMF2AGHJ	4	binary	Number of direct access BMF valid read hits. (pre-format)
1152	480 SMF2AGHK	4	binary	Number of BMF false invalids. (pre-format)

Offsets	Name	Length	Format	Description
1156	484 SMF2AGHL	4	binary	Number of direct access CF cache structure requests. (pre-format)
1160	488 SMF2AGHM	4	binary	Number of direct access CF cache structure Read requests. (pre-format)
1164	48C SMF2AGHN	4	binary	Number of direct access CF cache structure Write requests. (pre-format)
1168	490 SMF2AGHO	4	binary	Number of direct access CF cache structure read hits. (pre-format)
1172	494 SMF2AGHP	4	binary	Number of direct access CF cache structure read castins. (pre-format)
1176	498 SMF2AGHQ	8	binary	Number of direct access CF cache structure byte transferred. (pre-format)
1184	4A0 SMF2AGHR	4	binary	Total number of READ real I/O sequential requests to DASD. (pre-format)
1188	4A4 SMF2AGHS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1192	4A8 SMF2AGHT	8	binary	Total number of bytes transferred to DASD for the read requests.
1200	4B0 SMF2AGHU	8	binary	Total number of bytes transferred to DASD for the write requests.
1208	4B8 SMF2AGHV	16	EBCDIC	Reserved.
1224	4C8 SMF2AGHW	8	binary	Total amount of time, in milli seconds, for all sequential access (pre-format) requests in this interval.
1232	4D0 SMF2AGHX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).
1236	4D4 SMF2AGHY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1240	4D8 SMF2AGHZ	8	EBCDIC	Reserved.
1248	4E0 SMF2AGH7	32	EBCDIC	Reserved.
Sysplex-wide locking statistics summary section:				
1280	500 SMF2AGPA	4	binary	Number of record lock requests (obtain/alter/promote)
1284	504 SMF2AGPB	4	binary	Number of record lock requests that cause true contention.
1288	508 SMF2AGPC	4	binary	Number of record lock requests that cause false contention.
1292	50C SMF2AGPD	4	binary	Number of record lock release requests.
1296	510 SMF2AGPE	4	binary	Number of component_1 type lock requests.
1300	514 SMF2AGPF	4	binary	Number of component_1 type release lock requests.
1304	518 SMF42GUAA	4	binary	Accumulation of waiters for record lock.
1308	51C SMF42GUBA	4	binary	Number of record locks hashed to the same hash table entry.
1312	520 SMF2AGPH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
1316	524 SMF2AGPI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1320	528 SMF2AGPJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1324	52C SMF2AGPK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1328	530 SMF2AGPL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
1332	534 SMF2AGPM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.

Record type 42

Offsets	Name	Length	Format	Description
1336 538	SMF2AGPN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1340 53C	SMF2AGPO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1344 540	SMF2AGPP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1348 544	SMF2AGPQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1352 548	SMF2AGPR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
1356 54C	SMF2AGPS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1360 550	SMF2AGPT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1364 554	SMF2AGPU	4	binary	Number of component_2 locks that cause true contention.
1368 558	SMF2AGPV	4	binary	Number of component_2 locks that cause false contention.
1372 55C	SMF2AGPW	4	binary	Number of component_2 release lock requests.
1376 560	SMF42GUDA	4	binary	Accumulation of waiters for DIWA lock.
1380 564	SMF42GUEA	4	binary	Accumulation of waiters for UPGRADE lock.
1384 568	SMF42GUFA	4	binary	Accumulation of waiters for COMP2 lock.
1388 56C	SMF42GUGA	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1392 570	SMF42GSHA	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1396 574	SMF42GSIA	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
1400 578	SMF42GSJA	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1404 57C	SMF42GSKA	4	binary	Number of component class 4 (Index Record) release lock requests.
Sysplex-wide data set BMF LRU statistical section:				
1408 580	SMF2AGRA	4	binary	Number of RE-DO's.
1412 584	SMF2AGRB	4	binary	Number of recursive RE-DO's.
1416 588	SMF2AGRC	4	binary	Number of BMF writes.
1420 58C	SMF2AGRD	4	binary	Number of SCM read requests.
1424 590	SMF2AGRE	4	binary	Number of SCM read requests that encountered castout lock contention.
1428 594	SMF2AGRG	4	binary	RE-DO percentage.
1432 598	SMF2AGRH	4	binary	Recursive RE-DO percentage.
1436 59C	SMF2AGRI	4	binary	SCM castout lock percentage.
1440 5A0	SMF2AGRF	12	EBCDIC	Reserved.
1452 5AC	SMF2AGRJ	4	binary	Total number of CF read requests that encountered retries for cast out locks.
1456 5B0	SMF42GSAA	4	binary	Total number of CI splits for this interval (across the sysplex).
1460 5B4	SMF42GSBA	4	binary	Total number of CA splits for this interval (across the sysplex).
1464 5B8	SMF2AGRK	8	EBCDIC	Reserved.
1472 5C0	SMF2AGAQ	16	EBCDIC	Lock structure name.

Data Set, CF, SYS summary section for above the bar

Offsets	Name	Length	Format	Description								
0	0 SMF2AGBA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.								
4	4 SMF2AA05	12	EBCDIC	Reserved.								
16	10 SMF2AGBB	44	EBCDIC	Data set name.								
60	3C SMF2AA06	4	binary	Reserved.								
64	40 SMF2AGBC	44	EBCDIC	VSAM sphere name.								
108	6C SMF2AA07	4	binary	Reserved.								
112	70 SMF2AGBD	2	binary	Length of storage class name.								
114	72 SMF2AGBE	30	EBCDIC	Storage class name.								
144	90 SMF2AA08	2	binary	Length of cache set name.								
146	92 SMF2AGBF	30	EBCDIC	Cache set name.								
176	B0 SMF2AA12	2	binary	Reserved.								
178	B2 SMF2AGBG	30	EBCDIC	Cache structure name.								
208	D0 SMF2AGBH	8	EBCDIC	MVS system name.								
216	D8 SMF2AA11	8	EBCDIC	Reserved.								
224	E0 SMF2AGBI	4	binary	Indicator of component being processed <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Data component</td> </tr> <tr> <td>1</td> <td>Index component</td> </tr> <tr> <td>2-31</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Data component	1	Index component	2-31	Reserved.
Bit	Meaning when set											
0	Data component											
1	Index component											
2-31	Reserved.											
228	E4 SMF2AA09	12	EBCDIC	Indicates DFSMS greater than 4K CF caching status. Value is ALL, NONE, UPDATESONLY, DIRONLY or GT4KNOTACT.								
240	F0 SMF2AGBK	4	binary	Number of lock requests processed by this MVS system.								
244	F4 SMF2AGBL	4	binary	Number of true contention lock requests.								
248	F8 SMF2AGBM	4	binary	Number of false contention lock requests.								
252	FC SMF2AGZ8	2	binary	SMS DIRECT WEIGHT								
254	FE SMF2AGZ9	2	binary	SMS SEQUENTIAL WEIGHT								
256	100 SMF2AGBN	8	EBCDIC	In DFSMS 1.4, WLM SERV Class Name								
264	108 SMF2AGBO	8	EBCDIC	In DFSMS 1.4, WLM Report Class Name								
272	110 SMF2AGBP	16	EBCDIC	SMS data class name.								
Direct access section:												
288	120 SMF2AGIA	4	binary	Coupling facility cache partition number.								
292	124 SMF2AGIB	4	binary	Total number of direct access requests.								
296	128 SMF2AGIC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (pre-format)								
300	12C SMF2AGID	4	binary	Number of read requests - Consistent read protocol.								
304	130 SMF2AGIE	4	binary	Number of Write requests.								
308	134 SMF2AGIF	4	binary	Number of direct access BMF requests.								
312	138 SMF2AGIG	4	binary	Number of direct access BMF Read requests.								
316	13C SMF2AGIH	4	binary	Number of direct access BMF Write requests.								
320	140 SMF2AGII	4	binary	Number of direct access BMF read hits.								
324	144 SMF2AGIJ	4	binary	Number of direct access BMF valid read hits.								
328	148 SMF2AGIK	4	binary	Number of BMF false invalids.								
332	14C SMF2AGIL	4	binary	Number of direct access CF cache structure requests.								
336	150 SMF2AGIM	4	binary	Number of direct access CF cache structure Read requests.								

Record type 42

Offsets	Name	Length	Format	Description
340	154 SMF2AGIN	4	binary	Number of direct access CF cache structure Write requests.
344	158 SMF2AGIO	4	binary	Number of direct access CF cache structure read hits.
348	15C SMF2AGIP	4	binary	Number of direct access CF cache structure read castins.
352	160 SMF2AGIQ	8	binary	Number of direct access CF cache structure byte transferred.
360	168 SMF2AGIR	4	binary	Total number of real READ I/O direct requests to DASD.
364	16C SMF2AGIS	4	binary	Total number of real WRITE I/O direct requests to DASD.
368	170 SMF2AGIT	8	binary	Total number of bytes transferred to DASD for the read requests.
376	178 SMF2AGIU	8	binary	Total number of bytes transferred to DASD for the write requests.
384	180 SMF2AGIV	16	EBCDIC	Reserved.
400	190 SMF2AGIW	8	binary	Total amount of time, in milli seconds, for all the direct access requests in this interval.
408	198 SMF2AGIX	4	binary	Average response time for all of the requests in this interval (total time/number of requests).
412	19C SMF2AGIY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
416	1A0 SMF2AGIZ	8	EBCDIC	Reserved.
424	1A8 SMF2AGI7	32	EBCDIC	Reserved.
Direct access record merge (RE-DO) summary section:				
456	1C8 SMF2AGJA	4	binary	Coupling facility cache partition number.
460	1CC SMF2AGJB	4	binary	Total number of direct access requests. (RE-DO)
464	1D0 SMF2AGJC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
468	1D4 SMF2AGJD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
472	1D8 SMF2AGJE	4	binary	Number of Write requests. (RE-DO)
476	1DC SMF2AGJF	4	binary	Number of direct access BMF requests. (RE-DO)
480	1E0 SMF2AGJG	4	binary	Number of direct access BMF Read requests. (RE-DO)
484	1E4 SMF2AGJH	4	binary	Number of direct access BMF Write requests. (RE-DO)
488	1E8 SMF2AGJI	4	binary	Number of direct access BMF read hits. (RE-DO)
492	1EC SMF2AGJJ	4	binary	Number of direct access BMF valid read hits. (RE-DO)
496	1F0 SMF2AGJK	4	binary	Number of BMF false invalids. (RE-DO)
500	1F4 SMF2AGJL	4	binary	Number of direct access CF cache structure requests. (RE-DO)
504	1F8 SMF2AGJM	4	binary	Number of direct access CF cache structure Read requests. (RE-DO)
508	1FC SMF2AGJN	4	binary	Number of direct access CF cache structure Write requests. (RE-DO)
512	200 SMF2AGJO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
516	204 SMF2AGJP	4	binary	Number of direct access CF cache structure read castins.
520	208 SMF2AGJQ	8	binary	Number of direct access CF cache structure bytes transferred.
528	210 SMF2AGJR	4	binary	Total number of READ real I/O direct requests to DASD. (RE-DO)
532	214 SMF2AGJS	4	binary	Total number of WRITE real I/O direct requests to DASD. (RE-DO)
536	218 SMF2AGJT	8	binary	Total number of bytes transferred to DASD for the read requests.

Offsets	Name	Length	Format	Description
544	220 SMF2AGJU	8	binary	Total number of bytes transferred to DASD for the write requests.
552	228 SMF2AGJV	16	EBCDIC	Reserved.
568	238 SMF2AGJW	8	binary	Total amount of time, in milli seconds, for all direct access (RE-DO) requests in this interval.
576	240 SMF2AGJX	4	binary	Average response time for all of the direct access (RE-DO) requests in this interval (total time/number of requests).
580	244 SMF2AGJY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
584	248 SMF2AGJZ	8	EBCDIC	Reserved.
592	250 SMF2AGJ7	32	EBCDIC	Reserved.
Sequential access section:				
624	270 SMF2AGKA	4	binary	Coupling facility cache partition number.
628	274 SMF2AGKB	4	binary	Total number of sequential access requests.
632	278 SMF2AGKC	4	binary	Number of read requests - NRI protocol (No Read Integrity).
636	27C SMF2AGKD	4	binary	Number of read requests - Consistent read protocol.
640	280 SMF2AGKE	4	binary	Number of Write requests.
644	284 SMF2AGKF	4	binary	Number of direct access BMF requests.
648	288 SMF2AGKG	4	binary	Number of direct access BMF Read requests.
652	28C SMF2AGKH	4	binary	Number of direct access BMF Write requests.
656	290 SMF2AGKI	4	binary	Number of direct access BMF read hits.
660	294 SMF2AGKJ	4	binary	Number of direct access BMF valid read hits.
664	298 SMF2AGKK	4	binary	Number of BMF false invalids.
668	29C SMF2AGKL	4	binary	Number of direct access CF cache structure requests.
672	2A0 SMF2AGKM	4	binary	Number of direct access CF cache structure Read requests.
676	2A4 SMF2AGKN	4	binary	Number of direct access CF cache structure Write requests.
680	2A8 SMF2AGKO	4	binary	Number of direct access CF cache structure read hits.
684	2AC SMF2AGKP	4	binary	Number of direct access CF cache structure read castins.
688	2B0 SMF2AGKQ	8	binary	Number of direct access CF cache structure byte transferred.
696	2B8 SMF2AGKR	4	binary	Total number of READ real I/O sequential requests to DASD.
700	2BC SMF2AGKS	4	binary	Total number of WRITE real I/O sequential requests to DASD.
704	2C0 SMF2AGKT	8	binary	Total number of bytes transferred for all sequential access requests where the data was retrieved from DASD. (real I/O DASD)
712	2C8 SMF2AGKU	8	binary	Total number of bytes transferred for all sequential access requests where the data was retrieved from DASD or a coupling facility cache structure. (real I/O DASD)
720	2D0 SMF2AGKV	16	EBCDIC	Reserved.
736	2E0 SMF2AGKW	8	binary	Total amount of time, in milli seconds, for all sequential access requests in this interval.
744	2E8 SMF2AGKX	4	binary	Average response time for all of the sequential access requests in this interval (total time/number of requests).
748	2EC SMF2AGKY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K).
752	2F0 SMF2AGKZ	8	EBCDIC	Reserved.
760	2F8 SMF2AGK7	32	EBCDIC	Reserved.

Record type 42

Offsets	Name	Length	Format	Description
Sequential access record merge (RE-DO) summary section:				
792	318 SMF2AGLA	4	binary	Coupling facility cache partition number.
796	31C SMF2AGLB	4	binary	Total number of sequential access requests. (RE-DO)
800	320 SMF2AGLC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (RE-DO)
804	324 SMF2AGLD	4	binary	Number of read requests - Consistent read protocol. (RE-DO)
808	328 SMF2AGLE	4	binary	Number of Write requests. (RE-DO)
812	32C SMF2AGLF	4	binary	Number of direct access BMF requests. (RE-DO)
816	330 SMF2AGLG	4	binary	Number of direct access BMF Read requests.
820	334 SMF2AGLH	4	binary	Number of direct access BMF Write requests.
824	338 SMF2AGLI	4	binary	Number of direct access BMF read hits.
828	33C SMF2AGLJ	4	binary	Number of direct access BMF valid read hits.
832	340 SMF2AGLK	4	binary	Number of BMF false invalids. (RE-DO)
836	344 SMF2AGLL	4	binary	Number of direct access CF cache structure requests.
840	348 SMF2AGLM	4	binary	Number of direct access CF cache structure Read requests.
844	34C SMF2AGLN	4	binary	Number of direct access CF cache structure Write requests.
848	350 SMF2AGLO	4	binary	Number of direct access CF cache structure read hits. (RE-DO)
852	354 SMF2AGLP	4	binary	Number of direct access CF cache structure read castins.
856	358 SMF2AGLQ	8	binary	Number of direct access CF cache structure bytes transferred.
864	360 SMF2AGLR	4	binary	Total number of READ real I/O sequential requests to DASD. (RE-DO)
868	364 SMF2AGLS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (RE-DO)
872	368 SMF2AGLT	8	binary	Total number of bytes transferred to DASD for the read requests.
880	370 SMF2AGLU	8	binary	Total number of bytes transferred to DASD for the write requests.
888	378 SMF2AGLV	16	EBCDIC	Reserved.
904	388 SMF2AGLW	8	binary	Total amount of time, in milli seconds, for all sequential access (RE-DO) requests in this interval.
912	390 SMF2AGLX	4	binary	Average response time for all of the sequential access (RE-DO) requests in this interval (total time/number of requests).
916	394 SMF2AGLY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (RE-DO)
920	398 SMF2AGLZ	8	EBCDIC	Reserved.
928	3A0 SMF2AGL7	32	EBCDIC	Reserved.
Sequential access read ahead summary section:				
960	3C0 SMF2AGMA	4	binary	Coupling facility cache partition number.
964	3C4 SMF2AGMB	4	binary	Total number of sequential access requests. (read ahead)
968	3C8 SMF2AGMC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (read-ahead)
972	3CC SMF2AGMD	4	binary	Number of read requests - Consistent read protocol. (read-ahead)
976	3D0 SMF2AGME	4	binary	Number of Write requests. (read-ahead)
980	3D4 SMF2AGMF	4	binary	Number of direct access BMF requests. (read-ahead)

Offsets	Name	Length	Format	Description
984	3D8 SMF2AGMG	4	binary	Number of direct access BMF Read requests.
988	3DC SMF2AGMH	4	binary	Number of direct access BMF Write requests.
992	3E0 SMF2AGMI	4	binary	Number of direct access BMF read hits.
996	3E4 SMF2AGMJ	4	binary	Number of direct access BMF valid read hits.
1000	3E8 SMF2AGMK	4	binary	Number of BMF false invalids. (read-ahead)
1004	3EC SMF2AGML	4	binary	Number of direct access CF cache structure requests.
1008	3F0 SMF2AGMM	4	binary	Number of direct access CF cache structure Read requests.
1012	3F4 SMF2AGMN	4	binary	Number of direct access CF cache structure Write requests.
1016	3F8 SMF2AGMO	4	binary	Number of direct access CF cache structure read hits. (read-ahead)
1020	3FC SMF2AGMP	4	binary	Number of direct access CF cache structure read castins.
1024	400 SMF2AGMQ	8	binary	Number of direct access CF cache structure byte transferred.
1032	408 SMF2AGMR	4	binary	Total number of real READ I/O sequential requests to DASD. (read ahead)
1036	40C SMF2AGMS	4	binary	Total number of real WRITE I/O sequential requests to DASD. (read ahead)
1040	410 SMF2AGMT	8	binary	Total number of bytes transferred to DASD for the read requests.
1048	418 SMF2AGMU	8	binary	Total number of bytes transferred to DASD for the write requests.
1056	420 SMF2AGMV	16	EBCDIC	Reserved.
1072	430 SMF2AGMW	8	binary	Total amount of time, in milli seconds, for all sequential access (read ahead) requests in this interval.
1080	438 SMF2AGMX	4	binary	Average response time for all of the sequential access (read ahead) requests in this interval (total time/number of requests).
1084	43C SMF2AGMY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (read ahead)
1088	440 SMF2AGMZ	8	EBCDIC	Reserved.
1096	448 SMF2AGM7	32	EBCDIC	Reserved.
Sequential access pre-format summary section:				
1128	468 SMF2AGNA	4	binary	Coupling facility cache partition number.
1132	46C SMF2AGNB	4	binary	Total number of sequential access requests. (pre-format)
1136	470 SMF2AGNC	4	binary	Number of read requests - NRI protocol (No Read Integrity). (pre-format)
1140	474 SMF2AGND	4	binary	Number of read requests - Consistent read protocol. (pre-format)
1144	478 SMF2AGNE	4	binary	Number of Write requests. (pre-format)
1148	47C SMF2AGNF	4	binary	Number of direct access BMF requests. (pre-format)
1152	480 SMF2AGNG	4	binary	Number of direct access BMF Read requests.
1156	484 SMF2AGNH	4	binary	Number of direct access BMF Write requests.
1160	488 SMF2AGNI	4	binary	Number of direct access BMF read hits.
1164	48C SMF2AGNJ	4	binary	Number of direct access BMF valid read hits.
1168	490 SMF2AGNK	4	binary	Number of BMF false invalids. (pre-format)
1172	494 SMF2AGNL	4	binary	Number of direct access CF cache structure requests.
1176	498 SMF2AGNM	4	binary	Number of direct access CF cache structure Read requests.
1180	49C SMF2AGNN	4	binary	Number of direct access CF cache structure Write requests.
1184	4A0 SMF2AGNO	4	binary	Number of direct access CF cache structure read hits. (pre-format)

Record type 42

Offsets	Name	Length	Format	Description
1188	4A4 SMF2AGNP	4	binary	Number of direct access CF cache structure read castins.
1192	4A8 SMF2AGNQ	8	binary	Number of direct access CF cache structure byte transferred.
1200	4B0 SMF2AGNR	4	binary	Total number of READ real I/O sequential requests to DASD. (pre-format)
1204	4B4 SMF2AGNS	4	binary	Total number of WRITE real I/O sequential requests to DASD. (pre-format)
1208	4B8 SMF2AGNT	8	binary	Total number of bytes transferred to DASD for the read requests.
1216	4C0 SMF2AGNU	8	binary	Total number of bytes transferred to DASD for the write requests.
1224	4C8 SMF2AGNV	16	EBCDIC	Reserved.
1240	4D8 SMF2AGNW	8	binary	Total amount of time, in milli seconds, for all sequential access. (pre-format) requests in this interval.
1248	4E0 SMF2AGNX	4	binary	Average response time for all of the sequential access (pre-format) requests in this interval (total time/number of requests).
1252	4E4 SMF2AGNY	4	binary	Normalized response time for all of the requests in this interval (total time/number of bytes transferred/4K). (pre-format)
1256	4E8 SMF2AGNZ	8	EBCDIC	Reserved.
1264	4F0 SMF2AGN7	32	EBCDIC	Reserved.
1296	510 SMF2AGQA	4	binary	Number of record lock requests (obtain/alter/promote)
1300	514 SMF2AGQB	4	binary	Number of record lock requests that cause true contention.
1304	518 SMF2AGQC	4	binary	Number of record lock requests that cause false contention.
1308	51C SMF2AGQD	4	binary	Number of record lock release requests.
1312	520 SMF2AGQE	4	binary	Number of component_1 type lock requests.
1316	524 SMF2AGQF	4	binary	Number of component_1 type release lock requests.
1320	528 SMF42GVAA	4	binary	Accumulation of waiters for record lock.
1324	52C SMF42GVBA	4	binary	Number of record locks hashed to the same hash table entry.
1328	530 SMF2AGQH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
1332	534 SMF2AGQI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
1336	538 SMF2AGQJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
1340	53C SMF2AGQK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
1344	540 SMF2AGQL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
1348	544 SMF2AGQM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
1352	548 SMF2AGQN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
1356	54C SMF2AGQO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
1360	550 SMF2AGQP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
1364	554 SMF2AGQQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
1368	558 SMF2AGQR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.

Offsets	Name	Length	Format	Description
1372	55C SMF2AGQS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
1376	560 SMF2AGQT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
1380	564 SMF2AGQU	4	binary	Number of component_2 locks that cause true contention.
1384	568 SMF2AGQV	4	binary	Number of component_2 locks that cause false contention.
1388	56C SMF2AGQW	4	binary	Number of component_2 release lock requests.
1392	570 SMF42GVDA	4	binary	Accumulation of waiters for DIWA lock.
1396	574 SMF42GVEA	4	binary	Accumulation of waiters for UPGRADE lock.
1400	578 SMF42GVFA	4	binary	Accumulation of waiters for COMP2 lock.
1404	57C SMF42GVGA	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
1408	580 SMF42GTHA	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
1412	584 SMF42GTIA	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
1416	588 SMF42GTJA	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
1420	58C SMF42GTKA	4	binary	Number of component_1 class 4 (Index Record) release lock requests.
1424	590 SMF2AGRL	4	binary	Number of RE-DO's.
1428	594 SMF2AGRM	4	binary	Number of recursive RE-DO's.
1432	598 SMF2AGRN	4	binary	Number of BMF writes.
1436	59C SMF2AGRO	4	binary	Number of SCM read requests.
1440	5A0 SMF2AGRP	4	binary	Number of SCM read requests that encountered castout lock contention.
1444	5A4 SMF2AGRR	4	binary	RE-DO percentage.
1448	5A8 SMF2AGRS	4	binary	Recursive RE-DO percentage.
1452	5AC SMF2AGRT	4	binary	SCM castout lock percentage.
1456	5B0 SMF2AGRQ	12	EBCDIC	Reserved.
1468	5BC SMF2AGRU	4	binary	Total number of CF read requests that encountered retries for cast out locks.
1472	5C0 SMF42GTAA	4	binary	Total number of CI splits for this interval.
1476	5C4 SMF42GTBA	4	binary	Total number of CA splits for this interval.
1480	5C8 SMF2AGRV	8	EBCDIC	Reserved.
1488	5D0 SMF2AGBQ	16	EBCDIC	Lock structure name.

Subtype 17 — VSAM RLS Coupling Facility Lock Structure Usage

MVS system CF lock structure activity totals section

Offsets	Name	Length	Format	Description
0	0 SMF42HAA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF42H00	12	EBCDIC	Reserved.
16	10 SMF42HAB	16	EBCDIC	DFSMS lock table name.
32	20 SMF42H01	16	EBCDIC	Reserved.
48	30 SMF42HAC	4	binary	Reserved.

Record type 42

Offsets	Name	Length	Format	Description
52 34	SMF42HAD	4	binary	Reserved.
56 38	SMF42HAE	4	binary	Reserved.
60 3C	SMF42HAF	4	binary	Reserved.
64 40	SMF42HAG	32	EBCDIC	Reserved.
96 60	SMF42HAH	4	binary	Reserved.
100 64	SMF42HAI	4	binary	Reserved.
104 68	SMF42HAJ	4	binary	Reserved.
108 6C	SMF42HAK	4	binary	Reserved.
112 70	SMF42HAL	8	EBCDIC	Reserved.
120 78	SMF42HUA	4	binary	Accumulation of waiters for record lock.
124 7C	SMF42HUB	4	binary	Number of record locks hashed to the same hash table entry.
128 80	SMF42HUD	4	binary	Accumulation of waiters for DIWA lock.
132 84	SMF42HUE	4	binary	Accumulation of waiters for UPGRADE lock.
136 88	SMF42HUF	4	binary	Accumulation of waiters for COMP2 lock.
140 8C	SMF42HUG	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
144 90	SMF42HCA	4	binary	Number of record lock requests (obtain/alter/promote).
148 94	SMF42HCB	4	binary	Number of record lock requests that cause true contention.
152 98	SMF42HCC	4	binary	Number of record lock requests that cause false contention.
156 9C	SMF42HCD	4	binary	Number of record lock release requests.
160 A0	SMF42HCE	4	binary	Number of component_1 type lock requests.
164 A4	SMF42HCF	4	binary	Number of component_1 type release lock requests.
168 A8	SMF42HCG	8	EBCDIC	Reserved.
176 B0	SMF42HCH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
180 B4	SMF42HCI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
184 B8	SMF42HCJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
188 BC	SMF42HCK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
192 C0	SMF42HCL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
196 C4	SMF42HCM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
200 C8	SMF42HCN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
204 CC	SMF42HCO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
208 D0	SMF42HCP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
212 D4	SMF42HCQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
216 D8	SMF42HCR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
220 DC	SMF42HCS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
224 E0	SMF42HCT	4	binary	Number of component_2 lock requests (obtain/alter/promote).

Offsets	Name	Length	Format	Description
228	E4 SMF42HCU	4	binary	Number of component_2 locks that cause true contention.
232	E8 SMF42HCV	4	binary	Number of component_2 locks that cause false contention.
236	EC SMF42HCW	4	binary	Number of component_2 release lock requests.
240	F0 SMF42HCX	4	binary	Number of special lock requests.
244	F4 SMF42HCY	12	EBCDIC	Reserved.
256	100 SMF42HCZ	16	EBCDIC	Reserved.
272	110 SMF42HEH	4	binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote).
276	114 SMF42HEI	4	binary	Number of component_1 class 4 (Index Record) locks that cause true contention.
280	118 SMF42HEJ	4	binary	Number of component_1 class 4 (Index Record) locks that cause false contention.
284	11C SMF42HEK	4	binary	Number of component_1 class 4 (Index Record) release lock requests.

Lock structure summary section

Offsets	Name	Length	Format	Description
0	0 SMF42HBA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF42H02	12	EBCDIC	Reserved.
16	10 SMF42HBB	16	EBCDIC	DFSMS lock table name.
32	20 SMF42HBC	8	EBCDIC	MVS system name.
40	28 SMF42H03	8	EBCDIC	Reserved.
48	30 SMF42HBD	4	binary	Reserved.
52	34 SMF42HBE	4	binary	Reserved.
56	38 SMF42HBF	4	binary	Reserved.
60	3C SMF42HBG	4	binary	Reserved.
64	40 SMF42HBH	32	EBCDIC	Reserved.
96	60 SMF42HBI	4	binary	Reserved.
100	64 SMF42HBJ	4	binary	Reserved.
104	68 SMF42HBK	4	binary	Reserved.
108	6C SMF42HBL	4	binary	Reserved.
112	70 SMF42HBM	8	EBCDIC	Reserved.
120	78 SMF42HVA	4	binary	Accumulation of waiters for record lock.
124	7C SMF42HVB	4	binary	Number of record locks hashed to the same hash table entry.
128	80 SMF42HVC	4	binary	Accumulation of waiters for DIWA lock.
132	84 SMF42HVD	4	binary	Accumulation of waiters for UPGRADE lock.
136	88 SMF42HVF	4	binary	Accumulation of waiters for COMP2 lock.
140	8C SMF42HVG	4	binary	Number of locks (DIWA, UPGRADE, and COMP2) hashed to the same hash table entry.
144	90 SMF42HDA	4	binary	Number of record lock requests (obtain/alter/promote)
148	94 SMF42HDB	4	binary	Number of record lock requests that cause true contention.
152	98 SMF42HDC	4	binary	Number of record lock requests that cause false contention.
156	9C SMF42HDD	4	binary	Number of record lock release requests.
160	A0 SMF42HDE	4	binary	Number of component_1 type lock requests.
164	A4 SMF42HDF	4	binary	Number of component_1 type release lock requests.

Record type 42

Offsets	Name	Length	Format	Description
168	A8 SMF42HDG	8	EBCDIC	Reserved.
176	B0 SMF42HDH	4	binary	Number of component_1 class_1 (DIWA) locks (obtain/alter/promote).
180	B4 SMF42HDI	4	binary	Number of component_1 class_1 (DIWA) locks that cause true contention.
184	B8 SMF42HDJ	4	binary	Number of component_1 class_1 (DIWA) locks that cause false contention.
188	BC SMF42HDK	4	binary	Number of component_1 class_1 (DIWA) release lock requests.
192	C0 SMF42HDL	4	binary	Number of component_1 class_2 (UPGRADE) locks (obtain/alter/promote).
196	C4 SMF42HDM	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause true contention.
200	C8 SMF42HDN	4	binary	Number of component_1 class_2 (UPGRADE) locks that cause false contention.
204	CC SMF42HDO	4	binary	Number of component_1 class_2 (UPGRADE) release lock requests.
208	D0 SMF42HDP	4	binary	Number of component_1 class_3 (PREFORMAT) locks (obtain/alter/promote).
212	D4 SMF42HDQ	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause true contention.
216	D8 SMF42HDR	4	binary	Number of component_1 class_3 (PREFORMAT) locks that cause false contention.
220	DC SMF42HDS	4	binary	Number of component_1 class_3 (PREFORMAT) release lock requests.
224	E0 SMF42HDT	4	binary	Number of component_2 lock requests (obtain/alter/promote).
228	E4 SMF42HDU	4	binary	Number of component_2 locks that cause true contention.
232	E8 SMF42HDV	4	binary	Number of component_2 locks that cause false contention.
236	EC SMF42HDW	4	binary	Number of component_2 release lock requests.
240	F0 SMF42HDX	4	binary	Number of special lock requests.
244	F4 SMF42HDY	12	EBCDIC	Reserved.
256	100 SMF42HDZ	32	EBCDIC	Reserved.
272	110 SMF42HFH	4	Binary	Number of component_1 class 4 (Index Record) locks (obtain/alter/promote)
276	114 SMF42HFI	4	Binary	Number of component_1 class 4 (Index Record) locks that cause true contention
280	118 SMF42HFJ	4	Binary	Number of component_1 class 4 (Index Record) locks that cause false contention
284	11C SMF42HFK	4	Binary	Number of component_1 class 4 (Index Record) release lock requests

Subtype 18 — VSAM RLS CF cache partition usage

For additional information about the fields in this subtype, see the “IXLCACHE Storage Class Statistics Description” in *z/OS MVS Programming: Sysplex Services Guide*.

CF cache partition activity totals section

Offsets	Name	Length	Format	Description
0	0 SMF42IAA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.

Offsets	Name	Length	Format	Description
4	4 SMF42I00	12	EBCDIC	Reserved.
16	10 SMF42IAB	32	EBCDIC	Reserved.
48	30 SMF42IBG	16	EBCDIC	Partition type (sequential, direct, or combined).
64	40 SMF42IBH	4	binary	DFSMS specified cache weight.
68	44 SMF42I01	12	EBCDIC	Partition name.
80	50 SMF42IAD	4	binary	Coupling facility cache partition number.
84	54 SMF42IAE	4	binary	Status conditions.
88	58 SMF42IAF	4	binary	Read-hit counter.
92	5C SMF42IAG	4	binary	Read-miss directory-hit counter.
96	60 SMF42IAH	4	binary	Read-miss assignment-suppressed counter.
100	64 SMF42IAI	4	binary	Read-miss name-assigned counter.
104	68 SMF42IAJ	4	binary	Read-miss target storage class full counter.
108	6C SMF42IAK	4	binary	Write-hit change bit 0 counter.
112	70 SMF42IAL	4	binary	Write-hit change bit 1 counter.
116	74 SMF42IAM	4	binary	Write-miss not-registered counter.
120	78 SMF42IAN	4	binary	Write-miss invalid state counter.
124	7C SMF42IAO	4	binary	Write-miss target storage class full counter.
128	80 SMF42IAP	4	binary	Directory entry reclaim counter.
132	84 SMF42IAQ	4	binary	Data table entry reclaim counter.
136	88 SMF42IAR	4	binary	Cross invalidate (XI) for directory reclaim counter.
140	8C SMF42IAS	4	binary	XI for write counter.
144	90 SMF42IAT	4	binary	XI for name invalidation counter.
148	94 SMF42IAU	4	binary	XI for complement invalidation counter.
152	98 SMF42IAV	4	binary	Cast-out counter.
156	9C SMF42IAW	4	binary	Reference signal miss counter.
160	A0 SMF42IAX	4	binary	Target storage class full counter.
164	A4 SMF42IAY	4	binary	Directory entry counter.
168	A8 SMF42IAZ	4	binary	Data area element counter.
172	AC SMF42IBA	4	binary	Total changed counter.
176	B0 SMF42IBB	4	binary	Data area counter.
180	B4 SMF42IBC	4	binary	Completed reference lists counter.
184	B8 SMF42IBD	4	binary	Partially completed reference lists counter.
188	BC SMF42IBE	4	binary	XI for local cache vector entry replacement counter.
192	C0 SMF42IBF	4	binary	Write unchanged with XI counter.

CF cache partition summary section

Offsets	Name	Length	Format	Description
0	0 SMF42ICA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF42I02	12	EBCDIC	Reserved.
16	10 SMF42I04	2	binary	Reserved.
18	12 SMF42ICB	30	EBCDIC	DFSMS cache structure name.
48	30 SMF42IDG	16	EBCDIC	Partition type (sequential, direct, or combined).
64	40 SMF42IDH	4	binary	DFSMS specified cache weight.
68	44 SMF42I03	12	EBCDIC	Reserved.

Record type 42

Offsets	Name	Length	Format	Description
80	50 SMF42ICD	4	binary	Coupling facility cache partition number.
84	54 SMF42ICE	4	binary	Status conditions.
88	58 SMF42ICF	4	binary	Read-hit counter.
92	5C SMF42ICG	4	binary	Read-miss directory-hit counter.
96	60 SMF42ICH	4	binary	Read-miss assignment suppressed counter.
100	64 SMF42ICI	4	binary	Read-miss name assigned counter.
104	68 SMF42ICJ	4	binary	Read-miss target storage class full counter.
108	6C SMF42ICK	4	binary	Write-hit change bit 0 counter.
112	70 SMF42ICL	4	binary	Write-hit change bit 1 counter.
116	74 SMF42ICM	4	binary	Write-miss not-registered counter.
120	78 SMF42ICN	4	binary	Write-miss invalid state counter.
124	7C SMF42ICO	4	binary	Write-miss target storage class full counter.
128	80 SMF42ICP	4	binary	Directory entry reclaim counter.
132	84 SMF42ICQ	4	binary	Data table entry reclaim counter.
136	88 SMF42ICR	4	binary	XI for directory reclaim counter.
140	8C SMF42ICS	4	binary	XI for write counter.
144	90 SMF42ICT	4	binary	XI for name invalidation counter.
148	94 SMF42ICU	4	binary	XI for complement invalidation counter.
152	98 SMF42ICV	4	binary	Cast-out counter.
156	9C SMF42ICW	4	binary	Reference signal miss counter.
160	A0 SMF42ICX	4	binary	Target storage class full counter.
164	A4 SMF42ICY	4	binary	Directory entry counter.
168	A8 SMF42ICZ	4	binary	Data area element counter.
172	AC SMF42IDA	4	binary	Total changed counter.
176	B0 SMF42IDB	4	binary	Data area counter.
180	B4 SMF42IDC	4	binary	Completed reference lists counter.
184	B8 SMF42IDD	4	binary	Partially completed reference lists counter.
188	BC SMF42IDE	4	binary	XI for local cache vector entry replacement counter.
192	C0 SMF42IDF	4	binary	Write unchanged with XI counter.

CF Cache partition summary section, directory/element ratio data

Offsets	Name	Length	Format	Description
0	0 SMF42IEA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF42I06	12	EBCDIC	Reserved.
16	10 SMF42I07	2	EBCDIC	Reserved.
18	12 SMF42IEB	30	EBCDIC	DFSMS cache structure name.
48	30 SMF42IEC	4	binary	Number of changes to directory portion of directory/element ratio.
52	34 SMF42IED	4	binary	Number of changes to element portion of directory/element ratio.
56	38 SMF42IEE	4	binary	Low ratio value for directory portion of directory/element ratio.
60	3C SMF42IEF	4	binary	Low ratio value for element portion of directory/element ratio.
64	40 SMF42IEG	4	binary	High ratio value for directory portion of directory/element ratio.

Offsets	Name	Length	Format	Description
68 44	SMF42IEH	4	binary	High ratio value for element portion of directory/element ratio.
72 48	SMF42IEI	4	binary	Current ratio value for directory portion of directory/element ratio.
76 4C	SMF42IEJ	4	binary	Current ratio value for element portion of directory/element ratio.

Subtype 19 — VSAM RLS local buffer manager LRU statistics summary

Sysplex totals local buffer manager LRU statistics summary for below the bar

Offsets	Name	Length	Format	Description
0 0	SMF42JNA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4 4	SMF42J00	12	EBCDIC	Reserved.
16 10	SMF42JNB	16	EBCDIC	Reserved.
32 20	SMF42JND	8	EBCDIC	Reserved.
40 28	SMF42JNE	8	EBCDIC	Average CPU time for all systems in sysplex (in milli-seconds).
48 30	SMF42JNF	8	EBCDIC	Total CPU time for this record (in milli-seconds).
56 38	SMF42JN0	4	EBCDIC	Reserved.
60 3C	SMF42JN7	4	binary	Total number of write requests (sysplex totals).
64 40	SMF42JNG	4	binary	Average number of Buffer Manager LRU intervals processed (sysplex totals).
68 44	SMF42JNH	4	binary	Total number of Buffer Manager LRU intervals processed (across sysplex).
72 48	SMF42JNI	4	binary	Average number of Buffer Manager LRU intervals where BMF was over the goal, and normal algorithms were bypassed to reclaim buffers.
76 4C	SMF42JNJ	4	binary	Total number of Buffer Manager LRU intervals where BMF was over the goal, and normal algorithms were bypassed to reclaim buffers (across sysplex).
80 50	SMF42JNK	4	binary	Average number of times that BMF was called in this interval.
84 54	SMF42JNL	4	binary	Total number of times that BMF was called in this interval (across sysplex).
88 58	SMF42JNM	4	binary	Average number of Buffer Manager 'hits' during this interval.
92 5C	SMF42JNN	4	binary	Total number of Buffer Manager 'hits' during this interval.
96 60	SMF42JNO	4	binary	Buffer Manager 'hits' current percentage during this interval.
100 64	SMF42JNP	4	binary	Buffer Manager 'hits' low percentage during this interval.
104 68	SMF42JNQ	4	binary	Buffer Manager 'hits' high percentage during this interval.
108 6C	SMF42JNR	4	binary	Buffer Manager average 'hits' during this interval.
112 70	SMF42JNS	4	binary	Average Sysplex Cache manager number of 'hits' during this interval.
116 74	SMF42JNT	4	binary	Total Sysplex Cache manager number of 'hits' during this interval.
120 78	SMF42JNU	4	binary	Sysplex Cache manager number of 'hits' current percentage during this interval.

Record type 42

Offsets	Name	Length	Format	Description
124	7C SMF42JNV	4	binary	Sysplex Cache manager number of 'hits' low percentage during this interval.
128	80 SMF42JNW	4	binary	Sysplex Cache manager number of 'hits' high percentage during this interval.
132	84 SMF42JNX	4	binary	Sysplex Cache manager number of 'hits' average percentage during this interval.
136	88 SMF42JNY	4	binary	Average DASD number of 'hits' during this interval.
140	8C SMF42JNZ	4	binary	Total DASD number of 'hits' during this interval.
144	90 SMF42JOA	4	binary	DASD 'hits' current percentage during this interval.
148	94 SMF42JOB	4	binary	DASD 'hits' low percentage during this interval.
152	98 SMF42JOC	4	binary	DASD 'hits' high percentage during this interval.
156	9C SMF42JOD	4	binary	DASD average 'hits' during this interval.
160	A0 SMF42JOE	512	EBCDIC	Sysplex Average Buffer Pool Count array. This is a 16 bit entry array with each entry 32 bytes long. The first entry is the 2K storage pool, the second entry is for the 4K storage pool... See "Sysplex average buffer pool count array for below the bar" on page 432.
672	2A0 SMF42JRI	512	EBCDIC	Sysplex Wide Totals Buffer Pool Count array. This is a 16 bit entry array with each entry 32 bytes long. The first entry is the 2K storage pool, the second entry is for the 4K storage pool... See "Sysplex wide totals buffer pool count array for below the bar" on page 432.
1184	4A0 SMF42JON	4	binary	Average buffer size goal (in megabytes) - low value.
1188	4A4 SMF42JOO	4	binary	Total Buffer size goal (in megabytes) - Low value.
1192	4A8 SMF42JOP	4	binary	Average Buffer size goal (in megabytes) - high value.
1196	4AC SMF42JOQ	4	binary	Total Buffer size goal (in megabytes) - high value.
1200	4B0 SMF42JOR	4	binary	Average Buffer size goal (in megabytes) - current value.
1204	4B4 SMF42JOS	4	binary	Total Buffer size goal (in megabytes) - current value.
1208	4B8 SMF42JOT	4	binary	Total Buffer size goal (in megabytes) - average value.
1212	4BC SMF42JOU	4	binary	Reserved.
1216	4C0 SMF42JOV	4	binary	Average Buffer size Calculated (in megabytes) - low value.
1220	4C4 SMF42JOW	4	binary	Total Buffer size Calculated (in megabytes) - low value.
1224	4C8 SMF42JOX	4	binary	Average Buffer size Calculated (in megabytes) - high value.
1228	4CC SMF42JOY	4	binary	Total Buffer size Calculated (in megabytes) - high value.
1232	4D0 SMF42JOZ	4	binary	Average Buffer size Calculated (in megabytes) - current value.
1236	4D4 SMF42JRA	4	binary	Total Buffer size Calculated (in megabytes) - current value.
1240	4D8 SMF42JRB	4	binary	Total Buffer size Calculated (in megabytes) - Average value.
1244	4DC SMF42JRC	4	binary	Total number of CF read requests that encountered retries for cast out locks for this interval (across the sysplex).
1248	4E0 SMF42JRD	8	EBCDIC	Reserved.
1252	4E4 SMF42JRE	64	EBCDIC	Average calculated megabytes distribution array. This is a 16 entry array which contains the number of times the calculated value occurred within a 100MB span. Entry 1 = 0-99m, entry 2 = 100-199m,... entry 16 > 150m. See "Average buffer manager calculated distribution array for below the bar" on page 432.
1316	524 SMF42JRG	64	EBCDIC	Total calculated megabytes distribution array. This is a 16 entry array which contains the number of times the calculated value occurred within a 100MB span. Entry 1 = 0-99m, entry 2 = 100-199m,... entry 16 > 150m. See "Total buffer manager calculated distribution array for below the bar" on page 432.

Offsets	Name	Length	Format	Description
1380	564 SMF42JTA	4	binary	Average number of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1384	568 SMF42JTB	4	binary	Total number of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1388	56C SMF42JTC	4	binary	Average number of SCM read requests during this interval (across the sysplex).
1392	570 SMF42JTD	4	binary	Total number of SCM read requests during this interval (across the sysplex).
1396	574 SMF42JTE	4	binary	Current percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1400	578 SMF42JTF	4	binary	Low percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1404	57C SMF42JTG	4	binary	High percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1408	580 SMF42JTH	4	binary	Average percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1412	584 SMF42JTI	4	binary	Average number of RE-DO's during this interval (across the sysplex).
1416	588 SMF42JTI	4	binary	Total number of RE-DO's during this interval (across the sysplex).
1420	58C SMF42JTK	4	binary	Average number of recursive RE-DO's during this interval (across the sysplex).
1424	590 SMF42JTL	4	binary	Total number of recursive redo during this interval (across the sysplex).
1428	594 SMF42JTM	4	binary	Current percentage of RE-DO's during this interval (across the sysplex).
1432	598 SMF42JTN	4	binary	Low percentage of RE-DO's during this interval (across the sysplex).
1436	59C SMF42JTO	4	binary	High percentage of RE-DO's during this interval (across the sysplex).
1440	5A0 SMF42JTP	4	binary	Average percentage of RE-DO's during this interval (across the sysplex).
1444	5A4 SMF42JTQ	4	binary	Current percentage of Recursive RE-DO's during this interval (across the sysplex).
1448	5A8 SMF42JTR	4	binary	Low percentage of Recursive RE-DO's during this interval (across the sysplex).
1452	5AC SMF42JTS	4	binary	High percentage of Recursive RE-DO's during this interval (across the sysplex).
1456	5B0 SMF42JTT	4	binary	Average percentage of Recursive RE-DO's during this interval (across the sysplex).
1460	5B4 SMF42JUA	4	binary	Average number of buffer manager LRU intervals processed, where BMF was over the goal accelerated the aging, but did not go into panic mode (across the sysplex).
1464	5B8 SMF42JUB	4	binary	Total number of buffer manager LRU intervals processed, where BMF was over the goal accelerated the aging, but did not go into panic mode (across the sysplex).

Sysplex average buffer pool count array for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42JOF	4	binary	Average low value of the number of BMF buffers for this pool during this interval.
4	4 SMF42JOG	4	binary	Average high value of the number of BMF buffers for this pool during this interval.
8	8 SMF42JOH	4	binary	Average current value of the number of BMF buffers for this pool during this interval.
12	C SMF42JOI	4	binary	Reserved.
16	10 SMF42JOJ	4	binary	Average low value of the number of extents for this pool during this interval.
20	14 SMF42JOK	4	binary	Average high value of the number of extents for this pool during this interval.
24	18 SMF42JOL	4	binary	Average current value of the number of extents for this pool during this interval.
28	1C SMF42JOM	4	binary	Reserved.

Sysplex wide totals buffer pool count array for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42JRJ	4	binary	Low value of the number of BMF buffers for this pool during this interval.
4	4 SMF42JRK	4	binary	High value of the number of BMF buffers for this pool during this interval.
8	8 SMF42JRL	4	binary	Value of the number of BMF buffers for this pool during this interval.
12	C SMF42JRM	4	binary	Reserved.
16	10 SMF42JRN	4	binary	Low value of the number of extents for this pool during this interval.
20	14 SMF42JRO	4	binary	High value of the number of extents for this pool during this interval.
24	18 SMF42JRP	4	binary	Current value of the number of extents for this pool during this interval.
28	1C SMF42JRQ	4	binary	Reserved.

Average buffer manager calculated distribution array for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42JRF	4	binary	Average number of times calculated value was within this range (across the sysplex).

Total buffer manager calculated distribution array for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42JRH	4	binary	Total number of times calculated value was within this range (across the sysplex).

System local buffer manager LRU statistics summary for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42JPA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF42J01	12	EBCDIC	Reserved.
16	10 SMF42JPB	8	EBCDIC	MVS system name.
24	18 SMF42JPC	8	EBCDIC	Reserved.
32	20 SMF42JPD	8	EBCDIC	Reserved.
40	28 SMF42JPE	8	EBCDIC	Average CPU time for all systems in sysplex (in milli-seconds).
48	30 SMF42JPF	8	EBCDIC	Total CPU time for this record (in milli-seconds).
56	38 SMF42JP1	12	EBCDIC	Reserved.
68	44 SMF42JP6	4	binary	Total number of write requests.
72	48 SMF42JPG	4	binary	Number of Buffer Manager LRU intervals processed.
76	4C SMF42JPH	4	binary	Number of Buffer Manager LRU intervals where BMF was over the goal, and normal algorithms were bypassed to reclaim buffers
80	50 SMF42JPI	4	binary	Total number of times that BMF was called in this interval.
84	54 SMF42JP2	4	binary	Number of buffer manager LRU intervals processed, where BMF was over the goal, accelerated the aging, but did not go into panic mode.
88	58 SMF42JPJ	4	binary	Buffer Manager number of 'hits' during this interval.
92	5C SMF42JPK	4	binary	Buffer Manager number of 'hits' current percentage during this interval.
96	60 SMF42JPL	4	binary	Buffer Manager number of 'hits' low percentage during this interval.
100	64 SMF42JPM	4	binary	Buffer Manager number of 'hits' high percentage during this interval.
104	68 SMF42JPN	4	binary	Buffer Manager average 'hits' during this interval.
108	6C SMF42JP3	12	EBCDIC	Reserved.
120	78 SMF42JPO	4	binary	Sysplex Cache manager number of 'hits' during this interval.
124	7C SMF42JPP	4	binary	Sysplex Cache manager number of 'hits' current percentage during this interval.
128	80 SMF42JPQ	4	binary	Sysplex Cache manager number of 'hits' low percentage during this interval.
132	84 SMF42JPR	4	binary	Sysplex Cache manager number of 'hits' high percentage during this interval.
136	88 SMF42JPS	4	binary	Sysplex Cache manager number of 'hits' average percentage during this interval.
140	8C SMF42JP4	12	EBCDIC	Reserved.
152	98 SMF42JPT	4	binary	DASD number of 'hits' during this interval.
156	9C SMF42JPU	4	binary	DASD 'hits' current percentage during this interval.
160	A0 SMF42JPV	4	binary	DASD 'hits' low percentage during this interval.
164	A4 SMF42JPW	4	binary	DASD 'hits' high percentage during this interval.
168	A8 SMF42JPX	4	binary	DASD average 'hits' during this interval.
172	AC SMF42JP5	12	EBCDIC	Reserved.

Record type 42

Offsets	Name	Length	Format	Description
184	B8 SMF42JPY	512	EBCDIC	Sysplex Average Buffer Pool Count array. This is a 16 bit entry array with each entry 32 bytes long. The first entry is the 2K storage pool, the second entry is for the 4K storage pool... See "Sysplex average buffer pool count array for below the bar."
696	2B8 SMF42JQG	4	binary	Buffer size goal (in megabytes) - low value.
700	2BC SMF42JQH	4	binary	Buffer size goal (in megabytes) - high value.
704	2C0 SMF42JQI	4	binary	Buffer size goal (in megabytes) - current value.
708	2C4 SMF42JQJ	4	binary	Buffer size goal (in megabytes) - average value.
712	2C8 SMF42JQK	4	binary	Buffer size Calculated (in megabytes) - low value.
716	2CC SMF42JQL	4	binary	Buffer size Calculated (in megabytes) - high value.
720	2D0 SMF42JQM	4	binary	Buffer size Calculated (in megabytes) - current value.
724	2D4 SMF42JQN	4	binary	Buffer size Calculated (in megabytes) - Average value.
728	2D8 SMF42JQ2	4	binary	Total number of CF read requests that encountered retries for cast out locks for this interval.
728	2D8 SMF42JQ3	4	EBCDIC	Reserved.
736	2E0 SMF42JQO	64	EBCDIC	Calculated megabytes distribution array. This is a 16 entry array which contains the number of times the calculated value occurred within a 100MB span. Entry 1 = 0-99m, entry 2 = 100-199m,... entry 16 > 150m. See "Calculated megabytes distribution array for below the bar" on page 435
800	320 SMF42JSA	4	binary	Number of SCM read requests which encountered castout contention during this interval.
804	324 SMF42JSB	4	binary	Number of SCM read requests during this interval.
808	328 SMF42JSC	4	binary	Current percentage of SCM read requests which encountered cast contention during this interval. (Value is for the last LRU cycle before the SMF record was processed.)
812	32C SMF42JSD	4	binary	Low percentage during this interval for SMF42JSC.
816	330 SMF42JSE	4	binary	High percentage during this interval for SMF42JSC.
820	334 SMF42JSF	4	binary	Average percentage during this interval for SMF42JSC.
824	338 SMF42JSG	4	binary	Number of RE-DO's during this interval.
828	33C SMF42JSH	4	binary	Current percentage of RE-DO's during this interval. (Value is for the last LRU cycle before the SMF record was processed.)
832	340 SMF42JSI	4	binary	Low percentage during this interval for SMF42JSH.
836	344 SMF42JSJ	4	binary	High percentage during this interval for SMF42JSH.
840	348 SMF42JSK	4	binary	Average percentage during this interval for SMF42JSH.
844	34C SMF42JSL	4	binary	Number of recursive RE-DO's during this interval.
848	350 SMF42JSM	4	binary	Current percentage of recursive RE-DO's during this interval. (Value is for the last LRU cycle before the SMF record was processed.)
852	354 SMF42JSN	4	binary	Low percentage during this interval for SMF42JSM.
856	358 SMF42JSO	4	binary	High percentage during this interval for SMF42JSM.
860	35C SMF42JSP	4	binary	Average percentage during this interval for SMF42JSM.

Sysplex average buffer pool count array for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42JPZ	4	binary	Low value of the number of BMF buffers for this pool during this interval.

Offsets	Name	Length	Format	Description
4	4 SMF42JQA	4	binary	High value of the number of BMF buffers for this pool during this interval.
8	8 SMF42JQB	4	binary	Current value of the number of BMF buffers for this pool during this interval.
12	C SMF42JQ6	4	binary	Reserved.
16	10 SMF42JQC	4	binary	Low value of the number of extents for this pool during this interval.
20	14 SMF42JQD	4	binary	High value of the number of extents for this pool during this interval.
24	18 SMF42JQF	4	binary	Current value of the number of extents for this pool during this interval.
28	1C SMF42JQ7	4	binary	Reserved.

Calculated megabytes distribution array for below the bar

Offsets	Name	Length	Format	Description
0	0 SMF42JQP	4	binary	For a single system, number of times calculated value was within this range.

Sysplex totals local buffer manager lru statistics summary for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJNA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF2AJ00	12	EBCDIC	Reserved.
16	10 SMF2AJNB	16	EBCDIC	Reserved.
32	20 SMF2AJND	8	EBCDIC	Reserved.
40	28 SMF2AJNE	8	EBCDIC	Average CPU time for all systems in sysplex (in milli-seconds).
48	30 SMF2AJNF	8	EBCDIC	Total CPU time for this record (in milli-seconds).
56	38 SMF2AJN0	4	EBCDIC	Reserved.
60	3C SMF2AJN7	4	binary	Total number of write requests (sysplex totals).
64	40 SMF2AJNG	4	binary	Average number of Buffer Manager LRU intervals processed (sysplex totals).
68	44 SMF2AJNH	4	binary	Total number of Buffer Manager LRU intervals processed (across sysplex).
72	48 SMF2AJNI	4	binary	Average number of Buffer Manager LRU intervals where BMF was over the goal, and normal algorithms were bypassed to reclaim buffers.
76	4C SMF2AJNJ	4	binary	Total number of Buffer Manager LRU intervals where BMF was over the goal, and normal algorithms were bypassed to reclaim buffers (across sysplex).
80	50 SMF2AJNK	4	binary	Average number of times that BMF was called in this interval.
84	54 SMF2AJNL	4	binary	Total number of times that BMF was called in this interval (across sysplex).
88	58 SMF2AJNM	4	binary	Average number of Buffer Manager 'hits' during this interval.
92	5C SMF2AJNN	4	binary	Total number of Buffer Manager 'hits' during this interval.
96	60 SMF2AJNO	4	binary	Buffer Manager 'hits' current percentage during this interval.

Record type 42

Offsets	Name	Length	Format	Description
100	64 SMF2AJNP	4	binary	Buffer Manager 'hits' low percentage during this interval.
104	68 SMF2AJNQ	4	binary	Buffer Manager 'hits' high percentage during this interval.
108	6C SMF2AJNR	4	binary	Buffer Manager average 'hits' during this interval.
112	70 SMF2AJNS	4	binary	Average Sysplex Cache manager number of 'hits' during this interval.
116	74 SMF2AJNT	4	binary	Total Sysplex Cache manager number of 'hits' during this interval.
120	78 SMF2AJNU	4	binary	Sysplex Cache manager number of 'hits' current percentage during this interval.
124	7C SMF2AJNV	4	binary	Sysplex Cache manager number of 'hits' low percentage during this interval.
128	80 SMF2AJNW	4	binary	Sysplex Cache manager number of 'hits' high percentage during this interval.
132	84 SMF2AJNX	4	binary	Sysplex Cache manager number of 'hits' average percentage during this interval.
136	88 SMF2AJNY	4	binary	Average DASD number of 'hits' during this interval.
140	8C SMF2AJNZ	4	binary	Total DASD number of 'hits' during this interval.
144	90 SMF2AJOA	4	binary	DASD 'hits' current percentage during this interval.
148	94 SMF2AJOB	4	binary	DASD 'hits' low percentage during this interval.
152	98 SMF2AJOC	4	binary	DASD 'hits' high percentage during this interval.
156	9C SMF2AJOD	4	binary	DASD average 'hits' during this interval.
160	A0 SMF2AJOE	512	EBCDIC	Sysplex Average Buffer Pool Count array. This is a 16 bit entry array with each entry 32 bytes long. The first entry is the 2K storage pool, the second entry is for the 4K storage pool... See "Sysplex average buffer pool count array for below the bar" on page 432.
672	2A0 SMF2AJRI	512	EBCDIC	Sysplex Wide Totals Buffer Pool Count array. This is a 16 bit entry array with each entry 32 bytes long. The first entry is the 2K storage pool, the second entry is for the 4K storage pool... See "Sysplex wide totals buffer pool count array for below the bar" on page 432.
1184	4A0 SMF2AJON	4	binary	Average buffer size goal (in megabytes) - low value.
1188	4A4 SMF2AJOO	4	binary	Total Buffer size goal (in megabytes) - Low value.
1192	4A8 SMF2AJOP	4	binary	Average Buffer size goal (in megabytes) - high value.
1196	4AC SMF2AJOQ	4	binary	Total Buffer size goal (in megabytes) - high value.
1200	4B0 SMF2AJOR	4	binary	Average Buffer size goal (in megabytes) - current value.
1204	4B4 SMF2AJOS	4	binary	Total Buffer size goal (in megabytes) - current value.
1208	4B8 SMF2AJOT	4	binary	Total Buffer size goal (in megabytes) - average value.
1212	4BC SMF2AJOU	4	binary	Reserved.
1216	4C0 SMF2AJOV	4	binary	Average Buffer size Calculated (in megabytes) - low value.
1220	4C4 SMF2AJOW	4	binary	Total Buffer size Calculated (in megabytes) - low value.
1224	4C8 SMF2AJOX	4	binary	Average Buffer size Calculated (in megabytes) - high value.
1228	4CC SMF2AJOY	4	binary	Total Buffer size Calculated (in megabytes) - high value.
1232	4D0 SMF2AJOZ	4	binary	Average Buffer size Calculated (in megabytes) - current value.
1236	4D4 SMF2AJRA	4	binary	Total Buffer size Calculated (in megabytes) - current value.
1240	4D8 SMF2AJRB	4	binary	Total Buffer size Calculated (in megabytes) - Average value.
1244	4DC SMF2AJRC	4	binary	Total number of CF read requests that encountered retries for cast out locks for this interval (across the sysplex).
1248	4E0 SMF2AJRD	8	EBCDIC	Reserved.

Offsets	Name	Length	Format	Description
1252 4E4	SMF2AJRE	64	EBCDIC	Average calculated megabytes distribution array. This is a 16 entry array which contains the number of times the calculated value occurred within a 100MB span. Entry 1 = 0-99m, entry 2 = 100-199m,... entry 16 > 150m. See "Average buffer manager calculated distribution array for below the bar" on page 432.
1316 524	SMF2AJRG	64	EBCDIC	Total calculated megabytes distribution array. This is a 16 entry array which contains the number of times the calculated value occurred within a 100MB span. Entry 1 = 0-99m, entry 2 = 100-199m,... entry 16 > 150m. See "Total buffer manager calculated distribution array for below the bar" on page 432.
1380 564	SMF2AJTA	4	binary	Average number of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1384 568	SMF2AJTB	4	binary	Total number of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1388 56C	SMF2AJTC	4	binary	Average number of SCM read requests during this interval (across the sysplex).
1392 570	SMF2AJTD	4	binary	Total number of SCM read requests during this interval (across the sysplex).
1396 574	SMF2AJTE	4	binary	Current percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1400 578	SMF2AJTF	4	binary	Low percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1404 57C	SMF2AJTG	4	binary	High percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1408 580	SMF2AJTH	4	binary	Average percentage of SCM read requests which encountered castout lock contention during this interval (across the sysplex).
1412 584	SMF2AJTI	4	binary	Average number of RE-DO's during this interval (across the sysplex).
1416 588	SMF2AJTJ	4	binary	Total number of RE-DO's during this interval (across the sysplex).
1420 58C	SMF2AJTK	4	binary	Average number of recursive RE-DO's during this interval (across the sysplex).
1424 590	SMF2AJTL	4	binary	Total number of recursive redo during this interval (across the sysplex).
1428 594	SMF2AJTM	4	binary	Current percentage of RE-DO's during this interval (across the sysplex).
1432 598	SMF2AJTN	4	binary	Low percentage of RE-DO's during this interval (across the sysplex).
1436 59C	SMF2AJTO	4	binary	High percentage of RE-DO's during this interval (across the sysplex).
1440 5A0	SMF2AJTP	4	binary	Average percentage of RE-DO's during this interval (across the sysplex).
1444 5A4	SMF2AJTQ	4	binary	Current percentage of Recursive RE-DO's during this interval (across the sysplex).
1448 5A8	SMF2AJTR	4	binary	Low percentage of Recursive RE-DO's during this interval (across the sysplex).
1452 5AC	SMF2AJTS	4	binary	High percentage of Recursive RE-DO's during this interval (across the sysplex).

Record type 42

Offsets	Name	Length	Format	Description
1456	5B0 SMF2AJTT	4	binary	Average percentage of Recursive RE-DO's during this interval (across the sysplex).
1460	5B4 SMF2AJUA	4	binary	Average number of buffer manager LRU intervals processed, where BMF was over the goal accelerated the aging, but did not go into panic mode (across the sysplex).
1464	5B8 SMF2AJUB	4	binary	Total number of buffer manager LRU intervals processed, where BMF was over the goal accelerated the aging, but did not go into panic mode (across the sysplex).

Sysplex average buffer pool count array for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJOF	4	binary	Average low value of the number of BMF buffers for this pool during this interval.
4	4 SMF2AJOG	4	binary	Average high value of the number of BMF buffers for this pool during this interval.
8	8 SMF2AJOH	4	binary	Average current value of the number of BMF buffers for this pool during this interval.
12	C SMF2AJOI	4	binary	Reserved.
16	10 SMF2AJOJ	4	binary	Average low value of the number of extents for this pool during this interval.
20	14 SMF2AJOK	4	binary	Average high value of the number of extents for this pool during this interval.
24	18 SMF2AJOL	4	binary	Average current value of the number of extents for this pool during this interval.
28	1C SMF2AJOM	4	binary	Reserved.

Sysplex wide totals buffer pool count array for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJRJ	4	binary	Low value of the number of BMF buffers for this pool during this interval.
4	4 SMF2AJRK	4	binary	High value of the number of BMF buffers for this pool during this interval.
8	8 SMF2AJRL	4	binary	Value of the number of BMF buffers for this pool during this interval.
12	C SMF2AJRM	4	binary	Reserved.
16	10 SMF2AJRN	4	binary	Low value of the number of extents for this pool during this interval.
20	14 SMF2AJRO	4	binary	High value of the number of extents for this pool during this interval.
24	18 SMF2AJRP	4	binary	Current value of the number of extents for this pool during this interval.
28	1C SMF2AJRQ	4	binary	Reserved.

Average buffer manager calculated distribution array for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJRF	4	binary	Average number of times calculated value was within this range (across the sysplex).

Total buffer manager calculated distribution array for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJRH	4	binary	Total number of times calculated value was within this range (across the sysplex).

System local buffer manager LRU statistics summary for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJPA	4	binary	Interval length. This is the total length, in seconds, of the measurement period.
4	4 SMF2AJ01	12	EBCDIC	Reserved.
16	10 SMF2AJPB	8	EBCDIC	MVS system name.
24	18 SMF2AJPC	8	EBCDIC	Reserved.
32	20 SMF2AJPD	8	EBCDIC	Reserved.
40	28 SMF2AJPE	8	EBCDIC	Average CPU time for all systems in sysplex (in milli-seconds).
48	30 SMF2AJPF	8	EBCDIC	Total CPU time for this record (in milli-seconds).
56	38 SMF2AJPI	12	EBCDIC	Reserved.
68	44 SMF2AJP6	4	binary	Total number of write requests.
72	48 SMF2AJPG	4	binary	Number of Buffer Manager LRU intervals processed.
76	4C SMF2AJPH	4	binary	Number of Buffer Manager LRU intervals where BMF was over the goal, and normal algorithms were bypassed to reclaim buffers
80	50 SMF2AJPI	4	binary	Total number of times that BMF was called in this interval.
84	54 SMF2AJP2	4	binary	Number of buffer manager LRU intervals processed, where BMF was over the goal, accelerated the aging, but did not go into panic mode.
88	58 SMF2AJPJ	4	binary	Buffer Manager number of 'hits' during this interval.
92	5C SMF2AJPK	4	binary	Buffer Manager number of 'hits' current percentage during this interval.
96	60 SMF2AJPL	4	binary	Buffer Manager number of 'hits' low percentage during this interval.
100	64 SMF2AJPM	4	binary	Buffer Manager number of 'hits' high percentage during this interval.
104	68 SMF2AJPN	4	binary	Buffer Manager average 'hits' during this interval.
108	6C SMF2AJP3	12	EBCDIC	Reserved.
120	78 SMF2AJPO	4	binary	Sysplex Cache manager number of 'hits' during this interval.
124	7C SMF2AJPP	4	binary	Sysplex Cache manager number of 'hits' current percentage during this interval.
128	80 SMF2AJPQ	4	binary	Sysplex Cache manager number of 'hits' low percentage during this interval.
132	84 SMF2AJPR	4	binary	Sysplex Cache manager number of 'hits' high percentage during this interval.
136	88 SMF2AJPS	4	binary	Sysplex Cache manager number of 'hits' average percentage during this interval.
140	8C SMF2AJP4	12	EBCDIC	Reserved.
152	98 SMF2AJPT	4	binary	DASD number of 'hits' during this interval.
156	9C SMF2AJPU	4	binary	DASD 'hits' current percentage during this interval.
160	A0 SMF2AJPV	4	binary	DASD 'hits' low percentage during this interval.
164	A4 SMF2AJPW	4	binary	DASD 'hits' high percentage during this interval.

Record type 42

Offsets	Name	Length	Format	Description
168	A8 SMF2AJPX	4	binary	DASD average 'hits' during this interval.
172	AC SMF2AJP5	12	EBCDIC	Reserved.
184	B8 SMF2AJPY	512	EBCDIC	Sysplex Average Buffer Pool Count array. This is a 16 bit entry array with each entry 32 bytes long. The first entry is the 2K storage pool, the second entry is for the 4K storage pool... See "Sysplex average buffer pool count array for below the bar" on page 434.
696	2B8 SMF2AJQG	8	binary	Buffer size goal (in megabytes) - low value.
704	2C0 SMF2AJQH	8	binary	Buffer size goal (in megabytes) - high value.
712	2C8 SMF2AJQI	8	binary	Buffer size goal (in megabytes) - current value.
720	2D0 SMF2AJQJ	8	binary	Buffer size goal (in megabytes) - average value.
728	2D8 SMF2AJQK	8	binary	Buffer size Calculated (in megabytes) - low value.
736	2E0 SMF2AJQL	8	binary	Buffer size Calculated (in megabytes) - high value.
744	2E8 SMF2AJQM	8	binary	Buffer size Calculated (in megabytes) - current value.
752	2F0 SMF2AJQN	8	binary	Buffer size Calculated (in megabytes) - Average value.
760	2F8 SMF2AJQ2	4	binary	Total number of CF read requests that encountered retries for cast out locks for this interval.
764	2FC SMF2AJQ3	4	EBCDIC	Reserved.
768	300 SMF2AJQO	64	EBCDIC	Calculated megabytes distribution array. This is a 16 entry array which contains the number of times the calculated value occurred within a 100MB span. Entry 1 = 0-99m, entry 2 = 100-199m,... entry 16 > 150m. See "Calculated megabytes distribution array for below the bar" on page 435
832	340 SMF2AJSA	4	binary	Number of SCM read requests which encountered castout contention during this interval.
836	344 SMF2AJSB	4	binary	Number of SCM read requests during this interval.
840	348 SMF2AJSC	4	binary	Current percentage of SCM read requests which encountered cast contention during this interval. (Value is for the last LRU cycle before the SMF record was processed.)
844	34C SMF2AJSD	4	binary	Low percentage during this interval for SMF2AJSC.
848	350 SMF2AJSE	4	binary	High percentage during this interval for SMF2AJSC.
852	354 SMF2AJSF	4	binary	Average percentage during this interval for SMF2AJSC.
856	358 SMF2AJSG	4	binary	Number of RE-DO's during this interval.
860	35C SMF2AJSH	4	binary	Current percentage of RE-DO's during this interval. (Value is for the last LRU cycle before the SMF record was processed.)
864	360 SMF2AJSI	4	binary	Low percentage during this interval for SMF2AJSH.
868	364 SMF2AJSJ	4	binary	High percentage during this interval for SMF2AJSH.
872	368 SMF2AJSK	4	binary	Average percentage during this interval for SMF2AJSH.
876	36C SMF2AJSL	4	binary	Number of recursive RE-DO's during this interval.
880	370 SMF2AJSM	4	binary	Current percentage of recursive RE-DO's during this interval. (Value is for the last LRU cycle before the SMF record was processed.)
884	374 SMF2AJSN	4	binary	Low percentage during this interval for SMF2AJSM.
888	378 SMF2AJSO	4	binary	High percentage during this interval for SMF2AJSM.
892	37C SMF2AJSP	4	binary	Average percentage during this interval for SMF2AJSM.

Sysplex average buffer pool count array for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJPZ	4	binary	Low value of the number of BMF buffers for this pool during this interval.

Offsets	Name	Length	Format	Description
4	4 SMF2AJQA	4	binary	High value of the number of BMF buffers for this pool during this interval.
8	8 SMF2AJQB	4	binary	Current value of the number of BMF buffers for this pool during this interval.
12	C SMF2AJQ6	4	binary	Reserved.
16	10 SMF2AJQC	4	binary	Low value of the number of extents for this pool during this interval.
20	14 SMF2AJQD	4	binary	High value of the number of extents for this pool during this interval.
24	18 SMF2AJQF	4	binary	Current value of the number of extents for this pool during this interval.
28	1C SMF2AJQ7	4	binary	Reserved.

Calculated megabytes distribution array for above the bar

Offsets	Name	Length	Format	Description
0	0 SMF2AJQP	4	binary	For a single system, number of times calculated value was within this range.

Subtype 20 — STOW initialize

Job and data set information

Offsets	Name	Length	Format	Description
0	0 SMF42KJB	8	EBCDIC	Job name, started task control, or time sharing user who issued the STOW Initialize.
8	8 SMF42KST	8	EBCDIC	Step name.
16	10 SMF42KPR	8	EBCDIC	Proc name (or blanks).
24	18 SMF42KDS	44	EBCDIC	Data set name.
68	44 SMF42KVS	6	EBCDIC	VOLSER.

User information

Offsets	Name	Length	Format	Description
0	0 SMF42KUI	80	EBCDIC	User information of the caller of STOW macro that is mapped by ICHRUTKN.

Subtype 21 — Member delete

Job and data set information

Offsets	Name	Length	Format	Description
0	0 SMF42LJB	8	EBCDIC	Job name, started task control, or time sharing user who issued the STOW or DESERV delete.
8	8 SMF42LST	8	EBCDIC	Step name.
16	10 SMF42LPR	8	EBCDIC	Proc name (or blanks).
24	18 SMF42LDS	44	EBCDIC	Data set name.
68	44 SMF42LVS	6	EBCDIC	VOLSER.
74	4A SMF42LNL	2	binary	Length of the member name that was deleted (SMF42LMN).

Record type 42

Offsets	Name	Length	Format	Description						
76	4C SMF42LFL	4	binary	Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Some aliases were excluded from the record because the record length would have exceeded the maximum</td> </tr> <tr> <td>1-31</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Some aliases were excluded from the record because the record length would have exceeded the maximum	1-31	Reserved.
Bit	Meaning when set									
0	Some aliases were excluded from the record because the record length would have exceeded the maximum									
1-31	Reserved.									
80	50 SMF42LMN	VAR	EBCDIC	Member name that was deleted. Actual length used is determined by SMF42LNL. (Maximum length is 63.)						

Alias names deleted in sympathy

Offsets	Name	Length	Format	Description
0	0 SMF42LNA	2	binary	Number of alias names that were also deleted because SMF42LMN is a PDSE primary member name.
2	2 SMF42LAA	VAR	EBCDIC	Alias name list array, contains SMF42LNA number of entries. See "Alias name list array."

Alias name list array

Offsets	Name	Length	Format	Description
0	0 SMF42LAL	2	binary	Length of the alias name that was deleted in sympathy.
2	2 SMF42LAN	VAR	EBCDIC	Alias name deleted in sympathy. (Length is SMF42LAL.)

User Information

Offsets	Name	Length	Format	Description
0	0 SMF42LUI	80	EBCDIC	User information of the caller of STOW macro that is mapped by ICHRUTKN.

Subtype 22 — DFSMSrmm audit records

DFSMSrmm audit records section

Offsets	Name	Length	Format	Description
0	0 SMF420MA	76	Structure	
0	0 SMF42MJBN	8	EBCDIC	Job name.
8	8 SMF42MRST	4	binary	Reader start time in hundredths of a second.
12	C SMF42MRSD	4	packed	Reader start date in the form <i>OcyyddF</i> .
16	10 SMF42MUID	8	EBCDIC	RACF user ID.
24	18 SMF42MACT	1	EBCDIC	Activity type: A - Record added; C - Record changed; D - Record deleted.

Offsets	Name	Length	Format	Description
25	19 SMF42MFG1	1	binary	Flag 1. Bit Meaning when set 0 SMF42MLIS Last in set. 1 SMF42MJRN Journal record available. 2-7 * Reserved.
26	1A SMF42MCVTSFLG	8	binary	Virtual tape server flag.
27	1B SMF42MCENABLE	8	binary	Control record enable flag.
28	1C SMF42MLDTC	8	EBCDIC	Local time/date offset.
36	24 SMF42MCJNREC	4	Signed	Journal record number.
40	28 SMF42MJNREC	4	Signed	Number of next jn rec.
44	2C SMF42MCUPDVI	4	Signed	VSI when MCUPDACT set on.
48	30 SMF42MCVSI	4	Signed	VSI control count.
52	34 SMF42MCVRLCTK	8	EBCDIC	VRSEL last change token.
60	3C SMF42MCVRSCT	4	Signed	Current VRS change counter.
64	40 SMF42MCVRSR	4	Signed	Last HSKP VRS change counter.
68	44 SMF42MCSYNCT	8	EBCDIC	Catsynch time stamp.
68	44 SMF42MCSYNCDT	4	EBCDIC	Catsynch date.
72	48 SMF42MCSYNCTM	4	EBCDIC	Catsynch time.
76	4C SMF42MEND	0	EBCDIC	1st data section end.

Subtype 23 — DFSMSrmm security records

DFSMSrmm security records section

Offsets	Name	Length	Format	Description
0	0 SMF420NA	120	Structure	
0	0 SMF42NJB	8	EBCDIC	Job name.
8	8 SMF42NRST	4	binary	Reader start time in hundredths of a second.
12	C SMF42NRSD	4	packed	Reader start date in the form <i>OcyyddF</i> .
16	10 SMF42NUIF	8	EBCDIC	User identification.
24	18 SMF42NUID	8	EBCDIC	RACF user ID.
32	20 SMF42NCGP	8	EBCDIC	RACF connect group.
40	28 SMF42NVER	1	EBCDIC	Record version identifier (2).
41	29 SMF42NACT	1	EBCDIC	Activity type: C - Data set create E - Data set extend U - Data set update R - Data set read access D - Data set delete
42	2A SMF42NSTP	1	binary	Security type.
43	2B *	1	EBCDIC	Reserved.
44	2C SMF42NDSN	44	EBCDIC	Data set name.
88	58 SMF42NVOL	6	EBCDIC	Volume serial number.

Record type 42

Offsets	Name	Length	Format	Description
94	5E SMF42NUNT	8	EBCDIC	Device type.
102	66 SMF42NDSQ	2	Unsigned	Data set sequence number.
104	68 SMF42NVSQ	2	Unsigned	Volume sequence number.
112	70 SMF42NLDTO	8	EBCDIC	Local time/date offset.
120	78 SMF42NEND	0	EBCDIC	1st data section end.

Subtype 24 — Member Add/Replace

Job and data set information

Offsets	Name	Length	Format	Description								
0	0 SMF42PJB	8	EBCDIC	Job name, started task control, or time sharing user who issued the STOW (add/replace) or DESERV PUT.								
8	8 SMF42PST	8	EBCDIC	Step name.								
16	10 SMF42PPR	8	EBCDIC	Proc name (or blanks).								
24	18 SMF42PDS	44	EBCDIC	Data set name.								
68	44 SMF42PVS	6	EBCDIC	Volume serial number (VOLSER).								
74	4A SMF42PML	2	binary	Length of the member name that was added or replaced.								
76	4C SMF42PF1	1	binary	Flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Some aliases were excluded from the record because the record length would have exceeded the maximum.</td> </tr> <tr> <td>1</td> <td>When this bit is on, a new member was added.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Some aliases were excluded from the record because the record length would have exceeded the maximum.	1	When this bit is on, a new member was added.	2-7	Reserved.
Bit	Meaning when set											
0	Some aliases were excluded from the record because the record length would have exceeded the maximum.											
1	When this bit is on, a new member was added.											
2-7	Reserved.											
77	4D	3	binary	Reserved.								
80	50 SMF42PMN	VAR	EBCDIC	Member name that was added or replaced.								

Alias names deleted in sympathy

Offsets	Name	Length	Format	Description
0	0 SMF42P#A	2	binary	Number of alias names that were deleted because SMF42PMN is a PDSE primary member name.
2	2 SMF42PAA	VAR	EBCDIC	Alias name list array, contains SMF42P#A number of entries. See "Alias name list array."

Alias name list array

Offsets	Name	Length	Format	Description
0	0 SMF42PAL	2	binary	Length of the alias name that was deleted in sympathy.
2	2 SMF42PAN	VAR	EBCDIC	Alias name that was deleted in sympathy.

User information

Offsets	Name	Length	Format	Description
0	0 SMF42PUI	80	EBCDIC	User information of the caller of STOW or DESERV macro that is mapped by ICHRUTKN.

Subtype 25 — Member rename

Job and data set information

Offsets	Name	Length	Format	Description
0	0 SMF42QJB	8	EBCDIC	Job name, started task control, or time sharing user who issued the STOW (rename) or DESERV RENAME.
8	8 SMF42QST	8	EBCDIC	Step name.
16	10 SMF42QPR	8	EBCDIC	Proc name (or blanks).
24	18 SMF42QDS	44	EBCDIC	Data set name.
68	44 SMF42QVS	6	EBCDIC	Volume serial number (VOLSER).
74	4A SMF42QML	2	binary	Length of the member name after the rename.
76	4C SMF42QMN	VAR	EBCDIC	Member name after the rename (new name).

Original member name

Offsets	Name	Length	Format	Description
0	0 SMF42QOL	2	binary	Length of the member name before the rename.
2	2 SMF42QON	VAR	EBCDIC	Member name before the rename (old name).

User information

Offsets	Name	Length	Format	Description
0	0 SMF42QUI	80	EBCDIC	User information of the caller of STOW or DESERV macro that is mapped by ICHRUTKN.

Subtype 27 — VTOC audit log

The SMF type 42 subtype 27 record contains the data set control block (DSCB) that is being written to the VTOC, along with data (such as the job name) to identify the VTOC writer. This record is created by EXCP when it scans a channel program.

VTOC update header section

Offsets	Name	Length	Format	Description
0	0 SMF42RJOB	8	EBCDIC	Job name
8	8 SMF42RJNO	8	EBCDIC	Job number
16	10 SMF42RSTN	8	EBCDIC	Step name
24	18 SMF42RPRN	8	EBCDIC	Proc name or blanks
32	20 SMF42RVOL	6	EBCDIC	Volume serial number
38	26 SMF42RDEV	2	binary	Device number (UCBCHAN)

Record type 42

Offsets	Name	Length	Format	Description																																												
40 28	SMF42RACT	4	EBCDIC	Activity type: <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>AZAP</td> <td>AMASPZAP</td> </tr> <tr> <td>DCLO</td> <td>Close for output non-VSAM data set</td> </tr> <tr> <td>DCLX</td> <td>CLOSE executor non-VSAM extended format data set</td> </tr> <tr> <td>DCON</td> <td>DSS consolidate</td> </tr> <tr> <td>DCRE</td> <td>DADSM create data set</td> </tr> <tr> <td>DCVF</td> <td>CVAFDIR</td> </tr> <tr> <td></td> <td>Note: CVCLID not specified</td> </tr> <tr> <td>DDEL</td> <td>DADSM scratch data set.</td> </tr> <tr> <td></td> <td>Note: This entry reflects the DSCB just prior to the erase of the DSCB.</td> </tr> <tr> <td>DDMP</td> <td>DSS dump</td> </tr> <tr> <td>DEVO</td> <td>End-of-volume on output non-VSAM data set</td> </tr> <tr> <td>DEXT</td> <td>DADSM extend data set</td> </tr> <tr> <td>DFRG</td> <td>DSS defrag</td> </tr> <tr> <td>DMMS</td> <td>DFSMF media manager services</td> </tr> <tr> <td>DPAR</td> <td>DADSM partial release data set</td> </tr> <tr> <td>DREN</td> <td>DADSM rename data set</td> </tr> <tr> <td>DRST</td> <td>DSS restore</td> </tr> <tr> <td>DSSM</td> <td>SSAM non-VSAM extended format data set</td> </tr> <tr> <td>DUPT</td> <td>Update DSCB fields</td> </tr> <tr> <td>IOBE</td> <td>IOBE not provided</td> </tr> <tr> <td>IOBU</td> <td>IOBEUSER not specified</td> </tr> </tbody> </table>	Value	Meaning	AZAP	AMASPZAP	DCLO	Close for output non-VSAM data set	DCLX	CLOSE executor non-VSAM extended format data set	DCON	DSS consolidate	DCRE	DADSM create data set	DCVF	CVAFDIR		Note: CVCLID not specified	DDEL	DADSM scratch data set.		Note: This entry reflects the DSCB just prior to the erase of the DSCB.	DDMP	DSS dump	DEVO	End-of-volume on output non-VSAM data set	DEXT	DADSM extend data set	DFRG	DSS defrag	DMMS	DFSMF media manager services	DPAR	DADSM partial release data set	DREN	DADSM rename data set	DRST	DSS restore	DSSM	SSAM non-VSAM extended format data set	DUPT	Update DSCB fields	IOBE	IOBE not provided	IOBU	IOBEUSER not specified
Value	Meaning																																															
AZAP	AMASPZAP																																															
DCLO	Close for output non-VSAM data set																																															
DCLX	CLOSE executor non-VSAM extended format data set																																															
DCON	DSS consolidate																																															
DCRE	DADSM create data set																																															
DCVF	CVAFDIR																																															
	Note: CVCLID not specified																																															
DDEL	DADSM scratch data set.																																															
	Note: This entry reflects the DSCB just prior to the erase of the DSCB.																																															
DDMP	DSS dump																																															
DEVO	End-of-volume on output non-VSAM data set																																															
DEXT	DADSM extend data set																																															
DFRG	DSS defrag																																															
DMMS	DFSMF media manager services																																															
DPAR	DADSM partial release data set																																															
DREN	DADSM rename data set																																															
DRST	DSS restore																																															
DSSM	SSAM non-VSAM extended format data set																																															
DUPT	Update DSCB fields																																															
IOBE	IOBE not provided																																															
IOBU	IOBEUSER not specified																																															
44 2C	SMF42RIND	2	binary	Record indicators: <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>Device is reserved.</td> </tr> </tbody> </table>	Value	Meaning	X'80'	Device is reserved.																																								
Value	Meaning																																															
X'80'	Device is reserved.																																															
	SMF42RRSV																																															
46 2E *		2	CHAR	Reserved																																												
48 30	SMF42RSEEK	4	binary	VTOC track ID (CCCCHHHH)																																												
52 34	SMF42RSRCH	5	binary	VTOC record ID (CCCCHHHHR) (optional)																																												
57 39	SMF42RCMDS	15	binary	CCW command codes scanned																																												
72 48	SMF42RUPSW	4	binary	EXCP caller address following SVC 0																																												
76 4C	SMF42RUTOK	80	binary	User security token (mapped by ICHRUTKN)																																												

DSCB change section

Offsets	Name	Length	Format	Description
0 0	SMF42RKEY	44	binary	DSCB key field.
44 2C	SMF42RDSC	96	binary	DSCB data field.

Record Type 43 (2B) — JES2 Start

Record type 43 is written when the operator issues an S JES2 command (to start JES2) or a \$E SYS command (to reclaim the job processing that was being done on the named system in a multi-access spool configuration). This record contains a warm start indicator, JES2 start options, and the identification of the system whose job processing is to be reclaimed.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description																		
0	0 SMF43LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.																		
2	2 SMF43SEG	2	binary	Segment descriptor (see record length field).																		
4	4 SMF43FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.										
Bit	Meaning when set																					
0-2	Reserved																					
3-6	Version indicators*																					
7	Reserved.																					
5	5 SMF43RTY	1	binary	Record type 43 (X'2B').																		
6	6 SMF43TME	4	binary	Time since midnight, in hundredths of second, when the record was moved into the SMF buffer.																		
10	10 SMF43DTE	4	packed	Date record was moved into SMF buffer, in the form <i>OcyymmddF</i> . See "Standard SMF record header" on page 162 for a detailed description.																		
14	E SMF43SID	4	EBCDIC	System identification (from the SID parameter).																		
18	12 SMF43SBS	2	binary	Subsystem identification — X'0002' signifies JES2.																		
20	14 SMF43RSV	2		Reserved.																		
22	16 SMF43LRR	2	binary	Length of rest of record, excluding this field.																		
24	18 SMF43RV1	2		Reserved.																		
26	1A SMF43RST	1	binary	Warm start indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>If 0, record written for \$\$ JES2 command If 1, record written for \$E SYS command</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	If 0, record written for \$\$ JES2 command If 1, record written for \$E SYS command	1-7	Reserved.												
Bit	Meaning when set																					
0	If 0, record written for \$\$ JES2 command If 1, record written for \$E SYS command																					
1-7	Reserved.																					
27	1B SMF43OPT	1	binary	JES2 start options. (This field is zero for \$E SYS command.) See <i>z/OS JES2 Initialization and Tuning Guide</i> for more detailed information. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Format the spool</td> </tr> <tr> <td>1</td> <td>Cold start</td> </tr> <tr> <td>2</td> <td>REQ option was specified</td> </tr> <tr> <td>3</td> <td>LIST option was specified</td> </tr> <tr> <td>4</td> <td>LOG option was specified</td> </tr> <tr> <td>5</td> <td>RECONFIG option was specified</td> </tr> <tr> <td>6</td> <td>CONSOLE option was specified</td> </tr> <tr> <td>7</td> <td>JES2 determined that it could perform a quick start.</td> </tr> </table>	Bit	Meaning when set	0	Format the spool	1	Cold start	2	REQ option was specified	3	LIST option was specified	4	LOG option was specified	5	RECONFIG option was specified	6	CONSOLE option was specified	7	JES2 determined that it could perform a quick start.
Bit	Meaning when set																					
0	Format the spool																					
1	Cold start																					
2	REQ option was specified																					
3	LIST option was specified																					
4	LOG option was specified																					
5	RECONFIG option was specified																					
6	CONSOLE option was specified																					
7	JES2 determined that it could perform a quick start.																					
28	1C SMF43EID	4	EBCDIC	If \$E SYS command, identification of system whose job processing is to be reclaimed. If S JES2 command, zero.																		

Record Type 43 (2B) — JES3 Start

Record type 43 is written during JES3 and the converter/interpreter functional subsystem (C/I FSS) initialization. This record contains an indicator for the type of JES3 start, JES3 initialization deck origin type and contents, and JES3 procedure name.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF43LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF43SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF43FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF43RTY	1	binary	Record type 43 (X'2B').								
6	6 SMF43TME	4	binary	Time since midnight, in hundredths of second, that the record moved into the SMF buffer.								
10	A SMF43DTE	4	packed	Date when record was moved into SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF43SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF43SBS	2	binary	Subsystem identification — X'0005' signifies JES3.								
20	14 SMF43RSV	2		Reserved.								
22	16 SMF43LRR	2	binary	Length of rest of record, excluding this field.								
24	18 SMF43RV1	2		Reserved.								

Offsets	Name	Length	Format	Description																		
26	1A SMF43RST	1	binary	JES3 start record indicator (taken from operator's response to WTOR macro) <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Cold start</td> </tr> <tr> <td>1</td> <td>Warm start</td> </tr> <tr> <td>2</td> <td>Hot start</td> </tr> <tr> <td>3</td> <td>Start is with JES3 queue analysis</td> </tr> <tr> <td>4</td> <td>JES3 global processor. This bit is always set if start is a cold start or warm start.</td> </tr> <tr> <td>5</td> <td>JES3 local processor. This bit is always set if start is a hot start.</td> </tr> <tr> <td>6</td> <td>Reserved</td> </tr> <tr> <td>7</td> <td>Dynamic system interchange (DSI) was invoked by operator to convert a local processor to the global processor. Bits 2 and 4 will also be set.</td> </tr> </table>	Bit	Meaning when set	0	Cold start	1	Warm start	2	Hot start	3	Start is with JES3 queue analysis	4	JES3 global processor. This bit is always set if start is a cold start or warm start.	5	JES3 local processor. This bit is always set if start is a hot start.	6	Reserved	7	Dynamic system interchange (DSI) was invoked by operator to convert a local processor to the global processor. Bits 2 and 4 will also be set.
Bit	Meaning when set																					
0	Cold start																					
1	Warm start																					
2	Hot start																					
3	Start is with JES3 queue analysis																					
4	JES3 global processor. This bit is always set if start is a cold start or warm start.																					
5	JES3 local processor. This bit is always set if start is a hot start.																					
6	Reserved																					
7	Dynamic system interchange (DSI) was invoked by operator to convert a local processor to the global processor. Bits 2 and 4 will also be set.																					
27	18 SMF43RV2	1		Reserved.																		
28	1C SMF43US1	1	binary	User flags.																		
29	1D SMF43NMU	1	EBCDIC	JES3 initialization deck origin type (taken from operator's response to WTOR macro).																		
30	1E SMF43ORG	8	EBCDIC	JES3 initialization deck origin location (taken from operator's response to WTOR macro) <table border="0"> <tr> <td>Type</td> <td>Contents</td> <td>Location</td> </tr> <tr> <td>N</td> <td>Member name</td> <td>JCL in JES3 procedure</td> </tr> <tr> <td>M</td> <td>Member name</td> <td>Dataset in JES3 procedure</td> </tr> <tr> <td>U</td> <td>Unit address</td> <td>3- or 4-digit unit at specified address (stored in 4-digit format).</td> </tr> </table>	Type	Contents	Location	N	Member name	JCL in JES3 procedure	M	Member name	Dataset in JES3 procedure	U	Unit address	3- or 4-digit unit at specified address (stored in 4-digit format).						
Type	Contents	Location																				
N	Member name	JCL in JES3 procedure																				
M	Member name	Dataset in JES3 procedure																				
U	Unit address	3- or 4-digit unit at specified address (stored in 4-digit format).																				
38	26 SMF43PJ3	4	EBCDIC	JES3 procedure name.																		
42	2A SMF43RVJ	8		Reserved for JES3.																		
50	32 SMF43RVU	4		Reserved for user.																		

Record Type 45 (2D) — JES2 Withdrawal

Record type 45 is written when a \$P JES2 command (to withdraw JES2 from the system) is issued. It is written at the abnormal termination of JES2 if JES2 retains control long enough to write the record. This record contains a termination indicator and the JES2 completion code.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF45LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF45SEG	2	binary	Segment descriptor (see record length field).

Record type 45

Offsets	Name	Length	Format	Description								
4	4 SMF45FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF45RTY	1	binary	Record type 45 (X'2B').								
6	6 SMF45TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF45DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF45SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF45SBS	2	binary	Subsystem identification — X'0002' signifies JES2.								
20	14 SMF45RSV	2		Reserved.								
22	16 SMF45LRR	2	binary	Length of rest of record, excluding this field.								
24	18 SMF45IND	2	binary	Termination indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>If 0, record written for \$P JES2 command (JES2 withdrawal) If 1, record written for abnormal JES2 termination</td> </tr> <tr> <td>1-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	If 0, record written for \$P JES2 command (JES2 withdrawal) If 1, record written for abnormal JES2 termination	1-15	Reserved.		
Bit	Meaning when set											
0	If 0, record written for \$P JES2 command (JES2 withdrawal) If 1, record written for abnormal JES2 termination											
1-15	Reserved.											
26	1A SMF45JCC	2	binary	JES2 completion code.								

Record Type 45 (2D) — JES3 Stop

Record type 45 is written during JES3 and the converter/interpreter functional subsystem (C/I FSS) termination. This record contains an indicator for the type of JES3 stop, and JES3 completion code.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF45LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF45SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF45FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF45RTY	1	binary	Record type 45 (X'2D').								
6	6 SMF45TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF45DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF45SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF45SBS	2	binary	Subsystem identification — X'0005' signifies JES3.								
20	14 SMF45RSV	2		Reserved.								
22	16 SMF45LRR	2	binary	Length of rest of record, excluding this field.								
24	18 SMF45FG1	1	binary	JES3 stop record indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>JES3 or the C/I FSS abnormally terminated (taken from completion code in ECB)</td> </tr> <tr> <td>1</td> <td>Dynamic system interchange was invoked by operator to convert a local processor to the global processor</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	JES3 or the C/I FSS abnormally terminated (taken from completion code in ECB)	1	Dynamic system interchange was invoked by operator to convert a local processor to the global processor	2-7	Reserved.
Bit	Meaning when set											
0	JES3 or the C/I FSS abnormally terminated (taken from completion code in ECB)											
1	Dynamic system interchange was invoked by operator to convert a local processor to the global processor											
2-7	Reserved.											
25	19 SMF45J3C	3	binary	JES3 completion code (taken from completion code in ECB) where bits 0-11 represent a system code and bits 12-23 represent a user code. Note that the JES3 completion code, as recorded on the operator's console, is always S 2FB.								
28	1C SMF45RV1	1		Reserved.								
29	1D SMF45US1	1	binary	User flags.								
30	1E SMF45RVJ	8		Reserved for JES3.								
38	26 SMF45RVU	4		Reserved for user.								

Record Type 47 (2F) — JES2 SIGNON/Start Line (BSC only)

Record type 47 is written when:

- A \$S LINE(*n*) command (to start a line) is issued,
- A \$E LINE(*n*) command (to restart a line) is issued, or
- When a remote user signs on.

This record contains a record indicator, remote name, line name, password, and message text.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF47LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF47SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF47FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF47RTY	1	binary	Record type 47 (X'2F').								
6	6 SMF47TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF47DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF47SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF47SBS	2	binary	Subsystem identification — X'0002' signifies JES2.								
20	14 SMF47RSV	2		Reserved.								
22	16 SMF47LRR	2	binary	Length of rest of record, excluding this field.								
24	18 SMF47EVT	2	binary	Record indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-13</td> <td>Reserved</td> </tr> <tr> <td>14</td> <td>Record written for \$S LNE<i>n</i> command</td> </tr> <tr> <td>15</td> <td>Record written for SIGNON.</td> </tr> </table>	Bit	Meaning when set	0-13	Reserved	14	Record written for \$S LNE <i>n</i> command	15	Record written for SIGNON.
Bit	Meaning when set											
0-13	Reserved											
14	Record written for \$S LNE <i>n</i> command											
15	Record written for SIGNON.											

General Section

Offsets	Name	Length	Format	Description
26	1A SMF47LN1	2	binary	Length of general section, including this field.
28	1C SMF47RMT	8	EBCDIC	Remote name as defined in JESPARMS. (This field is filled in only if a remote terminal is connected to this line.)
36	24 SMF47LIN	8	EBCDIC	Line name as defined in JESPARMS.
44	2C SMF47PSW	8	EBCDIC	Password as defined in JESPARMS.

Message Section

The following fields apply when a remote user signs on:

Offsets	Name	Length	Format	Description
52	34 SMF47LN2	2	binary	Length of rest of record, including this field.

Offsets	Name	Length	Format	Description
54	36 SMF47MSG	36	EBCDIC	Message text. This field includes columns 45-70 of the SIGNON card image.

Record Type 47 (2F) — JES3 SIGNON/Start Line/LOGON

Record type 47 is written when a system network architecture (SNA) remote user logs on or when a binary synchronous communication (BSC) remote line is started or a BSC remote user signs on.

For SNA, the record contains a record indicator, a work station name, a logical unit (LU) name, and a password. The record length for an SNA LOGON is 52 bytes. For BSC, the record contains a record indicator, a remote name, a line name, a password, and, for a remote SIGNON, a message text. The record length is 52 bytes for a started line or 102 bytes for a SIGNON.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF47LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF47SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF47FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF47RTY	1	binary	Record type 47 (X'2F').								
6	6 SMF47TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF47DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyyddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF47SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF47SBS	2	binary	Subsystem identification — X'0005' signifies JES3.								
20	14 SMF47RSV	2		Reserved.								

Record type 47

Offsets	Name	Length	Format	Description
22	16 SMF47LRR	2	binary	Length of rest of record, excluding this field.
24	18 SMF47EVT	2	binary	Record indicator
				Bit Meaning when set
				0-12 Reserved
				13 Record written for SNA LOGON
				14 Record written for BSC started line
				15 Record written for BSC SIGNON.

General Section

Offsets	Name	Length	Format	Description
26	1A SMF47LN1	2	binary	Length of general section, including this field.
28	1C SMF47RMT	8	EBCDIC	Remote name as defined in JESPARMS. (This field is filled in only if a remote terminal is connected to this line.)
36	24 SMF47LIN	8	EBCDIC	Line name as defined in JESPARMS.
44	2C SMF47PSW	8	EBCDIC	Password as defined in JESPARMS.

Message Section

This section contains the fields that apply when a BSC remote user signs on.

Offsets	Name	Length	Format	Description
52	34 SMF47LN2	2	binary	Length of rest of message section, including this field.
54	36 SMF47MSG	36	EBCDIC	Message text. This field includes columns 35-70 of the SIGNON card image.
90	5A SMF47RVJ	8		Reserved for JES3.
98	62 SMF47RVU	4		Reserved for user.

Record Type 48 (30) — JES2 SIGNOFF/Stop Line (BSC only)

Record type 48 is written when:

- A \$P LNE*n* command (to stop a line) is issued
- A \$E LNE*n* command (to restart a line) is issued, and
- When a remote user signs off.

This record contains:

- A record indicator
- A remote name
- A line name
- A password
- A line adapter address
- The number of execute channel programs (EXCP)
- Negative acknowledgements to write text
- Data checks to read text
- Time outs to read text.

The field names beginning with MDCTS are for SIGNOFF and contain session totals; the other fields are for \$P LNE*n* commands and contain connection totals.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF48LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF48SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF48FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF48RTY	1	binary	Record type 48 (X'30').								
6	6 SMF48TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF48DTE	4	packed	Date when the record was moved into SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF48SID	4	EBCDIC	System identification (from the MEMBER statement).								
18	12 SMF48SBS	2	binary	Subsystem identification — X'0002' signifies JES2.								
20	14 SMF48RSV	2		Reserved.								
22	16 SMF48LRR	2	binary	Length of rest of record, excluding this field.								
24	18 SMF48EVT	2	binary	Record indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-13</td> <td>Reserved</td> </tr> <tr> <td>14</td> <td>Record written for \$P LNE<i>n</i> command.</td> </tr> <tr> <td>15</td> <td>Record written for SIGNOFF.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-13	Reserved	14	Record written for \$P LNE <i>n</i> command.	15	Record written for SIGNOFF.
Bit	Meaning when set											
0-13	Reserved											
14	Record written for \$P LNE <i>n</i> command.											
15	Record written for SIGNOFF.											
26	1A SMF48RV1	2		Reserved.								
28	1C SMF48RMT	8	EBCDIC	Remote name as defined in JESPARMS. (This field is filled in only if a remote terminal is connected to this line.)								
36	24 SMF48LIN	8	EBCDIC	Line name as defined in JESPARMS.								
44	2C SMF48PSW	8	EBCDIC	Password as defined in JESPARMS.								
52	34 SMF48IO	4	binary	Number of EXCPs for this line.								
56	36 SMF48NAK	4	binary	Number of negative acknowledgements to write text.								
60	3C SMF48DCK	4	binary	Number of data checks to read text.								
64	40 SMF48OUT	4	binary	Number of time outs to read text.								
68	44 SMF48ERR	4	binary	Sum of all other line errors.								
72	48 SMF48LAA	3	EBCDIC	3-digit hexadecimal device number.								
75	4B SMF48LA4	4	EBCDIC	4-digit hexadecimal device number.								

Record Type 48 (30) — JES3 SIGNOFF/Stop Line/LOGOFF

Record type 48 is written when a system network architecture (SNA) remote user logs off or if a binary synchronous communication (BSC) remote line is stopped. This record is also written when a BSC remote user signs off.

For SNA, the record contains a record indicator, a work station name, a logical unit (LU) name, a password, and a line I/O count. For BSC, the record contains a record indicator, a remote name, a line name, a password, a line adapter address, and line I/O counts.

Note: For BSC, the statistics in this record are accumulated for the line from SIGNON/LOGON to SIGNOFF/LOGOFF.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency

31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF48LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF48SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF48FLG	1	binary	System indicator: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF48RTY	1	binary	Record type 48 (X'30').								
6	6 SMF48TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF48DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF48SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF48SBS	2	binary	Subsystem identification — X'0005' signifies JES3.								
20	14 SMF48RSV	2		Reserved.								
22	16 SMF48LRR	2	binary	Length of rest of record, excluding this field.								

Offsets	Name	Length	Format	Description										
24	18 SMF48EVT	2	binary	Record indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-12</td> <td>Reserved</td> </tr> <tr> <td>13</td> <td>Record written for SNA LOGOFF</td> </tr> <tr> <td>14</td> <td>Record written for BSC stopped line</td> </tr> <tr> <td>15</td> <td>Record written for BSC SIGNOFF.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-12	Reserved	13	Record written for SNA LOGOFF	14	Record written for BSC stopped line	15	Record written for BSC SIGNOFF.
Bit	Meaning when set													
0-12	Reserved													
13	Record written for SNA LOGOFF													
14	Record written for BSC stopped line													
15	Record written for BSC SIGNOFF.													
26	1A SMF48RV1	2		Reserved.										
28	1C SMF48RMT	8	EBCDIC	Remote name as defined in JESPARMS. (This field is filled in only if a remote terminal is connected to this line.) Work station name.										
36	24 SMF48LIN	8	EBCDIC	Line name as defined in JESPARMS.										
44	26 SMF48PSW	8	EBCDIC	Password as defined in JESPARMS.										
52	34 SMF48TRN	4	binary	Number of transmissions.										
56	38 SMF48ERS	4	binary	Number of line errors.										
60	3C SMF48TOT	2	binary	Number of time outs to read text.										
62	3E SMF48NKS	2	binary	Number of negative acknowledgements to write text.										
64	40 SMF48SO	1	binary	Number of command rejects.										
65	41 SMF48S1	1	binary	Number of interventions required.										
66	42 SMF48S2	1	binary	Number of bus-out checks.										
67	43 SMF38S3	1	binary	Number of equipment checks.										
The following fields apply only to BSC:														
68	44 SMF48S4	1	binary	Number of data checks.										
69	45 SMF48S5	1	binary	Number of data overruns.										
70	46 SMF48S6	1	binary	Number of lost data(s).										
71	47 SMF48USR	9		Reserved.										
80	50 SMF48ADP	3	EBCDIC	3-digit line adapter number.										
83	53 SMF48RVJ	8		Reserved for JES3.										
91	5B SMF48RVU	4		Reserved for user.										
95	5F SMF48AD4	4	EBCDIC	4-digit line adapter number.										

For SNA, adjust offsets to account for the increased length.

66	42	SMF48S1
67	43	SMF48S2
69	45	SMF48S3

Record Type 49 (31) — JES2 Integrity (BSC only)

Record type 49 is written when a remote user attempts to sign on with an incorrect password. This record is the same as record type 47 except the password is incorrect. It contains a record indicator, remote name, line name, incorrect password, and message text.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF49LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF49SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF49FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF49RTY	1	binary	Record type 49 (X'31').								
6	6 SMF49TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF49DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyyddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF49SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF49SBS	2	binary	Subsystem identification — X'0002' signifies JES2.								
20	14 SMF49RSV	2		Reserved.								
22	16 SMF49LRR	2	binary	Length of rest of record, excluding this field.								
24	18 SMF49EVT	2	binary	Record indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-13</td> <td>Reserved</td> </tr> <tr> <td>14</td> <td>Started line</td> </tr> <tr> <td>15</td> <td>Record written for SIGNON.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-13	Reserved	14	Started line	15	Record written for SIGNON.
Bit	Meaning when set											
0-13	Reserved											
14	Started line											
15	Record written for SIGNON.											
Identification Section:												
26	1A SMF49LN1	2	binary	Length of identification section, including this field.								
28	1C SMF49RMT	8	EBCDIC	Remote name as defined in JESPARMS. (This field is filled in only if a remote terminal is connected to this line.)								
36	24 SMF49LIN	8	EBCDIC	Line name as defined in JESPARMS.								
44	2C SMF49PSW	8	EBCDIC	Incorrect password.								
Message Section:												
52	34 SMF49LN2	2	binary	Length of rest of record, including this field.								
54	36 SMF49MSG	36	EBCDIC	Message text. This field includes columns 35-70 of the SIGNON card image.								

Record Type 49 (31) — JES3 Integrity

Record type 49 is written when a system network architecture (SNA) remote user attempts to log on with an incorrect password or a binary synchronous communication (BSC) remote line user attempts to sign on with an incorrect password.

For SNA, the record contains a record indicator, a work station name, a logical unit (LU) name, and an incorrect password. For BSC, the record contains a record indicator, a remote name, a line name, an incorrect password, and, for a remote sign on, a message text.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency

31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF49LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF49SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF49FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF49RTY	1	binary	Record type 49 (X'31').								
6	6 SMF49TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF49DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyyddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF49SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF49SBS	2	binary	Subsystem identification — X'0005' signifies JES3.								
20	14 SMF49RSV	2		Reserved.								
22	16 SMF49LRR	2	binary	Length of rest of record, excluding this field.								

Record type 49

Offsets	Name	Length	Format	Description
24	18 SMF49EVT	2	binary	Record indicator
				Value Meaning
				1 Terminal not defined (BSC)
				2 Security failure (BSC)
				4 Line already signed on (BSC)
				8 Terminal already signed on (BSC)
				5 Session limit exceeded (SNA)
				6 Work station undefined (SNA)
				7 Security failure (SNA)
				8 Bind failure (SNA).
Identification Section:				
26	1A SMF49LN1	2	binary	Length of identification section, including this field.
28	1C SMF49RMT	8	EBCDIC	Remote name as defined in JESPARMS. (This field is filled in only if a remote terminal is connected to this line.)
36	24 SMF49LIN	8	EBCDIC	Line name as defined in JESPARMS.
44	2C SMF49PSW	8	EBCDIC	Incorrect password.
Message Section: The following fields apply only to BSC.				
52	34 SMF49LN2	2	binary	Length of message section, including this field.
54	36 SMF49MSG	36	EBCDIC	Message text. This field includes columns 35-70 of the SIGNON card image.

Record Type 50 (32) — VTAM Tuning Statistics

VTAM writes type 50 records to collect statistics about tuning when a user-specified time interval expires. For more information about tuning statistics, see *z/OS Communications Server: SNA Network Implementation Guide*.

Record Type 52 (34) — JES2 LOGON/Start Line (SNA only)

Record type 52 is written when:

- A \$S LNEn command (to start a line) is issued
- A \$E LNEn command (to restart a line) is issued, and
- When a remote user signs on.

This record contains a record indicator, remote name, line name, password, and message text.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF52LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF52SEG	2	binary	Segment descriptor (see record length field).

Offsets	Name	Length	Format	Description								
4	4 SMF52FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF52RTY	1	binary	Record type 52 (X'34').								
6	6 SMF52TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF52DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF52SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF52POF	2	binary	Offset to product section from start of record, including record descriptor word (RDW).								
20	14 SMF52PRL	2	binary	Length of product section.								
22	16 SMF52PRN	2	binary	Number of product section.								
24	18 SMF52IDO	2	binary	Offset to identification section from start of record, including record descriptor word (RDW).								
26	1A SMF52IDL	2	binary	Length of identification section.								
28	1C SMF52IDN	2	binary	Number of identification section.								
Product Section:												
30	1E SMF52SUB	2	binary	Subtype ID 1 = Record written for LOGON 2 = Record written for \$S LNE <i>n</i> .								
32	20 SMF52VER	2	EBCDIC	Record version number.								
34	22 SMF52SYS	4	EBCDIC	Subsystem name, 'JES2' when JES2 creates the record, 'PPCC' when PSF creates the record.								
Identification Section:												
38	26 SMF52RMT	8	EBCDIC	Remote name as defined in JESPARMS (only for Subtype ID = 1).								
46	2E SMF52LIN	8	EBCDIC	Line name as defined in JESPARMS.								
54	36 SMF52PSW	8	EBCDIC	Line password as defined in JESPARMS.								

Record Type 53 (35) — JES2 LOGOFF/Stop Line (SNA only)

Record type 53 is written when:

- A \$P LNE*n* command (to stop a line) is issued
- A \$E LNE*n* command (to restart a line) is issued
- When a remote user signs off.

This record contains:

- A record indicator
- A remote name
- A line name
- A password

Record type 53

- A line adapter address
- The number of execute channel programs (EXCP)
- Negative acknowledgements to write text
- Data checks to read text
- Time outs to read text.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF53LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF53SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF53FLG	1	binary	System indicator: <table border="1"><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF53RTY	1	binary	Record type 53 (X'35').								
6	6 SMF53TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF53DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF53SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF53PRD	2	binary	Offset to product section from start of record, including record descriptor word (RDW).								
20	14 SMF53PRL	2	binary	Length of product section.								
22	16 SMF53PRN	2	binary	Number of product section.								
24	18 SMF53IDO	2	binary	Offset to identification section from start of record, including record descriptor word (RDW).								
26	1A SMF53IDL	2	binary	Length of identification section.								
28	1C SMF53IDN	2	binary	Number of identification section.								
Product Section:												
30	1E SMF53SUB	2	binary	Subtype ID 1 = Record written for LOGOFF 2 = Record written for \$P LNE _n .								
32	20 SMF53VER	2	EBCDIC	Record version number.								
34	22 SMF53SYS	4	EBCDIC	Subsystem name, 'JES2'.								
Identification Section:												
38	26 SMF53RMT	8	EBCDIC	Remote name as defined in JESPARMS.								
46	2E SMF53LIN	8	EBCDIC	Line name as defined in JESPARMS.								
54	36 SMF53PSW	8	EBCDIC	Line password as defined in JESPARMS.								

Offsets	Name	Length	Format	Description
62	3E SMF53CTR	4	binary	Number of VTAM requests processed.
66	42 SMF53CTR +4	4	binary	Number of exception responses.
70	46 SMF53CTR +8	4	binary	Number of LUSTATs received.
74	4A SMF53CTR +12	4	binary	Number of bid rejects.
78	4E SMF53CTR +16	4	binary	Number of temporary errors.
82	52 SMF53ADP	3	EBCDIC	Line identifier, 'SNA'.

Record Type 54 (36) — JES2 Integrity (SNA only)

Record type 54 is written when a SNA remote user attempts to sign on with an incorrect password. It contains a record indicator, remote name, line name, invalid password, and message text.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF54LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF54SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF54FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF54RTY	1	binary	Record type 54 (X'36').								
6	6 SMF54TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF54DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF54SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF54POF	2	binary	Offset to product section from start of record, including record descriptor word (RDW).								
20	14 SMF54PRL	2	binary	Length of product section.								
22	16 SMF54PRN	2	binary	Number of product section.								
24	18 SMF54IDO	2	binary	Offset to identification section from start of record, including record descriptor word (RDW).								
26	1A SMF54IDL	2	binary	Length of identification section.								
28	1C SMF54IDN	2	binary	Number of identification section.								
Product Section:												

Record type 54

Offsets	Name	Length	Format	Description
30	1E SMF54SUB	2	binary	Subtype ID 1 = Record written for LOGON.
32	20 SMF54VER	2	EBCDIC	Record version number.
34	22 SMF54SYS	4	EBCDIC	Subsystem name, 'JES2'.
Identification Section:				
38	26 SMF54RMT	8	EBCDIC	Remote name as defined in JESPARMS.
46	2E SMF54RPW	8	EBCDIC	Remote password as defined in JESPARMS.
54	36 SMF54PSW	8	EBCDIC	Line password as defined in JESPARMS.

Record Type 55 (37) — JES2 Network SIGNON

Record type 55 is written at each node when a start networking command is processed. The initial SIGNON is recorded at the node to which the SIGNON was sent; the response SIGNON is recorded at the node that originated the initial SIGNON.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF55LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF55SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF55FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF55RTY	1	binary	Record type 55 (X'37').								
6	6 SMF55TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF55DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>OcyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF55SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF55SBS	2	binary	Subsystem identification — X'0002' signifies JES2.								
20	14 SMF55SUB	2	binary	Record subtype.								
22	16 SMF55LRR	2	binary	Length of rest of record, not including this field.								
24	18 SMF55NNM	8	EBCDIC	Node name.								
32	20 SMF55MEM	1	binary	Member number.								

Offsets	Name	Length	Format	Description
33	21 SMF55FG1	1	binary	Sign-On Status Flag Bit Meaning when set 0 Response sign-on (off = initial sign-on) 1-7 Reserved.
34	22 SMF55LPW	8	EBCDIC	Line password as defined in JESPARMS.
42	2A SMF55NPW	8	EBCDIC	Node password as defined in JESPARMS.
50	32 SMF55LNM	8	EBCDIC	Line name as defined in JESPARMS.

Record Type 56 (38) — JES2 Network Integrity

Record type 56 is written whenever an attempt to SIGNON contains an incorrect line or node password.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF56LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF56SEG	2	binary	Segment descriptor (see record length field).
4	4 SMF56FLG	1	binary	System indicator: Bit Meaning when set 0-2 Reserved 3-6 Version indicators* 7 Reserved. *See "Standard SMF record header" on page 162 for a detailed description.
5	5 SMF56RTY	1	binary	Record type 56 (X'38').
6	6 SMF56TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.
10	A SMF56DTE	4	packed	The date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
14	E SMF56SID	4	EBCDIC	System identification (from the SID parameter).
18	12 SMF56SBS	2	binary	Subsystem identification — X'0002' signifies JES2.
20	14 SMF56SUB	2	binary	Record subtype.
22	16 SMF56LRR	2	binary	Length of rest of record, not including this field.
24	18 SMF56NNM	8	EBCDIC	Node name.
32	20 SMF56MEM	1	binary	Member number.
33	21 SMF56FG1	1	binary	Sign-On Status Flag Bit Meaning when set 0 Response sign-on (off = initial sign-on) 1-7 Reserved.

Record type 56

Offsets	Name	Length	Format	Description
34	22 SMF56LPW	8	EBCDIC	Line password.
42	2A SMF56NPW	8	EBCDIC	Node password.
50	32 SMF56LNM	8	EBCDIC	Line name.

Record Type 57 (39) — JES2 Network SYSOUT Transmission

Record type 57 is written to record JES2 SYSOUT transmission information. This record contains original and current job identifiers, transmitter start and stop times, and a count of the records transmitted.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF57LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF57SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF57FLG	1	binary	System indicator: <table> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)											
7	Reserved.											
5	5 SMF57RTY	1	binary	Record type 57 (X'39').								
6	6 SMF57TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF57DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF57SID	4	EBCDIC	System identifier (from the SID parameter).								
18	12 SMF57SBS	2	binary	Subsystem identifier — X'0002' signifies JES2.								
20	14 SMF57SUB	2	binary	Record subtype.								
22	16 SMF57LRR	2	binary	Length of rest of record, not including this field.								
24	18 SMF57JID	8	EBCDIC	Original job identification.								
32	20 SMF57CJD	8	EBCDIC	Current job identification.								
40	28 SMF57ONN	8	EBCDIC	Original node name.								
48	30 SMF57ENN	8	EBCDIC	Processing node name.								
56	38 SMF57N>NN	8	EBCDIC	Next node name.								
64	40 SMF57DVN	8	EBCDIC	SYSOUT transmitter device name.								
72	48 SMF57TSS	4	binary	SYSOUT transmitter start time.								
76	4C SMF57DSS	4	packed	SYSOUT transmitter start date.								
80	50 SMF57TPS	4	binary	SYSOUT transmitter stop time.								
84	54 SMF57DPS	4	packed	SYSOUT transmitter stop date.								
88	58 SMF57ACN	8	EBCDIC	Network account number.								

Offsets	Name	Length	Format	Description
96	60 SMF57TSI	4	EBCDIC	SYSOUT transmitter system identification.
100	64 SMF57CNT	4	binary	Count of logical TP records.
104	68 SMF57NTR	2	binary	Number of triplets in record. A triplet is a set of offset/length/number values that defines a section of the record.
106	6A	2		Reserved.
108	6C SMF57OSW	4	binary	Offset to Enhanced SYSOUT Support (ESS) section.
112	70 SMF57LSW	4	binary	Length of Enhanced SYSOUT Support (ESS) section.
116	74 SMF57NSW	4	binary	Number of Enhanced SYSOUT Support (ESS) sections.

Enhanced SYSOUT Support (ESS) Section

This section contains the output descriptor (if any) for first offloaded data set in this record.

Offsets	Name	Length	Format	Description						
0	0 SMF57LN5	2	binary	Length of ESS section (including this field).						
2	2 SMF57SGT	4	binary	Segment identifier.						
6	6 SMF57IND	1	binary	Section indicator <table border="1" data-bbox="876 840 1396 1018"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.	1-7	Reserved.
Bit	Meaning when set									
0	Error obtaining scheduler JCL facility (SJF) information. Scheduler work block text unit (SWBTU) data area is not present.									
1-7	Reserved.									
7	7	1		Reserved.						
8	8 SMF57JDT	8	EBCDIC	JCL definition table (JDT) name in JCL definition vector table (JDTV).						
16	10 SMF57TUL	2	binary	Text unit (SWBTU) data area length.						
18	12 SMF57TU	VAR	binary	Text unit (SWBTU) data area. The data area can be processed using the SWBTUREQ macro.						

Record Type 57 (39) — JES3 Networking Transmission

Record type 57 is written whenever JES3 completes a network transmission and the connection to the next node is BSC. When the connection is SNA, JES3 does not write the record; BDT writes record type 59 instead. Record type 57 contains original and current job identifiers, accounting information, transmission path, and destination.

Macro to Symbolically Address JES3 Record Type 57: The SMF record mapping macro for JES3 record type 57 is IATYNM.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency

31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMFNJLEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMFNJDES	2	binary	Segment descriptor (see record length field).								
4	4 SMFNJFLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)											
7	Reserved.											
5	5 SMFNJRITY	1	binary	Record type 57 (X'39').								
6	6 SMFNJTME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMFNJDTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMFSYSID	4	EBCDIC	System identifier (from the SID parameter).								
18	12 SMFSUBID	2	binary	Subsystem identifier — X'0005' signifies JES3.								
20	14	2		Reserved.								
22	16 SMFNJLRR	2	binary	Length of the record following this field.								
24	18 SMFNJETM	4	binary	Transmission start time, in hundredths of a second.								
28	1C SMFNJEDT	4	packed	Transmission start date, in packed decimal form.								
32	20 SMFNJIND	2	EBCDIC	Job type indicator <ul style="list-style-type: none"> • JB — indicates data is a job stream • OP — indicates data is a SYSOUT data stream. 								
34	22 SMFNJNAM	8	EBCDIC	Job name, or transaction name (for APPC output).								
42	2A SMFNJNUM	4	EBCDIC	Current JES3-assigned job number if less than 10,000. If the job number is equal to or greater than 10,000, this field contains character zeroes, and the job number appears in SMFNJJID.								
46	2E SMFNJONM	4	binary	Original job number (from submitting node), or transaction ID (for APPC output).								
50	32 SMFNJPGM	20	EBCDIC	Programmer name.								
70	46 SMFNJUSR	8	EBCDIC	Origin or notify user identifier.								
78	4E SMFNJACT	8	EBCDIC	Networking account number.								
86	56 SMFNJDPT	8	EBCDIC	Department number.								
94	5E SMFNJBLD	8	EBCDIC	Building number.								
102	66 SMFNJLOC	8	EBCDIC	Location number.								
110	6E SMFNJORG	8	EBCDIC	Job origin.								
118	76 SMFNJRMT	8	EBCDIC	Secondary job origin.								
126	7E SMFNJXEQ	8	EBCDIC	Processing node name.								
134	86 SMFNJEXU	8	EBCDIC	Processing user identifier, or user associated with the transaction (for APPC output).								

Offsets	Name	Length	Format	Description
142	8E SMFNJDST	8	EBCDIC	Destination node name.
150	96 SMFNJPTH	8	EBCDIC	Transmission path node name.
158	9E SMFNJRCT	4	binary	Record count.
162	A2 SMFNJCNT	4	binary	Compressed byte count.
166	A6 SMFNJTRN	4	binary	Transmission buffer count.
170	AA SMFNJJID	8	EBCDIC	JES3-assigned job number in JOBxxxx format.

Record Type 58 (3A) — JES2 Network SIGNOFF

Record type 58 is written at each node when a networking session is terminated. The record contains the node name, member number, and line name.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF58LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF58SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF58FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF58RTY	1	binary	Record type 58 (X'3A').								
6	6 SMF58TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF58DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>OcyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF58SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF58SBS	2	binary	Subsystem identification — X'0002' signifies JES2.								
20	14 SMF58SUB	2	binary	Record subtype.								
22	16 SMF58LRR	2	binary	Length of rest of record, not including this field.								
24	18 SMF58NNM	8	EBCDIC	Node name.								
32	20 SMF58MEM	1	binary	Member number.								
33	21 SMF58RVI	1		Reserved.								
34	22 SMF58LNM	8	EBCDIC	Line name.								

Record Type 59 (3B) — MVS/BDT File-to-File Transmission

Record type 59 is written when MVS/Bulk Data Transfer (MVS/BDT) completes a file-to-file transmission, and the connection to the next node is SNA. When the connection is BSC, BDT does not write the record; JES3 writes record type 57 instead. MVS/BDT writes record type 59 from the global node where the transaction is queued; it produces a record whether the transmission successfully completes.

The record contains sections for:

- MVS/BDT product information
- Transaction identification
- File-to-file (FTF) information (transaction type section)
- Network information (transaction type section)
- Transaction data information (optional)
- Transaction accounting information (optional)
- Transmission information.

There are two 40-byte fields for user information at SMF59US1 (transaction data section) and SMF59US2 (transmission data section).

Macro to Symbolically Address JES3 Record Type 59: IFASMFR uses BDTDSMF, and MVS/BDT macro instructions to generate the mapping. If you want the record type 59 mapping, make sure that both IFASMFR and BDTDSMF reside on the same macro library. BDTDSMF is written in assembler language and is supplied on SYS1.AMODGEN.

MVS/BDT invokes the optional installation exit BDTUX24 before writing the record.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU84)

Mode Task

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF59LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF59SEG	2	binary	Segment descriptor (see record length field).

Offsets	Name	Length	Format	Description								
4	4 SMF59FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF59RTY	1	binary	Record type 59 (X'3B').								
6	6 SMF59TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF59DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF59SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF59SSI	4	EBCDIC	Subsystem identification ('BDT').								
22	16 SMF59VER	2	EBCDIC	Version number.								
24	18 SMF59OPD	4	binary	Offset to MVS/BDT product section.								
28	1C SMF59LPD	2	binary	Length of MVS/BDT product section.								
30	1E SMF59NPD	2	binary	Number of MVS/BDT product sections.								
32	20 SMF59OTI	4	binary	Offset to transaction identifier section.								
36	24 SMF59LTI	2	binary	Length of transaction identifier section.								
38	26 SMF59NTI	2	binary	Number of transaction identifier sections.								
40	28 SMF59OTT	4	binary	Offset to transaction type section.								
44	2C SMF59LTT	2	binary	Length of transaction type section.								
46	2E SMF59NTT	2	binary	Number of transaction type sections.								
48	30 SMF59OTD	4	binary	Offset to transaction data section.								
52	34 SMF59LTD	2	binary	Length of transaction data section.								
54	36 SMF59NTD	2	binary	Number of transaction data sections.								
56	38 SMF59OTS	4	binary	Offset to transmission section.								
60	3C SMF59LTS	2	binary	Length of transmission section.								
62	3E SMF59NTS	2	binary	Number of transmission sections.								
64	40 SMF59OTA	4	binary	Offset to transaction accounting section (an optional section).								
68	44 SMF59LTA	2	binary	Length of transaction accounting section (if present).								
70	46 SMF59NTA	2	binary	Number of transaction accounting sections (if any).								

MVS/BDT Product Section

Offsets	Name	Length	Format	Description
0	0 SMF59RCD	2	EBCDIC	MVS/BDT version number.
2	2 SMF59BDT	8	EBCDIC	Product name 'MVS-BDT'.
10	A SMF59SSN	8	EBCDIC	MVS/BDT node name.
18	12 SMF59TID	2	EBCDIC	Transaction type identifier — "FF" for FTE, "NJ" for NJE.

Record type 59

Transaction Identifier Section

Offsets	Name	Length	Format	Description
0	0 SMF59TNU	4	EBCDIC	MVS/BDT job number.
4	4 SMF59TI1	8		Reserved.
12	C SMF59T12	8		Reserved.
20	14 SMF59TQS	8	EBCDIC	MVS/BDT transaction queuing node.
28	1C SMF59T13	8		Reserved.
36	24 SMF59TSP	8	EBCDIC	Transaction source processor name.
44	2C SMF59TSS	8	EBCDIC	MVS/BDT transaction source node.
52	34 SMF59TUT	2	EBCDIC	Transaction source user ID type: J3 JES3 (for NJE) T TSO/E user J JES console B Batch job M MCS console.
54	36 SMF59T15	2		Reserved.
56	38 SMF59TSU	8	EBCDIC	Transaction source user ID: NJE Blank TSO/E Userid JES Console DD name Batch Job name MCS Console identified.

Transaction Type Section for FTF

Offsets	Name	Length	Format	Description
0	0 SMF59ONN	8	EBCDIC	MVS/BDT origin node name.
8	8 SMF59OFN	44	EBCDIC	Origin file name if specified in transaction.
52	34 SMF59OMN	8	EBCDIC	PDS member name of origin file if specified in SEQ transaction.
60	3C SMF59OVI	6	EBCDIC	First volume serial number for origin file if specified in transaction.
66	42 SMF59OFG	1	EBCDIC	Origin file flag: 'D' — DUMMY specified.
67	43 SMF59TTI	3		Reserved.
70	46 SMF59DNN	8	EBCDIC	MVS/BDT destination node name.
78	48 SMF59DFN	44	EBCDIC	Destination file name if specified in transaction.
122	7A SMF59DMN	8	EBCDIC	PDS member name of destination file is specified in SEQ transaction.
130	82 SMF59DVI	6	EBCDIC	First volume serial number for destination file is specified in transaction.
136	88 SMF59DFG	1	EBCDIC	Destination file flag: 'D' — DUMMY specified, 'I' — INTRDR specified.
137	89 SMF59TT2	3		Reserved.

Transaction Type Section for NJE

Offsets	Name	Length	Format	Description
0	0 SMF59NJT	2	EBCDIC	Job type JB data is a job stream OP data is a complete SYSOUT.
2	2 SMF59NUM	2	binary	Original job number (NJHGJID).
4	4 SMF59NR1	2	binary	Reserved.
6	6 SMF59NAN	8	EBCDIC	Network account number.
14	E SMF59NAM	8	EBCDIC	Original job name (NJHGJNAM).
22	16 SMF59JID	8	EBCDIC	JES3 job ID.
30	1E SMF59NUI	8	EBCDIC	Notify user ID (NJHGUSID).
38	26 SMF59NDT	8	binary	Job entry date/time stamp on origin node (NJHGETS).
46	2E SMF59XQN	8	EBCDIC	Processing node name (NJHGEXQN).
54	36 SMF59XQU	8	EBCDIC	Processing user ID (NJHGUSID).
62	3E SMF59NPN	20	EBCDIC	Programmer's name (NJHGPRGN).
82	52 SMF59NPR	8	EBCDIC	Programmer's room number (NJHGDEPT).
90	5A SMF59NP#	8	EBCDIC	Programmer's department number (NJHGDEPT).
98	62 SMF59NPB	8	EBCDIC	Programmer's building number (NJHFBLDG).
106	6A SMF59NR2	8		Reserved.
114	72 SMF59NR3	8		Reserved.
122	7A SMF59NR4	8		Reserved.
130	82 SMF59NR5	10		Reserved.

Transaction Data Section

Offsets	Name	Length	Format	Description
0	0 SMF59TTQ	4	binary	Time since midnight, in hundredths of a second, that the transaction was queued (GMT).
4	4 SMF59DTQ	4	packed	Date when the transaction was queued, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
8	8 SMF59TTC	4	binary	Time since midnight, in hundredths of a second, that the transaction was completed (GMT).
12	C SMF59DTC	4	packed	Date when the transaction was completed, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
16	10 SMF59BJN	8	EBCDIC	MVS/BDT job name.
24	18 SMF59PNM	20	EBCDIC	Programmer name.
44	2C SMF59TPR	2	EBCDIC	Transaction priority.
46	2E SMF59TCM	2	EBCDIC	Transaction completion code '00' normal '04' operator cancelled '08' abnormal.
48	30 SMF59BTC	8	EBCDIC	MVS/BDT transaction code X'51' — NJE transaction Q — self-defining transaction GMJD member name.
56	38 SMF59TD1	4		Reserved.
60	3C SMF59BCT	8	binary	Number of bytes transferred.
68	44 SMF59US1	40	EBCDIC	User area (initialized with blanks).

Record type 59

Transmission Section

Offsets	Name	Length	Format	Description
0	0 SMF59X01	8		Reserved.
8	8 SMF59X02	8		Reserved.
16	10 SMF59SNN	8	EBCDIC	MVS/BDT sender node.
24	18 SMF59X03	8		Reserved.
32	20 SMF59X04	8		Reserved.
40	28 SMF59X05	8		Reserved.
48	30 SMF59RCN	8	EBCDIC	MVS/BDT receiver node.
56	38 SMF59X06	8		Reserved.
64	40 SMF59XST	4	binary	Time since midnight, in hundredths of a second, that the transmission started (GMT).
68	44 SMF59XSD	4	packed	Date when the transmission started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
72	48 SMF59XPT	4	binary	Time since midnight, in hundredths of a second, that the transmission stopped (GMT).
76	4C SMF59XPD	4	packed	Date when the transmission stopped, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
80	50 SMF59X08	8		Reserved.
88	58 SMF59X09	4		Reserved.
92	5C SMF59XOC	5	EBCDIC	Transmission origin completion code.
97	61 SMF59XDC	5	EBCDIC	Transmission destination completion code.
102	66 SMF59X10	2		Reserved.
104	68 SMF59US2	40	EBCDIC	User area (initialized with blanks).

Transaction Accounting Section

This section is optional.

Offsets	Name	Length	Format	Description
0	0 SMF59ACT	variable	EBCDIC	User accounting data from ACCT parameter.

Record type 60 (3C) — VSAM volume data set updated

Note: Field SMF60CRC is *not* part of the programming interface.

Record type 60 is written when a VSAM Volume Record (VVR) or a Non-VSAM Volume Record (NVR) is inserted, updated, or deleted from a VSAM Volume Data Set (VVDS); for example, when a VSAM cluster is defined, closed, or deleted. One type 60 record is written for each VVR or NVR written or deleted.

Record type 60 identifies the VVDS in which the VVR or NVR is written or deleted and gives the new, updated, or deleted VVR or NVR. It identifies the job by job log and user identifiers.

If SMFVER = 2, an 8-byte field is at the end of the VVR/NVR record, which contains the time (recorded in microseconds) needed to complete the VVDS request (ADD, DELETE, or INSERT). This field only exists for an SMF type 60 record.

Macro to Symbolically Address Record Type 60: The SMF record mapping macro for record types 36, 60, 61, 65, and 66 is IFASMFI6. The syntax is as follows:

IFASMFI6 *nn*

nn identifies the type of the record you want to map. The mapping macro resides in SYS1.MACLIB.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF60LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF60SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF60SYS	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)											
7	Reserved.											
5	5 SMF60RTY	1	binary	Record type 60 (X'3C').								
6	6 SMF60TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF60DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF60CPU	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF60SBS	4		Reserved.								
22	16 SMF60SUB	2	EBCDIC	Indicates that the VVR is updated, deleted, or inserted in the VVDS: <table border="0"> <thead> <tr> <th>Contents</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>UP</td> <td>Updated</td> </tr> <tr> <td>DE</td> <td>Deleted</td> </tr> <tr> <td>IN</td> <td>Inserted</td> </tr> </tbody> </table>	Contents	Meaning	UP	Updated	DE	Deleted	IN	Inserted
Contents	Meaning											
UP	Updated											
DE	Deleted											
IN	Inserted											
24	18 SMF60POF	4	binary	Offset of product section from start of record, including the record descriptor word (RDW).								
28	1C SMF60PLN	2	binary	Length of product section.								
30	1E SMF60PNO	2	binary	Number of product sections.								
32	20 SMF60DOF	4	binary	Offset of data section from start of record, including the record descriptor word (RDW).								
36	24 SMF60DLN	2	binary	Length of data section.								
38	26 SMF60DNO	2	binary	Number of data sections.								
Product and data section:												
40	28 SMF60VER	2	EBCDIC	Version of the type 60 records.								
42	2A SMF60PNM	8	EBCDIC	Catalog management product identifier.								

Record type 60

Offsets	Name	Length	Format	Description																																																								
50	32 SMF60JNM	8	EBCDIC	Job name. The job log identification consists of the job name, time, and date that the reader recognized the JOB card (for this job).																																																								
58	3A SMF60RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).																																																								
62	3E SMF60RDT	4	packed	Date when the reader recognized the JOB card for this job, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.																																																								
66	42 SMF60UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).																																																								
74	4A SMF60FNC	1		Reserved.																																																								
75	4B SMF60CNM	44	EBCDIC	Name of VSAM volume data set (VVDS) in which entry is made.																																																								
119	77 SMF60TYP	1	EBCDIC	<p>Entry type identifier.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr><td>C'A'</td><td>NonVSAM data set</td></tr> <tr><td>C'B'</td><td>Generation data group (GDG) base</td></tr> <tr><td>C'C'</td><td>Cluster</td></tr> <tr><td>C'D'</td><td>Data set</td></tr> <tr><td>C'E'</td><td>VSAM extension record</td></tr> <tr><td>C'F'</td><td>Free space</td></tr> <tr><td>C'G'</td><td>Alternate index</td></tr> <tr><td>C'H'</td><td>Active generation data set (GDS) entry in GDG base</td></tr> <tr><td>C'I'</td><td>Index</td></tr> <tr><td>C'J'</td><td>CDG extension record</td></tr> <tr><td>C'K'</td><td>VSAM volume record (VVR)</td></tr> <tr><td>C'L'</td><td>Library control system library record</td></tr> <tr><td>C'M'</td><td>Master catalog</td></tr> <tr><td>C'N'</td><td>NonVSAM record header</td></tr> <tr><td>C'O'</td><td>Object Access Method (OAM) nonVSAM record</td></tr> <tr><td>C'P'</td><td>Page space</td></tr> <tr><td>C'Q'</td><td>VVR header (secondary)</td></tr> <tr><td>C'R'</td><td>Path</td></tr> <tr><td>C'T'</td><td>True name record</td></tr> <tr><td>C'U'</td><td>User catalog</td></tr> <tr><td>C'V'</td><td>Volume</td></tr> <tr><td>C'W'</td><td>Library control system volume</td></tr> <tr><td>C'X'</td><td>Alias record</td></tr> <tr><td>C'Y'</td><td>Upgrade</td></tr> <tr><td>C'Z'</td><td>VVR header (primary)</td></tr> <tr><td>X'00'</td><td>Normal nonVsam record</td></tr> <tr><td>X'01'</td><td>JES3 record.</td></tr> </tbody> </table>	Value	Meaning	C'A'	NonVSAM data set	C'B'	Generation data group (GDG) base	C'C'	Cluster	C'D'	Data set	C'E'	VSAM extension record	C'F'	Free space	C'G'	Alternate index	C'H'	Active generation data set (GDS) entry in GDG base	C'I'	Index	C'J'	CDG extension record	C'K'	VSAM volume record (VVR)	C'L'	Library control system library record	C'M'	Master catalog	C'N'	NonVSAM record header	C'O'	Object Access Method (OAM) nonVSAM record	C'P'	Page space	C'Q'	VVR header (secondary)	C'R'	Path	C'T'	True name record	C'U'	User catalog	C'V'	Volume	C'W'	Library control system volume	C'X'	Alias record	C'Y'	Upgrade	C'Z'	VVR header (primary)	X'00'	Normal nonVsam record	X'01'	JES3 record.
Value	Meaning																																																											
C'A'	NonVSAM data set																																																											
C'B'	Generation data group (GDG) base																																																											
C'C'	Cluster																																																											
C'D'	Data set																																																											
C'E'	VSAM extension record																																																											
C'F'	Free space																																																											
C'G'	Alternate index																																																											
C'H'	Active generation data set (GDS) entry in GDG base																																																											
C'I'	Index																																																											
C'J'	CDG extension record																																																											
C'K'	VSAM volume record (VVR)																																																											
C'L'	Library control system library record																																																											
C'M'	Master catalog																																																											
C'N'	NonVSAM record header																																																											
C'O'	Object Access Method (OAM) nonVSAM record																																																											
C'P'	Page space																																																											
C'Q'	VVR header (secondary)																																																											
C'R'	Path																																																											
C'T'	True name record																																																											
C'U'	User catalog																																																											
C'V'	Volume																																																											
C'W'	Library control system volume																																																											
C'X'	Alias record																																																											
C'Y'	Upgrade																																																											
C'Z'	VVR header (primary)																																																											
X'00'	Normal nonVsam record																																																											
X'01'	JES3 record.																																																											
120	78 SMF60ENM	44	EBCDIC	Entry name.																																																								

Offsets	Name	Length	Format	Description
164	A4 SMF60NNM	44		Reserved.
208	D0 SMF60CRC	<i>variable</i>	binary	VVR or NVR (the length of the VVR or NVR is contained in the first two bytes of this field). If SMFVER=2, an 8-byte field is at the end of this record which contains the time (recorded in microseconds) needed to complete the VVDS request (ADD, DELETE, or INSERT). This field exists only for an SMF type 60 record.

Record Type 61 (3D) — Integrated Catalog Facility Define Activity

Record type 61 is written during any processing that results in a DEFINE request to Catalog Management Services, such as:

```
IDCAMS
    DEFINE
IEHPROGM
    CATLG
```

One type 61 record is written for each record inserted or updated in a catalog.

Record type 61 identifies the entry being defined and the catalog in which the catalog record is written and gives the new or updated catalog record. It identifies the job by job log and user identifiers.

Macro to Symbolically Address Record Type 61: The SMF record mapping macro for record types 36, 60, 61, 65 and 66 is IFASMF16. The syntax is as follows:

```
IFASMF16 nn
```

nn identifies the type of the record you want to map. The mapping macro resides in SYS1.MACLIB.

Record Mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF61LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF61SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF61SYS	1	binary	System indicator: <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF61RTY	1	binary	Record type 61 (X'3D').								

Record type 61

Offsets	Name	Length	Format	Description
6	6 SMF61TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.
10	A SMF61DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
14	E SMF61CPU	4	EBCDIC	System identification (from the SID parameter).
18	12 SMF61SBS	4		Reserved.
22	16 SMF61SUB	2	EBCDIC	The action taken on the catalog entry; valid values are: IN (INSERT) DE (DELETE) UP (UPDATE)
24	18 SMF61POF	4	binary	Offset of product section from start of record, including record descriptor word (RDW).
28	1C SMF61PLN	2	binary	Length of product section.
30	1E SMF61PNO	2	binary	Number of product sections.
32	20 SMF61DOF	4	binary	Offset of data section from start of record, including record descriptor word (RDW).
36	24 SMF61DLN	2	binary	Length of data section.
38	26 SMF61DNO	2	binary	Number of data sections.
Product and Data Section:				
40	28 SMF61VER	2	EBCDIC	Version of the type 61 records.
42	2A SMF61PNM	8	EBCDIC	Catalog management product identifier.
50	32 SMF61JNM	8	EBCDIC	Job name. The job log identification consists of the job name, time, and date that the reader recognized for the JOB card (for this job). If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros.
58	3A SMF61RST	4	binary	Time since midnight, in hundredths of a second, the reader recognized the JOB card (for this job).
62	3E SMF61RDT	4	packed	Date reader recognized the JOB card for this job, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
66	42 SMF61UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
74	4A SMF61FNC	1		Reserved.
75	4B SMF61CNM	44	EBCDIC	Name of catalog in which entry is defined.
119	77 SMF61TYP	1	EBCDIC	Entry type identifier. For a description of this field, see the SMF60TYP field in "Header/Self-defining Section" on page 475.
120	78 SMF61ENM	44	EBCDIC	Entry name.
164	A4 SMF61NNM	44		Reserved.
208	D0 SMF61CRC	<i>variable</i>	binary	New catalog record for defined entry (the length of this record is contained in the first two bytes of this field).

Record Type 62 (3E) — VSAM Component or Cluster Opened

Record type 62 is written at the successful or unsuccessful opening of a VSAM component or cluster.

Record type 62 identifies the VSAM component or cluster and indicates whether it was successfully opened. It names the VSAM catalog in which the object is defined and the volumes on which the catalog and object are stored. It identifies the job that issued the OPEN macro by job log identification and user identification. The job name and the time and date that the reader recognized the JOB card for this job constitute the job log identification.

Note: This record is not generated when a system task issues the OPEN macro.

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro SMFWTM(1) (record exit: IEFU83)

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF62LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF62SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF62FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF62RTY	1	binary	Record type 62 (X'3E').								
6	6 SMF62TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF62DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF62SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF62JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF62RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF62RSD	4	packed	Date when the reader recognized the JOB card for this job, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF62UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								

Record type 62

Offsets	Name	Length	Format	Description												
42	2A SMF62IND	4	binary	Open status indicator. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Component or cluster was successfully opened</td> </tr> <tr> <td>1</td> <td>Security violation, that is, incorrect password</td> </tr> <tr> <td>2</td> <td>Record is a catalog or catalog recovery area (CRA) record</td> </tr> <tr> <td>3</td> <td>Record is for a VSAM volume data set (VVDS) or ICF catalog being opened or closed as a data set. If this bit is set, the catalog name field and the cluster name field may be set to zeroes.</td> </tr> <tr> <td>4-31</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Component or cluster was successfully opened	1	Security violation, that is, incorrect password	2	Record is a catalog or catalog recovery area (CRA) record	3	Record is for a VSAM volume data set (VVDS) or ICF catalog being opened or closed as a data set. If this bit is set, the catalog name field and the cluster name field may be set to zeroes.	4-31	Reserved.
Bit	Meaning when set															
0	Component or cluster was successfully opened															
1	Security violation, that is, incorrect password															
2	Record is a catalog or catalog recovery area (CRA) record															
3	Record is for a VSAM volume data set (VVDS) or ICF catalog being opened or closed as a data set. If this bit is set, the catalog name field and the cluster name field may be set to zeroes.															
4-31	Reserved.															
46	2E SMF62CNM	44	EBCDIC	Name of the catalog in which the component or cluster is defined.												
90	5A SMF62CVS	6	EBCDIC	Volume serial number of the volume containing the catalog.												
96	60 SMF62DNM	44	EBCDIC	Name of the component or cluster being opened.												
140	8C SMF62VCT	2	binary	Number of online volumes containing the component or cluster. (This field is also the number of ten-byte fields that list the volumes.)												
For each online volume, there is a ten-byte entry with the following format:																
0	0 SMF62VSR	6	EBCDIC	Volume serial number of the volume containing the component or cluster.												
6	6 SMF62DTY	4	binary	Unit type of the volume containing the component or cluster.												
After the volume entries, three fields define SMS class information:																
0	0 SMF62MGT	8	binary	SMS management class.												
8	8 SMF62STR	8	binary	SMS storage class.												
16	10 SMF62DAT	8	binary	SMS data class.												

Statistics Section

Offsets	Name	Length	Format	Description																		
0	0 SMF62TIM	4	binary	Time data set was opened (in hundredths of a second since midnight).																		
4	4 SMF62DT	4	packed	Date data set was opened, in the form of 0cyyddF (where c is 0 for 19xx and 1 for 20xx, yy is the current year (0-99), ddd is the current day (1-356), and F is the sign).																		
8	8 SMF62MC1	1	binary	First ACB MACRF flag byte: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is identified by a key</td> </tr> <tr> <td>1</td> <td>Record is identified by a relative byte address (RBA)</td> </tr> <tr> <td>2</td> <td>Control-Interval processing</td> </tr> <tr> <td>3</td> <td>Sequential processing</td> </tr> <tr> <td>4</td> <td>Direct processing</td> </tr> <tr> <td>5</td> <td>Input processing</td> </tr> <tr> <td>6</td> <td>Output processing</td> </tr> <tr> <td>7</td> <td>User-supplied buffer space</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Record is identified by a key	1	Record is identified by a relative byte address (RBA)	2	Control-Interval processing	3	Sequential processing	4	Direct processing	5	Input processing	6	Output processing	7	User-supplied buffer space
Bit	Meaning when set																					
0	Record is identified by a key																					
1	Record is identified by a relative byte address (RBA)																					
2	Control-Interval processing																					
3	Sequential processing																					
4	Direct processing																					
5	Input processing																					
6	Output processing																					
7	User-supplied buffer space																					

Offsets	Name	Length	Format	Description																		
9	9 SMF62MC2	1	binary	Second ACB MACRF flag byte: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Defined only when output and JES format. The system is to ensure that the logical record length will be the same when the data is read. This bit is not defined for input.</td> </tr> <tr> <td>1</td> <td>Control character type</td> </tr> <tr> <td>2</td> <td>Eligible for backup-while-open</td> </tr> <tr> <td>3</td> <td>Skip sequential processing</td> </tr> <tr> <td>4</td> <td>VTAM LOGON indicator</td> </tr> <tr> <td>5</td> <td>Set data set to empty state</td> </tr> <tr> <td>6</td> <td>Shared control blocks</td> </tr> <tr> <td>7</td> <td>Alternate index of the path</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Defined only when output and JES format. The system is to ensure that the logical record length will be the same when the data is read. This bit is not defined for input.	1	Control character type	2	Eligible for backup-while-open	3	Skip sequential processing	4	VTAM LOGON indicator	5	Set data set to empty state	6	Shared control blocks	7	Alternate index of the path
Bit	Meaning when set																					
0	Defined only when output and JES format. The system is to ensure that the logical record length will be the same when the data is read. This bit is not defined for input.																					
1	Control character type																					
2	Eligible for backup-while-open																					
3	Skip sequential processing																					
4	VTAM LOGON indicator																					
5	Set data set to empty state																					
6	Shared control blocks																					
7	Alternate index of the path																					
10	A SMF62MC3	1	binary	Third ACB MACRF flag byte: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No LSR exclusive control</td> </tr> <tr> <td>1</td> <td>Local shared resources</td> </tr> <tr> <td>2</td> <td>Global shared resources</td> </tr> <tr> <td>3</td> <td>Improved control-interval processing</td> </tr> <tr> <td>4</td> <td>Deferred write</td> </tr> <tr> <td>5</td> <td>Sequential insert strategy</td> </tr> <tr> <td>6</td> <td>Control blocks are fixed in real storage</td> </tr> <tr> <td>7</td> <td>VSAM 31-bit addressing mode I/O buffers</td> </tr> </tbody> </table>	Bit	Meaning when set	0	No LSR exclusive control	1	Local shared resources	2	Global shared resources	3	Improved control-interval processing	4	Deferred write	5	Sequential insert strategy	6	Control blocks are fixed in real storage	7	VSAM 31-bit addressing mode I/O buffers
Bit	Meaning when set																					
0	No LSR exclusive control																					
1	Local shared resources																					
2	Global shared resources																					
3	Improved control-interval processing																					
4	Deferred write																					
5	Sequential insert strategy																					
6	Control blocks are fixed in real storage																					
7	VSAM 31-bit addressing mode I/O buffers																					
11	B SMF62MC4	1	binary	Fourth ACB MACRF flag byte: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>RLS Processing</td> </tr> <tr> <td>1</td> <td>SNP Option</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	RLS Processing	1	SNP Option	2-7	Reserved.										
Bit	Meaning when set																					
0	RLS Processing																					
1	SNP Option																					
2-7	Reserved.																					

Record Type 63 (3F) — VSAM Catalog Entry Defined

The system no longer collects record type 63 as of January, 2000

Note that because VSAM catalogs are no longer supported and no longer exist, the system does not collect record type 63. However if you are using downlevel versions of SMF files, these explanations may still be useful.

Record type 63 is written when an entry (a component, cluster, catalog, alternate index, path, or non-VSAM data set) in a VSAM catalog is defined by the DEFINE access method services command and when that definition is altered. For example, when an entry in a VSAM catalog is altered with new space allocation information (that is, when the VSAM End-Of-Volume (EOV) routine extends the entire object) or, if the entry is changed by the Alter Access Method Services command. One

Record type 63

record type 63 is written for each newly created or altered entry. This record is **not** written when a VSAM catalog is renamed. In that case record type 68 is written.

The record's length includes the length of the catalog records required to describe the entry. The total length can be from 1000 to 4000 bytes or more, depending upon the sizes of the new and old catalog records (offsets 44 and 46 respectively). If you write this record to the SMF data set, you must include the sizes of these catalog records when estimating the additional storage required for the SMF buffer and the SMF data sets.

Record type 63 identifies the catalog in which the object is defined, gives the catalog record for the newly defined object, and, for an alteration, gives the parts of the old catalog record before they were altered. It identifies the job by job log identification and user identification. The job name and the time and date that the reader recognized the JOB card for this job constitute the job log identification. If a system task caused the record to be written, the job-name and the user-identification fields contain blanks and the time and date fields contain zeros.

Note: Field SMF63NCR is **NOT** part of the programming interface.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF63LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF63SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF63FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF63RTY	1	binary	Record type 63 (X'3F').								
6	6 SMF63TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF63DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF63SID	2	EBCDIC	System identification (from the SID parameter).								
16	10 SMF63SMI	2	EBCDIC	System model identifier.								
18	12 SMF63JBN	8	EBCDIC	Job name. If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								

Offsets	Name	Length	Format	Description																		
26	1A SMF63RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).																		
30	1E SMF63RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.																		
34	22 SMF63UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).																		
42	2A SMF63FDT	1	binary	Record creator/entry type indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>New definition</td> </tr> <tr> <td>1</td> <td>Altered definition</td> </tr> <tr> <td>2-5</td> <td>Reserved</td> </tr> <tr> <td>6</td> <td>Path defined or altered</td> </tr> <tr> <td>7</td> <td>Alternate index defined or altered.</td> </tr> </table>	Bit	Meaning when set	0	New definition	1	Altered definition	2-5	Reserved	6	Path defined or altered	7	Alternate index defined or altered.						
Bit	Meaning when set																					
0	New definition																					
1	Altered definition																					
2-5	Reserved																					
6	Path defined or altered																					
7	Alternate index defined or altered.																					
43	2B SMF63TYP	1	binary	Entry type indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>VSAM cluster</td> </tr> <tr> <td>1</td> <td>VSAM data component</td> </tr> <tr> <td>2</td> <td>VSAM index component</td> </tr> <tr> <td>3</td> <td>VSAM catalog</td> </tr> <tr> <td>4</td> <td>Non-VSAM data set</td> </tr> <tr> <td>5</td> <td>Generation data group</td> </tr> <tr> <td>6</td> <td>Alias</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	VSAM cluster	1	VSAM data component	2	VSAM index component	3	VSAM catalog	4	Non-VSAM data set	5	Generation data group	6	Alias	7	Reserved.
Bit	Meaning when set																					
0	VSAM cluster																					
1	VSAM data component																					
2	VSAM index component																					
3	VSAM catalog																					
4	Non-VSAM data set																					
5	Generation data group																					
6	Alias																					
7	Reserved.																					
44	2C SMF63NSZ	2	binary	Size of new catalog record. Include the contents of this field when estimating the additional storage required by SMF. A VSAM catalog record is contained in one or more physical catalog records. This field with offset 46 are the sums of the sizes of the physical catalog records that constitute the total logical VSAM catalog record.																		
46	2E SMF63OSZ	2	binary	Size of old catalog record. This field contains the size of the old records before they were altered. Include the contents of this field when estimating the additional storage required by SMF.																		
48	30 SMF63CNM	44	EBCDIC	Name of catalog in which the entry is defined.																		
92	5C SMF63ENM	44	EBCDIC	Entry name.																		
136	88 SMF63NCR	<i>variable</i>	binary	New catalog record followed by old catalog record. For the new catalog record, the complete new entry is recorded. For the old catalog record, this field contains only those old records that were altered; it shows what these records were before they were altered.																		

Record Type 64 (40) — VSAM Component or Cluster Status

Record type 64 is written when:

1. A VSAM component or cluster (including catalogs) is closed,
2. VSAM must switch to another volume to continue to read or write,
3. There is no more space available for VSAM to continue processing.

Record type 64

If a cluster is closed, one record is written for each component in the cluster.

Record type 64 indicates why the record was created (a component was closed, another volume was switched to, or no additional space was available). It describes the device and volume(s) on which the object is stored, and gives the extents of the object on the volume(s). It gives statistics about various processing events that have occurred since the object was defined, such as the number of records in the data component, the number of records that were inserted, and the number of control intervals that were split.

This record identifies the job by job log identification and user identification. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification.

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro SMFWTM(1) (record exit: IEFU83)

Storage Residency
24-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF64LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF64SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF64FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF64RTY	1	binary	Record type 64 (X'40').								
6	6 SMF64TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF64DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF64SID	4	EBCDIC	System identification (from the SID parameter).								

Offsets	Name	Length	Format	Description																		
18	12 SMF64JBN	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output). consists of the job name, time, and date that the reader recognized the JOB card (for this job).																		
26	1A SMF64RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).																		
30	1E SMF64RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See “Standard SMF record header” on page 162 for a detailed description.																		
34	22 SMF64UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).																		
42	2A SMF64RIN	1	binary	Situation indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Component closed</td> </tr> <tr> <td>1</td> <td>Volume switched (see note 1)</td> </tr> <tr> <td>2</td> <td>No space available</td> </tr> <tr> <td>3</td> <td>Record is a catalog or CRA record</td> </tr> <tr> <td>4</td> <td>Component closed, TYPE=T</td> </tr> <tr> <td>5</td> <td>Record written during ABEND processing</td> </tr> <tr> <td>6</td> <td>Record is for a VVDS or ICF catalog being opened or closed as a data set. If this bit is set, the catalog name field and the cluster name field may be set to zeroes.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Component closed	1	Volume switched (see note 1)	2	No space available	3	Record is a catalog or CRA record	4	Component closed, TYPE=T	5	Record written during ABEND processing	6	Record is for a VVDS or ICF catalog being opened or closed as a data set. If this bit is set, the catalog name field and the cluster name field may be set to zeroes.	7	Reserved.
Bit	Meaning when set																					
0	Component closed																					
1	Volume switched (see note 1)																					
2	No space available																					
3	Record is a catalog or CRA record																					
4	Component closed, TYPE=T																					
5	Record written during ABEND processing																					
6	Record is for a VVDS or ICF catalog being opened or closed as a data set. If this bit is set, the catalog name field and the cluster name field may be set to zeroes.																					
7	Reserved.																					
43	2B SMF64DTY	1	binary	Indicator of component being processed. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Data set</td> </tr> <tr> <td>1</td> <td>Index</td> </tr> <tr> <td>2</td> <td>Extended format</td> </tr> <tr> <td>3</td> <td>Compressed</td> </tr> <tr> <td>4</td> <td>RLS is in effect</td> </tr> <tr> <td>5</td> <td>RLS is in effect, measurement management facility is disabled</td> </tr> <tr> <td>6</td> <td>Extended addressable data set</td> </tr> <tr> <td>7</td> <td>Secondary space reduction</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Data set	1	Index	2	Extended format	3	Compressed	4	RLS is in effect	5	RLS is in effect, measurement management facility is disabled	6	Extended addressable data set	7	Secondary space reduction
Bit	Meaning when set																					
0	Data set																					
1	Index																					
2	Extended format																					
3	Compressed																					
4	RLS is in effect																					
5	RLS is in effect, measurement management facility is disabled																					
6	Extended addressable data set																					
7	Secondary space reduction																					
44	2C SMF64CNM	44	EBCDIC	Name of the catalog in which the component is defined.																		
88	58 SMF64DNM	44	EBCDIC	Name of the component or cluster being processed. For a CRA record, this field does not contain meaningful information. For a catalog record, this field contains the catalog or cluster name.																		
132	84 SMF64NTR	2	binary	Number of tracks that were requested but could not be allocated.																		
134	86 SMF64CHR	4	EBCDIC	Highest used relative byte address (RBA) of the component. See also SMF64CHC following.																		

I

Record type 64

Offsets	Name	Length	Format	Description
134	86 SMF64CHC	4	EBCDIC	Highest used control interval (CI) of the component. CI is used in place of RBA for an extended format data set capable of extended addressability.
138	8A SMF64ESL	2	binary	Length of extent entry portion of record, excluding this field. (See note 1)
140	8C SMF64NTA	4	binary	Number of tracks acquired during this EOVS processing.

Note:

1. If SMF64RIN=X'01', there will be **no** extended information written for this record (SMF64ESL). For more information, please review APAR OW56162 (for hdz11f0 and hdz11g0 users). For diagnostic purposes, VSAM EOVS writes an SMF64 record when there is a record management catalog update request.

Extent Information Section

This section contains the last extent with the high allocated CI for:

- a non-striped component
- each stripe of a striped component

Offsets	Name	Length	Format	Description
0	0 SMF64FCC	4	binary	Beginning cylinder and track, in the form CCHH where CC is the cylinder number and HH is the track number.
4	4 SMF64TCC	4	binary	Ending cylinder and track, in the form CCHH where CC is the cylinder number and HH is the track number.
8	8 SMF64VSN	6	EBCDIC	Volume serial number of the volume containing the extent.
14	E SMF64CUU	2	binary	Device number.
16	10 SMF64IND	2	EBCDIC	Spindle identification.
18	12 SMF64UTY	4	binary	Unit type.
22	16 SMF64RV1	4		Reserved.

The statistics section contains:

- Accumulative statistics from creation until the current OPEN
- Change in statistics from OPEN to time of EOVS and CLOSE
- Data set characteristics
- Hiperbatch I/O statistics
- Compressed data statistics
- CF Cache structure statistics

The statistics section includes information on the number of execute channel programs (EXCP). For more information about how EXCP count is determined, see Chapter 10, "EXCP count," on page 131.

Statistics Section at OPEN Time

Offsets	Name	Length	Format	Description
0	0 SMF64SLN	4	binary	Length of the statistics section, including this field.
4	4 SMF64NIL	4	binary	Number of levels in the index.
8	8 SMF64NEX	4	binary	Number of extents.
12	C SMF64NLR	4	binary	Number of logical records in the component.

Offsets	Name	Length	Format	Description
16	10 SMF64NDE	4	binary	Number of records that were deleted from the component.
20	14 SMF64NIN	4	binary	Number of records that were inserted into the component.
24	18 SMF64NUP	4	binary	Number of records that were updated in the component.
28	1C SMF64NRE	4	binary	Number of records that were retrieved from the component.
32	20 SMF64NFS	4	binary	Number of unused control intervals in the component. This value is multiplied by the control interval size when the component is not an extended addressable data set.
36	24 SMF64NCS	4	binary	Number of control intervals that were split in the component.
40	28 SMF64NAS	4	binary	Number of control areas that were split in the component.
44	2C SMF64NEP	4	binary	Number of execute channel programs (EXCPs). When MACRF=RLS, this field contains the number of buffer manager requests.
Change in Statistics from OPEN to time of EOVS and CLOSE:				
Note: The statistics might contain accumulated count among all concurrent users if the file is being opened by multiple ACBs or multiple JOBS.				
48	30 SMF64DIL	4	binary	Change in number of levels in the index.
52	34 SMF64DEX	4	binary	Change in number of extents.
56	38 SMF64DLR	4	binary	Change in number of logical records in the component. This field may be negative.
60	3C SMF64DDE	4	binary	Change in number of records that were deleted from the component. When MACRF=RLS, this field contains the total number of deletes performed by this access-method control block.
64	40 SMF64DIN	4	binary	Change in number of records that were inserted into the component. When MACRF=RLS, this field contains the total number of inserts performed by this access-method control block.
68	44 SMF64DUP	4	binary	Change in number of records that were updated in the component. When MACRF=RLS, this field contains the total number of updates performed by this access-method control block.
72	48 SMF64DRE	4	binary	Change in number of records that were retrieved from the component. When MACRF=RLS, this field contains the total number of retrieves performed by this access-method control block.
76	4C SMF64DFS	4	binary	Change in number of unused control intervals in the component. This value is multiplied by the control interval size when the component is not an extended addressable data set. This value may be negative.
80	50 SMF64DCS	4	binary	Change in number of control intervals that were split in the component. When MACRF=RLS, this field contains the total number of CI splits performed for this access-method control block.

Record type 64

Offsets	Name	Length	Format	Description
84	54 SMF64DAS	4	binary	Change in number of control areas that were split in the component. When MACRF=RLS, this field contains the total number of CA splits performed for this access-method control block.
88	58 SMF64DEP	4	binary	Change in number of execute channel programs (EXCPs) for the data set. When MACRF=RLS, this field contains the total number of buffer manager calls performed for this access-method control block.
Data Set Characteristics Section:				
92	5C SMF64DBS	4	binary	Physical block size.
96	60 SMF64DCI	4	binary	Control interval size.
100	64 SMF64DLS	4	binary	Maximum logical record size.
104	68 SMF64DKL	2	binary	Key length.
106	6A SMF64DDN	8	EBCDIC	DD name. When the record is written for a VSAM catalog or catalog recovery area, this field may contain zeros. When the record is written for a volume switch or no space available condition, and the volume is associated with a concatenated TIOT entry, this field contains blanks.
114	72 SMF64STR	1	binary	The number of strings requested by the user. This field may or may not contain the same number as SMF64PLH. It all depends on the data set activity (VSAM will dynamically add strings when necessary).
115	73 SMF64BNO	1	binary	Actual number of buffers requested by the user. VSAM may override the number of data buffers requested by the user based on such things as the amount of buffer space specified at define time. This number may also vary based on whether the data set is using an LSR/GSR buffer pool, and whether or not separate data and index pools were established. When MACRF=RLS, this field is not applicable and it is set to 0.
116	74 SMF64BSP	4	binary	Buffer space. When MACRF=RLS, this field is ignored.
120	78 SMF64BFD	2	binary	The number of data buffers requested by the user. When MACRF=RLS, this field is ignored.
122	7A SMF64BFI	2	binary	The number of index buffers requested by the user. When MACRF=RLS, this field is ignored.
124	7C SMF64CLN	44	EBCDIC	Cluster name from JCL.
168	A8 SMF64PLH	2	binary	Actual number of concurrent strings (requested by the user) used. When MACRF=RLS, this field is set to 0.
170	AA SMF64MAC	3	binary	ACB MACRF fields.

Offsets	Name	Length	Format	Description
170	AA SMF64MC1	1	binary	First ACB MACRF flag byte Bit Meaning when set 0 Record is identified by a key 1 Record is identified by a relative byte address (RBA) 2 Control-interval processing 3 Sequential processing 4 Direct processing 5 Input processing 6 Output processing 7 User-supplied buffer space.
171	AB SMF64MC2	1	binary	Second ACB MACRF flag byte Bit Meaning when set 0 Defined only when output and JES format. The system is to ensure that the logical record length will be the same when the data is read. This bit is not defined for input. 1 Control character type 2 Reserved 3 Skip sequential processing 4 VTAM LOGON indicator 5 Set data set to empty state 6 Shared control blocks 7 Alternate index of the path.
172	AC SMF64MC3	1	binary	Third ACB MACRF flag byte Bit Meaning when set 0 Reserved 1 Local shared resource 2 Global shared resource 3 Improved control-interval processing 4 Deferred write 5 Sequential insert strategy 6 Control blocks are fixed in real storage 7 VSAM 31-bit addressing mode I/O buffers.
173	AD SMF64MC4	1	binary	Fourth ACB MACRF flag byte Bit Meaning when set 0 RLS Processing 1 SNP Option 2-7 Reserved

Record type 64

Offsets	Name	Length	Format	Description																		
174	AE SMF64SMB	1	binary	SMB ACCESS BIAS Information <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>User specified AMP ACCBIAS through JCL (ACCBIAS=DOISOIDWISW)</td> </tr> <tr> <td>1</td> <td>User requested through JCL or DATACLAS that SMB is to determine ACCBIAS</td> </tr> <tr> <td>2</td> <td>BIAS=DO used</td> </tr> <tr> <td>3</td> <td>BIAS=SO used</td> </tr> <tr> <td>4</td> <td>BIAS=SW used</td> </tr> <tr> <td>5</td> <td>BIAS=DW used</td> </tr> <tr> <td>6</td> <td>BIAS=CO used</td> </tr> <tr> <td>7</td> <td>BIAS=CR used</td> </tr> </tbody> </table>	Bit	Meaning when set	0	User specified AMP ACCBIAS through JCL (ACCBIAS=DOISOIDWISW)	1	User requested through JCL or DATACLAS that SMB is to determine ACCBIAS	2	BIAS=DO used	3	BIAS=SO used	4	BIAS=SW used	5	BIAS=DW used	6	BIAS=CO used	7	BIAS=CR used
Bit	Meaning when set																					
0	User specified AMP ACCBIAS through JCL (ACCBIAS=DOISOIDWISW)																					
1	User requested through JCL or DATACLAS that SMB is to determine ACCBIAS																					
2	BIAS=DO used																					
3	BIAS=SO used																					
4	BIAS=SW used																					
5	BIAS=DW used																					
6	BIAS=CO used																					
7	BIAS=CR used																					
175	AF SMF64RSC	1	binary	SMB Information <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>DO with USER specified SMBVSP</td> </tr> <tr> <td>1</td> <td>DO with USER specified SMBHWT</td> </tr> <tr> <td>2</td> <td>RMODE31=BUFF used</td> </tr> <tr> <td>3</td> <td>RMODE31=CB used</td> </tr> <tr> <td>4</td> <td>Insufficient virtual storage for DO</td> </tr> <tr> <td>5-7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	DO with USER specified SMBVSP	1	DO with USER specified SMBHWT	2	RMODE31=BUFF used	3	RMODE31=CB used	4	Insufficient virtual storage for DO	5-7	Reserved				
Bit	Meaning when set																					
0	DO with USER specified SMBVSP																					
1	DO with USER specified SMBHWT																					
2	RMODE31=BUFF used																					
3	RMODE31=CB used																					
4	Insufficient virtual storage for DO																					
5-7	Reserved																					
Hiperbatch I/O Statistics Section:																						
176	B0 SMF64SIO	4	binary	Number of requests for I/O issued by the access method for this data set for which Hiperbatch attempted to find the requested data in its buffers (see SMF64HIT and SMF64MIS). When MACRF=RLS, this field is not applicable and it is set to 0.																		
180	B4 SMF64HIT	4	binary	Number of requests for I/O issued by the access method for this data set satisfied by moving data from Hiperbatch buffers. When MACRF=RLS, this field is not applicable and it is set to 0.																		
184	B8 SMF64WTS	4	binary	Number of times Hiperbatch temporarily suspended this requester because another user was already reading some or all of the requested data. When MACRF=RLS, this field is not applicable and it is set to 0.																		
188	BC SMF64MIS	4	binary	Number of requests for I/O issued by the access method for this data set satisfied by performing DASD I/O. Note that the sum of SMF64HIT and SMF64MIS should equal SMF64SIO. When MACRF=RLS, this field is not applicable and it is set to 0.																		

Offsets	Name	Length	Format	Description								
192	C0 SMF64IOS	4	binary	Number of DASD I/Os (as recorded in SMF64MIS) for which Hiperbatch copied the data into its buffers. Note that random reads from DASD do not populate the Hiperbatch buffers. When MACRF=RLS, this field is not applicable and it is set to 0.								
Compressed Data Statistics Section:												
196	C4 SMF64SDS	8	binary	Source data set size at open for compressed data set. Valid only if SMF64CMP (in SMF64DTY) is set on.								
204	CC SMF64CDS	8	binary	Compressed data set size at open. Valid only if SMF64CMP (in SMF64DTY) is set on.								
212	D4 SMF64CSS	8	binary	Change in source data set size in this open for compressed data set. Valid only if SMF64CMP (in SMF64DTY) is set on.								
220	DC SMF64CCS	8	binary	Change in compressed data set size in this open. Valid only if SMF64CMP (in SMF64DTY) is set on.								
228	E4 SMF64DTK	36	binary	Dictionary token for compressed data set. Valid only if SMF64CMP (in SMF64DTY) is set on.								
264	108 SMF64TRK	4	binary	Number of tracks released during partial release processing.								
CF Cache Structure Statistics Section:												
268	10C SMF64BMH	4	binary	Number of requests where the data was obtained from the local shared buffer pool.								
272	110 SMF64CFH	4	binary	Number of requests where the data was obtained from the DFSMS coupling facility cache structure.								
276	114 SMF64RIO	4	binary	Number of requests where the data was obtained from DASD.								
280	118 SMF64TIM	4	binary	Time data set was opened (in hundredths of a second since midnight).								
284	11C SMF64DT	4	packed	Date data set was opened, in the form of 0cyydddF (where c is 0 for 19xx and 1 for 20xx, yy is the current year (0-99), ddd is the current day (1-356), and F is the sign).								
288	120 SMF64FG1	1	binary	Miscellaneous flag 1 <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>CHECKPOINT has been issued</td> </tr> <tr> <td>1</td> <td>EOV diagnostic</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	CHECKPOINT has been issued	1	EOV diagnostic	2-7	Reserved.
Bit	Meaning when set											
0	CHECKPOINT has been issued											
1	EOV diagnostic											
2-7	Reserved.											
289	121 SMF64FD1	1	binary	EOV diagnostic field 1.								
290	122 SMF64FD2	1	binary	EOV diagnostic field 2.								
291	123	1	binary	Reserved.								
292	124 SMF64DAU	4	binary	Change in the number of CA-reclaimed control areas reused in the KSDS since the last EOV or CLOSE.								
296	128 SMF64RLM	4	binary	Number of control areas reclaimed in the KSDS since the last EOV or CLOSE.								
300	12C -	8	binary	Reserved.								

Record Type 65 (41) — Integrated Catalog Facility Delete Activity

Record type 65 is written during any processing that results in a DELETE request to Catalog management services, such as:

Record type 65

IDCAMS

DELETE

IEHPROGM

UNCATLG

One type 65 record is written for each record updated or deleted from a catalog.

Record type 65 identifies the entry being deleted and the catalog in which the catalog record is updated or deleted, and gives the updated or deleted catalog record. It indicates whether a VSAM cluster or non-VSAM data set was scratched (function indicator = 'S'), or only catalog information was deleted (function indicator = 'U'). It identifies the job by job log identification and user identification.

The job name, time, and date that the reader recognized the JOB card (for this job) constitutes the job log identification. If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros.

Macro to Symbolically Address Record Type 65: The SMF record mapping macro for record types 36, 60, 61, 65 and 66 is IFASMF16. The syntax is as follows:

IFASMF16 *nn*

nn identifies the type of the record you want to map. The mapping macro resides in SYS1.MACLIB.

Record Mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF65LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF65SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF65SYS	1	binary	System indicator: <table border="1"><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF65RTY	1	binary	Record type 65 (X'41').								
6	6 SMF65TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.								
10	A SMF65DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF65CPU	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF65SBS	4		Reserved.								

Offsets	Name	Length	Format	Description
22	16 SMF65SUB	2	EBCDIC	The action taken on the catalog entry; valid values are: IN (INSERT) DE (DELETE) UP (UPDATE)
24	18 SMF65POF	4	binary	Offset of product section from start of record, including record descriptor word (RDW).
28	1C SMF65PLN	2	binary	Length of product section.
30	1E SMF65PNO	2	binary	Number of product sections.
32	20 SMF65DOF	4	binary	Offset of data section from start of record, including record descriptor word (RDW).
36	24 SMF65DLN	2	binary	Length of data section.
38	26 SMF65DNO	2	binary	Number of data sections.
Product and data section:				
40	28 SMF65VER	2	EBCDIC	Version of the type 65 record.
42	2A SMF65PNM	8	EBCDIC	Catalog management product identifier.
50	32 SMF65JNM	8	EBCDIC	Job name. The job log identification consists of the job name, time, and date that the reader recognized the JOB card (for this job). If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros.
58	3A SMF65RST	4	binary	Time, in hundredths of a second, that the reader recognized the JOB card (for this job).
62	3E SMF65RDT	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
66	42 SMF65UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
74	4A SMF65FNC	1	EBCDIC	Contains 'S' if a data set was scratched; 'U' if only catalog entries were modified.
75	4B SMF65CNM	44	EBCDIC	Name of the catalog in which record was updated or deleted.
119	77 SMF65TYP	1	EBCDIC	Entry type identifier. For a description of this field, see the SMF60TYP field in "Header/Self-defining Section" on page 475.
120	78 SMF65ENM	44	EBCDIC	Entry name.
164	A4 SMF65NNM	44		Reserved.
208	D0 SMF65CRC	<i>variable</i>	binary	Catalog record for updated or deleted entry (the length of this record is contained in the first two bytes of this field).

Record Type 66 (42) — Integrated Catalog Facility Alter Activity

Record type 66 is written during any processing that results in an ALTER request to Catalog Management Services, such as:

```
IDCAMS
ALTER
```

One type 66 record is written for each record written or deleted from a catalog.

Record type 66 identifies the entry being altered and the catalog in which the catalog record is written or deleted, and gives the new, updated, or deleted catalog record. It indicates if the entry was renamed (function indicator = 'R') and, if so,

Record type 66

gives the old and new names of the entry. It identifies the job by job log identification and user identification. The job name, time, and date that the reader recognized the JOB card (for this job) constitutes the job log identification. If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros.

Macro to Symbolically Address Record Type 66: The SMF record mapping macro for record types 36, 60, 61, 65 and 66 is IFASMF16. The syntax is as follows:

```
IFASMF16 nn
```

nn identifies the type of the record you want to map. The mapping macro resides in SYS1.MACLIB.

Record Mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF66LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF66SEG	2	binary	Record descriptor word descriptor (see record length field).								
4	4 SMF66SYS	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF66RTY	1	binary	Record type 66 (X'42').								
6	6 SMF66TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF66DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0ccydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF66CPU	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF66SBS	4		Reserved.								
22	16 SMF66SUB	2	EBCDIC	The action taken on the catalog entry; valid values are: <table border="0"> <tr> <td>IN</td> <td>(INSERT)</td> </tr> <tr> <td>DE</td> <td>(DELETE)</td> </tr> <tr> <td>UP</td> <td>(UPDATE)</td> </tr> </table>	IN	(INSERT)	DE	(DELETE)	UP	(UPDATE)		
IN	(INSERT)											
DE	(DELETE)											
UP	(UPDATE)											
24	18 SMF66POF	4	binary	Offset of product section from start of record, including record descriptor word (RDW).								
28	1C SMF66PLN	2	binary	Length of product section.								
30	1E SMF66PNO	2	binary	Number of product sections.								
32	20 SMF66DOF	4	binary	Offset of data section from start of record, including record descriptor word (RDW).								

Offsets	Name	Length	Format	Description
36	24 SMF66DLN	2	binary	Length of data section.
38	26 SMF66DNO	2	binary	Number of data sections.
Product and data section:				
40	28 SMF66VER	2	EBCDIC	Version of the type 66 record.
42	2A SMF66PNM	8	EBCDIC	Catalog management product identifier.
50	32 SMF66JNM	8	EBCDIC	Job name. The job log identification consists of the job name, time, and date that the reader recognized the JOB card (for this job). If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros.
58	3A SMF66RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).
62	3E SMF66RDT	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>OcyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
66	42 SMF66UID	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
74	4A SMF66FNC	1	EBCDIC	Contains "R" if catalog entry is renamed.
75	4B SMF66CNM	44	EBCDIC	Name of catalog in which record was updated or deleted.
119	77 SMF66TYP	1	EBCDIC	Entry type identifier. For a description of this field, see the SMF60TYP field in "Header/Self-defining Section" on page 475.
120	78 SMF66ENM	44	EBCDIC	Current entry name.
164	A4 SMF66NNM	44	EBCDIC	New entry name.
208	D0 SMF66CRC	<i>variable</i>	binary	Catalog record for updated or deleted entry (the length of this record is contained in the first two bytes of this field).

Record Type 67 (43) — VSAM Catalog Entry Deleted

The system no longer collects record type 67 as of January, 2000

Note that because VSAM catalogs are no longer supported and no longer exist, the system does not collect record type 67. However if you are using downlevel versions of SMF files, these explanations may still be useful.

Record type 67 is written when an entry (a component, cluster, catalog, alternate index, path, or non-VSAM data set) in a VSAM catalog is deleted. A type 67 record is written for each entry affected by the DELETE access method services command. For example, three records are written for an indexed cluster: one for the relationship between the components of the cluster, one for the data component, and one for the index component.

Record type 67 identifies the deleted entry, the VSAM catalog in which the entry was defined and the deleted catalog records. A VSAM catalog record is contained in one or more physical catalog records (SMF67CRC). Field SMF67RSZ at offset 132 is the sum of the sizes of the physical catalog records that constitute the total logical VSAM catalog record. The length of this SMF record can be from 1000 to 4000 bytes or more, depending upon the sizes of the catalog records that describe the entry. If you are writing this record to the SMF data set, be sure to include the

Record type 67

sizes of these catalog records when estimating the additional storage SMF will need for the buffers and the data sets. It identifies the job by job log identification and user identification.

The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification. If a system task caused the record to be written, the job-name and the user-identification fields contain blanks and the time and date fields contain zeroes.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF67LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF67SEG	2	binary	Segment descriptor (see record length field).
4	4 SMF67FLG	1	binary	System indicator: Bit Meaning when set 0-2 Reserved 3-6 Version indicators* 7 Reserved. *See "Standard SMF record header" on page 162 for a detailed description.
5	5 SMF67RTY	1	binary	Record type 67 (X'43').
6	6 SMF67TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.
10	A SMF67DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
14	E SMF67SID	2	EBCDIC	System identification (from the SID parameter).
16	10 SMF67SMI	2	EBCDIC	System model identifier.
18	12 SMF67JBN	8	EBCDIC	Job name. If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).
26	1A SMF67RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).
30	1E SMF67RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
34	22 SMF67UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).

Offsets	Name	Length	Format	Description																		
42	2A SMF67FDT	1	binary	Record creator/entry type indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Uncataloged</td> </tr> <tr> <td>1</td> <td>Scratched</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table> <p>The uncataloged and scratched indicators are set for VSAM component or cluster entries. For all other VSAM entries, only the uncataloged bit is set. For non-VSAM entries, the uncataloged bit is always set and the scratched bit is set if the physical non-VSAM space was deleted.</p>	Bit	Meaning when set	0	Uncataloged	1	Scratched	2-7	Reserved.										
Bit	Meaning when set																					
0	Uncataloged																					
1	Scratched																					
2-7	Reserved.																					
43	2B SMF67IOD	1	binary	Entry type indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>VSAM cluster</td> </tr> <tr> <td>1</td> <td>VSAM data component</td> </tr> <tr> <td>2</td> <td>VSAM index component</td> </tr> <tr> <td>3</td> <td>VSAM catalog</td> </tr> <tr> <td>4</td> <td>Non-VSAM data set</td> </tr> <tr> <td>5</td> <td>Generation data group</td> </tr> <tr> <td>6</td> <td>Alias</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>A data or index component can only be deleted as one of the three catalog records deleted when a cluster is deleted.</p>	Bit	Meaning when set	0	VSAM cluster	1	VSAM data component	2	VSAM index component	3	VSAM catalog	4	Non-VSAM data set	5	Generation data group	6	Alias	7	Reserved.
Bit	Meaning when set																					
0	VSAM cluster																					
1	VSAM data component																					
2	VSAM index component																					
3	VSAM catalog																					
4	Non-VSAM data set																					
5	Generation data group																					
6	Alias																					
7	Reserved.																					
44	2C SMF67CNM	44	EBCDIC	Name of catalog in which the entry was defined.																		
88	58 SMF67DEN	44	EBCDIC	Entry name.																		
132	84 SMF67RSZ	2	binary	Size of catalog record that defined the entry. A VSAM catalog record is contained in one or more physical catalog records. Offset 132 is the sum of the sizes of the physical catalog records that constitute the total logical VSAM catalog record.																		
134	86 SMF67CRC	<i>variable</i>	binary	Catalog record.																		

Record Type 68 (44) — VSAM Catalog Entry Renamed

The system no longer collects record type 68 as of January, 2000

Note that because VSAM catalogs are no longer supported and no longer exist, the system does not collect record type 68. However if you are using downlevel versions of SMF files, these explanations may still be useful.

Record type 68 is written when an entry (a component, cluster, catalog, alternate index, path, or non-VSAM data set) in a VSAM catalog is renamed using the ALTER access method services command. This record identifies the VSAM catalog in which the object is defined, and gives the old and new names for the object. It identifies the job log identification and user identification. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification.

Record type 68

If a system task caused the record to be written, the job-name and user-identification fields contain blanks and the time and date fields contain zeros.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF68LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF68SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF68FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF68RTY	1	binary	Record type 68 (X'44').								
6	6 SMF68TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into SMF buffer.								
10	A SMF68DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF68SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF68JBN	8	EBCDIC	Job name. If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).								
26	1A SMF68RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).								
30	1E SMF68RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
34	22 SMF68UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).								
42	2A SMF68CNM	44	EBCDIC	Name of catalog in which the entry is defined.								
86	56 SMF68ONM	44	EBCDIC	Old name of the entry (obtained from the ALTER command).								
130	82 SMF68NNM	44	EBCDIC	New name of the entry (obtained from the ALTER command).								

Record Type 69 (45) — VSAM Data Space Defined, Extended, or Deleted

The system no longer collects record type 69 as of January, 2000

Note that because VSAM catalogs are no longer supported and no longer exist, the system does not collect record type 69. However if you are using downlevel versions of SMF files, these explanations may still be useful.

Record type 69 is written when a VSAM data space is defined, extended, or deleted using the DEFINE or DELETE Access Method Services commands. Record type 69 is not written when a catalog or a unique data set is defined or deleted.

This record identifies the catalog in which the VSAM data space is defined and the volume on which it is (or was) allocated. It gives the number of free data space extents and the amount of unallocated space on the affected volume after the definition, extension, or deletion. It identifies the job by job log identification and user identification. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification.

If a system task caused the record to be written, the job-name and user-identification fields contain blanks and the time and date fields contain zeros.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF69LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF69SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF69FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF69RTY	1	binary	Record type 69 (X'45').								
6	6 SMF69TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into SMF buffer.								
10	A SMF69DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>OcyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF69SID	4	EBCDIC	System identification (from the SID parameter).								

Record type 69

Offsets	Name	Length	Format	Description
18	12 SMF69JBN	8	EBCDIC	Job name. If a system task caused the record to be written, the job name and user identification fields contain blanks and the time and date fields contain zeros. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).
26	1A SMF69RST	4	binary	Time since midnight, in hundredths of a second, that the reader recognized the JOB card (for this job).
30	1E SMF69RSD	4	packed	Date when the reader recognized the JOB card (for this job), in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
34	22 SMF69UIF	8	EBCDIC	User-defined identification field (taken from common exit parameter area, not from USER=parameter on job statement).
42	2A SMF69CUU	2	binary	Device number.
44	2C SMF69IND	2	binary	Spindle identification.
46	2E SMF69NDS	2	binary	Number of free data space extents on the affected volume after the data space is defined, extended, or deleted.
48	30 SMF69NUC	2	binary	Number of unallocated cylinders in all of the data spaces on the volume.
50	32 SMF69NUT	2	binary	Number of unallocated tracks in all of the data spaces on the volume in addition to the number of unallocated cylinders.
52	34 SMF69LNC	2	binary	Number of cylinders in the largest continuous unallocated area in any data space on the volume.
54	36 SMF69LNT	2	binary	Number of tracks (in addition to the number of cylinders) in the largest continuous unallocated area in any data space on the volume.
56	38 SMF69CNM	44	EBCDIC	Name of catalog in which the data space is defined.
100	64 SMF69VSR	6	EBCDIC	Volume serial number of the volume on which the data space is defined.

Record Type 70 (46) — RMF Processor Activity

Record type 70 has the following subtypes:

- **Subtype 1** — contains measurement data for general and special purpose processors, logical partitions, and internal coupling facilities. It has the following sections:

CPU control section

Contains general CPU related information.

CPU data section

Contains general information on CPU use during the interval.

ASID Data Area section

Contains address space use during the interval.

PR/SM™ Partition data section

Contains a configured logical partition.

PR/SM Logical Processor data section

Contains a PR/SM logical processor data block.

CPU Identification section

Identifies a CPU type.

Logical Core data section

Contains logical core measurements in a multithreading environment.

- **Subtype 2** — contains measurement data for cryptographic coprocessors and accelerators. It has the following sections:

Cryptographic CCA Coprocessor data section

Contains measurement data for cryptographic CCA coprocessors.

Cryptographic Accelerator data section

Contains measurement data for cryptographic accelerators.

ICSF Services data section

Contains measurement data of selected Integrated Cryptographic Service Facility (ICSF) activities.

Cryptographic PKCS11 Coprocessor data section

Contains measurement data for cryptographic PKCS11 coprocessors.

Record type 70 is written for each measurement interval and when the session terminates. As with all SMF records produced by RMF, it contains a header section followed by the RMF product section.

Macro to Symbolically Address Record Type 70: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

For information on using RMF, see *z/OS RMF User's Guide*. For information on Monitor I and II, see *z/OS RMF Report Analysis*.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF70LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF70SEG	2	binary	Segment descriptor (see record length field).

Record type 70

Offsets	Name	Length	Format	Description												
4	4 SMF70FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved.	3-6	Version indicators*	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved.															
3-6	Version indicators*															
7	System is running in PR/SM mode.															
5	5 SMF70RTY	1	binary	Record type 70 (X'46').												
6	6 SMF70TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF70DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF70SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF70SSI	4	EBCDIC	Subsystem identification ('RMF').												
22	16 SMF70STY	2	binary	Record subtype.												
24	18 SMF70TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.												
26	1A	2		Reserved.												
28	1C SMF70PRS	4	binary	Offset to RMF product section from the RDW.												
32	20 SMF70PRL	2	binary	Length of RMF product section.												
34	22 SMF70PRN	2	binary	Number of RMF product sections.												
Individual header extension for subtype 1:																
36	24 SMF70CCS	4	binary	Offset to CPU control section from RDW.												
40	28 SMF70CCL	2	binary	Length of CPU control section.												
42	2A SMF70CCN	2	binary	Number of CPU control section.												
44	2C SMF70CPS	4	binary	Offset to CPU data section from RDW.												
48	30 SMF70CPL	2	binary	Length of CPU data section.												
50	32 SMF70CPN	2	binary	Number of CPU data sections in this record.												
52	34 SMF70ASS	4	binary	Offset to ASID Data Area section from RDW.												
56	38 SMF70ASL	2	binary	Length of ASID Data Area section.												
58	3A SMF70ASN	2	binary	Number of ASID Data Area sections.												
60	3C SMF70BCS	4	binary	Offset to PR/SM Partition data section from RDW.												
64	40 SMF70BCL	2	binary	Length of PR/SM Partition data section.												
66	42 SMF70BCN	2	binary	Number of PR/SM Partition data sections.												
68	44 SMF70BVS	4	binary	Offset to PR/SM Logical Processor data section from RDW.												
72	48 SMF70BVL	2	binary	Length of PR/SM Logical Processor data section.												
74	4A SMF70BVN	2	binary	Number of PR/SM Logical Processor data sections.												
76	4C SMF70CNS	4	binary	Offset to CPU-identification name sections.												
80	50 SMF70CNL	2	binary	Length of CPU-identification name section.												
82	52 SMF70CNN	2	binary	Number of CPU-identification name sections.												

Offsets	Name	Length	Format	Description
84	54 SMF70COS	4	binary	Offset to Logical Core data section from RDW.
88	58 SMF70COL	2	binary	Length of Logical Core data section.
90	5A SMF70CON	2	binary	Number of Logical Core data sections.
Individual header extension for subtype 2:				
36	24 SMF7023S	4	binary	Offset to Cryptographic CCA Coprocessor data section.
40	28 SMF7023L	2	binary	Length of Cryptographic CCA Coprocessor data section.
42	2A SMF7023N	2	binary	Number of Cryptographic CCA Coprocessor data sections.
44	2C SMF7024S	4	binary	Offset to Cryptographic Accelerator data section.
48	30 SMF7024L	2	binary	Length of Cryptographic Accelerator data section.
50	32 SMF7024N	2	binary	Number of Cryptographic Accelerator data sections.
52	34 SMF702CS	4	binary	Offset to ICSF Services data section.
56	38 SMF702CL	2	binary	Length of ICSF Services data section.
58	3A SMF702CN	2	binary	Number of ICSF Services data sections.
60	3C SMF7025S	4	binary	Offset to Cryptographic PKCS11 Coprocessor data section.
64	40 SMF7025L	2	binary	Length of Cryptographic PKCS11 Coprocessor data section.
66	42 SMF7025N	2	binary	Number of Cryptographic PKCS11 Coprocessor data sections.

RMF Product Section

Offsets	Name	Length	Format	Description												
0	0 SMF70MFV	2	packed	RMF version number.												
2	2 SMF70PRD	8	EBCDIC	Product name ('RMF').												
10	A SMF70IST	4	packed	Time that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.												
14	E SMF70DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
18	12 SMF70INT	4	packed	Duration of the RMF measurement interval, in the form <i>mmsstttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign. (The end of the measurement interval is the sum of the recorded start time and this field.)												
22	16	2		Reserved.												
24	18 SMF70SAM	4	binary	Number of RMF samples.												
28	1C	2		Reserved.												
30	1E SMF70FLA	2	binary	Flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.
Bit	Meaning when set															
0	Reserved															
1	Samples have been skipped															
2	Record was written by RMF Monitor III															
3	Interval was synchronized with SMF															
4-15	Reserved.															
32	20	4		Reserved.												

Record type 70

Offsets	Name	Length	Format	Description																		
36	24 SMF70CYC	4	packed	Sampling cycle length, in the form 000 <i>ttttF</i> , where <i>tttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.																		
40	28 SMF70MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).																		
48	30 SMF70IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries														
Value	Meaning																					
3	9672, zSeries																					
49	31 SMF70PRF	1	binary	Processor flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture® mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture® mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture® mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF70PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF70SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF70IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).																		
60	3C SMF70LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF70RAO	4	binary	Offset to reassembly area relative to start of RMF product section.																		
72	48 SMF70RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		
74	4A SMF70RAN	2	binary	Reassembly area indicator. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken.</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF70RAO) and length (SMF70RAL) are only valid if SMF70RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken.	1	Record is broken.												
Value	Meaning																					
0	Record is not broken.																					
1	Record is broken.																					
76	4C SMF70OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).																		
78	4E SMF70SYN	2	binary	SYNC value in seconds.																		
80	50 SMF70GIE	8	binary	Projected gathering interval end (STCK format) GMT time.																		
88	58 SMF70XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.																		

Offsets	Name	Length	Format	Description
96	60 SMF70SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.
Reassembly Area:				
0	0 SMF70RBR	2	binary	Total number of broken records built from the original large record.
2	2 SMF70RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF70RBR.
4	4 SMF70RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.
8	8 SMF70RIL	2	binary	Length of reassembly information block.
10	A SMF70RIN	2	binary	Number of reassembly information blocks (same value as SMF70TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF70RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF70RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF70RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Subtype 1 — CPU, PR/SM, and ICF Activity

CPU Control Section

There is one section per record.

Hex offset	Dec offset	Name	Length	Format	Description
0	0	SMF70MOD	2	binary	CPU processor family.
2	2	SMF70VER	1	binary	CPU version number — meaning varies with model number.
3	3	SMF70BNP	1	binary	Number of physical processors assigned for use by PR/SM.

Record type 70

Hex offset	Dec offset	Name	Length	Format	Description																		
4	4	SMF70INB	1	binary	PR/SM indicator bits <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>PR/SM diagnose X'204' failure.</td> </tr> <tr> <td>1</td> <td>Number of physical processors has changed.</td> </tr> <tr> <td>2</td> <td>Dispatch interval time has been changed.</td> </tr> <tr> <td>3</td> <td>An additional partition, that is not included in the count of configured partitions, is presented with a name of "PHYSICAL". This partition includes all of the uncaptured time that was used by the LPAR management time support feature but could not be attributed to a specific logical partition.</td> </tr> <tr> <td>4</td> <td>PR/SM - Diagnose X'204' extended data is supported.</td> </tr> <tr> <td>5</td> <td>Simplified Diagnose X'204' data provided for system running as z/VM® guest. CPU consumption by z/VM itself provided with partition data section for logical partition named PHYSICAL.</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	PR/SM diagnose X'204' failure.	1	Number of physical processors has changed.	2	Dispatch interval time has been changed.	3	An additional partition, that is not included in the count of configured partitions, is presented with a name of "PHYSICAL". This partition includes all of the uncaptured time that was used by the LPAR management time support feature but could not be attributed to a specific logical partition.	4	PR/SM - Diagnose X'204' extended data is supported.	5	Simplified Diagnose X'204' data provided for system running as z/VM® guest. CPU consumption by z/VM itself provided with partition data section for logical partition named PHYSICAL.	6-7	Reserved.		
Bit	Meaning when set																						
0	PR/SM diagnose X'204' failure.																						
1	Number of physical processors has changed.																						
2	Dispatch interval time has been changed.																						
3	An additional partition, that is not included in the count of configured partitions, is presented with a name of "PHYSICAL". This partition includes all of the uncaptured time that was used by the LPAR management time support feature but could not be attributed to a specific logical partition.																						
4	PR/SM - Diagnose X'204' extended data is supported.																						
5	Simplified Diagnose X'204' data provided for system running as z/VM® guest. CPU consumption by z/VM itself provided with partition data section for logical partition named PHYSICAL.																						
6-7	Reserved.																						
5	5	SMF70STF	1	binary	Flag <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The STSI facility is available for the CPC.</td> </tr> <tr> <td>1</td> <td>Physical CPU adjustment factor has been changed.</td> </tr> <tr> <td>2</td> <td>Service units available to MVS image have been changed.</td> </tr> <tr> <td>3</td> <td>SMF70LAC is provided for systems running in LPAR mode or as a z/VM guest. The value does no longer include CPU wait times.</td> </tr> <tr> <td>4</td> <td>SMF70MDL is the model-capacity identifier and SMF70HWM is the physical model. If this bit is OFF, SMF70MDL represents both model-capacity and physical model.</td> </tr> <tr> <td>5</td> <td>OPT parameter BLWLTRPCT changed.</td> </tr> <tr> <td>6</td> <td>OPT parameter BLWLINTHD changed.</td> </tr> <tr> <td>7</td> <td>Field SMF70GAU is valid.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The STSI facility is available for the CPC.	1	Physical CPU adjustment factor has been changed.	2	Service units available to MVS image have been changed.	3	SMF70LAC is provided for systems running in LPAR mode or as a z/VM guest. The value does no longer include CPU wait times.	4	SMF70MDL is the model-capacity identifier and SMF70HWM is the physical model. If this bit is OFF, SMF70MDL represents both model-capacity and physical model.	5	OPT parameter BLWLTRPCT changed.	6	OPT parameter BLWLINTHD changed.	7	Field SMF70GAU is valid.
Bit	Meaning when set																						
0	The STSI facility is available for the CPC.																						
1	Physical CPU adjustment factor has been changed.																						
2	Service units available to MVS image have been changed.																						
3	SMF70LAC is provided for systems running in LPAR mode or as a z/VM guest. The value does no longer include CPU wait times.																						
4	SMF70MDL is the model-capacity identifier and SMF70HWM is the physical model. If this bit is OFF, SMF70MDL represents both model-capacity and physical model.																						
5	OPT parameter BLWLTRPCT changed.																						
6	OPT parameter BLWLINTHD changed.																						
7	Field SMF70GAU is valid.																						
6	6	SMF70GTS	2	binary	Dispatch accumulated interval time in milliseconds. A zero value indicates that the dispatch interval was dynamically determined.																		
8	8	SMF70MDL	16	EBCDIC	CPC model identifier. See bit 4 of SMF70STF.																		
24	18	SMF70DSA	2	binary	Number of Diagnose samples.																		
26	1A	SMF70IFA	2	binary	Number of zAAPs online at the end of the interval.																		
28	1C	SMF70CPA	4	binary	Physical CPU adjustment factor based on alternate CPU capability. This value is replaced by SMF70CPA_actual and SMF70CPA_scaling_factor.																		
32	20	SMF70WLA	4	binary	Processor capacity available to MVS image measured in MSUs (millions of service units) per hour. The value takes into account whether or not the image has a defined capacity limit. (For systems running as VM guest, this is the VM capacity).																		
36	24	SMF70LAC	4	binary	Long-term average of CPU service (millions of service units). Scope of the value depends on bit 3 of SMF70STF.																		
40	28	SMF70HOF	8	binary	Hypervisor date/time offset in STCK format (aka Sysplex timer offset).																		
48	30	SMF70HWM	16	EBCDIC	CPC physical model identifier. Valid if bit 4 of SMF70STF is set.																		

Hex offset	Dec offset	Name	Length	Format	Description												
64	40	SMF70SUP	2	binary	Number of zIIPs online at the end of the interval.												
66	42	SMF70GJT	8	EBCDIC	Time in STCK format when the partition that wrote this record has joined or left a capacity group (last change of group name). Also set at IPL time, when the partition is not a member of a capacity group.												
74	4A	SMF70POM	4	EBCDIC	EBCDIC plant code that identifies the plant of manufacture for the configuration. The plant code is left-justified with trailing blank characters if necessary.												
78	4E	SMF70CSC	16	EBCDIC	EBCDIC sequence code of the configuration. The sequence code is right-justified with leading EBCDIC zeroes if necessary.												
94	5E	SMF70HHF	1	binary	HiperDispatch and multithreading information <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>HiperDispatch mode supported</td> </tr> <tr> <td>1</td> <td>HiperDispatch mode is active</td> </tr> <tr> <td>2</td> <td>HiperDispatch mode changed during interval</td> </tr> <tr> <td>3</td> <td>Failure returned by HISMT service. Values in Logical Core data section and values provided in SMF70MCF, SMF70MCFS, SMF70MCFI, SMF70CFE, SMF70CFS, SMF70CFI, SMF70ATD, SMF70ATDS, and SMF70ATDI are invalid.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	HiperDispatch mode supported	1	HiperDispatch mode is active	2	HiperDispatch mode changed during interval	3	Failure returned by HISMT service. Values in Logical Core data section and values provided in SMF70MCF, SMF70MCFS, SMF70MCFI, SMF70CFE, SMF70CFS, SMF70CFI, SMF70ATD, SMF70ATDS, and SMF70ATDI are invalid.	4-7	Reserved.
Bit	Meaning when set																
0	HiperDispatch mode supported																
1	HiperDispatch mode is active																
2	HiperDispatch mode changed during interval																
3	Failure returned by HISMT service. Values in Logical Core data section and values provided in SMF70MCF, SMF70MCFS, SMF70MCFI, SMF70CFE, SMF70CFS, SMF70CFI, SMF70ATD, SMF70ATDS, and SMF70ATDI are invalid.																
4-7	Reserved.																
95	5F	SMF70CR	1	binary	ZEP field 0.												
96	60	SMF70PMI	4	binary	Accumulated number of blocked dispatchable units per second that may get promoted in their dispatch priority. To get the average promote event rate, divide SMF70PMI by SMF70SAM.												
100	64	SMF70PMU	4	binary	Number of blocked dispatchable units being promoted during the interval.												
104	68	SMF70PMW	4	binary	Accumulated number of address spaces and enclaves being blocked during the interval. To get the average number of waiters for promote, divide SMF70PMW by SMF70SAM.												
108	6C	SMF70PMP	4	binary	Maximum number of address spaces and enclaves found being blocked during the interval.												
112	70	SMF70PMT	2	binary	1/1000s of the CPU capacity for promote slices (OPT parameter BLWLTRPCT).												
114	72	SMF70PML	2	binary	Swapped-in starvation threshold. When an address space or enclave has not received CPU service within this time interval although it has ready-to-run work, it is considered being blocked (OPT parameter BLWLINTHD).												
116	74	SMF70MPC	16	EBCDIC	CPC model identifier indicating the permanent capacity of the CPC, without the temporarily increased capacity and the temporarily available replacement capacity. The identifier is left justified with trailing blanks if necessary. This field is zero, if not supported by the hardware.												
132	84	SMF70MTC	16	EBCDIC	CPC model identifier indicating the temporary capacity of the CPC, which is the total of permanent capacity and temporarily increased capacity, without the temporarily available replacement capacity. The identifier is left justified with trailing blanks if necessary. This field is zero, if not supported by the hardware.												
148	94	SMF70MCR	4	binary	CPC model capacity rating associated with the model as identified by SMF70MDL. This field is zero, if not supported by the hardware.												
152	98	SMF70MPR	4	binary	CPC permanent model capacity rating associated with the model as identified by SMF70MPC. This field is zero, if not supported by the hardware.												

Record type 70

Hex offset	Dec offset	Name	Length	Format	Description
156	9C	SMF70MTR	4	binary	CPC temporary model capacity rating associated with the model as identified by SMF70MTC. This field is zero, if not supported by the hardware.
160	A0	SMF70ZEP	4	binary	ZEP field 1.
164	A4	SMF70ZER	8	binary	ZEP field 2.
172	AC	SMF70ZEE	8	binary	ZEP field 3.
180	B4	SMF70ZEC	8	binary	ZEP field 4.
188	BC	SMF70NRM	4	binary	Normalization factor for zIIP. Multiply zIIP time by this value and divide by 256 to get the equivalent time on a CP.
192	C0	SMF70GAU	4	binary	Long-term average of CPU service in millions of service units which would be allowed by the limit of the capacity group but is not used by its members. If the value is negative, the group is capped. Valid if bit 7 of SMF70STF is set.
196	C4	SMF70ZEI	8	binary	ZEP field 5.
204	CC	SMF70NCR	4	binary	Nominal model-capacity rating in MSU/hour. When non-zero, this value is associated with the nominal model capacity as identified in field SMF70MDL. When field SMF70CAI contains a value of 100, this value equals the value in field SMF70MCR.
208	D0	SMF70NPR	4	binary	Nominal permanent model-capacity rating in MSU/hour. When non-zero, this value is associated with the nominal permanent model capacity as identified in field SMF70MPC. When field SMF70CAI contains a value of 100, this value equals the value in field SMF70MPR.
212	D4	SMF70NTR	4	binary	Nominal temporary model-capacity rating in MSU/hour. When non-zero, this value is associated with the nominal temporary model capacity as identified in field SMF70MTC. When field SMF70CAI contains a value of 100, this value equals the value in field SMF70MTR.
216	D8	SMF70CAI	1	binary	Capacity-adjustment indication. When zero, the indication is not reported. When in the range from 1 to 99, some amount of reduction is indicated. When 100, the machine is operating at its normal capacity. Temporary capacity changes that affect machine performance (for example, CBU or OOCoD) are not included.
217	D9	SMF70CCR	1	binary	Capacity-change reason. Valid if SMF70CAI is non-zero. When 0, no capacity change took place. When 1, the capacity change is due to the setting of a manual control. When greater than 1, the capacity change is due to an internal machine condition or due to an external machine exception.
218	DA	SMF70MCP	2	binary	Maximum CPU ID available for this IPL.
220	DC	SMF70ICP	2	binary	Highest CPU ID installed at IPL time.
222	DE	SMF70CCP	2	binary	Highest CPU ID currently installed. This number can increase upon dynamic CPU addition.
224	E0	SMF70CPA_actual	4	binary	Physical CPU adjustment factor based on Model Capacity Rating (will be used for converting processor time to service units). This value together with SMF70CPA_scaling_factor replaces SMF70CPA.
228	E4	SMF70CPA_scaling_factor	4	binary	Scaling factor for SMF70CPA_actual.

Hex offset	Dec offset	Name	Length	Format	Description
232	E8	SMF70MCF	4	binary	Multithreading maximum capacity numerator for general purpose processors. Divide this value by 1024 to get the multithreading maximum capacity factor for all general purpose processors that were configured ONLINE for the complete interval.
236	EC	SMF70MCFS	4	binary	Multithreading maximum capacity numerator for zIIP. Divide this value by 1024 to get the multithreading maximum capacity factor for all zIIPs that were configured ONLINE for the complete interval. A zero value is reported if no zIIP is currently installed.
240	F0	SMF70MCFI	4	binary	Multithreading maximum capacity numerator for zAAP. Divide this value by 1024 to get the multithreading maximum capacity factor for all zAAPs that were configured ONLINE for the complete interval. A zero value is reported if no zAAP is currently installed.
244	F4	SMF70CF	4	binary	Multithreading capacity numerator for general purpose processors. Divide this value by 1024 to get the multithreading capacity factor for all general purpose processors that were configured ONLINE for the complete interval.
248	F8	SMF70CFS	4	binary	Multithreading capacity numerator for zIIP. Divide this value by 1024 to get the multithreading capacity factor for all zIIPs that were configured ONLINE for the complete interval. A zero value is reported if no zIIP is currently installed.
252	FC	SMF70CFI	4	binary	Multithreading capacity numerator for zAAP. Divide this value by 1024 to get the multithreading capacity factor for all zAAPs that were configured ONLINE for the complete interval. A zero value is reported if no zAAP is currently installed.
256	100	SMF70ATD	4	binary	Average Thread Density numerator for general purpose processors. Divide this value by 1024 to get the average number of active threads for all general purpose processors that were dispatched to physical hardware and configured ONLINE for the complete interval.
260	104	SMF70ATDS	4	binary	Average Thread Density numerator for zIIP. Divide this value by 1024 to get the average number of active threads for all zIIPs that were dispatched to physical hardware and configured ONLINE for the complete interval. A zero value is reported if no zIIP is currently installed.
264	108	SMF70ATDI	4	binary	Average Thread Density numerator for zAAP. Divide this value by 1024 to get the average number of active threads for all zAAPs that were dispatched to physical hardware and configured ONLINE for the complete interval. A zero value is reported if no zAAP is currently installed.

CPU Data Section

This section contains general information on CPU use during the interval. All measurements are provided on a per logical processor basis.

Offsets	Name	Length	Format	Description
0	0 SMF70WAT	8	binary	CPU wait time, where bit 51 = 1 microsecond. That is, the amount of time that the CPU is not processing instructions (PSW wait state bit is on). Data could be incorrect if a SET CLOCK occurred during the RMF interval. SMF70WAT is used in RMF report calculations Note: This field is incorrect if MVS is running under VM.
8	8 SMF70CID	2	binary	CPU identification

Record type 70

Offsets	Name	Length	Format	Description												
10	A SMF70CNF	1	binary	Configuration activity indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-3</td> <td>Reserved</td> </tr> <tr> <td>4</td> <td>Data available for complete interval</td> </tr> <tr> <td>5</td> <td>CPU reconfigured during post processor duration interval</td> </tr> <tr> <td>6</td> <td>CPU reconfigured during the measurement interval (data for this CPU is incorrect)</td> </tr> <tr> <td>7</td> <td>CPU online at end of interval.</td> </tr> </table>	Bit	Meaning when set	0-3	Reserved	4	Data available for complete interval	5	CPU reconfigured during post processor duration interval	6	CPU reconfigured during the measurement interval (data for this CPU is incorrect)	7	CPU online at end of interval.
Bit	Meaning when set															
0-3	Reserved															
4	Data available for complete interval															
5	CPU reconfigured during post processor duration interval															
6	CPU reconfigured during the measurement interval (data for this CPU is incorrect)															
7	CPU online at end of interval.															
11	B	1		Reserved.												
12	C SMF70SER	3	packed	CPU serial number (6 hexadecimal digits).												
15	F SMF70TYP	1	binary	CPU type. <table border="0"> <tr> <td>Value</td> <td>Meaning</td> </tr> <tr> <td>0</td> <td>General purpose CP</td> </tr> <tr> <td>1</td> <td>zAAP</td> </tr> <tr> <td>2</td> <td>zIIP</td> </tr> </table>	Value	Meaning	0	General purpose CP	1	zAAP	2	zIIP				
Value	Meaning															
0	General purpose CP															
1	zAAP															
2	zIIP															
16	10 SMF70SLH	4	binary	Number of entries to the I/O SLIH; number of I/O interruptions that this processor handled by entry into the I/O interrupt handler.												
20	14 SMF70TPI	4	binary	Number of TPI (test pending interrupt) with CC=1; number of I/O interruptions that this processor handled from issuing the TPI instruction.												
24	18 SMF70VFS	4	binary	Number of samples when the vector bit in the PSA image was on, which is used to determine the percentage of time vector affinity was on.												
28	1C SMF70V	1	binary	Vector configuration <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Vector was online</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Vector was online	1-7	Reserved.						
Bit	Meaning when set															
0	Vector was online															
1-7	Reserved.															
29	1D	3		Reserved.												
32	20 SMF70PAT	8	binary	CPU parked time, where bit 51 = 1 microsecond.												
40	28 SMF70TCB	8	binary	Number of TCB dispatches for this CPU.												
48	30 SMF70SRB	8	binary	Number of SRB dispatches for this CPU.												
56	38 SMF70NIO	8	binary	Number of I/Os for this CPU.												
64	40 SMF70SIG	8	binary	Total number of SIGPs done by this CPU.												
72	48 SMF70WTD	8	binary	Wait dispatch count for this CPU.												
80	50 SMF70WTS	4	binary	The number of times PR/SM issued a warning-track interruption to a logical processor and z/OS was able to return the logical processor within the grace period.												
84	54 SMF70WTU	4	binary	The number of times PR/SM issued a warning-track interruption to a logical processor and z/OS was unable to return the logical processor within the grace period.												
88	58 SMF70WTI	4	binary	Amount of time in milliseconds that a logical processor was yielded to PR/SM due to warning-track processing.												

ASID Data Area Section

This section contains address space use during the interval.

Offsets	Name	Length	Format	Description
0	0 SMF70RMN	2	binary	Ready minimum value over interval.
2	2 SMF70RMM	2	binary	Ready maximum value over interval.
4	4 SMF70RTT	4	binary	Ready total value over interval.
8	8 SMF70R00	4	binary	Count of times ready value was zero.
12	C SMF70R01	4	binary	Count of times ready value was 1.
16	10 SMF70R02	4	binary	Count of times ready value was 2.
20	14 SMF70R03	4	binary	Count of times ready value was 3.
24	18 SMF70R04	4	binary	Count of times ready value was 4.
28	1C SMF70R05	4	binary	Count of times ready value was 5.
32	20 SMF70R06	4	binary	Count of times ready value was 6.
36	24 SMF70R07	4	binary	Count of times ready value was 7.
40	28 SMF70R08	4	binary	Count of times ready value was 8.
44	2C SMF70R09	4	binary	Count of times ready value was 9.
48	30 SMF70R10	4	binary	Count of times ready value was 10.
52	34 SMF70R11	4	binary	Count of times ready value was 11.
56	38 SMF70R12	4	binary	Count of times ready value was 12.
60	3C SMF70R13	4	binary	Count of times ready value was 13.
64	40 SMF70R14	4	binary	Count of times ready value was 14.
68	44 SMF70R15	4	binary	Count of times ready value was 15 or more.
72	48 SMF70IMN	2	binary	IN users minimum over interval.
74	4A SMF70IMM	2	binary	IN users maximum over interval.
76	4C SMF70ITT	4	binary	IN users total value over interval.
80	50 SMF70I00	4	binary	Count of times IN users was zero.
80	54 SMF70I01	4	binary	Count of times IN users was 1 or 2.
88	58 SMF70I02	4	binary	Count of times IN users was 3 or 4.
92	5C SMF70I03	4	binary	Count of times IN users was 5 or 6.
96	60 SMF70I04	4	binary	Count of times IN users was 7 or 8.
100	64 SMF70I05	4	binary	Count of times IN users was 9 or 10.
104	68 SMF70I06	4	binary	Count of times IN users was 11 - 15.
108	6C SMF70I07	4	binary	Count of times IN users was 16 - 20.
112	70 SMF70I08	4	binary	Count of times IN users was 21 - 25.
116	74 SMF70I09	4	binary	Count of times IN users was 26 - 30.
120	78 SMF70I10	4	binary	Count of times IN users was 31 - 35.
124	7C SMF70I11	4	binary	Count of times IN users was 36 or more.
128	80 SMF70OMN	2	binary	Out users minimum over interval.
130	82 SMF70OMM	2	binary	Out users maximum over interval.
132	84 SMF70OTT	4	binary	Out users total value over interval.
136	88 SMF70O00	4	binary	Count of times out users was zero.
140	8C SMF70O01	4	binary	Count of times out users was 1 or 2.
144	90 SMF70O02	4	binary	Count of times out users was 3 or 4.
148	94 SMF70O03	4	binary	Count of times out users was 5 or 6.
152	98 SMF70O04	4	binary	Count of times out users was 7 or 8.
156	9C SMF70O05	4	binary	Count of times out users was 9 or 10.

Record type 70

Offsets	Name	Length	Format	Description
160	A0 SMF70O06	4	binary	Count of times out users was 11 - 15.
164	A4 SMF70O07	4	binary	Count of times out users was 16 - 20.
168	A8 SMF70O08	4	binary	Count of times out users was 21 - 25.
172	AC SMF70O09	4	binary	Count of times out users was 26 - 30.
176	B0 SMF70O10	4	binary	Count of times out users was 31 - 35.
180	B4 SMF70O11	4	binary	Count of times out users was 36 or more.
184	B8 SMF70WMN	2	binary	Wait user minimum over interval.
186	BA SMF70WMM	2	binary	Wait users maximum over interval.
188	BC SMF70WTT	4	binary	Wait users total value over interval.
192	C0 SMF70W00	4	binary	Count of times wait users was zero.
196	C4 SMF70W01	4	binary	Count of times wait users was 1 or 2.
200	C8 SMF70W02	4	binary	Count of times wait users was 3 or 4.
204	CC SMF70W03	4	binary	Count of times wait users was 5 or 6.
208	D0 SMF70W04	4	binary	Count of times wait users was 7 or 8.
212	D4 SMF70W05	4	binary	Count of times wait users was 9 or 10.
216	D8 SMF70W06	4	binary	Count of times wait users was 11 - 15.
220	DC SMF70W07	4	binary	Count of times wait users was 16 - 20.
224	E0 SMF70W08	4	binary	Count of times wait users was 21 - 25.
228	E4 SMF70W09	4	binary	Count of times wait users was 26 - 30.
232	E8 SMF70W10	4	binary	Count of times wait users was 31 - 35.
236	EC SMF70W11	4	binary	Count of times wait users was 36 or more.
240	F0 SMF70BMN	2	binary	Batch users minimum over interval.
242	F2 SMF70BMM	2	binary	Batch users maximum over interval.
244	F4 SMF70BTT	4	binary	Batch users total value over interval.
248	F8 SMF70B00	4	binary	Count of times batch users was zero.
252	FC SMF70B01	4	binary	Count of times batch users was 1 or 2.
256	100 SMF70B02	4	binary	Count of times batch users was 3 or 4.
260	104 SMF70B03	4	binary	Count of times batch users was 5 or 6.
264	108 SMF70B04	4	binary	Count of times batch users was 7 or 8.
268	10C SMF70B05	4	binary	Count of times batch users was 9 or 10
272	110 SMF70B06	4	binary	Count of times batch users was 11 - 15.
276	114 SMF70B07	4	binary	Count of times batch users was 16 - 20.
280	118 SMF70B08	4	binary	Count of times batch users was 21 - 25.
284	11C SMF70B09	4	binary	Count of times batch users was 26 - 30.
288	120 SMF70B10	4	binary	Count of times batch users was 31 - 35.
292	124 SMF70B11	4	binary	Count of times batch users was 36 or more.
296	128 SMF70SMN	2	binary	Started users minimum over interval.
298	12A SMF70SMM	2	binary	Started users maximum over interval.
300	12C SMF70STT	4	binary	Started users total value over interval.
304	130 SMF70S00	4	binary	Count of times users was zero.
308	134 SMF70S01	4	binary	Count of times users was 1 or 2.
312	138 SMF70S02	4	binary	Count of times users was 3 or 4.
316	13C SMF70S03	4	binary	Count of times users was 5 or 6.
320	140 SMF70S04	4	binary	Count of times users was 7 or 8.
324	144 SMF70S05	4	binary	Count of times users was 9 or 10.
328	148 SMF70S06	4	binary	Count of times users was 11 - 15.

Offsets	Name	Length	Format	Description
332	14C SMF70S07	4	binary	Count of times users was 16 - 20.
336	150 SMF70S08	4	binary	Count of times users was 21 - 25.
340	154 SMF70S09	4	binary	Count of times users was 26 - 30.
344	158 SMF70S10	4	binary	Count of times users was 31 - 35.
348	15C SMF70S11	4	binary	Count of times users was 36 or more.
352	160 SMF70TMN	2	binary	TSO/E users minimum over interval.
354	162 SMF70TMM	2	binary	TSO/E users maximum over interval.
356	164 SMF70TTT	4	binary	TSO/E users total value over interval.
360	168 SMF70T00	4	binary	Count of times TSO/E users was zero.
364	16C SMF70T01	4	binary	Count of times TSO/E users was 1 or 2.
368	170 SMF70T02	4	binary	Count of times TSO/E users was 3 or 4.
372	174 SMF70T03	4	binary	Count of times TSO/E users was 5 or 6.
376	178 SMF70T04	4	binary	Count of times TSO/E users was 7 or 8.
380	17C SMF70T05	4	binary	Count of times TSO/E users was 9 or 10.
384	180 SMF70T06	4	binary	Count of times TSO/E users was 11 - 15.
388	184 SMF70T07	4	binary	Count of times TSO/E users was 16 - 20.
392	188 SMF70T08	4	binary	Count of times TSO/E users was 21 - 25.
396	18C SMF70T09	4	binary	Count of times TSO/E users was 26 - 30.
400	190 SMF70T10	4	binary	Count of times TSO/E users was 31 - 35.
404	194 SMF70T11	4	binary	Count of times TSO/E users was 36 or more.
408	198 SMF70LMN	2	binary	Logical ready users minimum over interval.
410	19A SMF70LMM	2	binary	Logical ready users maximum over interval.
412	19C SMF70LTT	4	binary	Logical ready users total value over interval.
416	1A0 SMF70L00	4	binary	Count of times the number of logical ready users was zero.
420	1A4 SMF70L01	4	binary	Count of times the number of logical ready users was 1 or 2.
424	1A8 SMF70L02	4	binary	Count of times the number of logical ready users was 3 or 4.
428	1AC SMF70L03	4	binary	Count of times the number of logical ready users was 5 or 6.
432	1B0 SMF70L04	4	binary	Count of times the number of logical ready users was 7 or 8.
436	1B4 SMF70L05	4	binary	Count of times the number of logical ready users was 9 or 10.
440	1B8 SMF70L06	4	binary	Count of times the number of logical ready users was 11 - 15.
444	1BC SMF70L07	4	binary	Count of times the number of logical ready users was 16 - 20.
448	1C0 SMF70L08	4	binary	Count of times the number of logical ready users was 21 - 25.
452	1C4 SMF70L09	4	binary	Count of times the number of logical ready users was 26 - 30.
456	1C8 SMF70L10	4	binary	Count of times the number of logical ready users was 31 - 35.
460	1CC SMF70L11	4	binary	Count of times the number of logical ready users was 36 or more.
464	1D0 SMF70AMN	2	binary	Logical wait users minimum over interval.
466	1D2 SMF70AMM	2	binary	Logical wait users maximum over interval.
468	1D4 SMF70ATT	4	binary	Logical wait users total value over interval.
472	1D8 SMF70A00	4	binary	Count of times the number of logical wait users was zero.
476	1DC SMF70A01	4	binary	Count of times the number of logical wait users was 1 or 2.
480	1E0 SMF70A02	4	binary	Count of times the number of logical wait users was 3 or 4.

Record type 70

Offsets	Name	Length	Format	Description
484	1E4 SMF70A03	4	binary	Count of times the number of logical wait users was 5 or 6.
488	1E8 SMF70A04	4	binary	Count of times the number of logical wait users was 7 or 8.
492	1EC SMF70A05	4	binary	Count of times the number of logical wait users was 9 or 10.
496	1F0 SMF70A06	4	binary	Count of times the number of logical wait users was 11 - 15.
500	1F4 SMF70A07	4	binary	Count of times the number of logical wait users was 16 - 20.
504	1F8 SMF70A08	4	binary	Count of times the number of logical wait users was 21 - 25.
508	1FC SMF70A09	4	binary	Count of times the number of logical wait users was 26 - 30.
512	200 SMF70A10	4	binary	Count of times the number of logical wait users was 31 - 35.
516	204 SMF70A11	4	binary	Count of times the number of logical wait users was 36 or more.
520	208 SMF70PMN	2	binary	Minimum number of ASCH address spaces. An ASCH address space is scheduled by the APPC/MVS transaction scheduler.
522	20A SMF70PMM	2	binary	Maximum number of ASCH address spaces.
524	20C SMF70PTT	4	binary	Total number of ASCH address spaces.
528	210 SMF70P00	4	binary	Number of times when 0 ASCH address spaces were found.
532	214 SMF70P01	4	binary	Number of times when 1 - 2 ASCH address spaces were found.
536	218 SMF70P02	4	binary	Number of times when 3 - 4 ASCH address spaces were found.
540	21C SMF70P03	4	binary	Number of times when 5 - 6 ASCH address spaces were found.
544	220 SMF70P04	4	binary	Number of times when 7 - 8 ASCH address spaces were found.
548	224 SMF70P05	4	binary	Number of times when 9 - 10 ASCH address spaces were found.
552	228 SMF70P06	4	binary	Number of times when 11 - 15 ASCH address spaces were found.
556	22A SMF70P07	4	binary	Number of times when 16 - 20 ASCH address spaces were found.
560	230 SMF70P08	4	binary	Number of times when 21 - 25 ASCH address spaces were found.
564	234 SMF70P09	4	binary	Number of times when 26 - 30 ASCH address spaces were found.
568	238 SMF70P10	4	binary	Number of times when 31 - 35 ASCH address spaces were found.
572	23A SMF70P11	4	binary	Number of times when 36 or more ASCH address spaces were found.
576	240 SMF70XMN	2	binary	Minimum number of OMVS address spaces.
578	242 SMF70XMM	2	binary	Maximum number of OMVS address spaces.
580	244 SMF70XTT	4	binary	Total number of OMVS address spaces.
584	248 SMF70X00	4	binary	Number of times when zero OMVS address spaces were found.
588	24C SMF70X01	4	binary	Number of times when 1 - 2 OMVS address spaces were found.
592	250 SMF70X02	4	binary	Number of times when 3 - 4 OMVS address spaces were found.
596	254 SMF70X03	4	binary	Number of times when 5 - 6 OMVS address spaces were found.
600	258 SMF70X04	4	binary	Number of times when 7 - 8 OMVS address spaces were found.

Offsets	Name	Length	Format	Description
604	25C SMF70X05	4	binary	Number of times when 9 - 10 OMVS address spaces were found.
608	260 SMF70X06	4	binary	Number of times when 11 - 15 OMVS address spaces were found.
612	264 SMF70X07	4	binary	Number of times when 16 - 20 OMVS address spaces were found.
616	268 SMF70X08	4	binary	Number of times when 21 - 25 OMVS address spaces were found.
620	26C SMF70X09	4	binary	Number of times when 26 - 30 OMVS address spaces were found.
624	270 SMF70X10	4	binary	Number of times when 31 - 35 OMVS address spaces were found.
628	274 SMF70X11	4	binary	Number of times when 36 or more OMVS address spaces were found.
Fields SMF70Q00 to SMF70Q12 count the In Ready users based on the number N of logical processors being online when the sample was taken. With HiperDispatch mode active and an SMF record level SMF70SRL \geq X'55'(85), N is the number of logical processors being <i>online and not parked</i> when the sample was taken.				
632	278 SMF70Q00	4	binary	Count of times In Ready users was less or equal N.
636	27C SMF70Q01	4	binary	Count of times In Ready users was N+1.
640	280 SMF70Q02	4	binary	Count of times In Ready users was N+2.
644	284 SMF70Q03	4	binary	Count of times In Ready users was N+3.
648	288 SMF70Q04	4	binary	Count of times In Ready users was N+4 or N+5.
652	28C SMF70Q05	4	binary	Count of times In Ready users was N+6 to N+10.
656	290 SMF70Q06	4	binary	Count of times In Ready users was N+11 to N+15.
660	294 SMF70Q07	4	binary	Count of times In Ready users was N+16 to N+20.
664	298 SMF70Q08	4	binary	Count of times In Ready users was N+21 to N+30.
668	29C SMF70Q09	4	binary	Count of times In Ready users was N+31 to N+40.
672	2A0 SMF70Q10	4	binary	Count of times In Ready users was N+41 to N+60.
676	2A4 SMF70Q11	4	binary	Count of times In Ready users was N+61 or N+80.
680	2A8 SMF70Q12	4	binary	Count of times In Ready users was greater than N+80.
684	2AC SMF70SRM	4	binary	Number of samples taken by SRM
688	2B0 SMF70CMN	4	binary	Minimum number of work units for general purpose processors over interval.
692	2B4 SMF70CMM	4	binary	Maximum number of work units for general purpose processors over interval.
696	2B8 SMF70CTT	4	binary	Total number of work units for general purpose processors over interval.
700	2BC SMF70DMN	4	binary	Minimum number of work units for zAAPs over interval.
704	2C0 SMF70DMM	4	binary	Maximum number of work units for zAAPs over interval.
708	2C4 SMF70DTT	4	binary	Total number of work units for zAAPs over interval.
712	2C8 SMF70EMN	4	binary	Minimum number of work units for zIIPs over interval.
716	2CC SMF70EMM	4	binary	Maximum number of work units for zIIPs over interval.
720	2D0 SMF70ETT	4	binary	Total number of work units for zIIPs over interval.
Fields SMF70U00 to SMF70U015 count the number of work units based on the number N of logical processors being online when the sample was taken. With HiperDispatch mode active, N is the number of logical processors being <i>online and not parked</i> when the sample was taken.				
724	2D4 SMF70U00	4	binary	Count of times the number of work units was less or equal N.
728	2D8 SMF70U01	4	binary	Count of times the number of work units was N+1.
732	2DC SMF70U02	4	binary	Count of times the number of work units was N+2.

Record type 70

Offsets	Name	Length	Format	Description
736	2E0 SMF70U03	4	binary	Count of times the number of work units was N+3.
740	2E4 SMF70U04	4	binary	Count of times the number of work units was N+4 or N+5.
744	2E8 SMF70U05	4	binary	Count of times the number of work units was between N+6 and N+10.
748	2EC SMF70U06	4	binary	Count of times the number of work units was between N+11 and N+15.
752	2F0 SMF70U07	4	binary	Count of times the number of work units was between N+16 and N+20.
756	2F4 SMF70U08	4	binary	Count of times the number of work units was between N+21 and N+30.
760	2F8 SMF70U09	4	binary	Count of times the number of work units was between N+31 and N+40.
764	2FC SMF70U10	4	binary	Count of times the number of work units was between N+41 and N+60.
768	300 SMF70U11	4	binary	Count of times the number of work units was between N+61 and N+80.
772	304 SMF70U12	4	binary	Count of times the number of work units was between N+81 and N+100.
776	308 SMF70U13	4	binary	Count of times the number of work units was between N+101 and N+120.
780	30C SMF70U14	4	binary	Count of times the number of work units was between N+121 and N+150.
784	310 SMF70U15	4	binary	Count of times the number of work units was greater N+150.

PR/SM Partition Data Section

This section contains a configured logical partition. There is one for each logical partition. The measurements are on a per logical processor basis when multithreading is disabled and on a per logical core basis when multithreading is enabled for the reporting interval. In the latter case, the terms logical processor and logical CPU refer to a logical core.

Hex offset	Dec offset	Name	Length	Format	Description
0	0	SMF70LPM	8	EBCDIC	Logical partition name.
8	8	SMF70LPN	1	binary	Logical partition number.
9	9	SMF70PFG	1	binary	Partition flags
				Bit	Meaning when set
				0	Partition has changed from activated to deactivated, or vice versa, during interval
				1	Number of logical processors in partition has changed
				2	Number of dedicated processors in partition has changed
				3	Number of shared processors in partition has changed
				4	WLM LPAR management is active for this partition.
				5	Wait time field (SMF70WST) is defined.
				6	Defined capacity limit has been changed.
				7	Reserved.

Hex offset	Dec offset	Name	Length	Format	Description												
10	A	SMF70BDN	2	binary	<p>Number of logical CPUs assigned to this partition. This count matches the number of subsequent PR/SM Partition data sections.</p> <p>Starting with z900 processors, SMF70BDN has a different meaning if bit 4 of SMF70INB is set. It then contains the maximum logical processors defined as shown at the HMC. Active logical processors have an online time SMF70ONT greater than zero.</p>												
12	C	SMF70BDS	4	binary	The PR/SM logical processor data blocks for all partitions are grouped together in the record. PR/SM logical processor data blocks for a given partition are grouped together. To get to the first logical processor data block associated with this partition, skip over the number of logical processor data blocks specified by this field, starting at the first logical processor data block in the record.												
16	10	SMF70BDA	4	binary	<p>Accumulated number of active logical processors at a WLM partition. This value is updated at each measurement cycle. It does not cover the logical processors for a non WLM managed partition. (A partition is WLM managed, if bit 4 of SMF70PFG is set.)</p> <p>To get the average number of logical CPUs, this value has to be divided by the number of Diagnose samples (field SMF70DSA in the CPU control section).</p>												
20	14	SMF70SPN	8	EBCDIC	LPAR cluster name. For z/OS, the LPAR cluster name is the sysplex name. For any other logical partition, the LPAR cluster name is the name provided in the HMC definition of this logical partition. Blank, if partition is not a cluster member.												
28	1C	SMF70STN	8	EBCDIC	System name. Blank, if not provided or supported by the operating system in the logical partition.												
36	24		4		Reserved.												
40	28	SMF70CSF	4	binary	Number of megabytes of central storage currently online to this partition.												
44	2C		4		Reserved.												
48	30	SMF70ESF	4	binary	Number of megabytes of expanded storage currently online to this partition.												
52	34	SMF70MSU	4	binary	Defined capacity limit (in millions of service units).												
56	38	SMF70PFL	2	binary	<p>Additional partition flags.</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Content of SMF70UPI is valid.</td> </tr> <tr> <td>1</td> <td>Group flag. This partition is member of a capacity group.</td> </tr> <tr> <td>2</td> <td>Polarization flag. This partition is vertically polarized. That is, HiperDispatch mode is active. The SMF70POW fields in the logical processor data section are valid for CPUs of this partition.</td> </tr> <tr> <td>3</td> <td>Initial weight instead of current weight should be used to project usage of the members in the capacity group.</td> </tr> <tr> <td>4 -15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Content of SMF70UPI is valid.	1	Group flag. This partition is member of a capacity group.	2	Polarization flag. This partition is vertically polarized. That is, HiperDispatch mode is active. The SMF70POW fields in the logical processor data section are valid for CPUs of this partition.	3	Initial weight instead of current weight should be used to project usage of the members in the capacity group.	4 -15	Reserved.
Bit	Meaning when set																
0	Content of SMF70UPI is valid.																
1	Group flag. This partition is member of a capacity group.																
2	Polarization flag. This partition is vertically polarized. That is, HiperDispatch mode is active. The SMF70POW fields in the logical processor data section are valid for CPUs of this partition.																
3	Initial weight instead of current weight should be used to project usage of the members in the capacity group.																
4 -15	Reserved.																
58	3A	SMF70UPI	1	binary	User partition ID. Valid if bit 0 of SMF70PFL is set.												
59	3B	SMF70MTID	1	binary	Maximum Thread Identification. A non-zero value indicates that PROCVIEW CORE is effective for this partition and the hardware supports multithreading.												

Record type 70

Hex offset	Dec offset	Name	Length	Format	Description
60	3C	SMF70GNM	8	EBCDIC	Name of the capacity group to which this partition belongs. Valid if bit 1 of SMF70PFL is set.
68	44	SMF70GMU	4	binary	Maximum licensing units of a group. The maximum number of processor licensing units for the group of logical partitions of which this partition is a member, and which may be consumed per unit of time, on average. Valid if bit 1 of SMF70PFL is set.

PR/SM Logical Processor Data Section

This section contains a PR/SM logical processor data block. There is one for each logical processor in each configured partition. The terms logical processor and logical CPU refer to a logical core if multithreading is enabled for the reporting interval.

Hex offset	Dec offset	Name	Length	Format	Description																		
0	0	SMF70PDT	8	binary	<p>Logical processor dispatch time, in microseconds. This is the number of microseconds that were accumulated during the measurement interval (during which a physical CPU was assigned to this logical CPU).</p> <p>When associated with partition name PHYSICAL, this field contains the accumulated number of microseconds during which a physical CPU was busy, but the time could not be attributed to a specific logical partition. This time includes the time PR/SM was controlling the physical processor (LPAR management time), as well as any other time the processor was busy for any reason such as managing coupling facility traffic.</p>																		
8	8	SMF70VPA	2	binary	Logical processor address.																		
10	A	SMF70BPS	2	binary	Partition processor resource weight factor. If the value is X'FFFF', then the partition has been assigned dedicated processors.																		
12	C	SMF70VPF	1	binary	<p>Logical processor flags</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Wait completion is enabled</td> </tr> <tr> <td>1</td> <td>Wait completion status has changed during interval</td> </tr> <tr> <td>2</td> <td>Weight has changed during interval</td> </tr> <tr> <td>3</td> <td>'Initial Capping' was set to 'ON' on the Hardware Management Console</td> </tr> <tr> <td>4</td> <td>'Initial Capping' status has changed during the interval</td> </tr> <tr> <td>5</td> <td>Logical processor varied online during the measurement interval</td> </tr> <tr> <td>6</td> <td>SMF70HW_Cap_Limit has changed during the interval</td> </tr> <tr> <td>7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Wait completion is enabled	1	Wait completion status has changed during interval	2	Weight has changed during interval	3	'Initial Capping' was set to 'ON' on the Hardware Management Console	4	'Initial Capping' status has changed during the interval	5	Logical processor varied online during the measurement interval	6	SMF70HW_Cap_Limit has changed during the interval	7	Reserved
Bit	Meaning when set																						
0	Wait completion is enabled																						
1	Wait completion status has changed during interval																						
2	Weight has changed during interval																						
3	'Initial Capping' was set to 'ON' on the Hardware Management Console																						
4	'Initial Capping' status has changed during the interval																						
5	Logical processor varied online during the measurement interval																						
6	SMF70HW_Cap_Limit has changed during the interval																						
7	Reserved																						
13	D	SMF70POF	1	binary	<p>Polarization flags</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0 - 1</td> <td>Polarization indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>Horizontally polarized or polarization not indicated</td> </tr> <tr> <td>01</td> <td>Vertically polarized with low entitlement</td> </tr> <tr> <td>10</td> <td>Vertically polarized with medium entitlement</td> </tr> <tr> <td>11</td> <td>Vertically polarized with high entitlement</td> </tr> </tbody> </table> </td> </tr> <tr> <td>2</td> <td>Polarization indication changed during interval</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0 - 1	Polarization indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>Horizontally polarized or polarization not indicated</td> </tr> <tr> <td>01</td> <td>Vertically polarized with low entitlement</td> </tr> <tr> <td>10</td> <td>Vertically polarized with medium entitlement</td> </tr> <tr> <td>11</td> <td>Vertically polarized with high entitlement</td> </tr> </tbody> </table>	Bit	Meaning when set	00	Horizontally polarized or polarization not indicated	01	Vertically polarized with low entitlement	10	Vertically polarized with medium entitlement	11	Vertically polarized with high entitlement	2	Polarization indication changed during interval	3-7	Reserved.
Bit	Meaning when set																						
0 - 1	Polarization indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>00</td> <td>Horizontally polarized or polarization not indicated</td> </tr> <tr> <td>01</td> <td>Vertically polarized with low entitlement</td> </tr> <tr> <td>10</td> <td>Vertically polarized with medium entitlement</td> </tr> <tr> <td>11</td> <td>Vertically polarized with high entitlement</td> </tr> </tbody> </table>	Bit	Meaning when set	00	Horizontally polarized or polarization not indicated	01	Vertically polarized with low entitlement	10	Vertically polarized with medium entitlement	11	Vertically polarized with high entitlement												
Bit	Meaning when set																						
00	Horizontally polarized or polarization not indicated																						
01	Vertically polarized with low entitlement																						
10	Vertically polarized with medium entitlement																						
11	Vertically polarized with high entitlement																						
2	Polarization indication changed during interval																						
3-7	Reserved.																						
14	E	SMF70CIX	2	binary	Index to the CPU-identification name section that contains the EBCDIC name corresponding to the CPU type of the logical processor. This field is zero if there is no information available.																		

Hex offset	Dec offset	Name	Length	Format	Description
16	10	SMF70EDT	8	binary	Logical processor effective dispatch time, in microseconds. The number of microseconds that were accumulated during the measurement interval (excluding LPAR management time), during which a physical CPU was assigned to this logical CPU. When associated with partition name PHYSICAL, this field contains the accumulated number of microseconds during which a physical CPU was busy, but the time could not be attributed to a specific logical partition or to LPAR management of the physical processor. One example is time used for managing coupling facility traffic. This field is zero, if not supported by the hardware. LPAR management time is the time from SMF70PDT associated with partition name PHYSICAL minus the contents of this field.
24	18	SMF70ACS	4	binary	Accumulated processor actual share. To get the average processor actual share, this value has to be divided by the number of Diagnose samples (field SMF70DSA in the CPU control section).
28	1C	SMF70MIS	2	binary	Processor minimum share.
30	1E	SMF70MAS	2	binary	Processor maximum share.
32	20	SMF70NSI	4	binary	Number of samples within 10% of the specified minimum.
36	24	SMF70NSA	4	binary	Number of samples within 10% of the specified maximum.
40	28	SMF70ONT	8	binary	Logical processor online time.
48	30	SMF70WST	8	binary	Logical processor wait state time. SMF70WST is used only for internal purposes.
56	38	SMF70PMA	4	signed	Average adjustment weight for pricing management. This value may be negative.
60	3C	SMF70NSW	4	binary	Number of diagnose samples where WLM considers to cap the set of logical CPUs of type SMF70CIX within the logical partition (see also SMF70NCA).
64	40	SMF70POW	4	binary	Polarization weight for the logical CPU when HiperDispatch mode is active. See bit 2 of SMF70PFL. Multiplied by a factor of 4096 for more granularity. The value may be the same or different for all shared CPUs of type SMF70CIX. This is an accumulated value. Divide by the number of Diagnose samples SMF70DSA to get average weight value for the interval.
68	44	SMF70NCA	4	binary	Number of diagnose samples where capping actually limited the usage of processor resources for the set of logical CPUs of type SMF70CIX within the logical partition.
72	48	SMF70HW_Cap_Limit	4	binary	If not zero, absolute limit on partition usage of all CPUs of the type indicated in SMF70CIX in terms of a number specified in hundredths of a CPU. For example, a value of 250 indicates that the partition is limited to using 2.5 CPUs.
76	4C		4		Reserved.
80	50	SMF70MTIT	8	binary	Multithreading Idle Time in microseconds accumulated for all threads of a dispatched core. This field is only valid if SMF70MTID is not zero for this partition.

CPU Identification section

There is one section per EBCDIC name that identifies a CPU type. 'CP' and 'ICF', with appropriate trailing blanks, are examples of EBCDIC names describing a General Purpose CPU and an Internal Coupling Facility CPU, respectively.

Offsets	Name	Length	Format	Description
0	0 SMF70CIN	16	EBCDIC	CPU-identification name.
16	10 SMF70CTN	2	binary	Number of physical CPUs of this type at interval end.
18	12 *	2		Reserved.
20	14 SMF70CAN	4	binary	Accumulated number of physical CPUs. Divide by SMF70DSA to get the average number of physical CPUs of this type applicable during the interval.

Record type 70

Logical Core Data Section

This section contains usage information for a logical core in a multithreading environment (when the LOADxx PROCVIEW CORE parameter is in effect).

Offsets	Name	Length	Format	Description						
0	0 SMF70_CORE_ID	2	binary	Core identification.						
2	2 SMF70_CORE_FLG	1	binary	Logical Core Information <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Core LPAR Busy time is valid.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Core LPAR Busy time is valid.	1-7	Reserved.
Bit	Meaning when set									
0	Core LPAR Busy time is valid.									
1-7	Reserved.									
3	3	1		Reserved.						
4	4 SMF70_CPU_SKIP	2	binary	The CPU data sections for this core are grouped together in the record. To get to the first CPU data section associated with this logical core, skip over the number of CPU data sections specified by this field, starting at the first CPU data section in the record.						
6	6 SMF70_CPU_NUM	2	binary	Number of CPU data sections for this core. This value represents the number of threads that are active on this core.						
8	8 SMF70_PROD	4	binary	Multithreading core productivity numerator. Divide this value by 1024 to get the multithreading core productivity. A zero value is reported if the core was not configured ONLINE for the complete interval. If SMF70_CPU_NUM is greater than 1, the core productivity represents the percentage of how much work the core resources accomplished while dispatched to physical hardware over the maximum amount of work the core resources could have accomplished while dispatched to physical hardware.						
12	C SMF70_LPAR_BUSY	4	binary	Multithreading core LPAR Busy Time in milliseconds. This field is valid if bit 0 of SMF70_CORE_FLG is set.						

Subtype 2 — Cryptographic Hardware Activity

Cryptographic CCA Coprocessor Data Section

There is one section per cryptographic CCA coprocessor.

Offsets	Name	Length	Format	Description														
0	0 R7023AX	1	binary	Crypto processor index.														
1	1 R7023CT	1	binary	Crypto processor type: <table border="0"> <tr> <td>Value</td> <td>Meaning</td> </tr> <tr> <td>3</td> <td>PCICC</td> </tr> <tr> <td>5</td> <td>PCIXCC</td> </tr> <tr> <td>7</td> <td>CEX2C</td> </tr> <tr> <td>9</td> <td>CEX3C</td> </tr> <tr> <td>10</td> <td>CEX4C</td> </tr> <tr> <td>11</td> <td>CEX5C</td> </tr> </table>	Value	Meaning	3	PCICC	5	PCIXCC	7	CEX2C	9	CEX3C	10	CEX4C	11	CEX5C
Value	Meaning																	
3	PCICC																	
5	PCIXCC																	
7	CEX2C																	
9	CEX3C																	
10	CEX4C																	
11	CEX5C																	
2	2 R7023MSK	1	binary	Validity bit mask. Each bit position represents the validity of a timer-counter pair that measures the execution time and number of operations on a cryptographic coprocessor card. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Valid data for all operations</td> </tr> <tr> <td>1</td> <td>Valid data for RSA-key-generation operations</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table> Valid with SMF70SRL ≥ X'61'(97).	Bit	Meaning when set	0	Valid data for all operations	1	Valid data for RSA-key-generation operations	2-7	Reserved.						
Bit	Meaning when set																	
0	Valid data for all operations																	
1	Valid data for RSA-key-generation operations																	
2-7	Reserved.																	
3	3 R7023MT	1	binary	Reserved for diagnostic purposes.														
4	4	4		Reserved.														
8	8 R7023SF	8	floating	Scaling factor for this cryptographic coprocessor. Execution times in this data section have to be multiplied by this scaling factor to achieve a value in seconds.														
16	10 R7023T0	8	floating	Execution time of all operations on the specified cryptographic coprocessor.														
24	18 R7023C0	8	floating	Number of all operations on the specified cryptographic coprocessor.														

Offsets	Name	Length	Format	Description
32	20	8		Reserved.
40	28 R7023C1	8	floating	Number of all RSA-key-generation operations.

Cryptographic Accelerator Data Section

There is one section per cryptographic accelerator.

Offsets	Name	Length	Format	Description																
0	0 R7024AX	1	binary	Crypto processor index.																
1	1 R7024CT	1	binary	Crypto processor type: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>4</td> <td>PCICA</td> </tr> <tr> <td>6</td> <td>CEX2A</td> </tr> <tr> <td>8</td> <td>CEX3A</td> </tr> <tr> <td>10</td> <td>CEX4A</td> </tr> <tr> <td>11</td> <td>CEX5A</td> </tr> </tbody> </table>	Value	Meaning	4	PCICA	6	CEX2A	8	CEX3A	10	CEX4A	11	CEX5A				
Value	Meaning																			
4	PCICA																			
6	CEX2A																			
8	CEX3A																			
10	CEX4A																			
11	CEX5A																			
2	2 R7024MSK	1	binary	Validity bit mask. Each bit position represents the validity of a timer-counter pair that measures the execution time and number of operations on a cryptographic accelerator card for a certain type of RSA operations. <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Valid data for 1024-bit ME-format RSA operations</td> </tr> <tr> <td>1</td> <td>Valid data for 2048-bit ME-format RSA operations</td> </tr> <tr> <td>2</td> <td>Valid data for 1024-bit CRT-format RSA operations</td> </tr> <tr> <td>3</td> <td>Valid data for 2048-bit CRT-format RSA operations</td> </tr> <tr> <td>4</td> <td>Valid data for 4096-bit ME-format RSA operations</td> </tr> <tr> <td>5</td> <td>Valid data for 4096-bit CRT-format RSA operations</td> </tr> <tr> <td>6-7</td> <td>Reserved</td> </tr> </tbody> </table> Valid with SMF70SRL ≥ X'5B'(91).	Bit	Meaning when set	0	Valid data for 1024-bit ME-format RSA operations	1	Valid data for 2048-bit ME-format RSA operations	2	Valid data for 1024-bit CRT-format RSA operations	3	Valid data for 2048-bit CRT-format RSA operations	4	Valid data for 4096-bit ME-format RSA operations	5	Valid data for 4096-bit CRT-format RSA operations	6-7	Reserved
Bit	Meaning when set																			
0	Valid data for 1024-bit ME-format RSA operations																			
1	Valid data for 2048-bit ME-format RSA operations																			
2	Valid data for 1024-bit CRT-format RSA operations																			
3	Valid data for 2048-bit CRT-format RSA operations																			
4	Valid data for 4096-bit ME-format RSA operations																			
5	Valid data for 4096-bit CRT-format RSA operations																			
6-7	Reserved																			
3	3 R7024MT	1	binary	Reserved for diagnostic purposes.																
4	4 R7024EN	4	binary	Number of engines on the Crypto accelerator card. Specifies the number of valid entries in the R7024TC array.																
8	8 R7024SF	8	floating	Scaling factor for this cryptographic accelerator. Execution times in this data section have to be multiplied by this scaling factor to achieve a value in seconds.																
The following block of data (R7024TC) exists five times for up to five engines of a cryptographic accelerator. Unused blocks are allocated with values set to 0.																				
16	10 R7021MET	8	floating	Execution time for all operations in 1024-bit-ME format.																
24	18 R7021MEC	8	floating	Number of all operations in 1024-bit-ME format.																
32	20 R7022MET	8	floating	Execution time for all operations in 2048-bit-ME format.																
40	28 R7022MEC	8	floating	Number of all operations in 2048-bit-ME format.																
48	30 R7021CRT	8	floating	Execution time for all operations in 1024-bit-CRT format.																
56	38 R7021CRC	8	floating	Number of all operations in 1024-bit-CRT format.																
64	40 R7022CRT	8	floating	Execution time for all operations in 2048-bit-CRT format.																
72	48 R7022CRC	8	floating	Number of all operations in 2048-bit-CRT format.																
End of five instances of the R7024TC data block.																				
336	150 R7023MET	8	floating	Execution time for all operations in 4096-bit ME-format.																
344	158 R7023MEC	8	floating	Number of all operations in 4096-bit ME-format.																
352	160 R7023CRT	8	floating	Execution time for all operations in 4096-bit CRT-format.																
360	168 R7023CRC	8	floating	Number of all operations in 4096-bit CRT-format.																

Record type 70

ICSF Services Data Section

There is either one or no section containing measurement data of selected Integrated Cryptographic Service Facility (ICSF) activities.

Offsets	Name	Length	Format	Description
0	0 R702SNEC	8	floating	Single DES: Number of calls to encipher the data.
8	8 R702SNEB	8	floating	Single DES: Number of bytes of data enciphered.
16	10 R702SNEI	8	floating	Single DES: Number of instructions used to encipher the data.
24	18 R702TNEC	8	floating	Triple DES: Number of calls to encipher the data.
32	20 R702TNEB	8	floating	Triple DES: Number of bytes of data enciphered.
40	28 R702TNEI	8	floating	Triple DES: Number of instructions used to encipher the data.
48	30 R702SNDC	8	floating	Single DES: Number of calls to decipher the data.
56	38 R702SNDB	8	floating	Single DES: Number of bytes of data deciphered.
64	40 R702SNDI	8	floating	Single DES: Number of instructions used to decipher the data.
72	48 R702TNDC	8	floating	Triple DES: Number of calls to decipher the data.
80	50 R702TNDB	8	floating	Triple DES: Number of bytes of data deciphered.
88	58 R702TNDI	8	floating	Triple DES: Number of instructions used to decipher the data.
96	60 R702NMGC	8	floating	Number of calls to generate the message authentication code (MAC).
104	68 R702NMGB	8	floating	Number of bytes of data for which the MAC was generated.
112	70 R702NMGI	8	floating	Number of PCMF instructions used to generate the MAC.
120	78 R702NMVC	8	floating	Number of calls to verify the MAC.
128	80 R702NMVB	8	floating	Number of bytes of data for which the MAC was verified.
136	88 R702NMVI	8	floating	Number of PCMF instructions used to verify the MAC.
144	90 R702NHAC	8	floating	For SHA-1 hashing: Number of calls to hash the data.
152	98 R702NHAB	8	floating	For SHA-1 hashing: Number of bytes of data which was hashed.
160	A0 R702NHAI	8	floating	For SHA-1 hashing: Number of PCMF instructions used to hash the data.
168	A8 R702NPTC	8	floating	Number of calls to translate the PIN.
176	B0 R702NPVC	8	floating	Number of calls to verify the PIN.
184	B8 R702NH2C	8	floating	For SHA-224 and SHA-256 hashing: Number of calls to hash the data.
192	C0 R702NH2B	8	floating	For SHA-224 and SHA-256 hashing: Number of bytes of data which was hashed.
200	C8 R702NH2I	8	floating	For SHA-224 and SHA-256 hashing: Number of PCMF instructions used to hash the data.
208	D0 R702NH5C	8	floating	For SHA-384 and SHA-512 hashing: Number of calls to hash the data.
216	D8 R702NH5B	8	floating	For SHA-384 and SHA-512 hashing: Number of bytes of data which was hashed.
224	E0 R702NH5I	8	floating	For SHA-384 and SHA-512 hashing: Number of PCMF instructions used to hash the data.
232	E8 R702CDLV	4	binary	ICSF data level.
AES measurements. Fields are valid only if R702CDLV is greater than 11.				
236	EC R702AESC	8	floating	Number of AES encipher calls sent to a coprocessor.

Offsets	Name	Length	Format	Description
244	F4 R702AESB	8	floating	Number of bytes processed by the AES encipher services handled by a coprocessor.
252	FC R702AESI	8	floating	Number of operations required to complete the AES encipher service calls to a coprocessor.
260	104 R702ASDC	8	floating	Number of AES decipher calls sent to a coprocessor.
268	10C R702ASDB	8	floating	Number of bytes processed by the AES decipher services handled by a coprocessor.
276	114 R702ASDI	8	floating	Number of operations required to complete the AES decipher service calls to a coprocessor.
Digital Signatures measurements. Fields are valid only if R702CDLV is greater than 13.				
284	11C R702DRGC	8	floating	Number of calls to generate the RSA digital signatures.
292	124	16		Reserved.
308	134 R702DRVC	8	floating	Number of calls to verify the RSA digital signatures.
316	13C	16		Reserved.
332	14C R702DEGC	8	floating	Number of calls to generate the ECC digital signatures.
340	154	16		Reserved.
356	164 R702DEVC	8	floating	Number of calls to verify the ECC digital signatures.
364	16C	16		Reserved.
AES MAC measurements. Fields are valid only if R702CDLV is greater than 17				
380	17C R702AMGC	8	floating	Number of calls to generate the AES MACs.
388	184 R702AMGB	8	floating	Number of bytes of data for which the AES MACs were generated.
396	18C R702AMGI	8	floating	Number of instructions used to generate the AES MACs.
404	194 R702AMVC	8	floating	Number of calls to verify the AES MACs.
412	19C R702AMVB	8	floating	Number of bytes of data for which the AES MACs were verified.
420	1A4 R702AMVI	8	floating	Number of instructions used to verify the AES MACs.
FPE measurements. Fields are valid only if R702CDLV is greater than 19				
428	1AC R702FPEC	8	floating	Number of calls to encipher data using FPE.
436	1B4 R702FPEB	8	floating	Number of bytes of data enciphered using FPE.
444	1BC R702FPEI	8	floating	Number of instructions used to encipher the data using FPE.
452	1C4 R702FPDC	8	floating	Number of calls to decipher data using FPE.
460	1CC R702FPDB	8	floating	Number of bytes of data deciphered using FPE.
468	1D4 R702FPDI	8	floating	Number of instructions used to decipher the data using FPE.
476	1DC R702FPTC	8	floating	Number of calls to translate data using FPE.
484	1E4 R702FPTB	8	floating	Number of bytes of data translated using FPE.
492	1EC R702FPTI	8	floating	Number of instructions used to translate the data using FPE.

Cryptographic PKCS11 Coprocessor Data Section

There is one section per cryptographic PKCS11 coprocessor.

Offsets	Name	Length	Format	Description
0	0 R7025AX	1	binary	Crypto processor index.

Record type 70

Offsets	Name	Length	Format	Description														
1	1 R7025CT	1	binary	Crypto processor type: <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>CEX4P</td> </tr> <tr> <td>11</td> <td>CEX5P</td> </tr> </tbody> </table>	Value	Meaning	10	CEX4P	11	CEX5P								
Value	Meaning																	
10	CEX4P																	
11	CEX5P																	
2	2 R7025MSK	1	binary	Validity bit mask. Each bit position represents the validity of a timer-counter pair that measures the execution time and number of operations by functions on a cryptographic PKCS11 coprocessor. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Valid data for operations by slow asymmetric-key functions</td> </tr> <tr> <td>1</td> <td>Valid data for operations by fast asymmetric-key functions</td> </tr> <tr> <td>2</td> <td>Valid data for operations by symmetric-key functions (partial or incremental results)</td> </tr> <tr> <td>3</td> <td>Valid data for operations by symmetric-key functions (complete or final result)</td> </tr> <tr> <td>4</td> <td>Valid data for operations by asymmetric-key generation functions</td> </tr> <tr> <td>5-7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Valid data for operations by slow asymmetric-key functions	1	Valid data for operations by fast asymmetric-key functions	2	Valid data for operations by symmetric-key functions (partial or incremental results)	3	Valid data for operations by symmetric-key functions (complete or final result)	4	Valid data for operations by asymmetric-key generation functions	5-7	Reserved
Bit	Meaning when set																	
0	Valid data for operations by slow asymmetric-key functions																	
1	Valid data for operations by fast asymmetric-key functions																	
2	Valid data for operations by symmetric-key functions (partial or incremental results)																	
3	Valid data for operations by symmetric-key functions (complete or final result)																	
4	Valid data for operations by asymmetric-key generation functions																	
5-7	Reserved																	
3	3 R7025MT	1	binary	Reserved for diagnostic purposes.														
4	4	4	binary	Reserved.														
8	8 R7025SF	8	floating	Scaling factor for this cryptographic PKCS11 coprocessor. Execution times in this data section have to be multiplied by this scaling factor to achieve a value in seconds.														
16	10 R7025SAT	8	floating	Aggregate execution time of operations by slow asymmetric-key functions.														
24	18 R7025SAC	8	floating	Number of operations by slow asymmetric-key functions.														
32	20 R7025FAT	8	floating	Aggregate execution time of operations by fast asymmetric-key functions.														
40	28 R7025FAC	8	floating	Number of operations by fast asymmetric-key functions.														
48	30 R7025SPT	8	floating	Aggregate execution time of operations by symmetric-key functions that return partial or incremental results.														
56	38 R7025SPC	8	floating	Number of operations by symmetric-key functions that return partial or incremental results.														
64	40 R7025SCT	8	floating	Aggregate execution time of operations by symmetric-key functions that return a complete or final result.														
72	48 R7025SCC	8	floating	Number of operations by symmetric-key functions that return a complete or final result.														
80	50 R7025AGT	8	floating	Aggregate execution time of operations by asymmetric-key generation function.														
88	58 R7025AGC	8	floating	Number of operations by asymmetric-key generation function.														

Record Type 71 (47) — RMF Paging Activity

Reference information:

- For information on using RME, see *z/OS RMF User's Guide*.
- For information on Monitor I and II, see *z/OS RMF Report Analysis*.

Record type 71 is written for each measurement interval and when the session is terminated. Record type 71 contains information about the demands made on the system paging facilities and the utilization of central storage and external page storage during the reporting interval.

As with all the SMF records RMF produces, it contains a header section followed by the RMF product section. These are followed by:

Paging data section

Includes information on central storage pages for SQA, SPA, CSA, LSQA and REGIONS+SWA.

Macro to symbolically address record type 71

The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2,...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF71LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF71SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF71FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	System is running in PR/SM mode.															
5	5 SMF71RTY	1	binary	Record type 71 (X'47').												
6	6 SMF71TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												

Record type 71

Offsets	Name	Length	Format	Description
10	A SMF71DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
14	E SMF71SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).
18	12 SMF71SSI	4	EBCDIC	Subsystem identification ('RMF').
22	16 SMF71STY	2	binary	Record subtype=1.
24	18 SMF71TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record.
26	1A	2		Reserved.
28	1C SMF71PRS	4	binary	Offset to RMF product section.
32	20 SMF71PRL	2	binary	Length of RMF product section.
34	22 SMF71PRN	2	binary	Number of RMF product sections.
36	24 SMF71PDS	4	binary	Offset to Paging data sections.
40	28 SMF71PDL	2	binary	Length of Paging data section.
42	2A SMF71PDN	2	binary	Number of Paging data section.
44	2C SMF71SWS	4	binary	Offset to Swap Placement section.
48	30 SMF71SWL	2	binary	Length of Swap Placement section.
50	32 SMF71SWN	2	binary	Number of Swap Placement sections.

RMF Product Section

Offsets	Name	Length	Format	Description												
0	0 SMF71IMFV	2	packed	RMF version number.												
2	2 SMF71IPRD	8	EBCDIC	Product name ('RMF').												
10	A SMF71IST	4	packed	Time that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.												
14	E SMF71DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
18	12 SMF71INT	4	packed	Duration of RMF measurement interval, in the form <i>mmssstttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign. The end of the measurement interval is the sum of the record start time (and this field).												
22	16	2		Reserved.												
24	18 SMF71SAM	4	binary	Number of RMF samples.												
28	1C	2		Reserved.												
30	1E SMF71FLA	2	binary	Flags <table border="1" data-bbox="844 1575 1380 1827"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.
Bit	Meaning when set															
0	Reserved															
1	Samples have been skipped															
2	Record was written by RMF Monitor III															
3	Interval was synchronized with SMF															
4-15	Reserved.															
32	20	4		Reserved.												

Offsets	Name	Length	Format	Description																		
36	24 SMF71CYC	4	packed	Sampling cycle length, in the form 000 <i>tttF</i> , where <i>ttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.																		
40	28 SMF71MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).																		
48	30 SMF71IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries														
Value	Meaning																					
3	9672, zSeries																					
49	31 SMF71PRF	1	binary	Processor flags. <table> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The system has ESCON channels in the configuration</td> </tr> <tr> <td>2</td> <td>There is an ESCON director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The system has ESCON channels in the configuration	2	There is an ESCON director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The system has ESCON channels in the configuration																					
2	There is an ESCON director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF71PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF71SRL	1	binary	SMF record level change number ('X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF71IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).																		
60	3C SMF71LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF71RAO	4	binary	Offset to reassembly area relative to start of RMF product section.																		
72	48 SMF71RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		
74	4A SMF71RAN	2	binary	Reassembly area indicator. <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken.</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF71RAO) and length (SMF71RAL) are only valid if SMF71RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken.	1	Record is broken.												
Value	Meaning																					
0	Record is not broken.																					
1	Record is broken.																					
76	4C SMF71OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).																		
78	4E SMF71SYN	2	binary	SYNC value in seconds.																		
80	50 SMF71GIE	8	binary	Projected gathering interval end (STCK format) GMT time.																		
88	58 SMF71XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.																		
96	60 SMF71SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.																		

Record type 71

Offsets	Name	Length	Format	Description
Reassembly Area:				
0	0 SMF71RBR	2	binary	Total number of broken records built from the original large record.
2	2 SMF71RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF71RBR.
4	4 SMF71RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.
8	8 SMF71RIL	2	binary	Length of reassembly information block.
10	A SMF71RIN	2	binary	Number of reassembly information blocks (same value as SMF71TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF71RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF71RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF71RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Paging Data Section

Offsets	Name	Length	Format	Description
0	0 SMF71PIN	4	binary	Number of non-VIO page-ins from auxiliary to central storage. This field includes page-ins required through page faults, specific page requests, and page fixes. It does not include page reclaims or page-ins for VIO data sets.
4	4 SMF71POT	4	binary	Number of non-VIO page-outs from central to auxiliary storage. This field includes page-outs required through specific page requests as well as those pages stolen by the paging supervisor through infrequent use. It does not include page-outs for VIO data sets.
8	8	4		Reserved.
12	C SMF71SSQ	4	binary	Number of address space swap sequences. (A swap sequence consists of an address space swap-out and swap-in.)
16	10 SMF71SIN	4	binary	Number of pages swapped in. This field includes: LSQA, fixed pages, and those pages that the real storage manager determined to be active when the address space was swapped in. It does not include page reclaims.
20	14 SMF71SOT	4	binary	Number of pages swapped out. This field includes: LSQA, private area fixed pages, and private area non-fixed changed pages.
24	18 SMF71VIN	4	binary	Number of VIO page-ins from auxiliary to central storage. This field includes page-ins resulting from page faults or specific page requests on a VIO window. It does not include VIO swap-ins or page-ins for the common area.

Offsets	Name	Length	Format	Description
28	1C SMF71VOT	4	binary	Number of VIO page-outs from central to auxiliary storage. This field includes page-outs resulting from specific page requests on a VIO window as well as those pages stolen by the paging supervisor through infrequent use. It does not include VIO swap-outs or page-outs for the common area.
32	20	4		Reserved.
36	24 SMF71SNI	4	binary	Number of non-VIO page-ins (from auxiliary to central storage) performed in common area (LPA/CSA).
40	28 SMF71SNO	4	binary	Number of non-VIO page-outs (from central to auxiliary storage) performed in common area (LPA/CSA).
44	2C	4		Reserved.
48	30 SMF71LNI	4	binary	Number of non-VIO page-ins performed in LPA.
52	34	4		Reserved.
56	38 SMF71AFC	4	binary	End-of-interval snapshot value of the number of unused central storage page frames.
60	3C SMF71TFC	4	binary	Number of page frames defined in central storage. (This field does not include frames occupied by the nucleus, frames marked as bad or offline, or frames used by HSA or PR/SM.)
64	40 SMF71TSC	4	binary	Total number of local page data set slots.
68	44 SMF71DSC	4	binary	Number of local page data set slots allocated to VIO private area pages.
72	48 SMF71VSC	4	binary	Number of local page data set slots allocated to non-VIO private area pages.
76	4C SMF71NSC	4	binary	Number of usable local page data set slots that have not been allocated.
80	50 SMF71FIN	4	binary	Number of central storage frames in nucleus.
84	54 SMF71MNF	4	binary	Minimum number of unused central storage page frames.
88	58 SMF71MXF	4	binary	Maximum number of unused central storage page frames.
92	5C SMF71AVF	4	binary	Average number of unused central storage page frames.
96	60 SMF71MNP	4	binary	Minimum number of CSA central storage frames used.
100	64 SMF71MXP	4	binary	Maximum number of CSA central storage frames used.
104	68 SMF71AVP	4	binary	Average number of CSA central storage frames used.
108	6C SMF71MNS	4	binary	Minimum number of pageable address space central storage frames in the private address space.
112	70 SMF71MXS	4	binary	Maximum number of pageable address space central storage frames in the private address space.
116	74 SMF71AVS	4	binary	Average number of pageable address space central storage frames in the private address space.
120	78 SMF71MNT	4	binary	Minimum total number of central storage frames used.
124	7C SMF71MXT	4	binary	Maximum total number of central storage frames used.
128	80 SMF71AVT	4	binary	Average total number of central storage frames used.
132	84 SMF71MNQ	4	binary	Minimum number of SQA fixed frames in central storage.
136	88 SMF71MXQ	4	binary	Maximum number of SQA fixed frames in central storage.
140	8C SMF71AVQ	4	binary	Average number of SQA fixed frames in central storage.
144	90 SMF71MNC	4	binary	Minimum number of CSA fixed frames in central storage.
148	94 SMF71MXC	4	binary	Maximum number of CSA fixed frames in central storage.
152	98 SMF71AVC	4	binary	Average number of CSA fixed frames in central storage.
156	9C SMF71MNR	4	binary	Minimum number of non-LSQA fixed central storage frames in the private address space.

Record type 71

Offsets	Name	Length	Format	Description
160	A0 SMF71MXR	4	binary	Maximum number of non-LSQA fixed central storage frames in the private address space.
164	A4 SMF71AVR	4	binary	Average number of non-LSQA fixed central storage frames in the private address space.
168	A8 SMF71MNX	4	binary	Minimum total number of fixed central storage frames used.
172	AC SMF71MXX	4	binary	Maximum total number of fixed central storage frames used.
176	B0 SMF71AVX	4	binary	Average total number of fixed central storage frames used.
180	B4 SMF71MNU	4	binary	Minimum number of usable local page data set slots that have not been allocated.
184	B8 SMF71MXU	4	binary	Maximum number of usable local page data set slots that have not been allocated.
188	BC SMF71AVU	4	binary	Average number of usable local page data set slots that have not been allocated.
192	C0 SMF71MNV	4	binary	Minimum number of local page data set slots allocated to VIO private area pages.
196	C4 SMF71MXV	4	binary	Maximum number of local page data set slots allocated to VIO private area pages.
200	C8 SMF71AVV	4	binary	Average number of local page data set slots allocated to VIO private area pages.
204	CC SMF71MNM	4	binary	Minimum number of local page data set slots allocated to non-VIO private area pages.
208	D0 SMF71MXM	4	binary	Maximum number of local page data set slots allocated to non-VIO private area pages.
212	D4 SMF71AVM	4	binary	Average number of local page data set slots allocated to non-VIO private area pages.
216	D8 SMF71MNB	4	binary	Minimum number of unusable local page data set slots.
220	DC SMF71MXB	4	binary	Maximum number of unusable local page data set slots.
224	E0 SMF71AVB	4	binary	Average number of unusable local page data set slots.
228	E4 SMF71MNA	4	binary	Minimum total number of local page data set slots.
232	E8 SMF71MXA	4	binary	Maximum total number of local page data set slots.
236	EC SMF71IS1	2	binary	Number of samples skipped due to invalid fixed frame counts. Fields affected are SMF71MNC, MXC, AVC, MNR, MXR and AVR.
238	EE SMF71IS2	2	binary	Number of incorrect samples resulting from negative calculations. Fields affected are the same as SMF71IS1.
240	F0	60		Reserved.
300	12C SMF71NLP	4	binary	Minimum number of LPA frames in central storage.
304	130 SMF71XLP	4	binary	Maximum number of LPA frames in central storage.
308	134 SMF71ALP	4	binary	Average number of LPA frames in central storage.
312	138 SMF71NLF	4	binary	Minimum number of LPA fixed frames in central storage.
316	13C SMF71XLF	4	binary	Maximum number of LPA fixed frames in central storage.
320	140 SMF71ALF	4	binary	Average number of LPA fixed frames in central storage.
324	144 SMF71NLS	4	binary	Minimum number of LSQA fixed frames in central storage.
328	148 SMF71XLS	4	binary	Maximum number of LSQA fixed frames in central storage.
332	14C SMF71ALS	4	binary	Average number of LSQA fixed frames in central storage.
336	150 SMF71MNL	4	binary	Minimum number of fixed frames in central storage (less than 16 megabytes).
340	154 SMF71MXL	4	binary	Maximum number of fixed frames in central storage (less than 16 megabytes).
344	158 SMF71AVL	4	binary	Average number of fixed frames in central storage (less than 16 megabytes).

Offsets	Name	Length	Format	Description
348	15C SMF71PMV	4	binary	Total number of pages moved within central storage.
352	160 SMF71OPT	8	EBCDIC	SRM opt member name.
360	168	20		Reserved.
380	17C SMF71LIC	4	binary	Minimum high UIC. A value from 0 to 2540 that indicates the age (in seconds) of the oldest unreferenced frame in central storage.
384	180 SMF71HIC	4	binary	Maximum high UIC. A value from 0 to 2540 that indicates the age (in seconds) of the oldest unreferenced frame in central storage.
388	184 SMF71ACA	4	binary	Average high UIC (scale factor=-1). Scale factor -1 means the field has been multiplied by 10 to give a result in tenths and must be multiplied by 10 ⁻¹ to get the correct value.
392	188	24		Reserved.
416	1A0 SMF71MSR	4	binary	Minimum number SQA pages in central storage.
420	1A4 SMF71XSR	4	binary	Maximum number SQA pages in central storage.
424	1A8 SMF71ASR	4	binary	Average number of SQA pages in central storage.
428	1AC	36		Reserved.
464	1D0 SMF71MLR	4	binary	Minimum number of LSQA pages in central storage.
468	1D4 SMF71XLR	4	binary	Maximum number of LSQA pages in central storage.
472	1D8 SMF71ALR	4	binary	Average number of LSQA pages in central storage.
476	1DC	24		Reserved.
500	1F4 SMF71ISC	4	binary	Number of incorrect samples returned from collector service.
504	1F8 SMF71HME	12	binary	Reserved.
516	204 SMF71HOT	4	binary	Number of hiperspace page-outs from central to auxiliary storage.
520	208 SMF71HIN	4	binary	Number of hiperspace page-ins from auxiliary to central storage.
524	20C	12		Reserved.
536	218 SMF71BLP	4	binary	Number of blocked pages paged in (this does not include VIO or hiperspace pages).
540	21C SMF71BLK	4	binary	Number of blocks paged in.
544	220	8		Reserved.
552	228 SMF71PMT	8	binary	Steal timer - the elapsed time spent in a preferred steal in CPU-timer units. The interval of CPU time needed to steal the page includes the time to move the contents of the stolen page and any time spent in frame steal processing of any type. Some examples of the types of steal routines whose CPU time get included in SMF71PMT are non-preferred above, non-preferred below, preferred above, preferred below, storage buffer frame queue, bottom double frame queue, and V=R waiting frame. No matter what type of steal processing occurs, the steal module records it all, and it gets included in this field. Note that SMF71PMT does not include the time to move the new contents into the page.
560	230 SMF71SBI	4	binary	Number of system pageable areas block page ins.
564	234 SMF71LBI	4	binary	Number of LPA block page ins.
568	238 SMF71ASI	8	floating	Number of page-ins from auxiliary storage for shared page groups.
576	240 SMF71ASO	8	floating	Number of page-outs to auxiliary storage for shared page groups.
584	248	16		Reserved.

Record type 71

Offsets	Name	Length	Format	Description
600	258 SMF71MGT	8	floating	Minimum number of shared page groups in the system.
608	260 SMF71XGT	8	floating	Maximum number of shared page groups in the system.
616	268 SMF71AGT	8	floating	Average number of shared page groups in the system.
624	270 SMF71MGC	8	floating	Minimum number of shared page groups in the central storage.
632	278 SMF71XGC	8	floating	Maximum number of shared page groups in the central storage.
640	280 SMF71AGC	8	floating	Average number of shared page groups in the central storage.
648	288 SMF71MGE	24	floating	Reserved.
672	2A0 SMF71MGA	8	floating	Minimum number of auxiliary slots in use for shared page groups.
680	2A8 SMF71XGA	8	floating	Maximum number of auxiliary slots in use for shared page groups.
688	2B0 SMF71AGA	8	floating	Average number of auxiliary slots in use for shared page groups.
696	2B8 SMF71MGF	8	floating	Minimum number of shared page groups fixed in the system.
704	2C0 SMF71XGF	8	floating	Maximum number of shared page groups fixed in the system.
712	2C8 SMF71AGF	8	floating	Average number of shared page groups fixed in the system.
720	2D0 SMF71MGB	8	floating	Minimum number of shared page groups fixed below 16 MB in the system.
728	2D8 SMF71XGB	8	floating	Maximum number of shared page groups fixed below 16 MB in the system.
736	2E0 SMF71AGB	8	floating	Average number of shared page groups fixed below 16 MB in the system.
744	2E8 SMF71CAM	8	floating	Minimum number of available central storage frames.
752	2F0 SMF71CAX	8	floating	Maximum number of available central storage frames.
760	2F8 SMF71CAA	8	floating	Average number of available central storage frames.
768	300 SMF71CLM	8	floating	Minimum number of low-impact central storage frames.
776	308 SMF71CLX	8	floating	Maximum number of low-impact central storage frames.
784	310 SMF71CLA	8	floating	Average number of low-impact central storage frames.
792	318 SMF71CMM	8	floating	Minimum number of medium-impact central storage frames.
800	320 SMF71CMX	8	floating	Maximum number of medium-impact central storage frames.
808	328 SMF71CMA	8	floating	Average number of medium-impact central storage frames.
816	330 SMF71CHM	8	floating	Minimum number of high-impact central storage frames.
824	338 SMF71CHX	8	floating	Maximum number of high-impact central storage frames.
832	340 SMF71CHA	8	floating	Average number of high-impact central storage frames.
840	348 SMF71EAM	96	floating	Reserved.
936	3A8 SMF71MVI	8	floating	Minimum number of VIO pages in central storage.
944	3B0 SMF71XVI	8	floating	Maximum number of VIO pages in central storage.
952	3B8 SMF71AVI	8	floating	Average number of VIO pages in central storage.
960	3C0 SMF71MHI	8	floating	Minimum number of hiperspace pages in central storage.
968	3C8 SMF71XHI	8	floating	Maximum number of hiperspace pages in central storage.
976	3D0 SMF71AHI	8	floating	Average number of hiperspace pages in central storage.
984	3D8 SMF71VWS	8	floating	Number of VIO pages written to central storage.
992	3E0 SMF71VRS	8	floating	Number of VIO pages read from central storage.

Offsets	Name	Length	Format	Description
1000	3E8 SMF71HWS	8	floating	Number of hiperspace pages written to central storage.
1008	3F0 SMF71HRS	8	floating	Number of hiperspace pages read from central storage.
1016	3F8 SMF71MFB	8	floating	Minimum number of pages fixed between 16M and 2G.
1024	400 SMF71XFB	8	floating	Maximum number of pages fixed between 16M and 2G.
1032	408 SMF71AFB	8	floating	Average number of pages fixed between 16M and 2G.
1040	410 SMF71PTH	8	floating	Average number of shared pages in the system (with virtual storage address above the bar).
1048	418 SMF71PCH	8	floating	Average number of shared pages in central storage (with virtual storage address above the bar).
1056	420 SMF71PAH	8	floating	Average number of shared pages in auxiliary storage (with virtual storage address above the bar).
1064	428 SMF71BLG	8	floating	Maximum number of shared bytes from large virtual memory in a memory object for the entire system.
1072	430 SMF71PIH	8	floating	Number of page-ins from auxiliary storage for shared pages.
1080	438 SMF71POH	8	floating	Number of page-outs to auxiliary storage for shared pages (with virtual storage address above the bar).
1088	440 SMF71ULM	4	binary	Lowest minimum system UIC during the interval (from MCTMinSystemUIC).
1092	444 SMF71ULC	4	binary	Lowest current system UIC during the interval (from MCTCurSystemUIC).
1096	448 SMF71UHC	4	binary	Highest current system UIC during the interval (from MCTCurSystemUIC).
1100	44C SMF71UHX	4	binary	Highest maximum system UIC during the interval (from MCTMaxSystemUIC).
1104	450 SMF71UAM	4	binary	Average minimum system UIC during the interval (from MCTMinSystemUIC).
1108	454 SMF71UAC	4	binary	Average current system UIC during the interval (from MCTCurSystemUIC).
1112	458 SMF71UAX	4	binary	Average maximum system UIC during the interval (from MCTMaxSystemUIC).
1116	45C SMF71LOM	8	floating	Minimum number of fixed memory objects that are allocated in the system and can be backed in 1 MB frames.
1124	464 SMF71LOX	8	floating	Maximum number of fixed memory objects that are allocated in the system and can be backed in 1 MB frames.
1132	46C SMF71LOA	8	floating	Average number of fixed memory objects that are allocated in the system and can be backed in 1 MB frames.
1140	474 SMF71LRM	8	floating	Minimum number of 1 MB pages fixed in central storage.
1148	47C SMF71LRX	8	floating	Maximum number of 1 MB pages fixed in central storage.
1156	484 SMF71LRA	8	floating	Average number of 1 MB pages fixed in central storage.
1164	48C SMF71COM	8	floating	Minimum number of memory objects allocated in the high virtual common storage of the system.
1172	494 SMF71COX	8	floating	Maximum number of memory objects allocated in the high virtual common storage of the system.
1180	49C SMF71COA	8	floating	Average number of memory objects allocated in the high virtual common storage of the system.
1188	4A4 SMF71CRM	8	floating	Minimum number of pages from high virtual common storage that are backed in central storage (in units of 4 KB).
1196	4AC SMF71CRX	8	floating	Maximum number of pages from high virtual common storage that are backed in central storage (in units of 4 KB).
1204	4B4 SMF71CRA	8	floating	Average number of pages from high virtual common storage that are backed in central storage (in units of 4 KB).
1212	4BC SMF71CFM	8	floating	Minimum number of fixed pages from high virtual common storage that are backed in central storage (in units of 4 KB).

Record type 71

Offsets	Name	Length	Format	Description								
1220	4C4 SMF71CFX	8	floating	Maximum number of fixed pages from high virtual common storage that are backed in central storage (in units of 4 KB).								
1228	4CC SMF71CFA	8	floating	Average number of fixed pages from high virtual common storage that are backed in central storage (in units of 4 KB).								
1236	4D4 SMF71CSM	8	floating	Minimum number of auxiliary storage slots used for high virtual common pages that are backed on DASD.								
1244	4DC SMF71CSX	8	floating	Maximum number of auxiliary storage slots used for high virtual common pages that are backed on DASD.								
1252	4E4 SMF71CSA	8	floating	Average number of auxiliary storage slots used for high virtual common pages that are backed on DASD.								
1260	4EC SMF71SOM	8	floating	Minimum number of memory objects allocated in the high virtual shared storage of the system.								
1268	4F4 SMF71SOX	8	floating	Maximum number of memory objects allocated in the high virtual shared storage of the system.								
1276	4FC SMF71SOA	8	floating	Average number of memory objects allocated in the high virtual shared storage of the system.								
1284	504 SMF71SRM	8	floating	Minimum number of pages from high virtual shared storage that are backed in central storage (in units of 4 KB).								
1292	50C SMF71SRX	8	floating	Maximum number of pages from high virtual shared storage that are backed in central storage (in units of 4 KB).								
1300	514 SMF71SRA	8	floating	Average number of pages from high virtual shared storage that are backed in central storage (in units of 4 KB).								
1308	51C SMF71GRN	4	binary	Number of GETMAIN requests that have been issued.								
1312	520 SMF71FBN	4	binary	Number of pages backed during GETMAIN requests that have been issued.								
1316	524 SMF71FRN	4	binary	Number of fix requests that have been issued for storage (address spaces only) below 2 GB.								
1320	528 SMF71FFN	4	binary	Number of pages that were requested to be fixed for storage (address spaces only) below 2 GB.								
1324	52C SMF711RN	4	binary	Number of first reference faults taken.								
1328	530 SMF71NRN	4	binary	Number of non-first reference faults taken.								
1332	534 SMF71RFL	4	binary	Flags: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SCM support enabled</td> </tr> <tr> <td>1</td> <td>Pageable large pages support enabled</td> </tr> <tr> <td>2-31</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	SCM support enabled	1	Pageable large pages support enabled	2-31	Reserved.
Bit	Meaning when set											
0	SCM support enabled											
1	Pageable large pages support enabled											
2-31	Reserved.											
1336	538 SMF71LFA	8	floating	Large Frame Area size in bytes.								
1344	540 SMF71L1M	8	floating	Minimum total number of 1 MB frames that can be used by fixed memory objects.								
1352	548 SMF71L1X	8	floating	Maximum total number of 1 MB frames that can be used by fixed memory objects.								
1360	550 SMF71L1A	8	floating	Average total number of 1 MB frames that can be used by fixed memory objects.								
1368	558 SMF71L2M	8	floating	Reserved. Value is now in SMF71L7M.								
1376	560 SMF71L2X	8	floating	Reserved. Value is now in SMF71L7X.								
1384	568 SMF71L2A	8	floating	Reserved. Value is now in SMF71L7A.								
1392	570 SMF71L3M	8	floating	Minimum number of 1 MB frames in the LFAREA that are in-use by fixed memory objects.								
1400	578 SMF71L3X	8	floating	Maximum number of 1 MB frames in the LFAREA that are in-use by fixed memory objects.								

Offsets	Name	Length	Format	Description
1408	580 SMF71L3A	8	floating	Average number of 1 MB frames in the LFAREA that are in-use by fixed memory objects .
1416	588 SMF71L4M	8	floating	Minimum total number of 1 MB frames that can be used by pageable/DREF memory objects.
1424	590 SMF71L4X	8	floating	Maximum total number of 1 MB frames that can be used by pageable/DREF memory objects.
1432	598 SMF71L4A	8	floating	Average total number of 1 MB frames that can be used by pageable/DREF memory objects.
1440	5A0 SMF71L5M	8	floating	Minimum number of 1 MB frames that are not used by pageable/DREF memory objects.
1448	5A8 SMF71L5X	8	floating	Maximum number of 1 MB frames that are not used by pageable/DREF memory objects.
1456	5B0 SMF71L5A	8	floating	Average number of 1 MB frames that are not used by pageable/DREF memory objects.
1464	5B8 SMF71L6M	8	floating	Minimum number of 1 MB frames that are used by pageable/DREF memory objects.
1472	5C0 SMF71L6X	8	floating	Maximum number of 1 MB frames that are used by pageable/DREF memory objects.
1480	5C8 SMF71L6A	8	floating	Average number of 1 MB frames that are used by pageable/DREF memory objects.
1488	5D0 SMF71L7M	8	floating	Minimum number of 1 MB frames in the LFAREA that are not in-use. Same as SMF71L2M (calculated differently).
1496	5D8 SMF71L7X	8	floating	Maximum number of 1 MB frames in the LFAREA that are not in-use. Same as SMF71L2X (calculated differently).
1504	5E0 SMF71L7A	8	floating	Average number of 1 MB frames in the LFAREA that are not in-use. Same as SMF71L2A (calculated differently).
1512	5E8 SMF71S1M	8	floating	Minimum total number of high virtual shared memory pages (in units of 4 KB).
1520	5F0 SMF71S1X	8	floating	Maximum total number of high virtual shared memory pages (in units of 4 KB).
1528	5F8 SMF71S1A	8	floating	Average total number of high virtual shared memory pages (in units of 4 KB).
1536	600 SMF71S2M	8	floating	Minimum number of shared memory objects that are allocated in the system and can be backed in 1 MB frames
1544	608 SMF71S2X	8	floating	Maximum number of shared memory objects that are allocated in the system and can be backed in 1 MB frames
1552	610 SMF71S2A	8	floating	Average number of shared memory objects that are allocated in the system and can be backed in 1 MB frames
1560	618 SMF71S3M	8	floating	Minimum number of frames in use for shared high virtual 4K pages
1568	620 SMF71S3X	8	floating	Maximum number of frames in use for shared high virtual 4K pages
1576	628 SMF71S3A	8	floating	Average number of frames in use for shared high virtual 4K pages
1584	630 SMF71S4M	8	floating	Minimum number of high virtual shared memory 1 MB pages backed in central storage
1592	638 SMF71S4X	8	floating	Maximum number of high virtual shared memory 1 MB pages backed in central storage
1600	640 SMF71S4A	8	floating	Average number of high virtual shared memory 1 MB pages backed in central storage
1608	648 SMF71S5M	8	floating	Minimum number of auxiliary storage slots used for high virtual shared memory pages backed on DASD.
1616	650 SMF71S5X	8	floating.	Maximum number of auxiliary storage slots used for high virtual shared memory pages backed on DASD.

Record type 71

Offsets	Name	Length	Format	Description
1624	658 SMF71S5A	8	floating	Average number of auxiliary storage slots used for high virtual shared memory pages backed on DASD.
1632	660 SMF71S6M	8	floating	Minimum number of high virtual shared memory pages backed on SCM storage.
1640	668 SMF71S6X	8	floating	Maximum number of high virtual shared memory pages backed on SCM storage.
1648	670 SMF71S6A	8	floating	Average number of high virtual shared memory pages backed on SCM storage.
1656	678 SMF71C1M	8	floating	Minimum total number of high virtual common memory pages (in units of 4 KB).
1664	680 SMF71C1X	8	floating	Maximum total number of high virtual common memory pages (in units of 4 KB).
1672	688 SMF71C1A	8	floating	Average total number of high virtual common memory pages (in units of 4 KB).
1680	690 SMF71C2M	8	floating	Minimum number of high virtual common memory 1 MB fixed pages
1688	698 SMF71C2X	8	floating	Maximum number of high virtual common memory 1 MB fixed pages
1696	6A0 SMF71C2A	8	floating	Average number of high virtual common memory 1 MB fixed pages
1704	6A8 SMF71C3M	8	floating	Minimum number of high virtual common memory 1 MB pages backed in central storage
1712	6B0 SMF71C3X	8	floating	Maximum number of high virtual common memory 1 MB pages backed in central storage
1720	6B8 SMF71C3A	8	floating	Average number of high virtual common memory 1 MB pages backed in central storage
1728	6C0 SMF71C4M	8	floating	Minimum number of high virtual common memory pages backed on SCM storage
1736	6C8 SMF71C4X	8	floating	Maximum number of high virtual common memory pages backed on SCM storage.
1744	6D0 SMF71C4A	8	floating	Average number of high virtual common memory pages backed on SCM storage.
1752	6D8 SMF71TSM	8	floating	Minimum total number of 4K SCM blocks available to ASM.
1760	6E0 SMF71TSX	8	floating	Maximum total number of 4K SCM blocks available to ASM.
1768	6E8 SMF71TSA	8	floating	Average total number of 4K SCM blocks available to ASM.
1776	6F0 SMF71ASM	8	floating	Minimum number of available (not in-use) SCM blocks.
1784	6F8 SMF71ASX	8	floating	Maximum number of available (not in-use) SCM blocks.
1792	700 SMF71ASV	8	floating	Average number of available (not in-use) SCM blocks.
1800	708 SMF71BSM	8	floating	Minimum number of bad SCM blocks.
1808	710 SMF71BSX	8	floating	Maximum number of bad SCM blocks.
1816	718 SMF71BSA	8	floating	Average number of bad SCM blocks.
1824	720 SMF71USM	8	floating	Minimum number of SCM blocks in-use.
1832	728 SMF71USX	8	floating	Maximum number of SCM blocks in-use.
1840	730 SMF71USA	8	floating	Average number of SCM blocks in-use.
1848	738 SMF71TLS	4	binary	Total number of logical swaps.
1852	73C	4	binary	Not used.
1856	740 SMF71S7M	8	floating	Minimum number of shared page groups backed on SCM storage.
1864	748 SMF71S7X	8	floating	Maximum number of shared page groups backed on SCM storage.
1872	750 SMF71S7A	8	floating	Average number of shared page groups backed on SCM storage.

Offsets	Name	Length	Format	Description
1880	758 SMF71LVF	8	floating	Average number of unused central storage page frames. Same as SMF71AVF, but long floating point format.
1888	760 SMF71LVS	8	floating	Average number of pageable address space central storage frames in the private address space. Same as SMF71AVS, but long floating point format.
1896	768 SMF71LVT	8	floating	Average total number of central storage frames used. Same as SMF71AVT, but long floating point format.
1904	770 SMF71LVR	8	floating	Average number of non-LSQA fixed central storage frames in the private address space. Same as SMF71AVR, but long floating point format.
1912	778 SMF71LVX	8	floating	Average total number of fixed central storage frames used. Same as SMF71AVX, but long floating point format.
1920	780 SMF71LVU	8	floating	Average number of usable local page data set slots that have not been allocated. Same as SMF71AVU, but long floating point format.
1928	788 SMF71LVV	8	floating	Average number of local page data set slots allocated to VIO private area pages. Same as SMF71AVV, but long floating point format.
1936	790 SMF71LVM	8	floating	Average number of local page data set slots allocated to non-VIO private area pages. Same as SMF71AVM, but long floating point format.
1944	798 SMF71LVB	8	floating	Average number of unusable local page data set slots. Same as SMF71AVB, but long floating point format.
1952	7A0 SMF71MCF	4	binary	Multithreading maximum capacity numerator for general purpose processors. Divide this value by 1024 to get the multithreading maximum capacity factor for all general purpose processors that were configured ONLINE for the complete interval.
1956	7A4	4		Reserved
1960	7A8 SMF71CPM	8	floating	Minimum number of high virtual common pages in-use
1968	7B0 SMF71CPX	8	floating	Maximum number of high virtual common pages in-use
1976	7B8 SMF71CPA	8	floating	Average number of high virtual common pages in-use
1984	7C0 SMF714KM	8	floating	Minimum number of 1 MB fixed frames used on behalf of 4K page requests
1992	7C8 SMF714KX	8	floating	Maximum number of 1 MB fixed frames used on behalf of 4K page requests
2000	7D0 SMF714KA	8	floating	Average number of 1 MB fixed frames used on behalf of 4K page requests
2008	7D8 SMF71PLM	8	floating	Minimum number of 1 MB pageable pages backed by 1 MB pageable frames
2016	7E0 SMF71PLX	8	floating	Maximum number of 1 MB pageable pages backed by 1 MB pageable frames
2024	7E8 SMF71PLA	8	floating	Average number of 1 MB pageable pages backed by 1 MB pageable frames

Swap Placement Section

Starting with z/OS V1R13, this section does no longer contain valid values.

Offsets	Name	Length	Format	Description
0	0	24		Reserved.

Record Type 72 (48) — Workload Activity, Storage Data, and Serialization Delay

Note: Beginning with z/OS V1R3, WLM compatibility mode is no longer available. Accordingly, subtypes 1 and 2 of record type 72 are no longer valid and have been removed from this documentation.

Record type 72 has the following subtypes:

- **Subtype 3: Workload Activity** — is written for each service class and active report class in the active service policy. A report class becomes active as soon as work has been assigned to that report class.

Workload Manager control section

Identifies the policy, workload and service/report class name and contains workload data.

Service Class Served data section

Contains information about the service classes being served.

Resource Group data section

Contains information about the resource group to which the service class belongs.

Service/Report Class Period data section

Contains goals and actual measured values for each service and report class period. In addition, there are pointers to the corresponding Response Time Distribution data section and Work/Resource Manager State section.

Response Time Distribution data section

Contains the response time distribution map and count tables for each service class period with a response time goal or execution velocity goal.

Work/Resource Manager State section

Contains the subsystem work manager delay array with two entries for each subsystem.

- **Subtype 4: Storage Data** — is written from the Monitor III data gatherer for each service class period of each service class defined in the active service policy.

Service Class Period data section

Contains Monitor III specific using and delay counts and storage frame counts for each service class period.

Swap Reason data section

Contains swap reason information.

- **Subtype 5: Serialization Delay** — is written from the Monitor III data gatherer. It contains serialization delay data on address space level, used as input for the RMF Postprocessor to create the Serialization Delay Report. One record is written for each measurement interval and when the session terminates.

Subtype 5 contains one control section and several data sections. While the *Serialization control section* contains summary data for system-wide serialization delays, the data sections contain serialization delay data for up to twenty address spaces sorted by total contention time.

The *GRS QScan Statistics data section* contains measurements about GQSCAN and ISGQUERY REQINFO=QSCAN requests used to obtain the status of resources and requestors of those resources. This section contains data for up to twenty address spaces sorted by the total request execution time.

Serialization control section

Contains system-wide serialization delay data (see “Serialization Control Section” on page 559).

CMS Lock data section

Contains CMS lock data per address space. This section is mapped by “CMS lock type data” on page 561.

CMS Enqueue/Dequeue Lock data section

Contains CMS ENQ/DEQ lock data per address space. This section is mapped by “CMS lock type data” on page 561.

CMS Latch Lock data section

Contains CMS Latch lock data per address space. This section is mapped by “CMS lock type data” on page 561.

CMS SMF Lock data section

Contains CMS SMF lock data per address space. This section is mapped by “CMS lock type data” on page 561.

Local Lock data section

Contains local lock data per address space (see “Local Lock Data Section” on page 561).

CML Lock Owner data section

Contains CML lock owner data per address space (see “CML lock owner data section” on page 562).

CML Lock Requestor data section

Contains CML lock requestor data per address space (see “CML Lock Requestor Data Section” on page 563).

GRS Latch Set Creator data section

Contains GRS latch set creator data per address space. This section is mapped by “GRS latch type data” on page 563.

GRS Latch Requestor data section

Contains GRS latch requestor data per address space. This section is mapped by “GRS latch type data” on page 563.

GRS Enqueue Step data section

Contains data for GRS ENQ SCOPE=STEP requests per address space. This section is mapped by “GRS enqueue data” on page 564.

GRS Enqueue System data section

Contains data for GRS ENQ SCOPE=SYSTEM requests per address space. This section is mapped by “GRS enqueue data” on page 564.

GRS Enqueue Systems data section

Contains data for GRS ENQ SCOPE=SYSTEMS requests per address space. This section is mapped by “GRS enqueue data” on page 564.

GRS QScan Statistics data section

Contains data about GQSCAN and ISGQUERY REQINFO=QSCAN requests per address space (see “GRS QScan statistics data section” on page 565).

Each subtype contains a header section followed by the RMF Product section.

Macro to Symbolically Address Record Type 72: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*)

Record type 72

where $n1, n2, \dots$ are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

For information on using RMF, see *z/OS RMF User's Guide*. For more information on Monitor I, II, and III, see *z/OS RMF Report Analysis*. For information on the MVS workload manager, see *z/OS MVS Planning: Workload Management* and *z/OS MVS Programming: Workload Management Services*.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTMM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF72LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF72SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF72FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0</td><td>New SMF record format</td></tr><tr><td>1</td><td>Subtypes used</td></tr><tr><td>2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>System is running in PR/SM mode</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	New SMF record format	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	System is running in PR/SM mode
Bit	Meaning when set															
0	New SMF record format															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	System is running in PR/SM mode															
5	5 SMF72RTY	1	binary	Record type 72(X'48').												
6	6 SMF72TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF72DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF72SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF72SSI	4	EBCDIC	Subsystem identification (RMF).												
22	16 SMF72STY	2	binary	Record subtype.												
24	18 SMF72TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.												
26	1A	2		Reserved.												
28	1C SMF72PRS	4	binary	Offset to RMF Product section from RDW.												
32	20 SMF72PRL	2	binary	Length of RMF Product section.												
34	22 SMF72PRN	2	binary	Number of RMF Product sections.												

Offsets	Name	Length	Format	Description
Individual header extension for subtype 3:				
36	24 SMF72WMS	4	binary	Offset to Workload Manager control section.
40	28 SMF72WML	2	binary	Length of Workload Manager control section.
42	2A SMF72WMN	2	binary	Number of Workload Manager control sections.
44	2C SMF72SSS	4	binary	Offset to Service Class Served data section.
48	30 SMF72SSL	2	binary	Length of Service Class Served data section.
50	32 SMF72SSN	2	binary	Number of Service Class Served data sections.
52	34 SMF72RGS	4	binary	Offset to Resource Group data section.
56	38 SMF72RGL	2	binary	Length of Resource Group data section.
58	3A SMF72RGN	2	binary	Number of Resource Group data sections.
60	3C SMF72SCS	4	binary	Offset to Service/Report Class Period data section.
64	40 SMF72SCL	2	binary	Length of Service/Report Class Period data section.
66	42 SMF72SCN	2	binary	Number of Service/Report Class Period data sections.
68	44 SMF72RTS	4	binary	Offset to Response Time Distribution data section.
72	48 SMF72RTL	2	binary	Length of Response Time Distribution data section.
74	4A SMF72RTN	2	binary	Number of Response Time Distribution data sections.
76	4C SMF72WRS	4	binary	Offset to Work/Resource Manager State section.
80	50 SMF72WRL	2	binary	Length of Work/Resource Manager State section.
82	52 SMF72WRN	2	binary	Number of Work/Resource Manager State sections.
84	54 SMF72DNS	4	binary	Offset to Resource Delay Type Names sections.
88	58 SMF72DNL	2	binary	Length of Resource Delay Type Names sections.
90	5A SMF72DNN	2	binary	Number of Resource Delay Type Names sections.
Individual header extension for subtype 4:				
36	24 SMF72CPS	4	binary	Offset to Service Class Period data section.
40	28 SMF72CPL	2	binary	Length of Service Class Period data section.
42	2A SMF72CPN	2	binary	Number of Service Class Period data sections.
44	2C SMF72SPS	4	binary	Offset to Swap Reason data section.
48	30 SMF72SPL	2	binary	Length of Swap Reason data section.
50	32 SMF72SPN	2	binary	Number of Swap Reason data sections.
Individual header extension for subtype 5:				
36	24 SMF72SES	4	binary	Offset to Serialization control section.
40	28 SMF72SEL	2	binary	Length of Serialization control section.
42	2A SMF72SEN	2	binary	Number of Serialization control sections.
System suspend lock data sections:				
44	2C SMF72CMS	4	binary	Offset to CMS lock data section.
48	30 SMF72CML	2	binary	Length of CMS lock data section.
50	32 SMF72CMN	2	binary	Number of CMS lock data sections.
52	34 SMF72EDS	4	binary	Offset to CMS EnqueueDequeue lock data section.
56	38 SMF72EDL	2	binary	Length of CMS EnqueueDequeue lock data section.
58	3A SMF72EDN	2	binary	Number of CMS EnqueueDequeue lock data sections.
60	3C SMF72LAS	4	binary	Offset to CMS latch lock data section.
64	40 SMF72LAL	2	binary	Length of CMS latch lock data section.
66	42 SMF72LAN	2	binary	Number of CMS latch lock data sections.
68	44 SMF72SMS	4	binary	Offset to CMS SMF lock data section.
72	48 SMF72SML	2	binary	Length of CMS SMF lock data section.
74	4A SMF72SMN	2	binary	Number of CMS SMF lock data sections.

Record type 72

Offsets	Name	Length	Format	Description
76	4C SMF72LOS	4	binary	Offset to local lock data section.
80	50 SMF72LOL	2	binary	Length of local lock data section.
82	52 SMF72LON	2	binary	Number of local lock data sections.
84	54 SMF72COS	4	binary	Offset to CML lock owner data section.
88	58 SMF72COL	2	binary	Length of CML lock owner data section.
90	5A SMF72CON	2	binary	Number of CML lock owner data sections.
92	5C SMF72CRS	4	binary	Offset to CML lock requestor data section.
96	60 SMF72CRL	2	binary	Length of CML lock requestor data section.
98	62 SMF72CRN	2	binary	Number of CML lock requestor data sections.
GRS data sections:				
100	64 SMF72LCS	4	binary	Offset to GRS latch set creator data section.
104	68 SMF72LCL	2	binary	Length of GRS latch set creator data section.
106	6A SMF72LCN	2	binary	Number of GRS latch set creator data sections.
108	6C SMF72LRS	4	binary	Offset to GRS latch set requestor data section.
112	70 SMF72LRL	2	binary	Length of GRS latch set requestor data section.
114	72 SMF72LRN	2	binary	Number of GRS latch set requestor data sections.
116	74 SMF72TDS	4	binary	Offset to GRS ENQ SCOPE=STEP data section.
120	78 SMF72TDL	2	binary	Length of GRS ENQ SCOPE=STEP data section.
122	7A SMF72TDN	2	binary	Number of GRS ENQ SCOPE=STEP data sections.
124	7C SMF72YDS	4	binary	Offset to GRS ENQ SCOPE=SYSTEM data section.
128	80 SMF72YDL	2	binary	Length of GRS ENQ SCOPE=SYSTEM data section.
130	82 SMF72YDN	2	binary	Number of GRS ENQ SCOPE=SYSTEM data sections.
132	82 SMF72SDS	4	binary	Offset to GRS ENQ SCOPE=SYSTEMS data section.
136	88 SMF72SDL	2	binary	Length of GRS ENQ SCOPE=SYSTEMS data section.
138	8A SMF72SDN	2	binary	Number of GRS ENQ SCOPE=SYSTEMS data sections.
140	8C SMF72QSS	4	binary	Offset to GRS QScan statistics data section.
144	90 SMF72QSL	2	binary	Length of GRS QScan statistics data section.
146	92 SMF72QSN	2	binary	Number of GRS QScan statistics data sections.

RMF Product Section

Offsets	Name	Length	Format	Description
0	0 SMF72MFV	2	EBCDIC/ packed	RMF version number.
2	2 SMF72PRD	8	EBCDIC	Product name ('RMF').
10	A SMF72IST	4	packed	Time that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.
14	E SMF72DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
18	12 SMF72INT	4	packed	Duration of the RMF measurement interval, in the form <i>mmsstttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign. The end of the measurement interval is the sum of the recorded start time (and this field.)
22	16	2		Reserved.
24	18 SMF72SAM	4	binary	Number of RMF samples.
28	1C	2		Reserved.

Offsets	Name	Length	Format	Description																		
30	1E SMF72FLA	2	binary	Flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.						
Bit	Meaning when set																					
0	Reserved																					
1	Samples have been skipped																					
2	Record was written by RMF Monitor III																					
3	Interval was synchronized with SMF																					
4-15	Reserved.																					
32	20	4		Reserved.																		
36	24 SMF72CYC	4	packed	Sampling cycle length, in the form 000 <i>tttF</i> , where <i>ttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.																		
40	28 SMF72MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).																		
48	30 SMF72IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries														
Value	Meaning																					
3	9672, zSeries																					
49	31 SMF72PRF	1	binary	Processor flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF72PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF72SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF72IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).																		
60	3C SMF72LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF72RAO	4	binary	Offset to reassembly area relative to start of RMF Product section.																		
72	48 SMF72RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		

Record type 72

Offsets	Name	Length	Format	Description						
74	4A SMF72RAN	2	binary	Reassembly area indicator. <table border="0"> <tr> <td>Value</td> <td>Meaning</td> </tr> <tr> <td>0</td> <td>Record is not broken.</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </table> Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF72RAO) and length (SMF72RAL) are only valid if SMF72RAN = 1. A reassembly area is only present in broken records.	Value	Meaning	0	Record is not broken.	1	Record is broken.
Value	Meaning									
0	Record is not broken.									
1	Record is broken.									
76	4C SMF72OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).						
78	4E SMF72SYN	2	binary	SYNC value in seconds.						
80	50 SMF72GIE	8	binary	Projected gathering interval end (STCK format) GMT time.						
88	58 SMF72XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.						
96	60 SMF72SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.						
Reassembly Area:										
0	0 SMF72RBR	2	binary	Total number of broken records built from the original large record.						
2	2 SMF72RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF72RBR.						
4	4 SMF72RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.						
8	8 SMF72RIL	2	binary	Length of reassembly information block.						
10	A SMF72RIN	2	binary	Number of reassembly information blocks (same value as SMF72TRN in header section).						
12	C	4		Reserved.						
Reassembly Area Information Block:										
0	0 SMF72RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.						
2	2 SMF72RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF72RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.						

Subtype 3: Workload Activity

Workload Manager Control Section

Offsets	Name	Length	Format	Description																		
0	0 R723MSCF	1	binary	Service/Report class flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Indicator for a report class</td> </tr> <tr> <td>1</td> <td>Workload activity data not available</td> </tr> <tr> <td>2</td> <td>Policy data not available</td> </tr> <tr> <td>3</td> <td>Execution velocity includes I/O delays</td> </tr> <tr> <td>4</td> <td>Indicator for CPU protection</td> </tr> <tr> <td>5</td> <td>Indicator for storage protection</td> </tr> <tr> <td>6</td> <td>Indicator for dynamic alias tuning</td> </tr> <tr> <td>7</td> <td>Indicator for I/O priority group HIGH</td> </tr> </table>	Bit	Meaning when set	0	Indicator for a report class	1	Workload activity data not available	2	Policy data not available	3	Execution velocity includes I/O delays	4	Indicator for CPU protection	5	Indicator for storage protection	6	Indicator for dynamic alias tuning	7	Indicator for I/O priority group HIGH
Bit	Meaning when set																					
0	Indicator for a report class																					
1	Workload activity data not available																					
2	Policy data not available																					
3	Execution velocity includes I/O delays																					
4	Indicator for CPU protection																					
5	Indicator for storage protection																					
6	Indicator for dynamic alias tuning																					
7	Indicator for I/O priority group HIGH																					
1	1 R723MFLG	1	binary	Flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Indicator for zAAP crossover</td> </tr> <tr> <td>1</td> <td>Indicator for zAAP honor priority</td> </tr> <tr> <td>2</td> <td>Indicator for zIIP honor priority</td> </tr> <tr> <td>3</td> <td>Failure returned by HISMT service. Multithreading maximum capacity numerator values are invalid.</td> </tr> <tr> <td>4-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	Indicator for zAAP crossover	1	Indicator for zAAP honor priority	2	Indicator for zIIP honor priority	3	Failure returned by HISMT service. Multithreading maximum capacity numerator values are invalid.	4-7	Reserved						
Bit	Meaning when set																					
0	Indicator for zAAP crossover																					
1	Indicator for zAAP honor priority																					
2	Indicator for zIIP honor priority																					
3	Failure returned by HISMT service. Multithreading maximum capacity numerator values are invalid.																					
4-7	Reserved																					
2	2	2		Reserved.																		
4	4 R723MNSP	8	EBCDIC	Policy name.																		
12	C R723MDSP	32	EBCDIC	Policy description.																		
44	2C R723MTPA	8	binary	Local time/date of policy activation (STCK format).																		
52	34 R723MCPU	4	binary	CPU service coefficient * 10,000																		
56	38 R723MIOC	4	binary	I/O service coefficient * 10,000																		
60	3C R723MMSO	4	binary	Storage service coefficient * 10,000. When being used in calculations, apply the following scaling: $R723MMSO / 10000 * 4096 / 50 + 1$ For details see <i>z/OS MVS Planning: Workload Management, Defining Service Coefficients and Options.</i>																		
64	40 R723MSRB	4	binary	SRB service coefficient * 10,000																		
68	44 R723MTVL	4	binary	WLM sample interval (in milliseconds).																		
72	48 R723MTV#	4	binary	Number of times when WLM sampling code ran.																		
76	4C R723MOPT	2	EBCDIC	Suffix of the IEAOPTxx parmlib member.																		
78	4E	2		Reserved.																		
80	50 R723MWNM	8	EBCDIC	Workload name.																		
88	58 R723MWDE	32	EBCDIC	Workload description.																		
120	78 R723MCNM	8	EBCDIC	Service/Report class name.																		
128	80 R723MCDE	32	EBCDIC	Service/Report class description.																		
160	A0 R723MCPG	2	binary	Number of periods belonging to this service or report class.																		
162	A2 R723MSUB	1	binary	Number of entries in the work/resource manager state section belonging to a subsystem.																		

Record type 72

Offsets	Name	Length	Format	Description
163	A3	3		Reserved.
166	A6 R723MERF	6	EBCDIC	Enqueue residency CPU service factor.
172	AC R723MADJ	4	binary	Adjustment factor for CPU rate.
176	B0 R723MIDN	8	EBCDIC	Service definition name.
184	B8 R723MIDD	32	EBCDIC	Service definition description.
216	D8 R723MTDI	8	binary	Local time/date the service definition was installed (STCK format).
224	E0 R723MIDU	8	EBCDIC	Userid that installed the service definition.
232	E8 R723CLSC	8	EBCDIC	Service class that last contributed to this report class. Blank if this is a service class.
240	F0 R723NFFI	4	binary	Normalization factor for zAAP. Multiply zAAP service times or service units with this value and divide by 256 to calculate the CP equivalent value.
244	F4 R723NFFS	4	binary	Normalization factor for zIIP. Multiply zIIP service units with this value and divide by 256 to calculate the CP equivalent value.
248	F8 R723NADJ	4	binary	Nominal adjustment factor for CPU rate.
252	FC R723CECA	4	binary	CEC adjustment factor.
256	100 R723MCF	4	binary	Multithreading maximum capacity numerator for general purpose processors. Divide this value by 1024 to get the MT maximum capacity factor for all general purpose processors that were configured ONLINE for the complete interval.
260	104 R723MCF5	4	binary	Multithreading maximum capacity numerator for zIIP. Divide this value by 1024 to get the multithreading maximum capacity factor for all zIIPs that were configured ONLINE for the complete interval. A zero value is reported if no zIIP is currently installed.
264	108 R723MCFI	4	binary	Multithreading maximum capacity numerator for zAAP. Divide this value by 1024 to get the multithreading maximum capacity factor for all zAAPs that were configured ONLINE for the complete interval. A zero value is reported if no zAAP is currently installed.

Service Class Served Data Section

Offsets	Name	Length	Format	Description
0	0 R723SCSN	8	EBCDIC	Name of service class being served (by one or more address spaces in service class R723MCNM).
8	8 R723SCS#	4	binary	Number of times an address space running in service class R723MCNM was observed serving the served service class R723SCSN.

Resource Group Data Section

Offsets	Name	Length	Format	Description
0	0 R723GGNM	8	EBCDIC	Resource group name.
8	8 R723GGDE	32	EBCDIC	Resource group description.

Offsets	Name	Length	Format	Description												
40	28 R723GGGLT	1	binary	Resource group flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Maximum capacity was specified</td> </tr> <tr> <td>1</td> <td>Minimum capacity was specified</td> </tr> <tr> <td>2</td> <td>Specification of R723GGMN and R723GGMX is in percentage of the LPAR share rather than in service units. In addition, the scope of the resource group is system-wide rather than sysplex-wide.</td> </tr> <tr> <td>3</td> <td>Specification of R723GGMN and R723GGMX is in percentage of a single processor capacity rather than in service units. In addition, the scope of the resource group is system-wide rather than sysplex-wide.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Maximum capacity was specified	1	Minimum capacity was specified	2	Specification of R723GGMN and R723GGMX is in percentage of the LPAR share rather than in service units. In addition, the scope of the resource group is system-wide rather than sysplex-wide.	3	Specification of R723GGMN and R723GGMX is in percentage of a single processor capacity rather than in service units. In addition, the scope of the resource group is system-wide rather than sysplex-wide.	4-7	Reserved.
Bit	Meaning when set															
0	Maximum capacity was specified															
1	Minimum capacity was specified															
2	Specification of R723GGMN and R723GGMX is in percentage of the LPAR share rather than in service units. In addition, the scope of the resource group is system-wide rather than sysplex-wide.															
3	Specification of R723GGMN and R723GGMX is in percentage of a single processor capacity rather than in service units. In addition, the scope of the resource group is system-wide rather than sysplex-wide.															
4-7	Reserved.															
41	29	3		Reserved.												
44	2C R723GGMN	4	binary	If bit 1 of R723GGGLT is ON, minimum capacity of the resource group. If bit 2 and bit 3 of R723GGGLT are OFF, this value is in unweighted CPU service units per second. In addition, the scope of the resource group is sysplex-wide. If bit 2 or bit 3 of R723GGGLT is ON, see the description of R723GGGLT.												
48	30 R723GGMX	4	binary	If bit 0 of R723GGGLT is ON, maximum capacity of the resource group. If bit 2 and bit 3 of R723GGGLT are OFF, this value is in unweighted CPU service units per second. In addition, the scope of the resource group is sysplex-wide. If bit 2 or bit 3 of R723GGGLT is ON, see the description of R723GGGLT.												

Service/Report Class Period Data Section

There is one section per service or report class period.

Dec offset	Hex offset	Name	Length	Format	Description														
0	0	R723CRTX	2	binary	Index into the response time distribution count table in the Response Time Distribution data section. These buckets exist only for periods with a response time goal. <p>Example: If the service class has six service class periods, and the periods 1, 3, and 5 have a response time goal, then this index has the following values:</p> <table border="0"> <thead> <tr> <th>Period</th> <th>Index into Response Time Distribution Count Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> </tr> <tr> <td>2</td> <td>0</td> </tr> <tr> <td>3</td> <td>2</td> </tr> <tr> <td>4</td> <td>0</td> </tr> <tr> <td>5</td> <td>3</td> </tr> <tr> <td>6</td> <td>0</td> </tr> </tbody> </table>	Period	Index into Response Time Distribution Count Table	1	1	2	0	3	2	4	0	5	3	6	0
Period	Index into Response Time Distribution Count Table																		
1	1																		
2	0																		
3	2																		
4	0																		
5	3																		
6	0																		
2	2	R723CWMX	2	binary	Index into the work/resource manager states area.														
4	4	R723CWMN	2	binary	Number of entries in the work/resource manager states area associated with this period (R723CWMX points to the first entry).														

Record type 72

Dec offset	Hex offset	Name	Length	Format	Description
6	6	R723CRS1	1	binary	Report class period flags. Bit Meaning when set 0 This report class period is heterogeneous. 1-7 Reserved.
7	7	R723CADF	1	binary	Data flags - they indicate the availability of actual measured data in one of the subsections being a part of this section. Bit Meaning when set 0 Resource consumption data available 1 Response time data available 2 General execution delay data available 3-7 Reserved.
Goals: For a report class period, these are the goals of the service class period that last contributed to this report class period. For a homogeneous report class period, this goal must be used to format the response time distribution.					
8	8	R723CPER	1	binary	Service or report class period number.
9	9	R723CRTF	1	binary	Response time flags (indicates units for R723CVAL). Bit Meaning when set 0 Response time specified in milliseconds. 1 Response time specified in seconds. 2 Response time specified in minutes. 3 Response time specified in hours. 4-7 Reserved.
10	A	R723CRGF	1	binary	Response time goal flags. Bit Meaning when set 0 Percentile response time goal. 1 Average response time goal. 2 Execution velocity goal. 3 Discretionary goal. 4 System specified goal. 5-7 Reserved.
11	B		1		Reserved.
12	C	R723CVAL	4	binary	Response time or execution velocity goal - or zero if discretionary or system goal. Units are defined in R723CRTF.
16	10	R723CPCT	2	binary	Goal percentile value (in percentage).
18	12	R723CIMP	2	binary	Importance of the goal to be achieved for this period (1=highest, 5=lowest). The value is zero for a discretionary or system goal.
20	14	R723CDUR	4	binary	Period duration in weighted service units, or zero for the last period.
Resource Consumption Data - Actual measured values: All service units are weighted by the coefficients in the active service policy.					
24	18	R723CSRV	8	floating	Total service units.
32	20	R723CCPU	8	floating	Total TCB service units. This value includes SUs on general purpose CPs and normalized SUs on zIIPs and zAAPs.
40	28	R723CIOC	8	floating	Total IOC service units.

Dec offset	Hex offset	Name	Length	Format	Description
48	30	R723CMSO	8	floating	Total central storage service units.
56	38	R723CSRB	8	floating	Total SRB service units. This value includes SUs on general purpose CPs and normalized SUs on zIIPs and zAAPs.
64	40	R723CPIR	8	floating	Total page-in count.
72	48	R723CHPI	8	floating	Total hiperspace page-in count. This value includes only those hiperspace pages that were moved by the Real Storage Manager and not by the MVPG instruction.
80	50	R723CBPI	8	floating	Total block page-in from auxiliary count.
88	58	R723CPIE	8	floating	Total page-in from expanded count.
96	60	R723CBPE	8	floating	Total block page-in from expanded count.
104	68	R723CBKA	8	floating	Total auxiliary blocks paged in.
112	70	R723CBKE	8	floating	Total expanded blocks paged in.
120	78	R723CPRS	8	floating	Total page residency time (1024-microsecond units).
128	80	R723CERS	8	floating	Total expanded page residency time (1024-microsecond units).
136	88	R723CTRR	8	floating	Total in storage residency time (1024-microsecond units).
144	90	R723CTAT	8	floating	Total transaction active time (1024-microsecond units).
152	98	R723CRCT	8	floating	Total RCT time (microseconds).
160	A0	R723CIIT	8	floating	Total I/O interrupt time (microseconds).
168	A8	R723CHST	8	floating	Total hiperspace service time (microseconds).
176	B0	R723CSWC	4	binary	Total swap count.
180	B4	R723CCRM	4	binary	Total hiperspace ESO read miss count.
Response Time Data - Actual measured values:					
184	B8	R723CRCP	4	binary	Count of transaction completions for this period. This field includes transaction completions reported by subsystem work managers by way of the IWMRPT service.
188	BC	R723CARC	4	binary	Count of transactions that completed abnormally as reported by subsystem work manager. This value is not part of R723CRCP and should not be used for response time calculations.
192	C0	R723CNCP	4	binary	Count of transactions that completed their execution phase as reported by subsystem work managers by way of the IWMNTFY service.
196	C4	R723CANC	4	binary	Count of transactions that completed their execution phase abnormally as reported by subsystem work Manager. This value is not part of R723CNCP and should not be used for execution response time calculations.
200	C8	R723CTET	8	floating	Total transaction elapsed time (1024-microsecond units).
208	D0	R723CXET	8	floating	Total transaction execution time (1024-microsecond units).
216	D8	R723CETS	8	floating	Sum of transaction elapsed times squared (1024-microsecond units).
General Execution Delay Data - Actual measured values:					
224	E0	R723CCUS	4	binary	CPU using samples. These are included in R723CTOU.
228	E4	R723CTOT	4	binary	Total general execution delay samples used in WLM's execution velocity calculation. For the velocity formula, see <i>z/OS MVS Planning: Workload Management</i> .
The following categories of samples represent general execution delays that are included in R723CTOT. Each counter was incremented by one every time the WLM sampler found the appropriate condition.					
232	E8	R723CCDE	4	binary	CPU delay. A TCB or SRB is waiting to be dispatched or a TCB is waiting for local lock.

Record type 72

Dec offset	Hex offset	Name	Length	Format	Description
236	EC	R723CCCA	4	binary	CPU capping delay. A TCB or SRB is marked non-dispatchable because a resource group maximum is being enforced. Note that R723CCCA is NOT a subset of R723CCDE.
240	F0	R723CSWI	4	binary	Swap-in delay. Swap-in has started, but not completed.
244	F4	R723CMPL	4	binary	MPL delay. Ready but swap-in has not started.
248	F8	R723CAPR	4	binary	Auxiliary page from private.
252	FC	R723CACO	4	binary	Auxiliary page from common.
256	100	R723CAXM	4	binary	Auxiliary page from cross memory.
260	104	R723CVIO	4	binary	Auxiliary page from VIO.
264	108	R723CHSP	4	binary	Auxiliary page from standard hiperspaces.
268	10C	R723CCHS	4	binary	Auxiliary page from ESO hiperspaces.
The following categories of samples are not included in R723CTOT:					
272	110	R723CUNK	4	binary	Unknown. Address space or enclave is waiting, but none of the general execution delays (listed earlier) apply.
276	114	R723CIDL	4	binary	Idle. Address space or enclave is in STIMER wait, TSO terminal wait, APPC wait, or an initiator waiting for work.
280	118	R723CPDE	4	binary	Resource group capping count. Group maximum is being enforced for work in this class.
284	11C	R723CPQU	4	binary	Quiesce count. Some work in this service class has been reset by way of the RESET xxx, QUIESCE command.
Additional General Execution Delay Data - Actuals:					
288	120	R723CSAC	4	binary	Sampled address space count. Number of address spaces that contributed delay and using samples to this class.
292	124	R723CSRS	8	floating	Total shared page residency time in 1024-microsecond units.
The following categories of samples represent general execution delays that are included in R723CTOT. Each counter was incremented by one every time the WLM sampler found the appropriate condition.					
300	12C	R723CSPA	8	floating	Total shared page-ins from auxiliary storage.
308	134	R723CSPE	8	floating	Total shared page-ins from expanded storage.
Additional Resource Consumption Data:					
316	13C	R723CICT	8	floating	Total non-paging DASD connect time in 128-microsecond units.
324	144	R723CIWT	8	floating	Total non-paging DASD wait time (queue time + pending time) in 128-microsecond units.
332	14C	R723CIDT	8	floating	Total non-paging DASD disconnect time in 128-microsecond units. This does not include IOS queue time.
340	154	R723CIRC	4	binary	Total non-paging DASD I/O start subchannel count. This can be used with fields R723CICT, R723CIWT, and R723CIDT to determine the average DASD response time for the period.
Additional General Execution Delay Data – Actuals:					
344	158	R723CTOU	4	binary	Total using samples. For the velocity formula, see <i>z/OS MVS Planning: Workload Management</i> .
348	15C	R723CIOU	4	binary	DASD using samples. Only non-paging DASD I/O can contribute to I/O using samples.
The following categories of samples represent general execution delays. Each counter was incremented by one every time the WLM sampler found the appropriate condition.					
352	160	R723CIOD	4	binary	DASD delay samples.
356	164	R723CQ	4	binary	Queue delay samples, work is waiting for a server.
360	168	R723CSPV	4	binary	Server private area paging delay samples.
364	16C	R723CSVI	4	binary	Server space VIO paging delay samples.

Dec offset	Hex offset	Name	Length	Format	Description
368	170	R723CSHS	4	binary	Server hiperspace paging delay samples.
372	174	R723CSMP	4	binary	Server MPL delay samples.
376	178	R723CSSW	4	binary	Server swap-in delay samples.
Non-DASD I/O Using or Delay Samples:					
380	17C	R723CNDI	4	binary	Non-DASD I/O using or delay samples.
384	180	R723CTDQ	4	binary	Total delay samples always including batch queue delay. For service classes that contain batch jobs that were not run in WLM managed initiators the batch queue delay samples are derived from the measured batch queue delay time. For service classes that contain jobs that ran in WLM managed initiators this value is the same as RCAETOTD. RCAETOTDQ can be used as a migration aid to determine what a batch service class period's velocity will be if its jobs are run in WLM managed initiators.
388	184	R723CTSA	8	floating	Total execution samples. It is the sum of RCAETOTU, RCAETOTD, RCAEUNKN, RCAEIDLE.
396	18C	R723CIOT	8	floating	Total DASD IOS queue time in 128-microsecond units.
404	194	R723CQDT	8	floating	Total queue delay time in 1024-microsecond units. For batch jobs, this is the time jobs spent on the job queue while eligible to run on some system. It represents the time the jobs spent waiting for an initiator. For TSO users, this time can be a portion of the LOGON process. For APPC, this is the time an APPC request spent on an APPC queue.
The following three values only apply to batch jobs, they are zero for other work types:					
412	19C	R723CADT	8	floating	Total time (in 1024-microsecond units) batch jobs were ineligible to run because a resource that the job had affinity to was unavailable.
420	1A4	R723CCVT	8	floating	Total time (in 1024-microsecond units) batch jobs spent in JCL conversion.
428	1AC	R723CIQT	8	floating	Total time (in 1024-microsecond units) batch jobs spent on job queue (after JCL conversion) while ineligible to run on any system for reasons other than resource affinities.
436	1B4	R723CIEA	8	floating	Independent enclave total transaction active time (in 1024-microsecond units) for enclaves that originated on this system.
444	1BC	R723CXEA	8	floating	Exported enclave total transaction active time (in 1024-microsecond units).
452	1C4	R723CFEA	8	floating	Foreign enclave total transaction active time (in 1024-microsecond units).
Crypto Using and Delay Samples:					
460	1CC	R723CAMU	4	binary	CAM crypto using samples: a TCB was found executing on a cryptographic asynchronous message processor.
464	1D0	R723CAMD	4	binary	CAM crypto delay samples: a TCB was found waiting for a cryptographic asynchronous message processor.
468	1D4	R723APU	4	binary	AP crypto using samples: a TCB was found executing on a cryptographic assist processor.
472	1D8	R723APD	4	binary	AP crypto delay samples: a TCB was found waiting for a cryptographic assist processor.
476	1DC	R723FQD	4	binary	Feature queue delay samples: a TCB was found waiting on a processor feature queue associated with a CPU. This is a subset of R723CCDE. Note: R723CCUS includes feature queue using samples.

Record type 72

Dec offset	Hex offset	Name	Length	Format	Description
480	1E0	R723PLSC	8	EBCDIC	Service class that last contributed to this report class period during this interval. Blank if this is a service class period.
488	1E8	R723RCOD	4	binary	Contention delay sample count. One sample is accumulated for each held resource which is reported to WLM by the resource manager by way of IWMCNTN.
492	1EC	R723RCOU	4	binary	Contention using sample count. One sample is accumulated for each resource in use which is reported to WLM by the resource manager by way of IWMCNTN.
496	1F0	R723ECTC	8	floating	CPU time consumed while dispatching priority was temporarily raised by enqueue management because the work unit held a resource that other work needed (in 1024 microsecond units).
504	1F8	R723IFAU	4	binary	zAAP using samples.
508	1FC	R723IFCU	4	binary	zAAP on CP using samples. These samples are included in R723CCUS.
512	200	R723IFAD	4	binary	zAAP delay samples.
516	204	R723IFAT	8	floating	Reserved. Use R723CIFA to calculate zAAP (IFA) service times.
524	20C	R723IFCT	8	floating	zAAP service time spent on CPs in microseconds.
532	214	R723SUPU	4	binary	zIIP using samples.
536	218	R723SUCU	4	binary	zIIP on CP using samples.
540	21C	R723SUPD	4	binary	zIIP delay samples.
544	220	R723CSUP	8	floating	Total service units on zIIPs. Multiply with R723NFFS and divide by 256 to calculate the CP equivalent value.
552	228	R723CSUC	8	floating	Total service units on CPs spent by zIIP eligible work.
560	230	R723CIFA	8	floating	Total service units on zAAPs. Multiply with R723NFFI and divide by 256 to calculate the CP equivalent value.
568	238	R723CIFC	8	floating	Total service units on CPs spent by zAAP eligible work.
576	240	R723TPDP	8	floating	CPU time consumed while dispatching priority of work with low importance was temporarily raised to help blocked workloads (in 1024 microsecond units).
584	248	R723CPDP	8	floating	CPU time consumed while dispatching priority was temporarily raised by chronic resource contention management because the work unit held a resource that other work needed (in 1024 microsecond units).
592	250	R723LPDP	8	floating	CPU time consumed while dispatching priority was temporarily raised to shorten the lock hold time of a local suspend lock held by the work unit (in 1024 microsecond units). Only valid if HiperDispatch is active.
600	258	R723SPDP	8	floating	CPU time consumed while dispatching priority for a work unit was temporarily raised by the z/OS supervisor to a higher dispatching priority than assigned by WLM (in 1024-microsecond units).
608	260	R723RTDM	4	binary	Midpoint of all response times that were collected in the response time distribution buckets in milliseconds. For response time goals, the midpoint is always the response time goal. For execution velocity goals, it is the average of all response times that were collected in the response time distribution buckets.
612	264	R723RTDC	4	binary	Number of midpoint changes that occurred during the interval. Number equals zero for response time goals.
616	268	R723RTDT	8	binary	Timestamp in STCK format, showing the latest point in time when a midpoint change occurred in R723RTDM.

Response Time Distribution Data Section

This section is available for each service or report class period and defines up to 9 arrays. Each array represents 14 response time distribution buckets built around a midpoint that is calculated dependent on the goal of the associated service class period. For service and report class periods with response time goals, the midpoint is the response time goal as defined in the active WLM service definition. For periods with execution velocity, the midpoint is the average of all response times that were collected in the response time distribution buckets. The midpoint is stored in field R723RTDM of the Service/Report Class Period data section.

Note: The data in the Response Time Distribution data section is not valid for heterogeneous report class periods. A report class period is heterogeneous if bit 0 of R723CRS1 is ON.

Offsets	Name	Length	Format	Description
Response Time Distribution Map:				
0	0 R723TRDB	4	binary	50 - Each map entry defines a maximum percentage of the midpoint that was calculated for the response time distribution. When used in conjunction with an entry in the response time distribution count table, it shows the number of transactions that completed in a percentage of the midpoint.
4	4	4	binary	60 - this value means: 60% of the goal response time.
8	8	4	binary	70 - this value means: 70% of the goal response time.
12	C	4	binary	80 - this value means: 80% of the goal response time.
16	10	4	binary	90 - this value means: 90% of the goal response time.
20	14	4	binary	100 - this value means: 100% of the goal response time.
24	18	4	binary	110 - this value means: 110% of the goal response time.
28	1C	4	binary	120 - this value means: 120% of the goal response time.
32	20	4	binary	130 - this value means: 130% of the goal response time.
36	24	4	binary	140 - this value means: 140% of the goal response time.
40	28	4	binary	150 - this value means: 150% of the goal response time.
44	2C	4	binary	200 - this value means: 200% of the goal response time.
48	30	4	binary	400 - this value means: 400% of the goal response time.
52	34	4	binary	X'FFFFFFF' - last entry : >400% of the goal response time.
Response Time Distribution Count Table: Arrays 1-8 (where 8 is the maximum number of periods) contain the counts for an associated period and are addressed by an index from the Service/Report Class Period data section (R723CRTX). Each entry contains the number of transactions that completed in the time period represented by that entry. For example, the count at offset 0 means: Count of completed transactions with a response time \leq 50% of the midpoint.				
0	0	4	binary	Count of completed transactions with: Response time \leq 50% of the goal.
4	4	4	binary	Count of completed transactions with: Response time > 50% of the goal. Response time \leq 60% of the goal.
8	8	4	binary	Count of completed transactions with: Response time > 60% of the goal. Response time \leq 70% of the goal.

Record type 72

Offsets	Name	Length	Format	Description
12	C	4	binary	Count of completed transactions with: Response time > 70% of the goal. Response time ≤ 80% of the goal.
16	10	4	binary	Count of completed transactions with: Response time > 80% of the goal. Response time ≤ 90% of the goal.
20	14	4	binary	Count of completed transactions with: Response time > 90% of the goal. Response time ≤ 100% of the goal.
24	18	4	binary	Count of completed transactions with: Response time > 100% of the goal. Response time ≤ 110% of the goal.
28	1C	4	binary	Count of completed transactions with: Response time > 110% of the goal. Response time ≤ 120% of the goal.
32	20	4	binary	Count of completed transactions with: Response time > 120% of the goal. Response time ≤ 130% of the goal.
36	24	4	binary	Count of completed transactions with: Response time > 130% of the goal. Response time ≤ 140% of the goal.
40	28	4	binary	Count of completed transactions with: Response time > 140% of the goal. Response time ≤ 150% of the goal.
44	2C	4	binary	Count of completed transactions with: Response time > 150% of the goal. Response time ≤ 200% of the goal.
48	0	4	binary	Count of completed transactions with: Response time > 200% of the goal. Response time ≤ 400% of the goal.
52	34	4	binary	Count of completed transactions with: Response time > 400% of the goal.

Work Manager/Resource Manager State Section

This section defines subsystem work manager delay arrays per service class period. Value R723CWMN in the Service Class Period data section gives the number of entries in this section per service class period.

Entry in the subsystem work manager delay array.

There are always two entries for a subsystem:

- One for the begin_to_end phase; the begin_to_end entry is always the first one.
- One for the execution phase

Offsets	Name	Length	Format	Description								
0	0 R723RTYP	4	EBCDIC	Subsystem type, as used in the classification rules specified in the WLM administrative application. The subsystem's documentation should explain the meaning that the product attributes to the various states.								
4	4 R723RFLG	1	binary	Work/Resource manager flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>States sampled in the begin_to_end phase of a transaction.</td> </tr> <tr> <td>1</td> <td>States sampled in the execution phase of a transaction.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	States sampled in the begin_to_end phase of a transaction.	1	States sampled in the execution phase of a transaction.	2-7	Reserved.
Bit	Meaning when set											
0	States sampled in the begin_to_end phase of a transaction.											
1	States sampled in the execution phase of a transaction.											
2-7	Reserved.											
5	5	3		Reserved.								
8	8 R723RESS	4	binary	Total number of transaction states sampled in the phase specified by R723RFLG.								
12	C R723RACT	4	binary	Total number of active state samples. Active indicates that there is a program executing on behalf of the work request, from the perspective of the work manager. This does not mean that the program is active from the base control program's perspective.								
16	10 R723RRDY	4	binary	Total number of ready state samples. Ready indicates that there is a program ready to execute on behalf of the work request described by the monitoring environment, but the work manager has given priority to another work request.								
20	14 R723RIDL	4	binary	Total number of idle state samples. Idle indicates that no work request is available to the work manager that is allowed to run.								
24	18 R723RWLO	4	binary	Total number of waiting for lock state samples.								
28	1C R723RWIO	4	binary	Total number of waiting for I/O state samples. Waiting for I/O indicates that the work manager is waiting for an activity related to an I/O request. This may be an actual I/O operation or some other function associated with the I/O request.								
32	20 R723RWCO	4	binary	Total number of waiting for conversation state samples. Waiting for conversation may have been used in conjunction with the WLM service IWMMSWCH to identify where the recipient of the conversation is located. In this case, only the switched state will be recorded.								
36	24 R723RWDS	4	binary	Total number of waiting for distributed request state samples. Waiting for distributed request indicates a high level that some function or data must be routed prior to resumption of the work request. This is to be contrasted with waiting for conversation, which is a low level view of the precise resource that is needed. A distributed request could involve waiting on a conversation as part of its processing.								
40	28 R723RWSL	4	binary	Total number of waiting for a session to be established locally samples. Waiting for a session to be established locally, i.e. on the current MVS image.								
44	2C R723RWSN	4	binary	Total number of waiting for a session to be established somewhere in the network samples.								
48	30 R723RWSS	4	binary	Total number of waiting for a session to be established somewhere in the sysplex samples.								

Record type 72

Offsets	Name	Length	Format	Description
52	34 R723RWTM	4	binary	Total number of waiting for a timer samples.
56	38 R723RWO	4	binary	Total number of waiting for another product samples.
60	3C R723RWMS	4	binary	Total number of waiting for unidentified resource samples. Waiting for unidentified resource, possibly among another more specific category, but which may not be readily determined.
64	40 R723RSSL	4	binary	Number of states representing transactions for which there are logical continuations on this MVS image. Subsystem work managers might set this state when they function ship a transaction to another component within the same MVS image.
68	44 R723RSSS	4	binary	Number of states representing transactions for which there are logical continuations on another MVS image in the sysplex. Subsystem work managers might set this state when they function ship a transaction to another component on another MVS image within the sysplex.
72	48 R723RSSN	4	binary	Number of states representing transactions for which there are logical continuations somewhere within the network. Subsystem work managers might set this state when they function ship a transaction to another component within the network.
76	4C R723RWST	4	binary	Total number of waiting for SSL thread samples.
80	50 R723RWRT	4	binary	Total number of waiting for regular thread samples.
84	54 R723RWWR	4	binary	Total number of waiting for work table registration samples.
88	58 R723RAPP	4	binary	Total number of active application state samples.
92	5C R723RWNL	4	binary	Total number of state samples reflecting waiting for new latch.
96	60 R723RW01	4	binary	Total number of samples waiting for resource type 1.
100	64 R723RW02	4	binary	Total number of samples waiting for resource type 2.
104	68 R723RW03	4	binary	Total number of samples waiting for resource type 3.
108	6C R723RW04	4	binary	Total number of samples waiting for resource type 4.
112	70 R723RW05	4	binary	Total number of samples waiting for resource type 5.
116	74 R723RW06	4	binary	Total number of samples waiting for resource type 6.
120	78 R723RW07	4	binary	Total number of samples waiting for resource type 7.
124	7C R723RW08	4	binary	Total number of samples waiting for resource type 8.
128	80 R723RW09	4	binary	Total number of samples waiting for resource type 9.
132	84 R723RW10	4	binary	Total number of samples waiting for resource type 10.
136	88 R723RW11	4	binary	Total number of samples waiting for resource type 11.
140	8C R723RW12	4	binary	Total number of samples waiting for resource type 12.
144	90 R723RW13	4	binary	Total number of samples waiting for resource type 13.
148	94 R723RW14	4	binary	Total number of samples waiting for resource type 14.
152	98 R723RW15	4	binary	Total number of samples waiting for resource type 15.
156	9C R723RBPM	4	binary	Number of state samples representing buffer pool misses that resulted in I/O.
160	A0 R723RDNX	2	binary	Index into resource delay type names table.
162	A2 R723RDNN	2	binary	Number of entries in resource delay type names table.
164	A4	8		Reserved.

Resource Delay Type Names Section

This section defines descriptions for generic resource types. Field R723RDNX in the “Work Manager/Resource Manager State Section” on page 554 is the index into this section and R723RDNN is the number of entries for the subsystem.

Offsets	Name	Length	Format	Description
0	0 R723DNST	4	EBCDIC	Subsystem type as used in the classification rules specified in the WLM administrative application.
4	4 R723DNNU	2	binary	Number of the resource delay type. Values 1 ... 15 are related to R723RW01 ... R723RW15 respectively.
6	6 R723DNDE	16	EBCDIC	Resource delay description.
22	16	2		Reserved.

Subtype 4: Storage Data

Service Class Period Data Section

Offsets	Name	Length	Format	Description
0	0 R724PNAM	8	EBCDIC	Name of active service policy.
8	8 R724PTM	8	binary	Local time/date of policy activation (STCK format).
16	10 R724LCNM	8	EBCDIC	Service class name.
24	18 R724PER#	1	binary	Service class period number.
25	19	3		Reserved.
28	1C R724USER	4	binary	Number of users found.
32	20 R724ACTV	4	binary	Number of active users found.
36	24 R724ACTS	4	binary	Number of active samples (except OUTR).
40	28 R724IDLS	4	binary	Number of idle samples.
44	2C R724PAGE	4	binary	Number of users delayed for paging at all samples.
48	30 R724SWAP	4	binary	Number of users delayed for swapping at all samples.
52	34 R724OUTR	4	binary	Number of out and ready users at all samples.
56	38 R724PGIN	4	binary	Number of page-ins.
60	3C R724DIVS	4	binary	Number of DIV samples.
64	40 R724LSSA	4	binary	Total logically swapped samples for the group.
68	44 R724PSSA	4	binary	Total swapped samples for the group (except logical).
72	48 R724UPRO	4	binary	Total processor using samples for the group.
76	4C R724UDEV	4	binary	Total device using samples for the group.
80	50 R724DPRO	4	binary	Total processor delay samples for the group.
84	54 R724DDEV	4	binary	Total device delay samples for the group.
88	58 R724DSTO	4	binary	Total storage delay samples for the group.
92	5C R724DJES	4	binary	Total JES delay samples for the group.
96	60 R724DHSM	4	binary	Total HSM delay samples for the group.
100	64 R724DXCF	4	binary	Total XCF delay samples for the group.
104	68 R724DENQ	4	binary	Total ENQ delay samples for the group.
108	6C R724DMNT	4	binary	Total mount delay samples for the group.
112	70 R724DMSG	4	binary	Total message delay samples for the group.
116	74 R724UNKN	4	binary	Total unknown state samples for the group.
120	78 R724VALD	4	binary	Total valid samples for the group (single state sum of all using, delay, idle, and unknown).
124	7C R724LSCT	4	binary	Count of "long" logical swaps for the group.
128	80 R724ESCT	4	binary	Count of "long" swaps to expanded storage for the group.
132	84 R724PSCT	4	binary	Count of "long" physical swaps for the group.
136	88 R724ACTF	8	floating	Number of active frames.
144	90 R724IDLE	8	floating	Number of idle frames.

Record type 72

Offsets	Name	Length	Format	Description
152	98 R724SLOT	8	floating	Number of slots used.
160	A0 R724DIV	8	floating	Number of DIV frames.
168	A8 R724FIX	8	floating	Number of fixed frames.
176	B0 R724LSCF	8	floating	Number of central frames for all logically swapped users at all samples.
184	B8 R724LSEF	8	floating	Number of expanded frames for all logically swapped users at all samples.
192	C0 R724PSEF	8	floating	Number of expanded frames for all swapped users (except logical) at all samples.
200	C8 R724VECT	8	floating	Total vector utilization time for the group (microseconds).
208	D0 R724ET	8	floating	Total elapsed time for all transactions that ended in the group. Does not include queued time (microseconds).
216	D8 R724QT	8	floating	Total time spent on JES or APPC queues by all transactions that ended in the group (microseconds).
224	E0 R724END	8	floating	Number of transactions that ended in the group (microseconds).
232	E8 R724TSV	8	floating	Sum of shared page views.
240	F0 R724VIN	8	floating	Sum of shared pages in central storage that are valid.
248	F8 R724VLC	8	floating	Sum of shared page validations.
256	100 R724GPI	8	floating	Sum of shared page-ins from auxiliary storage.

Swap Reason Data Section

Offsets	Name	Length	Format	Description
0	0 R724OR1	4	binary	STOR/OUTR delay samples for swap reason 1: Terminal output wait.
4	4 R724OR2	4	binary	STOR/OUTR delay samples for swap reason 2: Terminal input wait.
8	8 R724OR3	4	binary	STOR/OUTR delay samples for swap reason 3: Long wait.
12	C R724OR4	4	binary	STOR/OUTR delay samples for swap reason 4: Auxiliary storage shortage.
16	10 R724OR5	4	binary	STOR/OUTR delay samples for swap reason 5: Real storage shortage.
20	14 R724OR6	4	binary	STOR/OUTR delay samples for swap reason 6: Detected long wait.
24	18 R724OR7	4	binary	STOR/OUTR delay samples for swap reason 7: Requested swap.
28	1C R724OR8	4	binary	STOR/OUTR delay samples for swap reason 8: Enqueue exchange swap.
32	20 R724OR9	4	binary	STOR/OUTR delay samples for swap reason 9: Exchange swap.
36	24 R724OR10	4	binary	STOR/OUTR delay samples for swap reason 10: Unilateral swap.
40	28 R724OR11	4	binary	STOR/OUTR delay samples for swap reason 11: Transition swap.
44	2C R724OR12	4	binary	STOR/OUTR delay samples for swap reason 12: Improve central storage usage.
48	30 R724OR13	4	binary	STOR/OUTR delay samples for swap reason 13: Improve system paging rate.
52	34 R724OR14	4	binary	STOR/OUTR delay samples for swap reason 14: Make room for an out too long user.

Offsets	Name	Length	Format	Description
56	38 R724OR15	4	binary	STOR/OUTR delay samples for swap reason 15: APPC wait.
60	3C R724OR16	4	binary	STOR/OUTR delay samples for swap reason 16: OMVS input wait.
64	40 R724OR17	4	binary	STOR/OUTR delay samples for swap reason 17: OMVS output wait.
68	44 R724OR18	4	binary	STOR/OUTR delay samples for swap reason 18: In-real swap.

Subtype 5: Serialization Delay

Serialization Control Section

This section contains system-wide serialization delay data for all address spaces. There is one section per record.

Offsets	Name	Length	Format	Description
0	0 R725SGMO	1	binary	GRS mode. Value Meaning 0 None 1 Ring 2 Star
1	1	15		Reserved.
CMS Lock Summary - system wide data for all address spaces.				
16	10 R725SCMS	8	binary	Total number of times that a unit of work was suspended on a CMS lock.
24	18 R725SCMA	8	binary	Total number of times that a unit of work was suspended on a CMS lock when there was already at least one other unit of work suspended for the lock.
32	20 R725SCMT	8	binary	Total amount of time in milliseconds that a unit of work was suspended on a CMS lock.
40	28	8		Reserved.
CMS Enqueue/Dequeue Lock Summary - system wide data for all address spaces.				
48	30 R725SEDS	8	binary	Total number of times that a unit of work was suspended on a CMS Enqueue/Dequeue lock.
56	38 R725SEDA	8	binary	Total number of times that a unit of work was suspended on a CMS Enqueue/Dequeue lock when there was already at least one other unit of work suspended for the lock.
64	40 R725SEDT	8	binary	Total amount of time in milliseconds that a unit of work was suspended on a CMS Enqueue/Dequeue lock.
72	48	8		Reserved.
CMS Latch Lock Summary - system wide data for all address spaces.				
80	50 R725SLAS	8	binary	Total number of times that a unit of work was suspended on a CMS Latch lock.
88	58 R725SLAA	8	binary	Total number of times that a unit of work was suspended on a CMS Latch lock when there was already at least one other unit of work suspended for the lock.
96	60 R725SLAT	8	binary	Total amount of time in milliseconds that a unit of work was suspended on a CMS Latch lock.
104	68	8		Reserved.
CMS SMF Lock Summary - system wide data for all address spaces.				

Record type 72

Offsets	Name	Length	Format	Description
112	70 R725SSMS	8	binary	Total number of times that a unit of work was suspended on a CMS SMF lock.
120	78 R725SSMA	8	binary	Total number of times that a unit of work was suspended on a CMS SMF lock when there was already at least one other unit of work suspended for the lock.
128	80 R725SSMT	8	binary	Total amount of time in milliseconds that a unit of work was suspended on a CMS SMF lock.
136	88	8		Reserved.
Local Lock Summary - system wide data for all address spaces.				
144	90 R725SLOS	8	binary	Total number of times that a unit of work was suspended on a local lock.
152	98 R725SLOA	8	binary	Total number of times that a unit of work was suspended on a local lock when there was already at least one other unit of work suspended for the lock.
160	A0 R725SLOT	8	binary	Total amount of time in milliseconds that a unit of work was suspended on a local lock.
168	A8	8		Reserved.
CML Lock Owner Summary - system wide data for all address spaces.				
176	B0 R725SCLS	8	binary	Total number of times that a unit of work from another address space was suspended when requesting the local lock of an address space.
184	B8 R725SCLA	8	binary	Total number of times that a unit of work from another address space was suspended when requesting the local lock of an address space and there was already at least one other unit of work suspended for the lock.
192	C0 R725SCLT	8	binary	Total amount of time in milliseconds that a unit of work from another address space was suspended when requesting the local lock of an address space.
200	C8	8		Reserved.
GRS Latch Obtain Request Summary - system wide data for all address spaces.				
208	D0 R725SLRS	8	binary	Total number of suspended latch obtain requests.
216	D8 R725SLRT	8	binary	Total amount of time in milliseconds that latch obtain requests were suspended.
224	E0 R725SLRQ	16	binary	Total sum of squares of time in milliseconds that latch obtain requests were suspended.
GRS ENQ SCOPE=STEP Summary - system wide data for all address spaces.				
240	F0 R725SSTR	8	binary	Total number of ENQ SCOPE=STEP requests.
248	F8 R725SSTS	8	binary	Total number of ENQ SCOPE=STEP requests that were suspended.
256	100 R725SSTT	8	binary	Total amount of contention time in milliseconds caused by ENQ SCOPE=STEP requests.
264	108	8		Reserved.
272	110 R725SSTQ	16	binary	Total sum of squares of contention time in milliseconds caused by ENQ SCOPE=STEP requests.
GRS ENQ SCOPE=SYSTEM Summary - system wide data for all address spaces.				
288	120 R725SSYR	8	binary	Total number of ENQ SCOPE=SYSTEM requests.
296	128 R725SSYS	8	binary	Total number of ENQ SCOPE=SYSTEM requests that were suspended.
304	130 R725SSYT	8	binary	Total amount of contention time in milliseconds caused by ENQ SCOPE=SYSTEM requests.
312	138	8		Reserved.
320	140 R725SSYQ	16	binary	Total sum of squares of contention time in milliseconds caused by ENQ SCOPE=SYSTEM requests.

Offsets	Name	Length	Format	Description
GRS ENQ SCOPE=SYSTEMS Summary - system wide data for all address spaces.				
336	150 R725SSSR	8	binary	Total number of ENQ SCOPE= SYSTEMS requests.
344	158 R725SSSS	8	binary	Total number of ENQ SCOPE= SYSTEMS requests that were suspended.
352	160 R725SSST	8	binary	Total amount of contention time in milliseconds caused by ENQ SCOPE= SYSTEMS requests.
360	168	8		Reserved.
368	170 R725SSSQ	16	binary	Total sum of squares of contention time in milliseconds caused by ENQ SCOPE=SYSTEMS requests.

CMS lock type data

This structure is mapping the following lock data sections of subtype 5:

- CMS Lock data section
- CMS Enqueue/Dequeue Lock data section
- CMS Latch Lock data section
- CMS SMF Lock data section

There is one section per address space, but only data for up to twenty address spaces is provided. The data sections are sorted by total contention time.

Offsets	Name	Length	Format	Description										
R725CMSD - CMS lock type data														
0	0 R725CMJN	8	EBCDIC	Name of the job.										
8	8	3		Reserved.										
11	B R725CMSP	1	binary	Service class period.										
12	C R725CMAS	2	binary	Address space ID.										
14	E	2		Reserved.										
16	10 R725CMST	8	EBCDIC	Address space SToken.										
24	18 R725CMSN	8	EBCDIC	Service class name.										
32	20 R725CMTY	1	binary	Lock type: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>CMS lock</td> </tr> <tr> <td>2</td> <td>CMS Enqueue/Dequeue lock</td> </tr> <tr> <td>3</td> <td>CMS Latch lock</td> </tr> <tr> <td>4</td> <td>CMS SMF lock</td> </tr> </tbody> </table>	Value	Meaning	1	CMS lock	2	CMS Enqueue/Dequeue lock	3	CMS Latch lock	4	CMS SMF lock
Value	Meaning													
1	CMS lock													
2	CMS Enqueue/Dequeue lock													
3	CMS Latch lock													
4	CMS SMF lock													
33	21	7		Reserved.										
40	28 R725CMSU	8	binary	Number of times that a unit of work of this address space was suspended on the CMS lock type as specified in R725CMTY.										
48	30 R725CMAL	8	binary	Number of times that a unit of work of this address space was suspended on the CMS lock type as specified in R725CMTY when there was already at least one other unit of work suspended for this lock.										
56	38 R725CMTI	8	binary	Total amount of time in milliseconds that a unit of work of this address space was suspended on the CMS lock type as specified in R725CMTY.										

Local Lock Data Section

There is one section per address space, but only data for up to twenty address spaces is provided. The data sections are sorted by total contention time.

Record type 72

Offsets	Name	Length	Format	Description
0	0 R725LOJN	8	EBCDIC	Name of the job.
8	8	3		Reserved.
11	B R725LOSP	1	binary	Service class period.
12	C R725LOAS	2	binary	Address space ID.
14	E	2		Reserved.
16	10 R725LOST	8	EBCDIC	Address space SToken.
24	18 R725LOSN	8	EBCDIC	Service class name.
32	20	8		Reserved.
Local lock data				
40	28 R725LOSU	8	binary	Number of times that a unit of work of this address space was suspended on a local lock.
48	30 R725LOAL	8	binary	Number of times that a unit of work of this address space was suspended on a local lock when there was already at least one other unit of work suspended.
56	38 R725LOTI	8	binary	Total amount of time in milliseconds that a unit of work of this address space was suspended on a local lock.
CML lock owner data				
64	40 R725LCSU	8	binary	Number of times that a unit of work from another address space was suspended when requesting the local lock of this address space.
72	48 R725LCAL	8	binary	Number of times that a unit of work from another address space was suspended when requesting the local lock of this address space and there was already at least one other unit of work waiting for that lock.
80	50 R725LCTI	8	binary	Total amount of time in milliseconds that a unit of work was suspended when requesting the local lock of this address space.

CML lock owner data section

There is one section per address space, but only data for up to twenty address spaces is provided. The data sections are sorted by total contention time.

Offsets	Name	Length	Format	Description
0	0 R725COJN	8	EBCDIC	Name of the job.
8	8	3		Reserved.
11	B R725COSP	1	binary	Service class period.
12	C R725COAS	2	binary	Address space ID.
14	E	2		Reserved.
16	10 R725COST	8	EBCDIC	Address space SToken.
24	18 R725COSN	8	EBCDIC	Service class name.
32	20	8		Reserved.
CML lock owner data				
40	28 R725COSU	8	binary	Number of times that a unit of work from another address space was suspended when requesting the local lock of this address space.
48	30 R725COAL	8	binary	Number of times that a unit of work from another address space was suspended when requesting the local lock of this address space and there was already at least one other unit of work waiting for that lock.
56	38 R725COTI	8	binary	Total amount of time in milliseconds that a unit of work was suspended when requesting the local lock of this address space.

Offsets	Name	Length	Format	Description
Local lock data				
64	40 R725CLSU	8	binary	Number of times that a unit of work of this address space was suspended on a local lock.
72	48 R725CLAL	8	binary	Number of times that a unit of work of this address space was suspended on a local lock when there was already at least one other unit of work suspended.
80	50 R725CLTI	8	binary	Total amount of time in milliseconds that a unit of work of this address space was suspended on a local lock.

CML Lock Requestor Data Section

There is one section per address space, but only data for up to twenty address spaces is provided. The data sections are sorted by total contention time.

Offsets	Name	Length	Format	Description
0	0 R725CRJN	8	EBCDIC	Name of the job.
8	8	3		Reserved.
11	B R725CRSP	1	binary	Service class period.
12	C R725CRAS	2	binary	Address space ID.
14	E	2		Reserved.
16	10 R725CRST	8	EBCDIC	Address space SToken.
24	18 R725CRSN	8	EBCDIC	Service class name.
32	20	8		Reserved.
40	28 R725CRSU	8	binary	Number of times that a unit of work from this address space was suspended when requesting the local lock of another address space.
48	30 R725CRAL	8	binary	Number of times that a unit of work from this address space was suspended when requesting the local lock of another address space and there was already at least one other unit of work waiting for that lock.
56	38 R725CRTI	8	binary	Total amount of time in milliseconds that a unit of work was suspended when requesting the local lock of another address space.

GRS latch type data

This structure is mapping the following lock data sections of subtype 5:

- GRS Latch Set Creator data section
- GRS Latch Requestor data section

There is one section per address space, but only data for up to twenty address spaces is provided. The data sections are sorted by total contention time.

Offsets	Name	Length	Format	Description
R725LATD - GRS latch type data				
0	0 R725LAJN	8	EBCDIC	Name of the job.
8	8	3		Reserved.
11	B R725LASP	1	binary	Service class period.
12	C R725LAAS	2	binary	Address space ID.
14	E	2		Reserved.
16	10 R725LAST	8	EBCDIC	Address space SToken.
24	18 R725LASN	8	EBCDIC	Service class name.

Record type 72

Offsets	Name	Length	Format	Description						
32	20 R725LATY	1	binary	Request type: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Latch obtain requests against a latch set created by this address space</td> </tr> <tr> <td>2</td> <td>Latch obtain requests from this address space</td> </tr> </tbody> </table>	Value	Meaning	1	Latch obtain requests against a latch set created by this address space	2	Latch obtain requests from this address space
Value	Meaning									
1	Latch obtain requests against a latch set created by this address space									
2	Latch obtain requests from this address space									
33	21	7		Reserved.						
40	28 R725LASU	8	binary	Number of times a latch obtain request was suspended for the request type as specified in R725LATY.						
48	30 R725LATI	8	binary	Total amount of suspend time in milliseconds that was caused by latch obtain requests for the request type as specified in R725LATY.						
56	38 R725LASQ	16	binary	Sum of squares of the individual suspend times in milliseconds that was caused by latch obtain requests for the request type as specified in R725LATY.						

GRS enqueue data

This structure is mapping the following lock data sections of subtype 5:

- GRS Enqueue Step data section
- GRS Enqueue System data section
- GRS Enqueue Systems data section

There is one section per address space, but only data for up to twenty address spaces is provided. The data sections are sorted by total contention time.

Offsets	Name	Length	Format	Description								
R725ENTD - GRS enqueue data												
0	0 R725ENJN	8	EBCDIC	Name of the job.								
8	8	3		Reserved.								
11	B R725ENSP	1	binary	Service class period.								
12	C R725ENAS	2	binary	Address space ID.								
14	E	2		Reserved.								
16	10 R725ENST	8	EBCDIC	Address space SToken.								
24	18 R725ENSN	8	EBCDIC	Service class name.								
32	20 R725ENSC	1	binary	Enqueue scope type: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Scope = Step</td> </tr> <tr> <td>2</td> <td>Scope = System</td> </tr> <tr> <td>3</td> <td>Scope = Systems</td> </tr> </tbody> </table>	Value	Meaning	1	Scope = Step	2	Scope = System	3	Scope = Systems
Value	Meaning											
1	Scope = Step											
2	Scope = System											
3	Scope = Systems											
33	21	7		Reserved.								
40	28 R725ENRC	8	binary	Number of GRS ENQ requests with the scope as specified in R725ENSC for this address space.								
48	30 R725ENSU	8	binary	Number of GRS ENQ requests with the scope as specified in R725ENSC that were suspended for this address space.								
56	38 R725ENTI	8	binary	Total amount of suspend time in milliseconds that was caused by GRS ENQ requests with the scope as specified in R725ENSC for this address space.								
64	40 R725ENSQ	16	binary	Sum of squares of the individual suspend times in milliseconds.								

GRS QScan statistics data section

There is one section per address space, but only data for up to twenty address spaces is provided. The data sections are sorted by total request execution time.

Offsets	Name	Length	Format	Description
0	0 R725QSJN	8	EBCDIC	Name of the job.
8	8	3		Reserved.
11	B R725QSSP	1	binary	Service class period.
12	C R725QSAS	2	binary	Address space ID.
14	E	2		Reserved.
16	10 R725QSST	8	EBCDIC	Address space SToken.
24	18 R725QSSN	8	EBCDIC	Service class name.
32	20	8		Reserved.
Statistics for GQSCAN and ISGQUERY REQINFO = QSCAN requests issued from this address space				
40	28 R725QSRC	8	binary	Number of requests including START and RESUME requests, but not QUIT requests.
48	30 R725QSSC	8	binary	Number of specific requests that are either GQSCAN requests specified by QNAME and RNAME, or ISGQUERY requests specifying a search by ENQTOKEN.
56	38 R725QSRR	8	binary	Total number of resources returned for these requests.
64	40 R725QSRQ	16	binary	Sum of squares of number of resources returned for these requests.
80	50 R725QSTI	8	binary	Total amount of execution times within GRS for these requests in microseconds.
88	58 R725QSTQ	16	binary	Sum of squares of individual request execution times in microseconds.

Record Type 73 (49) — RMF Channel Path Activity

For information on using RMF, see *z/OS RMF User's Guide*.

For information on Monitor I and II, see *z/OS RMF Report Analysis*.

Record type 73 is written when channel path activity measurement is requested. Entries are created for all 256 theoretical possible channel paths in the system.

As with all records produced by RMF, this record contains a header section followed by the RMF Product section. These are followed by:

Channel Path control section

Identifies number of times any channel path was busy. The SMF73CFL flag byte indicates (X'08') whether the record might include data sections that are not valid.

Channel Path data section

Identifies and gives information on each channel path. The SMF73FG3 flag byte indicates (X'02') whether the channel path is a real entry. This is of relevance only if the channel path control section indicates that invalid entries might occur.

Macro to Symbolically Address Record Type 73: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*)

Record type 73

where *n1*, *n2*, ... are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF73LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF73SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF73FLG	1	binary	System indicator <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	System is running in PR/SM mode.															
5	5 SMF73RTY	1	binary	Record type 73 (X'49').												
6	6 SMF73TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF73DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF73SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF73SSI	4	EBCDIC	Subsystem identification ('RMF').												
22	16 SMF73STY	2	binary	Record subtype=1.												
24	18 SMF73TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.												
26	1A	2		Reserved.												
28	1C SMF73PRS	4	binary	Offset to RMF product section from RDW.												
32	20 SMF73PRL	2	binary	Length of RMF product section.												
34	22 SMF73PRN	2	binary	Number of RMF product sections.												
36	24 SMF73HIS	4	binary	Offset to channel path control section from RDW.												
40	28 SMF73HIL	2	binary	Length of channel path control section.												

Offsets	Name	Length	Format	Description
42	2A SMF73HIN	2	binary	Number of channel path control sections.
44	2C SMF73HPS	4	binary	Offset to Channel Path data section from RDW.
48	30 SMF73HPL	2	binary	Length of Channel Path data section.
50	32 SMF73HPN	2	binary	Number of Channel Path data sections.
52	34 SMF73HES	4	binary	Offset to Extended Channel Path data section from RDW.
56	38 SMF73HEL	2	binary	Length of Extended Channel Path data section.
58	3A SMF73HEN	2	binary	Number of Extended Channel Path data sections.

RMF Product Section

Offsets	Name	Length	Format	Description												
0	0 SMF73MFV	2	packed	RMF version number.												
2	2 SMF73PRD	8	EBCDIC	Product name ('RMF').												
10	A SMF73IST	4	packed	Time that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.												
14	E SMF73DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
18	12 SMF73INT	4	packed	Duration of the RMF measurement interval, in the form <i>mmssittF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>itt</i> is the milliseconds, and <i>F</i> is the sign. The end of the measurement interval is the sum of the recorded start time (and this field.)												
22	16	2		Reserved.												
24	18 SMF73SAM	4	binary	Number of RMF samples.												
28	1C	2		Reserved.												
30	1E SMF73FLA	2	binary	Flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.
Bit	Meaning when set															
0	Reserved															
1	Samples have been skipped															
2	Record was written by RMF Monitor III															
3	Interval was synchronized with SMF															
4-15	Reserved.															
32	20	4		Reserved.												
36	24 SMF73CYC	4	packed	Sampling cycle length, in the form <i>000ttttF</i> , where <i>tttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.												
40	28 SMF73MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).												
48	30 SMF73IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries								
Value	Meaning															
3	9672, zSeries															

Record type 73

Offsets	Name	Length	Format	Description																		
49	31 SMF73PRF	1	binary	Processor flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF73PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF73SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF73IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).																		
60	3C SMF73LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF73RAO	4	binary	Offset to reassembly area relative to start of RMF product section.																		
72	48 SMF73RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		
74	4A SMF73RAN	2	binary	Reassembly area indicator. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken.</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF73RAO) and length (SMF73RAL) are only valid if SMF73RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken.	1	Record is broken.												
Value	Meaning																					
0	Record is not broken.																					
1	Record is broken.																					
76	4C SMF73OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).																		
78	4E SMF73SYN	2	binary	SYNC value in seconds.																		
80	50 SMF73GIE	8	binary	Projected gathering interval end (STCK format) GMT time.																		
88	58 SMF73XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.																		
96	60 SMF73SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.																		
Reassembly Area:																						
0	0 SMF73RBR	2	binary	Total number of broken records built from the original large record.																		
2	2 SMF73RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF73RBR.																		
4	4 SMF73RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.																		
8	8 SMF73RIL	2	binary	Length of reassembly information block.																		

Offsets	Name	Length	Format	Description
10	A SMF73RIN	2	binary	Number of reassembly information blocks (same value as SMF73TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF73RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF73RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF73RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Channel path control section

There is one section per record.

Offsets	Name	Length	Format	Description																		
0	0 SMF73SMP	4	binary	This field contains the number of samples while the busy count is stored in field SMF73BSY. Only valid if bit 2 of SMF73SFL is not set.																		
4	4 SMF73CFL	1	binary	Configuration change flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Configuration changed. Used to decide whether to provide the text "POR" or "ACTIVATE" on reports. Also used to check whether data can be combined in a duration report.</td> </tr> <tr> <td>1</td> <td>Configuration change since power-on-reset (POR).</td> </tr> <tr> <td>2</td> <td>POR using IODF data set that supports dynamic configuration change (contains I/O token).</td> </tr> <tr> <td>3</td> <td>I/O token is valid.</td> </tr> <tr> <td>4</td> <td>Record may include data sections that are not valid.</td> </tr> <tr> <td>5</td> <td>CPMF (channel path measurement facility) available.</td> </tr> <tr> <td>6</td> <td>Reserved.</td> </tr> <tr> <td>7</td> <td>CPMF mode has changed.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Configuration changed. Used to decide whether to provide the text "POR" or "ACTIVATE" on reports. Also used to check whether data can be combined in a duration report.	1	Configuration change since power-on-reset (POR).	2	POR using IODF data set that supports dynamic configuration change (contains I/O token).	3	I/O token is valid.	4	Record may include data sections that are not valid.	5	CPMF (channel path measurement facility) available.	6	Reserved.	7	CPMF mode has changed.
Bit	Meaning when set																					
0	Configuration changed. Used to decide whether to provide the text "POR" or "ACTIVATE" on reports. Also used to check whether data can be combined in a duration report.																					
1	Configuration change since power-on-reset (POR).																					
2	POR using IODF data set that supports dynamic configuration change (contains I/O token).																					
3	I/O token is valid.																					
4	Record may include data sections that are not valid.																					
5	CPMF (channel path measurement facility) available.																					
6	Reserved.																					
7	CPMF mode has changed.																					
5	5 SMF73SFL	1	binary	Status flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>DCM supported by hardware.</td> </tr> <tr> <td>1</td> <td>Configuration contains DCM managed channels.</td> </tr> <tr> <td>2</td> <td>Hardware allows multiple logical channel subsystems.</td> </tr> <tr> <td>3</td> <td>Enhanced channel measurement facility available.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	DCM supported by hardware.	1	Configuration contains DCM managed channels.	2	Hardware allows multiple logical channel subsystems.	3	Enhanced channel measurement facility available.	4-7	Reserved.						
Bit	Meaning when set																					
0	DCM supported by hardware.																					
1	Configuration contains DCM managed channels.																					
2	Hardware allows multiple logical channel subsystems.																					
3	Enhanced channel measurement facility available.																					
4-7	Reserved.																					

Record type 73

Offsets	Name	Length	Format	Description								
6	6	2		Reserved.								
8	8 SMF73TNM	44	EBCDIC	IODF name.								
52	34 SMF73TSF	2	EBCDIC	IODF name suffix.								
54	36	2		Reserved.								
56	38 SMF73TOK	16	EBCDIC	Partial token information.								
56	38 SMF73TDT	8	EBCDIC	IODF creation date, in the form <i>mm/dd/yy</i> .								
64	40 SMF73TTM	8	EBCDIC	IODF creation time, in the form <i>hh.mm.ss</i> .								
72	48 SMF73CRC	4	binary	CPMF (channel path measurement facility) restart count								
76	4C SMF73CSC	4	binary	Last CPMF (channel path measurement facility) sample count								
80	50 SMF73TDY	10	EBCDIC	IODF creation date, in the form <i>mm/dd/yyyy</i> .								
90	5A SMF73CMI	1	binary	CPMF mode. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>CPMF is not active</td> </tr> <tr> <td>1</td> <td>Compatibility mode</td> </tr> <tr> <td>2</td> <td>Extended mode</td> </tr> </tbody> </table>	Value	Meaning	0	CPMF is not active	1	Compatibility mode	2	Extended mode
Value	Meaning											
0	CPMF is not active											
1	Compatibility mode											
2	Extended mode											
91	5B SMF73CSS	1	EBCDIC	Channel subsystem ID. Only valid if bit 2 of SMF73SFL is set.								

Channel path data section

There is one section per channel path.

Dec offset	Hex offset	Name	Length	Format	Description																
0	0	SMF73PID	1	binary	Channel path identification. The range of values is X'0' to X'FF'. Support for dynamic I/O. There are always X'FF' path data sections in record type 73, even though there might not be X'FF' CHPIDs defined in the system. These dummy data sections in the SMF records only contain the channel path ID. The rest is filled with hexadecimal zeroes.																
1	1	SMF73FG2	1	binary	Channel flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Reserved</td> </tr> <tr> <td>2</td> <td>Block multiplexor</td> </tr> <tr> <td>3</td> <td>Byte multiplexor</td> </tr> <tr> <td>4</td> <td>Reserved</td> </tr> <tr> <td>5</td> <td>Only partial statistics available</td> </tr> <tr> <td>6</td> <td>Data recorded is incorrect because channel path was reconfigured during interval</td> </tr> <tr> <td>7</td> <td>Channel path is currently online.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-1	Reserved	2	Block multiplexor	3	Byte multiplexor	4	Reserved	5	Only partial statistics available	6	Data recorded is incorrect because channel path was reconfigured during interval	7	Channel path is currently online.
Bit	Meaning when set																				
0-1	Reserved																				
2	Block multiplexor																				
3	Byte multiplexor																				
4	Reserved																				
5	Only partial statistics available																				
6	Data recorded is incorrect because channel path was reconfigured during interval																				
7	Channel path is currently online.																				

Dec offset	Hex offset	Name	Length	Format	Description
2	2	SMF73FG3	1	binary	Channel flags extension Bit Meaning when set 0 ES connection channel 1 ES connection director attached to channel path 2 ES connection converter attached to this channel 3 Channel path modified 4 Channel path deleted 5 Channel path added 6 Valid path 7 Channel path is shared between logical partitions
3	3	SMF73FG4	1	binary	Channel path flags Bit Meaning when set 0 CPMB (channel path measurement block) entry not valid 1 Channel path is CTC defined 2 Channel conversion 3090 3 Reserved 4 Channel path is DCM managed 5 Channel characteristics changed during interval 6 Extended channel path measurements are supported 7 Reserved.
4	4	SMF73BSY	4	binary	Count of store channel path status (STCPS) samples taken by SRM in which the channel path related to this entry was found busy. This count is normalized (broken down into the simplest expression).
8	8	SMF73PBY	4	binary	Partition's channel-path-busy-time since last RMF interval, in units of 1024 microseconds.
12	C	SMF73PTI	4	binary	Partition's channel-path measurement interval, in units of 1024 microseconds.
16	10	SMF73CPD	1	binary	Channel path description. For an explanation, you can issue the command D M=CHP.
17	11	SMF73ACR	5	EBCDIC	Channel path acronym.
22	16	SMF73CMG	1	binary	CPMF Channel measurement group.
23	17	SMF73FG5	1	binary	CPMF validation flags - each bit (if on) indicates that the corresponding measurement data is available and valid. This refers to the first five words of the channel measurement data in field SMF73CCM. Bit Measurement Data 0 Channel measurement data — word 1 1 Channel measurement data — word 2 2 Channel measurement data — word 3 3 Channel measurement data — word 4 4 Channel measurement data — word 5 5-7 Reserved.

Record type 73

Dec offset	Hex offset	Name	Length	Format	Description
24	18	SMF73CCM	48	*	CPMF Channel measurement data (extended mode). The contents of this field is different for each measurement group, as described in the following tables.
72	48	SMF73CPP	1	binary	Channel path parameter.
73	49	SMF73GEN	1	binary	Channel type generation.
74	4A	SMF73EIX	2	binary	Index to Extended Channel Path data section. Only valid if bit 6 of SMF73FG4 is set.
76	4C	SMF73SPD	2	binary	Channel path speed at the end of interval. If channel path power (bits 4-7 of SMF73MSC) is zero, the channel path speed is in units of 100 megabits per second. Otherwise, this value must be multiplied by 10**Power to get the speed in units of bits per second.
78	4E	SMF73MSC	1	binary	Miscellaneous 0 - 3 Reserved. 4 - 7 Channel path power at the end of interval. If non-zero, this value can be used to calculate the channel path speed (SMF73SPD * 10**Power).
79	4F	*	1	binary	Reserved.

SMF73CCM — CPMF Channel Measurement Data (Measurement Group 1):

Offsets	Name	Length	Format	Description
0	0 SMF73TUT	4	float	Total channel path busy time (in units of 128 microseconds).
4	4 SMF73PUT	4	float	LPAR channel path busy time (in units of 128 microseconds).
8	8	40		Reserved.

SMF73CCM — CPMF Channel Measurement Data (Measurement Group 2):

Offsets	Name	Length	Format	Description
0	0 SMF73MBC	4	float	Maximum bus cycles per second - word 1.
4	4 SMF73MCU	4	float	Maximum channel work units per second - word 2.
8	8 SMF73MWU	4	float	Maximum WRITE data units per second - word 3.
12	C SMF73MRU	4	float	Maximum READ data units per second - word 4.
16	10 SMF73US	4	float	Data unit size (in bytes) - word 5.
20	14 SMF73TBC	4	float	Total bus cycles count.
24	18 SMF73TUC	4	float	Total channel work unit count.
28	1C SMF73PUC	4	float	LPAR channel work units count.
32	20 SMF73TWU	4	float	Total WRITE data units count.
36	24 SMF73PWU	4	float	LPAR WRITE data units count.
40	28 SMF73TRU	4	float	Total READ data units count.
44	2C SMF73PRU	4	float	LPAR READ data units count.

SMF73CCM — CPMF Channel Measurement Data (Measurement Group 3):

Offsets	Name	Length	Format	Description
0	0 SMF73PDU	4	float	LPAR data unit size (in bytes) - word 1.
4	4 SMF73TDU	4	float	Total data unit size (in bytes) - word 2.

Offsets	Name	Length	Format	Description
8	8 SMF73PUM	4	float	LPAR message sent unit size (in bytes) - word 3.
12	C SMF73TUM	4	float	Total message sent unit size (in bytes) - word 4.
16	10	4		Reserved.
20	14 SMF73PMS	4	float	LPAR count of message sent units.
24	18 SMF73TMS	4	float	Total count of message sent units.
28	1C SMF73PUS	4	float	LPAR count of unsuccessful attempts to send messages.
32	20 SMF73PUB	4	float	LPAR count of unsuccessful attempts to receive messages due to unavailable buffers.
36	24 SMF73TUB	4	float	Total count of unsuccessful attempts to receive messages due to unavailable buffers.
40	28 SMF73PDS	4	float	LPAR count of data units sent.
44	2C SMF73TDS	4	float	Total count of data units sent.

Extended Channel Path Data Section

Offsets	Name	Length	Format	Description
0	0 SMF73ECP	1	binary	Channel path identification
1	1	3		Reserved.
4	4 SMF73EDT	32	*	CPMF extended channel path measurement data. This field is only available for measurement group 2. See "SMF73EDT — CPMF Extended Channel Measurement Data (Measurement Group 2)" for the contents of the field.

SMF73EDT — CPMF Extended Channel Measurement Data (Measurement Group 2):

Offsets	Name	Length	Format	Description
0	0 SMF73EOC	4	float	Total number of FICON command-mode operations (CPC) that have been attempted by the channel.
4	4 SMF73EOD	4	float	Total number of FICON command-mode operations (CPC) that could not be initiated by the channel because of a lack of available resources.
8	8 SMF73EOS	8	float	Summation count of FICON command-mode operations (CPC). Each time the number of FICON command-mode operations is incremented, the number of FICON command-mode operations active at the channel, including the one being initiated, is added to this field.
16	10 SMF73ETC	4	float	Total number of FICON transport-mode operations (CPC) that have been attempted by the channel. Zero when zHPF is not available.
20	14 SMF73ETD	4	float	Total number of FICON transport-mode operations (CPC) that could not be initiated by the channel because of a lack of available resources. Zero when zHPF is not available.
24	18 SMF73ETS	8	float	Summation count of FICON transport-mode operations (CPC). Each time the number of FICON transport-mode operations is incremented, the number of transport-mode operations active at the channel, including the one being initiated, is added to this field. Zero when zHPF is not available.

Record Type 74 (4A) — RMF Activity of Several Resources

For information on using RMF, see *z/OS RMF User's Guide*.

For information on Monitor I, II, and III, see *z/OS RMF Report Analysis*.

Record type 74 has the following subtypes:

- **Subtype 1** — Device Activity

The record is written for all devices specified in the DEVICE option for a Monitor I session. It contains entries for all devices that have been online at least once since RMF was started. The entry for any device that was offline at the end of the reporting interval, or for any device that was taken offline during the interval, does not contain data.

Device Control data section

Contains general information on the number of devices and types.

Device data section

Contains the volume serial number for tape and direct access devices, number of requests on the device, total active, pending and connect time to service those requests, the number of requests enqueued for the device and the device number, class and type and other data collected about the device. RMF produces one or more type 74 records for the classes requested by the installation, and one Device data section for each device.

- **Subtype 2** — XCF Activity

Monitor III Cross-System Coupling Facility (XCF) measurement writes this subtype, only if the Monitor III data gatherer is on.

Control data section

Contains control information for splitting and reassembling of the XCF records.

System data section

Describes the message traffic between the local system (where RMF is running) and the remote systems on a system level.

Path data section

Describes the message traffic broken down by signalling paths connecting the local system with the remote systems.

Member data section

Describes the message traffic on a member basis for members on the local system and members communicating with the local system.

- **Subtype 3** — OMVS Kernel Activity

Monitor III Data Gatherer collects z/OS UNIX System Services measurement data that are input for the RMF Postprocessor to create the OMVS Kernel Activity report.

Control data section

Contains various z/OS UNIX System Services measurement data.

- **Subtype 4** — Coupling Facility Activity

One record is written for each coupling facility by each member in the sysplex.

Local Coupling Facility data section

One per record; contains path and subchannel data collected from each local system.

Connectivity data section

One per sysplex member connected to the coupling facility. This member list is used by the Postprocessor to verify that it has a complete set of SMF records for creating sysplex-level reports for this coupling facility.

This section is gathered on only one system in the sysplex (RMF's sysplex master gathering) and is available only if the status flag R744FFLG in the Local Coupling Facility data section indicates that the coupling facility was connected to the system at the end of the interval.

Storage Coupling Facility data section

One per record; contains global data that is only collected once for the sysplex.

Structure data section

One for each structure allocated in this facility.

This section is gathered on only one system in the sysplex (RMF's sysplex master gathering) and is available only if the status flag R744FFLG in the Local Coupling Facility data section indicates that the coupling facility was connected to the system at the end of the interval.

Request data section

One for each structure in this facility if the structure has had an active connection at some time during the interval.

Processor Utilization data section

One for each processor (CP, not IOP) within the respective coupling facility.

Cache data section

Several sections for each Request data section are possible, depending on applications using the coupling facility.

Remote Facility data section

One section for each duplexing coupling facility with various signal counters.

Channel Path data section

One section for each channel path of type CIB, CFP, or CS5 associated with a local or remote coupling facility, containing channel path attributes. There can be up to eight Channel Path data sections per coupling facility.

Storage Class Memory data section

One section for each structure in this coupling facility that is allocated with storage class memory and has had an active connection at some time during the interval.

- **Subtype 5** — Cache Subsystem Device Activity

One or several records (depending on the number of devices attached to the control unit) are written for each cache subsystem. The header section of each record contains an individual header extension for subtype 5.

Cache control section

Contains control information and return codes from interfaces.

Cache Device data section

Contains cache statistics for each device.

Cache Device data extension section

This extension applies only to control unit types 3990-03 and 3990-06. It is collected by RMF to provide the same data as in the corresponding CRR record.

Cache Control Unit Status data section

Contains cache statistics for the control unit.

RAID Rank/Extent Pool data section

Contains RAID rank statistics for a 2105 device or extent pool statistics for a 2107 device.

- **Subtype 6** — HFS Statistics

HFS Global data section

Contains global statistics and return codes from interfaces.

HFS Global Buffer section

Contains buffer statistics, there is one section for each buffer in the buffer pool.

HFS File System section

Contains file system statistics, there is one section for each mounted file system for which data gathering was activated.

- **Subtype 7** — FICON Director Statistics

FCD Global data section

Contains IODF configuration data.

FCD Switch data section

Contains switch configuration data.

FCD Port data section

Contains port statistics.

FCD Connector data section

Contains configuration data for additional control units.

- **Subtype 8** — Enterprise Disk System Statistics

Control data section

Contains control information and control unit information concerning the storage server.

Link Statistics section

Contains link performance statistics for each active adapter.

Extent Pool Statistics section

Contains capacity information of allocated disk space and performance statistics for an extent pool.

Rank Statistics section

Contains activity statistics about read and write operations in the ranks of an extent pool.

Rank Array data section

Contains information about array characteristics of a rank.

- **Subtype 9** — PCI Express Based Function Activity

PCIE Function data section

Contains the PCIE Function ID upon which performance data is returned, the PCIE device name and type, counts of executed PCI operations, as well as other data collected about the function.

PCIE Function Type data section

Contains one PCIE Function Type data block per PCIE Function data section. A PCIE Function Type data block contains different type of measurements that depend on the PCIE function type and hardware.

Hardware Accelerator data section

Provides performance statistics that are common between all Hardware Accelerators and independent from the application type. There is one data section per Hardware Accelerator.

Hardware Accelerator Compression data section

The Hardware Accelerator compression data section consists of performance statistics related to compression acceleration. This data section exists only if the Hardware Accelerator is used for compression acceleration.

- **Subtype 10** — Storage Class Memory (SCM) Statistics

Monitor III Data Gatherer collects measurement data that are input for the RMF Postprocessor to create the storage class memory (SCM) report.

Storage class memory (SCM) configuration measurement section

Contains various measurement data. There is one section per SCM-resource part.

Storage class memory (SCM) device (subchannel) information section

There is one section per record. This section holds the response time information of all EADM devices at an aggregated level.

Note:

1. All fields with format *s_float* have the type *short format floating point*.
2. All fields with format *l_float* have the type *long format floating point*.

Each subtype contains a header section, the individual header extension (which contains offset/length/number triplets to address record parts following the RMF Product section) and the RMF Product section.

Macro to Symbolically Address Record Type 74: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Record type 74

Offsets	Name	Length	Format	Description												
0	0 SMF74LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF74SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF74FLG	1	binary	System indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for details.)</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </table>	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved.	3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved.															
3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)															
7	System is running in PR/SM mode.															
5	5 SMF74RTY	1	binary	Record type 74 (X'4A').												
6	6 SMF74TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF74DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF74SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF74SSI	4	EBCDIC	Subsystem identification ('RMF').												
22	16 SMF74STY	2	binary	Record subtype.												
24	18 SMF74TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.												
26	1A	2		Reserved.												
28	1C SMF74PRS	4	binary	Offset to RMF Product section from RDW.												
32	20 SMF74PRL	2	binary	Length of RMF Product section.												
34	22 SMF74PRN	2	binary	Number of RMF Product sections.												
Individual header extension for subtype 1:																
36	24 SMF74DCS	4	binary	Offset to Device Control data section from RDW.												
40	28 SMF74DCL	2	binary	Length of Device Control data section.												
42	2A SMF74DCN	2	binary	Number of Device Control data sections.												
44	2C SMF74DDS	4	binary	Offset to Device data section from RDW.												
48	30 SMF74DDL	2	binary	Length of Device data section.												
50	32 SMF74DDN	2	binary	Number of Device data sections.												
Individual header extension for subtype 2:																
36	24 SMF742CO	4	binary	Offset to Control data section from RDW.												
40	28 SMF742CL	2	binary	Length of Control data section.												
42	2A SMF742CN	2	binary	Number of Control data sections.												
44	2C SMF742SO	4	binary	Offset to System data section from RDW.												
48	30 SMF742SL	2	binary	Length of System data section.												
50	32 SMF742SN	2	binary	Number of System data sections.												
52	34 SMF742PO	4	binary	Offset to Path data section.												
56	38 SMF742PL	2	binary	Length of Path data section.												
58	3A SMF742PN	2	binary	Number of Path data sections.												
60	3C SMF742MO	4	binary	Offset to Member data section from RDW.												
64	40 SMF742ML	2	binary	Length of Member data section.												
66	42 SMF742MN	2	binary	Number of Member data sections.												
Individual header extension for subtype 3:																

Offsets	Name	Length	Format	Description
36	24 SMF743PO	4	binary	Offset to OMVS control data section.
40	28 SMF743PL	2	binary	Length of OMVS control data section.
42	2A SMF743PN	2	binary	Number of OMVS control data sections.
Individual header extension for subtype 4:				
36	24 SMF744FO	4	binary	Offset to Local Coupling Facility data section.
40	28 SMF744FL	2	binary	Length of Local Coupling Facility data section.
42	2A SMF744FN	2	binary	Number of Local Coupling Facility data sections.
44	2C SMF744XO	4	binary	Offset to Connectivity data section.
48	30 SMF744XL	2	binary	Length of Connectivity data section.
50	32 SMF744XN	2	binary	Number of Connectivity data sections.
52	34 SMF744GO	4	binary	Offset to Storage data section.
56	38 SMF744GL	2	binary	Length of Storage data section.
58	3A SMF744GN	2	binary	Number of Storage data sections.
60	3C SMF744QO	4	binary	Offset to Structure data section.
64	40 SMF744QL	2	binary	Length of Structure data section.
66	42 SMF744QN	2	binary	Number of Structure data sections.
68	44 SMF744SO	4	binary	Offset to Request data section.
72	48 SMF744SL	2	binary	Length of Request data section.
74	4A SMF744SN	2	binary	Number of Request data sections.
76	4C SMF744PO	4	binary	Offset to Processor data section.
80	50 SMF744PL	2	binary	Length of Processor data section.
82	52 SMF744PN	2	binary	Number of Processor data sections.
84	54 SMF744CO	4	binary	Offset to Cache data section.
88	58 SMF744CL	2	binary	Length of Cache data section.
90	5A SMF744CN	2	binary	Number of Cache data sections.
92	5C SMF744RO	4	binary	Offset to Remote Facility data section.
96	60 SMF744RL	2	binary	Length of Remote Facility data section.
98	62 SMF744RN	2	binary	Number of Remote Facility data sections.
100	64 SMF744HO	4	binary	Offset to Channel Path data section.
104	68 SMF744HL	2	binary	Length of Channel Path data section.
106	6A SMF744HN	2	binary	Number of Channel Path data sections.
108	6C SMF744MO	4	binary	Offset to SCM data section.
112	70 SMF744ML	2	binary	Length of SCM data section.
114	72 SMF744MN	2	binary	Number of SCM data sections.
Individual header extension for subtype 5:				
36	24 SMF745CO	4	binary	Offset to Control section.
40	28 SMF745CL	2	binary	Length of Control section.
42	2A SMF745CN	2	binary	Number of Control sections.
44	2C SMF745DO	4	binary	Offset to Cache Device data section.
48	30 SMF745DL	2	binary	Length of Cache Device data section.
50	32 SMF745DN	2	binary	Number of Cache Device data sections.
52	34 SMF745XO	4	binary	Offset to Cache Device data section extension.
56	38 SMF745XL	2	binary	Length of Cache Device data section extension.
58	3A SMF745XN	2	binary	Number of Cache Device data section extensions.
60	3C SMF745SO	4	binary	Offset to Cache Status data section.
64	40 SMF745SL	2	binary	Length of Cache Status data section.

Record type 74

Offsets	Name	Length	Format	Description
66	42 SMF745SN	2	binary	Number of Cache Status data sections.
68	44 SMF7451O	4	binary	Offset to RAID Rank data sections.
72	48 SMF7451L	2	binary	Length of RAID Rank data section.
74	4A SMF7451N	2	binary	Number of RAID Rank data sections.
Individual header extension for subtype 6:				
36	24 SMF746DO	4	binary	Offset to HFS Global data section.
40	28 SMF746DL	2	binary	Length of HFS Global data section.
42	2A SMF746DN	2	binary	Number of HFS Global data sections.
44	2C SMF746BO	4	binary	Offset to HFS Global Buffer section.
48	30 SMF746BL	2	binary	Length of HFS Global Buffer section.
50	32 SMF746BN	2	binary	Number of HFS Global Buffer sections.
52	34 SMF746FO	4	binary	Offset to HFS File System section.
56	38 SMF746FL	2	binary	Length of HFS File System section.
58	3A SMF746FN	2	binary	Number of HFS File System sections.
Individual header extension for subtype 7:				
36	24 SMF747GO	4	binary	Offset to FCD Global data section.
40	28 SMF747GL	2	binary	Length of FCD Global data section.
42	2A SMF747GN	2	binary	Number of FCD Global data sections.
44	2C SMF747SO	4	binary	Offset to FCD Switch data section.
48	30 SMF747SL	2	binary	Length of FCD Switch data section.
50	32 SMF747SN	2	binary	Number of FCD Switch data sections.
52	34 SMF747PO	4	binary	Offset to FCD Port data section.
56	38 SMF747PL	2	binary	Length of FCD Port data section.
58	3A SMF747PN	2	binary	Number of FCD Port data sections.
60	3C SMF747CO	4	binary	Offset to FCD Connector data section.
64	40 SMF747CL	2	binary	Length of FCD Connector data section.
66	42 SMF747CN	2	binary	Number of FCD Connector data sections.
Individual header extension for subtype 8:				
36	24 SMF748CO	4	binary	Offset to Control data section.
40	28 SMF748CL	2	binary	Length of Control data section.
42	2A SMF748CN	2	binary	Number of Control data sections.
44	2C SMF748LO	4	binary	Offset to Link Statistics section.
48	30 SMF748LL	2	binary	Length of Link Statistics section.
50	32 SMF748LN	2	binary	Number of Link Statistics sections.
52	34 SMF748XO	4	binary	Offset to Extent Pool Statistics section.
56	38 SMF748XL	2	binary	Length of Extent Pool Statistics section.
58	3A SMF748XN	2	binary	Number of Extent Pool Statistics sections.
60	3C SMF748RO	4	binary	Offset to Rank Statistics section.
64	40 SMF748RL	2	binary	Length of Rank Statistics section.
66	42 SMF748RN	2	binary	Number of Rank Statistics sections.
68	44 SMF748AO	4	binary	Offset to Rank Array data section.
72	48 SMF748AL	2	binary	Length of Rank Array data section.
74	4A SMF748AN	2	binary	Number of Rank Array data sections.
Individual header extension for subtype 9:				
36	24 SMF749PO	4	binary	Offset to PCIE Function data section.
40	28 SMF749PL	2	binary	Length of PCIE Function data section.

Offsets	Name	Length	Format	Description
42	2A SMF749PN	2	binary	Number of PCIE Function data sections.
44	2C SMF749DO	4	binary	Offset to PCIE Function Type data section.
48	30 SMF749DL	2	binary	Length of PCIE Function Type data section.
50	32 SMF749DN	2	binary	Number of PCIE Function Type data sections.
52	34 SMF749FO	4	binary	Offset to Hardware Accelerator data section.
56	38 SMF749FL	2	binary	Length of Hardware Accelerator data section.
58	3A SMF749FN	2	binary	Number of Hardware Accelerator data sections.
60	3C SMF749IO	4	binary	Offset to Hardware Accelerator Compression data section.
64	40 SMF749IL	2	binary	Length of Hardware Accelerator Compression data section.
66	42 SMF749IN	2	binary	Number of Hardware Accelerator Compression data sections.
Individual header extension for subtype 10:				
36	24 SMF7410DO	4	binary	Offset to SCM EADM device information section.
40	28 SMF7410DL	2	binary	Length of SCM EADM device information section.
42	2A SMF7410DN	2	binary	Number of SCM EADM device information sections.
44	2C SMF7410CO	4	binary	Offset to SCM configuration measurement sections.
48	30 SMF7410CL	2	binary	Length of SCM configuration measurement section.
50	32 SMF7410CN	2	binary	Number of SCM configuration measurement sections.

RMF Product Section

Offsets	Name	Length	Format	Description												
0	0 SMF74MFV	2	EBCDIC/ packed	RMF version number.												
2	2 SMF74PRD	8	EBCDIC	Product name ('RMF').												
10	A SMF74IST	4	packed	Time that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.												
14	E SMF74DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
18	12 SMF74INT	4	packed	Duration of RMF measurement interval, in the form <i>mmssittF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>itt</i> is the milliseconds, and <i>F</i> is the sign. The end of the measurement interval is the sum of the recorded start time and this field.												
22	16	2		Reserved.												
24	18 SMF74SAM	4	binary	Number of RMF samples.												
28	1C	2		Reserved.												
30	1E SMF74FLA	2	binary	Flags <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved.	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.
Bit	Meaning when set															
0	Reserved.															
1	Samples have been skipped															
2	Record was written by RMF Monitor III															
3	Interval was synchronized with SMF															
4-15	Reserved.															
32	20	4		Reserved.												

Record type 74

Offsets	Name	Length	Format	Description																		
36	24 SMF74CYC	4	packed	Sampling cycle length, in the form 000 <i>tttF</i> , where <i>ttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.																		
40	28 SMF74MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).																		
48	30 SMF74IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries														
Value	Meaning																					
3	9672, zSeries																					
49	31 SMF74PRF	1	binary	Processor flags. <table> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF74PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF74SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF74IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).																		
60	3C SMF74LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF74RAO	4	binary	Offset to reassembly area relative to start of RMF Product section.																		
72	48 SMF74RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		
74	4A SMF74RAN	2	binary	Reassembly area indicator. <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken.</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF74RAO) and length (SMF74RAL) are only valid if SMF74RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken.	1	Record is broken.												
Value	Meaning																					
0	Record is not broken.																					
1	Record is broken.																					
76	4C SMF74OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).																		
78	4E SMF74SYN	2	binary	SYNC value in seconds.																		
80	50 SMF74GIE	8	binary	Projected gathering interval end (STCK format) GMT time.																		
88	58 SMF74XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.																		

Offsets	Name	Length	Format	Description
96	60 SMF74SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.
Reassembly Area:				
0	0 SMF74RBR	2	binary	Total number of broken records built from the original large record.
2	2 SMF74RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF74RBR.
4	4 SMF74RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.
8	8 SMF74RIL	2	binary	Length of reassembly information block.
10	A SMF74RIN	2	binary	Number of reassembly information blocks (same value as SMF74TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF74RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF74RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF74RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Subtype 1 — Device Activity

Device Control Data Section

There is one section per device class.

Offsets	Name	Length	Format	Description
0	0 SMF74NXT	2	binary	Number of Device Control data sections in following records for this class.
2	2 SMF74TOT	2	binary	Total number of Device Control data sections in all records for this class.
4	4 SMF74GEN	2	binary	Total number of devices specified for all classes at system installation.
6	6 SMF74SUB	2	binary	Device class code: Bit Configuration Meaning '0080'X Magnetic tape device '0040'X Communication equipment '0020'X Direct access devices '0010'X Graphics devices '0008'X Unit record devices '0004'X Character reader devices.

Record type 74

Offsets	Name	Length	Format	Description
8	8 SMF74DCF	1	binary	Flags for DASD class Bit Meaning when set 0 Both sections of report requested 1 Sort by storage group 2-7 Reserved.
9	9 SMF74DMS	1	binary	Message flag Bit Meaning when set 0 Message issued that SMS not available 1 SMS interface error 2 Too many devices per device class 3-7 Reserved.
10	A SMF74ENF	1	binary	Flags for environment. Bit Meaning when set 0 Extended CMB 1 Model-dependent data not available by STSCH 2 Initial command response time valid (SMF74CMR) 3 Interrupt-Delay-Time facility is provided by channel subsystem 4 -7 Reserved
11	B	1		Reserved.
12	C SMF74S15	4	binary	Contents of register 15 after SMS interface call, zero if normal return.
16	10 SMF74SRC	4	binary	Return code from SMS interface, zero if normal return.
20	14 SMF74SRS	4	binary	Reason code from SMS interface, zero if normal return.
24	18 SMF74TSR	2	binary	Total number of small SMF records.
26	1A SMF74CFL	1	binary	Configuration change flags Bit Meaning when set 0 Configuration changed. Used to decide whether to provide the text "POR" or "ACTIVATE" on reports. Also used to check whether data can be combined in a duration report. 1 Configuration change since power-on-reset (POR). 2 POR using IOC data set that contains a token. 3 Configuration token is valid. 4-7 Reserved.
27	1B	3		Reserved.
30	1E SMF74TNM	44	EBCDIC	IODF name suffix.
74	4A SMF74TSF	2	EBCDIC	IODF name suffix.
76	4C	2		Reserved.
78	4E SMF74TOK	16	EBCDIC	Partial token information.
78	4E SMF74TDT	8	EBCDIC	IODF creation date, in the form <i>mm/dd/yy</i> .
86	56 SMF74TTM	8	EBCDIC	IODF creation time, in the form <i>hh.mm.ss</i> .
94	5E	2		Reserved.

Offsets	Name	Length	Format	Description
96	60 SMF74MCT	4	binary	Maximum number of allocated tape devices. This field is zero for devices other than tape.
100	64 SMF74TDY	10	EBCDIC	IODF creation date, in the form <i>mm/dd/yyyy</i> .
110	6E	2		Reserved.

Device Data Section

There is one section per device.

Offsets	Name	Length	Format	Description																		
0	0 SMF74NUM	2	binary	Device number, in the range X'0000' to X'FFFF'.																		
2	2 SMF74LCU	2	binary	Logical control unit number, in the range X'0000' to X'FFFF'.																		
4	4	1		Reserved.																		
5	5 SMF74CNF	1	binary	Device indicator <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>IOS queue length is incorrect</td> </tr> <tr> <td>1</td> <td>No logical control unit information</td> </tr> <tr> <td>2</td> <td>Data contained in fields SMF74SSC through SMF74DIS is incorrect</td> </tr> <tr> <td>3</td> <td>Device has been deleted</td> </tr> <tr> <td>4</td> <td>Only partial statistics are available</td> </tr> <tr> <td>5</td> <td>Reserved.</td> </tr> <tr> <td>6</td> <td>Data recorded is incorrect because device was configured during interval</td> </tr> <tr> <td>7</td> <td>Device is currently online.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	IOS queue length is incorrect	1	No logical control unit information	2	Data contained in fields SMF74SSC through SMF74DIS is incorrect	3	Device has been deleted	4	Only partial statistics are available	5	Reserved.	6	Data recorded is incorrect because device was configured during interval	7	Device is currently online.
Bit	Meaning when set																					
0	IOS queue length is incorrect																					
1	No logical control unit information																					
2	Data contained in fields SMF74SSC through SMF74DIS is incorrect																					
3	Device has been deleted																					
4	Only partial statistics are available																					
5	Reserved.																					
6	Data recorded is incorrect because device was configured during interval																					
7	Device is currently online.																					
6	6 SMF74SER	6	EBCDIC	Volume serial of the volume mounted on this device (tape or direct access device only).																		
12	C SMF74TYP	4	binary	Unit type.																		
16	10 SMF74NUX	4	binary	Number of unit control blocks (UCBs) for a parallel access volume. For HyperPAV base devices (bit 6 of SMF74CNX is set), this is the accumulated number of HyperPAV aliases.																		
20	14 SMF74SSC	4	binary	Start subchannel count. This is the number of physical requests to the device and includes SSCH and RSSCH instructions.																		
24	18 SMF74MEC	4	binary	Measurement event count (number of SSCH instructions for which connect, pending, and active times were stored).																		
28	1C SMF74CNN	4	binary	Device connect time (in 128-microsecond units).																		
32	20 SMF74PEN	4	binary	Device pending time (in 128-microsecond units).																		
36	24 SMF74ATV	4	binary	Device active time (in 128-microsecond units).																		
40	28 SMF74DIS	4	binary	Device disconnect time (in 128-microsecond units).																		
44	2C SMF74QUE	4	binary	Number of requests queued in IOS for this device.																		
48	30 SMF74UTL	4	binary	Number of samples when the device was reserved but an SSCH instruction had not been issued to the device.																		
52	34 SMF74RSV	4	binary	Number of samples taken when the device was reserved.																		
56	38	4		Reserved.																		
60	3C SMF74ALC	4	binary	Number of samples taken that indicated that the device was allocated.																		
64	40 SMF74MTP	4	binary	Number of samples taken that indicated a mount pending condition.																		

Record type 74

Offsets	Name	Length	Format	Description																		
68	44 SMF74NRD	4	binary	Number of samples taken that indicated that the device was not ready.																		
72	48 SMF74COF	2	binary	Number of requests that had hardware timer overflow for connect time measurement.																		
74	4A SMF74ICT	2	binary	Number of incorrect samples.																		
76	4C SMF74DVB	4	binary	Device busy delay time, from subchannel information block (SCHIB) (in 128-microsecond units).																		
80	50	4		Reserved.																		
84	54 SMF74CLF	1	binary	DASD report control flag <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Number option active indicator</td> </tr> <tr> <td>1</td> <td>Storage group option active indicator</td> </tr> <tr> <td>2</td> <td>Storage group name changed during the interval</td> </tr> <tr> <td>3</td> <td>Mount pending condition exists at the start of the interval</td> </tr> <tr> <td>4</td> <td>Mount pending condition exists at end of the interval</td> </tr> <tr> <td>5</td> <td>Reserved</td> </tr> <tr> <td>6</td> <td>CTC with special protocol</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Number option active indicator	1	Storage group option active indicator	2	Storage group name changed during the interval	3	Mount pending condition exists at the start of the interval	4	Mount pending condition exists at end of the interval	5	Reserved	6	CTC with special protocol	7	Reserved.
Bit	Meaning when set																					
0	Number option active indicator																					
1	Storage group option active indicator																					
2	Storage group name changed during the interval																					
3	Mount pending condition exists at the start of the interval																					
4	Mount pending condition exists at end of the interval																					
5	Reserved																					
6	CTC with special protocol																					
7	Reserved.																					
85	55	3		Reserved.																		
88	58 SMF74SGN	8	EBCDIC	Storage group name as defined by DFSMS.																		
96	60 SMF74NDA	4	binary	Total number of allocations in effect for the device.																		
100	64 SMF74DEV	8	EBCDIC	Device model name. This field is blank if device name cannot be determined.																		
108	6C SMF74CU	8	EBCDIC	Control unit name. Blank if control unit name cannot be determined.																		
116	74	4		Reserved.																		
120	78 SMF74CNX	1	binary	Device flag extensions: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Device dynamically changed</td> </tr> <tr> <td>1</td> <td>Device disconnect time is not valid</td> </tr> <tr> <td>2</td> <td>Base exposure of a parallel access volume</td> </tr> <tr> <td>3</td> <td>Number of alias exposures has changed</td> </tr> <tr> <td>4</td> <td>Timing facility not active</td> </tr> <tr> <td>5</td> <td>Device connect time is invalid</td> </tr> <tr> <td>6</td> <td>HyperPAV base device</td> </tr> <tr> <td>7</td> <td>Device connected to FICON.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Device dynamically changed	1	Device disconnect time is not valid	2	Base exposure of a parallel access volume	3	Number of alias exposures has changed	4	Timing facility not active	5	Device connect time is invalid	6	HyperPAV base device	7	Device connected to FICON.
Bit	Meaning when set																					
0	Device dynamically changed																					
1	Device disconnect time is not valid																					
2	Base exposure of a parallel access volume																					
3	Number of alias exposures has changed																					
4	Timing facility not active																					
5	Device connect time is invalid																					
6	HyperPAV base device																					
7	Device connected to FICON.																					
121	79 SMF74CN2	1	Binary	Device flag extension 2 <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>HyperWrite requested</td> </tr> <tr> <td>1-7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	HyperWrite requested	1-7	Reserved												
Bit	Meaning when set																					
0	HyperWrite requested																					
1-7	Reserved																					
122	7A SMF74MTC	2	binary	Number of tape mounts detected against the device during the interval.																		

Offsets	Name	Length	Format	Description														
124	7C SMF74DTS	1	binary	Shared Device report control flag <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Valid node descriptor ID retrieved</td> </tr> <tr> <td>1</td> <td>No valid node descriptor ID retrieved</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>SMF74SHR is valid</td> </tr> <tr> <td>4</td> <td>Device is shared/assigned to multiple systems</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Valid node descriptor ID retrieved	1	No valid node descriptor ID retrieved	2	Reserved	3	SMF74SHR is valid	4	Device is shared/assigned to multiple systems	5-7	Reserved.
Bit	Meaning when set																	
0	Valid node descriptor ID retrieved																	
1	No valid node descriptor ID retrieved																	
2	Reserved																	
3	SMF74SHR is valid																	
4	Device is shared/assigned to multiple systems																	
5-7	Reserved.																	
125	7D SMF74DCT	28	EBCDIC	Node descriptor ID for selfdescribing devices (if bit 0 of SMF74SRD on). 4-byte device number in EBCDIC format left justified with trailing blanks (if bit 1 of SMF74DTS is on).														
153	99 SMF74HPC	1	binary	Number of HyperPAV aliases configured for that LSS.														
154	9A SMF74NSS	2	binary	Number of skipped samples caused by too large delta values.														
156	9C SMF74PSM	4	binary	Number of successful PAV samples.														
160	A0 SMF74PCT	4	binary	Number of unsuccessful PAV counts.														
164	A4 SMF74CMR	4	binary	Command response time in units of 128 microseconds.														
168	A8 SMF74CAP	4	binary	DASD volume capacity (specified by the number of available cylinders).														
172	AC SMF74IDT	4	binary	Interrupt delay time in units of 128 microseconds. This field is zero if not supported by the hardware.														
176	B0 SMF74CUQ	4	binary	Control Unit Queuing Time.														
180	B4	1		Reserved.														
181	B5 SMF74SCS	1	binary	Subchannel set ID.														
182	B6 SMF74NM2	2	binary	Device number (same as SMF74NUM).														

Subtype 2 — XCF Activity

Control Data Section

Offsets	Name	Length	Format	Description
0	0 R742TSR	2	binary	Total number of type 74 subtype 2 records written during this interval.
2	2	2		Reserved.
4	4 R742STOT	4	binary	Total number of System data sections in all SMF records.
8	8 R742SNXT	4	binary	Number of System data sections in records written after this record.
12	C R742PTOT	4	binary	Total number of Path data sections in all SMF records.
16	10 R742PNXT	4	binary	Number of Path data sections in records written after this record.
20	14 R742MTOT	4	binary	Total number of Member data sections in all SMF records.
24	18 R742MNXT	4	binary	Number of Member data sections in records written after this record.

System Data Section

Offsets	Name	Length	Format	Description												
0	0 R742SNME	8	EBCDIC	System name as defined in parmlib member IEASYSxx SYSNAME parameter.												
8	8 R742SSTF	1	binary	Status flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>System became active during this interval</td> </tr> <tr> <td>1</td> <td>System became inactive during this interval</td> </tr> <tr> <td>2</td> <td>Counts reset by XCF during this interval</td> </tr> <tr> <td>3</td> <td>Partially not active during RMF Postprocessor interval.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	System became active during this interval	1	System became inactive during this interval	2	Counts reset by XCF during this interval	3	Partially not active during RMF Postprocessor interval.	4-7	Reserved.
Bit	Meaning when set															
0	System became active during this interval															
1	System became inactive during this interval															
2	Counts reset by XCF during this interval															
3	Partially not active during RMF Postprocessor interval.															
4-7	Reserved.															
9	9 R742SDIR	1	binary	Direction of the message traffic <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Inbound. The R742SNME system sent messages to the local system.</td> </tr> <tr> <td>1</td> <td>Outbound. The R742SNME system receives messages from the local system.</td> </tr> <tr> <td>2</td> <td>Local. This means that the message traffic is within the local system.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Inbound. The R742SNME system sent messages to the local system.	1	Outbound. The R742SNME system receives messages from the local system.	2	Local. This means that the message traffic is within the local system.	3-7	Reserved.		
Bit	Meaning when set															
0	Inbound. The R742SNME system sent messages to the local system.															
1	Outbound. The R742SNME system receives messages from the local system.															
2	Local. This means that the message traffic is within the local system.															
3-7	Reserved.															
10	A	2		Reserved.												
12	C R742SPTH	4	binary	Current number of signalling paths in service (zero for local entry). If outbound entry, count is for the indicated transport class.												
16	10 R742SBSY	4	binary	Number of no buffer conditions. For local or outbound entry, count is for the indicated transport class.												
20	14 R742SNOP	4	binary	Number of no path conditions (zero for local entry). For outbound entry, count is for the indicated transport class.												
24	18 R742SMXB	4	binary	Maximum 1K blocks of message buffer space. For local or outbound entry, count is for the indicated transport class.												
28	1C R742SBIG	4	binary	Number of big message conditions (zero for inbound entry).												
32	20 R742SFIT	4	binary	Number of message fit conditions (zero for inbound entry).												
36	24 R742SSML	4	binary	Number of small message conditions (zero for inbound entry).												
40	28 R742SOVR	4	binary	Number of big messages that exceeded the message length for which XCF was optimized (zero for inbound entry).												
44	2C R742STCL	4	binary	Message length for transport class (zero for inbound entry).												
48	30 R742STCN	8	EBCDIC	Transport class name (blanks for inbound entry).												

Path Data Section

Offsets	Name	Length	Format	Description
0	0 R742PNME	8	EBCDIC	System name as defined in parmlib member IEASYSxx SYSNAME parameter.
8	8 R742PDEV	4	EBCDIC	Device number.

Offsets	Name	Length	Format	Description
12	C R742PSTF	1	binary	Status flags Bit Meaning when set 0 Path became active during this interval 1 Path became inactive during this interval. 2 Counts reset by XCF during this interval. 3-7 Reserved.
13	D R742PDIR	1	binary	Direction path Bit Meaning when set 0 Inbound path 1 Outbound path 2-7 Reserved.
14	E R742PTYP	1	binary	Path type indicator. Value Meaning 1 CTC 3 List structure.
15	F	1		Reserved.
16	10 R742PONA	8	EBCDIC	Name of system on other end if known, otherwise blanks.
24	18 R742PODV	4	EBCDIC	Device number on other end if known, otherwise blanks.
28	1C R742PSTA	1	binary	Path status Bit Meaning when set 0 Starting 1 Restarting 2 Working 3 Stopping 4 Waiting for completion of communication link 5 Not operational. Path defined to XCF, but not usable until hardware and/or definition problems are resolved. 6 Stop failed 7 Rebuilding.
29	1D R742PSTM	1	binary	More path status flags: Bit Meaning when set 0 Quiescing 1 Quiesced 2-7 Reserved.
30	1E	2		Reserved.
32	20 R742PRET	4	binary	Path retry limit.
36	24 R742PRST	4	binary	Number of restarts.
40	28 R742PMXM	4	binary	Maximum number of 1K blocks of message buffer space.
44	2C R742PSIG	4	binary	Number of outbound (inbound) signals sent (received) over path.
48	30 R742PQLN	4	binary	Number of outbound signals pending transfer on path.
52	34 R742PIBR	4	binary	Number of inbound signals refused due to maximum message limit.

Record type 74

Offsets	Name	Length	Format	Description
56	38 R742PSUS	4	binary	Number of times this signalling path was not busy when it was selected to transfer a message.
60	3C R742PAPP	4	binary	Number of times this signalling path was busy when it was selected to transfer a message.
64	40 R742PTCN	8	EBCDIC	Transport class name (blanks for an inbound path).
72	48 R742PSTR	16	EBCDIC	Name of XES list structure being used as a path, blank for CTCs.
88	58 R742PIOT	4	binary	For inbound paths: Average I/O transfer time (microseconds) for the observed in the last minute of the RMF reporting interval, or X'FFFFFFFF' (if time > 35 minutes). For outbound paths, the field is zero.
92	5C R742PRCT	4	binary	Path retry count.
96	60 R742PPND	4	binary	The current number of signals pending for transfer on the path (outbound only).
100	64 R742PUSE	4	binary	The current number of 1KB blocks of message buffer space in use by this path.
104	68 R742PLIN	4	binary	List number within structure.

For each path which has been added during the measurement interval, only fields R742PNME, R742PDIR, R742PONA, and R742PQLN contain data, all other fields are blank or contain X'00'.

Member Data Section

The information contained in this section provides information about the message traffic for the member. If the member is active on the system that provided this SMF data, this information describes all messages sent and received by that member. If the member is active on some other system than the one that provided the data, this information describes just those messages sent from the system providing the data to that member, and just those messages received from that member by the system providing the data.

If the member is active on the system that provided the SMF data, then the contents of R742MSYS and SMF74SNM (in the RMF Product section) are the same.

Offsets	Name	Length	Format	Description
0	0 R742MSYS	8	EBCDIC	System name (as defined in parmlib member IEASYSxx SYSNAME parameter) where the member resides.
8	8 R742MGRP	8	EBCDIC	Group name.
16	10 R742MMEM	16	EBCDIC	Member name.
32	20 R742MSTF	1	binary	Status flags
			Bit	Meaning when set
			0	Member became active during this interval
			1	Member became inactive during this interval
			2	Counts reset by XCF during this interval
			3	Partially not active during RMF Postprocessor interval.
			4	No information returned from IXCQUERY.
			5-7	Reserved.

Offsets	Name	Length	Format	Description																		
33	21 R742MST1	1	binary	Extended member state (1): 2=CREATED 3=ACTIVE 4=QUIESCED 5=FAILED																		
34	22 R742MST2	1	binary	Extended member state (2): <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>System status update missing</td> </tr> <tr> <td>1</td> <td>System termination started</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>Status update missing (confirmed)</td> </tr> <tr> <td>4</td> <td>Status update missing (not confirmed)</td> </tr> <tr> <td>5</td> <td>Reserved</td> </tr> <tr> <td>6</td> <td>Monitoring has been removed</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	System status update missing	1	System termination started	2	Reserved	3	Status update missing (confirmed)	4	Status update missing (not confirmed)	5	Reserved	6	Monitoring has been removed	7	Reserved.
Bit	Meaning when set																					
0	System status update missing																					
1	System termination started																					
2	Reserved																					
3	Status update missing (confirmed)																					
4	Status update missing (not confirmed)																					
5	Reserved																					
6	Monitoring has been removed																					
7	Reserved.																					
35	23	1		Reserved.																		
36	24 R742MSNT	4	binary	Number of signals sent by member.																		
40	28 R742MRCV	4	binary	Number of signals received by member.																		
44	2C R742MINT	4	binary	Status checking interval.																		
48	30 R742MJOB	8	EBCDIC	Job name that joined the member.																		

Subtype 3 — OMVS Kernel Activity

Control Data Section

Offsets	Name	Length	Format	Description
0	0 R743CYCU	4	binary	The number of cycle units elapsed between first and last measured sample.
4	4 R743CYCT	4	binary	The cycle time value obtained from Monitor III options (in milliseconds).

Record type 74

Offsets	Name	Length	Format	Description																												
8	8 R743FLG	4	binary	<p>Processing Flags</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Kernel address space is terminated or reinstated this interval.</td> </tr> <tr> <td>1</td> <td>Maximum number of processes changed during reporting interval.</td> </tr> <tr> <td>2</td> <td>Maximum number of users changed during reporting interval.</td> </tr> <tr> <td>3</td> <td>Maximum number of processes per user changed during reporting interval.</td> </tr> <tr> <td>4</td> <td>Maximum number of message queue ids changed during reporting interval when set.</td> </tr> <tr> <td>5</td> <td>Maximum number of semaphore ids changed during reporting interval when set.</td> </tr> <tr> <td>6</td> <td>Maximum number of shared memory ids changed during reporting interval when set.</td> </tr> <tr> <td>7</td> <td>Maximum number of shared memory pages changed during reporting interval when set.</td> </tr> <tr> <td>8</td> <td>Maximum number of memory map storage pages changed during reporting interval when set.</td> </tr> <tr> <td>9</td> <td>Maximum number of shared storage pages changed during reporting interval when set.</td> </tr> <tr> <td>10</td> <td>Maximum size of shared library region changed during reporting interval when set.</td> </tr> <tr> <td>11</td> <td>Maximum number of queued signals per process changed during reporting interval when set.</td> </tr> <tr> <td>12-31</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Kernel address space is terminated or reinstated this interval.	1	Maximum number of processes changed during reporting interval.	2	Maximum number of users changed during reporting interval.	3	Maximum number of processes per user changed during reporting interval.	4	Maximum number of message queue ids changed during reporting interval when set.	5	Maximum number of semaphore ids changed during reporting interval when set.	6	Maximum number of shared memory ids changed during reporting interval when set.	7	Maximum number of shared memory pages changed during reporting interval when set.	8	Maximum number of memory map storage pages changed during reporting interval when set.	9	Maximum number of shared storage pages changed during reporting interval when set.	10	Maximum size of shared library region changed during reporting interval when set.	11	Maximum number of queued signals per process changed during reporting interval when set.	12-31	Reserved.
Bit	Meaning when set																															
0	Kernel address space is terminated or reinstated this interval.																															
1	Maximum number of processes changed during reporting interval.																															
2	Maximum number of users changed during reporting interval.																															
3	Maximum number of processes per user changed during reporting interval.																															
4	Maximum number of message queue ids changed during reporting interval when set.																															
5	Maximum number of semaphore ids changed during reporting interval when set.																															
6	Maximum number of shared memory ids changed during reporting interval when set.																															
7	Maximum number of shared memory pages changed during reporting interval when set.																															
8	Maximum number of memory map storage pages changed during reporting interval when set.																															
9	Maximum number of shared storage pages changed during reporting interval when set.																															
10	Maximum size of shared library region changed during reporting interval when set.																															
11	Maximum number of queued signals per process changed during reporting interval when set.																															
12-31	Reserved.																															
12	C R743SYSC	4	s_float	The total number of kernel callable services invoked during the interval.																												
16	10 R743SCMN	4	binary	The minimum number of kernel callable services invoked during one cycle.																												
20	14 R743SCMX	4	binary	The maximum number of kernel callable services invoked during one cycle.																												
24	18 R743CPU	4	s_float	Total CPU time spent processing callable services in the kernel address space during the interval (in 10-millisecond units).																												
28	1C R743CTMN	4	binary	Minimum CPU time spent processing callable services in the kernel address space during one cycle (in 10-millisecond units).																												
32	20 R743CTMX	4	binary	Maximum CPU time spent processing callable services in the kernel address space during one cycle (in 10-millisecond units).																												
36	24 R743OPR	4	s_float	Count of times fork() or dub failed because the maximum number of processes was exceeded during the interval.																												
40	28 R743OPMN	4	binary	Minimum number of times fork() or dub failed because the maximum number of processes was exceeded during one cycle.																												
44	2C R743OPMX	4	binary	Maximum number of times fork() or dub failed because the maximum number of processes was exceeded during one cycle.																												
48	30 R743OUS	4	s_float	Count of times fork() or dub failed because the maximum number of users was exceeded during the interval.																												

Offsets	Name	Length	Format	Description
52	34 R743OUMN	4	binary	Minimum number of times fork() or dub failed because the maximum number of users was exceeded during one cycle.
56	38 R743OUMX	4	binary	Maximum number of times fork() or dub failed because the maximum number of users was exceeded during one cycle.
60	3C R743OPRU	4	s_float	Count of times fork() or dub failed because the maximum number of processes per user was exceeded during the interval.
64	40 R743ORMN	4	binary	Minimum number of times fork() or dub failed because the maximum number of processes per user was exceeded during one cycle.
68	44 R743ORMX	4	binary	Maximum number of times fork() or dub failed because the maximum number of processes per user was exceeded during one cycle.
72	48 R743MAXP	2	binary	Maximum number of processes.
74	4A R743MAXU	2	binary	Maximum number of users.
76	4C R743MXPU	2	binary	Maximum number of processes per user.
78	4E R743RSV1	2	binary	Reserved.
80	50 R743CURP	4	s_float	Accumulated number of processes during the interval.
84	54 R743CPMN	2	binary	Minimum number of processes during one cycle.
86	56 R743CPMX	2	binary	Maximum number of processes during one cycle.
88	58 R743CURU	4	s_float	Accumulated number of users during the interval.
92	5C R743CUMN	2	binary	Minimum number of users during one cycle.
94	5E R743CUMX	2	binary	Maximum number of users during one cycle.
96	60 R743MMSG	4	binary	Maximum number of message queue IDs (constant).
100	64 R743MSEM	4	binary	Maximum number of semaphore IDs (constant).
104	68 R743MSHM	4	binary	Maximum number of shared memory IDs (constant).
108	6C R743MSPG	4	binary	Maximum number of shared memory pages (constant).
112	70 R743CMMSG	4	s_float	Accumulated number of message queue IDs during one interval.
116	74 R743CMMN	4	binary	Minimum number of message queue IDs per cycle.
120	78 R743CMMX	4	binary	Maximum number of message queue IDs per cycle.
124	7C R743CSEM	4	s_float	Accumulated number of semaphore IDs during one interval.
128	80 R743CSMN	4	binary	Minimum number of semaphore IDs per cycle.
132	84 R743CSMX	4	binary	Maximum number of semaphore IDs per cycle.
136	88 R743CSHM	4	s_float	Accumulated number of shared memory IDs during one interval.
140	8C R743CHMN	4	binary	Minimum number of shared memory IDs per cycle.
144	90 R743CHMX	4	binary	Maximum number of shared memory IDs per cycle.
148	94 R743CSPG	4	s_float	Accumulated number of shared memory pages during one interval.
152	98 R743CGMN	4	binary	Minimum number of shared memory pages per cycle.
156	9C R743CGMX	4	binary	Maximum number of shared memory pages per cycle.
160	A0 R743OMSG	4	s_float	Accumulated number of attempts to exceed maximum number of message queue IDs during one interval.
164	A4 R743OMMN	4	binary	Minimum number of attempts to exceed maximum number of message queue IDs per cycle.
168	A8 R743OMMX	4	binary	Maximum number of attempts to exceed maximum number of message queue IDs per cycle.
172	AC R743OSEM	4	s_float	Accumulated number of attempts to exceed maximum number of semaphore IDs during one interval.

Record type 74

Offsets	Name	Length	Format	Description
176	B0 R743OSMN	4	binary	Minimum number of attempts to exceed maximum number of semaphore IDs per cycle.
180	B4 R743OSMX	4	binary	Maximum number of attempts to exceed maximum number of semaphore IDs per cycle.
184	B8 R743OSHM	4	s_float	Accumulated number of attempts to exceed maximum number of shared memory IDs during one interval.
188	BC R743OHMN	4	binary	Minimum number of attempts to exceed maximum number of shared memory IDs per cycle.
192	C0 R743OHMX	4	binary	Maximum number of attempts to exceed maximum number of shared memory IDs per cycle.
196	C4 R743OSPG	4	s_float	Accumulated number of attempts to exceed maximum number of shared memory pages during one interval.
200	C8 R743OGMN	4	binary	Minimum number of attempts to exceed maximum number of shared memory pages per cycle.
204	CC R743OGMX	4	binary	Maximum number of attempts to exceed maximum number of shared memory pages per cycle.
208	D0 R743MMAP	4	binary	Maximum number of memory map storage pages (constant).
212	D4 R743CMAP	4	s_float	Accumulated number of memory map storage pages during one interval.
216	D8 R743CAMN	4	binary	Minimum number of memory map storage pages per cycle.
220	DC R743CAMX	4	binary	Maximum number of memory map storage pages per cycle.
224	E0 R743OMAP	4	s_float	Accumulated number of attempts to exceed maximum number of memory map storage pages during one interval.
228	E4 R743OAMN	4	binary	Minimum number of attempts to exceed maximum number of memory map storage pages per cycle.
232	E8 R743OAMX	4	binary	Maximum number of attempts to exceed maximum number of memory map storage pages per cycle.
236	EC R743MPAG	4	binary	Maximum number of shared storage pages (constant).
240	F0 R743CPAG	4	s_float	Accumulated number of shared storage pages during one interval.
244	F4 R743CXMN	4	binary	Minimum number of shared storage pages per cycle.
248	F8 R743CXMN	4	binary	Maximum number of shared storage pages per cycle.
252	FC R743OPAG	4	s_float	Accumulated number of attempts to exceed maximum number of shared storage pages during one interval.
256	100 R743OXMN	4	binary	Minimum number of attempts to exceed maximum number of shared storage pages per cycle.
260	104 R743OXMN	4	binary	Maximum number of attempts to exceed maximum number of shared storage pages per cycle.
264	108 R743MSLR	4	binary	Maximum amount of storage (MB) available for shared library region.
268	10C R743CSLR	4	s_float	Accumulated amount of shared library storage (MB) allocated in one interval.
272	110 R743CLMN	4	binary	Minimum amount of shared library storage (MB) allocated per cycle.
276	114 R743CLMX	4	binary	Maximum number of shared library storage (MB) allocated per cycle.
280	118 R743OSLR	4	s_float	Accumulated number of attempts to exceed maximum amount of shared library region size during one interval.
284	11C R743OLMN	4	binary	Minimum number of attempts to exceed maximum amount of shared library region per cycle.
288	120 R743OLMX	4	binary	Maximum number of attempts to exceed maximum amount of shared library region per cycle.

Offsets	Name	Length	Format	Description
292	124 R743MQDS	4	binary	Maximum amount of queued signals allowed per process.
296	128 R743OQDS	4	s_float	Accumulated number of attempts to exceed maximum amount of queued signals per interval.
300	12C R743OQMN	4	binary	Minimum number of attempts to exceed maximum amount of queued signals per cycle.
304	130 R743OQMX	4	binary	Maximum number of attempts to exceed maximum amount of queued signals per cycle.

Subtype 4 — Coupling Facility Activity

Local Coupling Facility Data Section

One per record

Offsets	Name	Length	Format	Description														
0	0 R744FNAM	8	EBCDIC	Name of coupling facility as defined in parmlib member COUPLExx.														
8	8 R744FSYS	8	EBCDIC	Name of this system (from IEASYSxx parmlib member, SYSNAME parameter).														
16	10 R744FFLG	1	binary	Status Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Coupling facility was connected to the system at the end of the interval</td> </tr> <tr> <td>1</td> <td>Coupling facility became active during the interval</td> </tr> <tr> <td>2</td> <td>Permanent error in cycle gatherer during the complete interval</td> </tr> <tr> <td>3</td> <td>Dynamic dispatching is active. Valid if R744FLVL > 14.</td> </tr> <tr> <td>4</td> <td>Thin interrupts are enabled. Valid if R744FLVL > 18.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Coupling facility was connected to the system at the end of the interval	1	Coupling facility became active during the interval	2	Permanent error in cycle gatherer during the complete interval	3	Dynamic dispatching is active. Valid if R744FLVL > 14.	4	Thin interrupts are enabled. Valid if R744FLVL > 18.	5-7	Reserved.
Bit	Meaning when set																	
0	Coupling facility was connected to the system at the end of the interval																	
1	Coupling facility became active during the interval																	
2	Permanent error in cycle gatherer during the complete interval																	
3	Dynamic dispatching is active. Valid if R744FLVL > 14.																	
4	Thin interrupts are enabled. Valid if R744FLVL > 18.																	
5-7	Reserved.																	
17	11 R744FFLC	1	binary	Informational Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>CHPIDs set offline during the interval</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	CHPIDs set offline during the interval	1-7	Reserved.								
Bit	Meaning when set																	
0	CHPIDs set offline during the interval																	
1-7	Reserved.																	
18	12	1		Reserved.														
19	13 R744FAMV	1	binary	IXLYAMDA Version.														
20	14 R744FPAM	4	binary	Number of paths available to the coupling facility.														
24	18 R744FPBC	8	l_float	Number of times coupling facility requests fail due to path busy.														
32	20 R744FSCG	4	binary	Number of subchannels defined.														
36	24 R744FSCU	4	binary	Number of subchannels currently in use.														
40	28 R744FSCL	4	binary	Number of subchannels that can be used (limit).														
44	2C R744FSCL	8	l_float	Subchannel contention count (all subchannel busy).														
52	34 R744FTOR	8	l_float	Total number of requests from this system.														
60	3C R744FAIL	8	l_float	Number of unsuccessful requests from this system.														
68	44 R744FTIM	8	binary	Total service time for unsuccessful requests in microseconds.														
76	4C R744FSQU	8	binary	Total squares of service time for unsuccessful requests (in square-microseconds).														

Record type 74

Offsets	Name	Length	Format	Description
84	54 R744FCTM	8	binary	Total contention time (microseconds) for waiting for subchannels to become free for synchronous immediate operations.
92	5C R744FCSQ	8	binary	Total squares of contention time for waiting for subchannels to become free for synchronous immediate operations.
100	64 R744FMODE	6	EBCDIC	Coupling facility type. The type is right aligned with leading blanks if necessary.
106	6A R744FVER	3	EBCDIC	Coupling facility model.
109	6D R744FMPC	2	EBCDIC	Manufacturer plant code of the coupling facility.
111	6F R744FLPN	1	binary	Partition identifier of CF. Valid with SMF74SRL ≥ X'55'(85) and RMF version number SMF74MFV ≥ 718F
112	70 R744FLVL	4	binary	Coupling facility level.
116	74 R744FPAS	1	binary	Path-available mask for CF links.
117	75 R744FPIS	1	binary	Path-installed mask for CF links.
118	76 R744FPCM	1	binary	Composite-path mask: paths that have a physical or logical connection to the facility or that are connected to the facility in the active policy.
119	77	1		Reserved.
The following field is available eight times for eight possible channel paths.				
120	78 R744FTAP	5	EBCDIC	Channel path type acronym.
160	A0 R744FSEQ	12	EBCDIC	Sequence number of this coupling facility.
172	AC R744FPSN	2	binary	Number of shared processors. Valid if R744FLVL > 14.
174	AE R744FPDN	2	binary	Number of dedicated processors. Valid if R744FLVL > 14.
The following field is available eight times for eight possible channel paths.				
176	B0 R744FIDP	1	binary	Channel path identifier. The range of values is X'00' to X'FF'.
184	B8 R744FCPI	2	binary	Index to first channel path data section associated with this coupling facility.
186	BA R744FCPN	2	binary	Number of channel path data sections for channel paths of type CIB, CFP, or CS5 connected to this coupling facility. This count matches the number of subsequent channel path data sections.

Connectivity Data Section

One per sysplex member

Offsets	Name	Length	Format	Description
0	0 R744XSYS	8	EBCDIC	Name of remote system also reporting on this coupling facility (from IEASYSxx parmlib member, SYSNAME parameter).

Storage Data Section

One per record; contains global data that is only collected once in the sysplex.

Offsets	Name	Length	Format	Description
0	0 R744GCSD	4	binary	Total amount of control storage defined (4K-block units).
4	4 R744GCSF	4	binary	Amount of free control storage (4K-block units).
8	8 R744GTSD	4	binary	Total amount of coupling facility storage defined (4K-block units).
12	C R744GTSF	4	binary	Amount of free coupling facility storage (4K-block units).
16	10 R744GDSA	4	binary	Amount of dump space allocated (4K-block units).
20	14 R744GDSF	4	binary	Amount of free dump space (4K-block units).

Offsets	Name	Length	Format	Description
24	18 R744GDSR	4	binary	Maximum amount of dump space requested (4K-block units).
28	1C *	4		Reserved
32	20 R744GTSC	8	binary	Total amount of coupling facility storage class memory (4K-block units) which may be concurrently used as structure extensions.
40	28 R744GFSC	8	binary	Amount of free coupling facility storage class memory (4K-block units).
48	30 R744GISC	2	binary	Amount of storage class memory increment. This is the number of 4K blocks that are assigned to a single storage class memory segment.

Structure Data Section

One for each structure.

Offsets	Name	Length	Format	Description																		
0	0 R744QSTR	16	EBCDIC	Name of structure allocated in this coupling facility.																		
16	10 R744QSZ	4	binary	Structure size requested to be allocated (4K-block units).																		
20	14 R744QVER	8	binary	Structure version number.																		
28	1C R744QFLG	4	binary	Status Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Active instance of structure (normal case).</td> </tr> <tr> <td>1</td> <td>New instance during rebuild.</td> </tr> <tr> <td>2</td> <td>Old instance during rebuild.</td> </tr> <tr> <td>3</td> <td>Instance is just being added or deleted (in transition).</td> </tr> <tr> <td>4</td> <td>Instance in hold, deletion could not be finished.</td> </tr> <tr> <td>5</td> <td>Dump was initiated for this structure.</td> </tr> <tr> <td>6</td> <td>Structure rebuild in progress.</td> </tr> <tr> <td>7</td> <td>The in-progress rebuild is a duplexing rebuild.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Active instance of structure (normal case).	1	New instance during rebuild.	2	Old instance during rebuild.	3	Instance is just being added or deleted (in transition).	4	Instance in hold, deletion could not be finished.	5	Dump was initiated for this structure.	6	Structure rebuild in progress.	7	The in-progress rebuild is a duplexing rebuild.
Bit	Meaning when set																					
0	Active instance of structure (normal case).																					
1	New instance during rebuild.																					
2	Old instance during rebuild.																					
3	Instance is just being added or deleted (in transition).																					
4	Instance in hold, deletion could not be finished.																					
5	Dump was initiated for this structure.																					
6	Structure rebuild in progress.																					
7	The in-progress rebuild is a duplexing rebuild.																					
29	1D	3		Reserved.																		

Request Data Section

One for each structure

Offsets	Name	Length	Format	Description										
0	0 R744SNAM	16	EBCDIC	Name of connected structure in this coupling facility.										
16	10 R744SVER	8	binary	Structure version number.										
24	18 R744STYP	1	binary	Structure type identifier. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Unserialized List structure</td> </tr> <tr> <td>2</td> <td>Serialized List structure</td> </tr> <tr> <td>3</td> <td>Lock structure</td> </tr> <tr> <td>4</td> <td>Cache structure</td> </tr> </tbody> </table>	Value	Meaning	1	Unserialized List structure	2	Serialized List structure	3	Lock structure	4	Cache structure
Value	Meaning													
1	Unserialized List structure													
2	Serialized List structure													
3	Lock structure													
4	Cache structure													

Record type 74

Offsets	Name	Length	Format	Description								
25	19 R744SFLG	1	binary	Status Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Structure was connected to the system at the end of the interval</td> </tr> <tr> <td>1</td> <td>Structure became active during the interval</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Structure was connected to the system at the end of the interval	1	Structure became active during the interval	2-7	Reserved.
Bit	Meaning when set											
0	Structure was connected to the system at the end of the interval											
1	Structure became active during the interval											
2-7	Reserved.											
26	1A	1		Reserved.								
27	1B R744SLEC	1	binary	Lock structure only: lock table entry characteristic.								
28	1C R744SLEL	4	binary	List structure: limit on number of list entries. The estimated maximum number of list entries that may reside in storage class memory is not included. Lock structure: limit on number of data elements.								
32	20 R744SLEM	4	binary	List structure: current number of list entries in use. The number of list entries that currently reside in storage class memory is not included. Lock structure: current number of data elements in use.								
36	24 R744SLTL	4	binary	Lock structure only: limit on number of lock table entries.								
40	28 R744SLTM	4	binary	Lock structure only: Current number of lock table entries in use.								
44	2C R744SSTA	8	L_float	The number of list, lock, or cache requests that were to be executed synchronously at the coupling facility, but which were changed to an asynchronous operation due to lack of resources.								
52	34 R744STRC	8	L_float	The total number of IXLLIST, IXLCACHE, or IXLLOCK requests made. This field will not necessarily equal the sum of R744SSRC, R744SARC, and R744SSTA due to internal processing. Use of the batch unlock function can produce large discrepancies because R744STRC is incremented for each lock being released, but only one coupling facility operation is executed.								
60	3C R744STAC	8	L_float	The total number of IXLLOCK requests that could not be satisfied immediately because of lock contention.								
68	44 R744SARC	8	L_float	The total number of operations executed asynchronously at the coupling facility.								
76	4C R744SATM	8	binary	Summed service time for asynchronous requests in microseconds.								
84	54 R744SASQ	8	binary	Summed squares of service time for asynchronous requests.								
92	5C R744SSRC	8	L_float	Count of number of times for synchronous requests.								
100	64 R744SSTM	8	binary	Summed service time for synchronous requests in microseconds.								
108	6C R744SSSQ	8	binary	Summed squares of service time for synchronous requests.								
116	74 R744SQRC	8	L_float	Count of number of times for queued requests.								
124	7C R744SQTM	8	binary	Summed queue delay time in microseconds.								
132	84 R744SQSQ	8	binary	Summed squares of delay time for queued requests.								
140	8C R744SDRC	8	L_float	Number of times a request was found delayed in case of dump serialization.								
148	94 R744SDTM	8	binary	Summed dump delay time in microseconds.								
156	9C R744SDSQ	8	binary	Summed squares of dump delay time.								
164	A4 R744SDMP	8	L_float	Number of times dump serialization was found for this structure (list and cache structures only).								
172	AC R744SHTO	8	L_float	Total number of requests waiting on the high priority queue.								

Offsets	Name	Length	Format	Description
180	B4 R744SHMN	4	binary	Minimum number of requests waiting on the high priority queue during this interval.
184	B8 R744SHMX	4	binary	Maximum number of requests waiting on the high priority queue during this interval.
188	BC R744SLTO	8	L_float	Total number of requests waiting on the low priority queue.
196	C4 R744SLMN	4	binary	Minimum number of requests waiting on the low priority queue during this interval.
200	C8 R744SLMX	4	binary	Maximum number of requests waiting on the low priority queue during this interval.
204	CC R744SDTO	8	L_float	Total number of requests delayed because dump serialization is in progress.
212	D4 R744SDMN	4	binary	Minimum number of requests delayed because dump serialization is in progress during this interval.
216	D8 R744SDMX	4	binary	Maximum number of requests delayed because dump serialization is in progress during this interval.
220	DC R744SCN	8	L_float	Lock structure only: number of times any request encountered lock contention.
228	E4 R744SFCN	8	L_float	Lock structure only: number of times any request encountered false lock contention (storage contention within the structure).
236	EC R744SSIZ	4	binary	Allocated size of structure (units = 4K byte blocks).
240	F0 R744SMAS	4	binary	Maximum structure size.
244	F4 R744SMIS	4	binary	Minimum structure size.
248	F8 R744SDEC	4	binary	Cache structure only: Total directory entry count.
252	FC R744SDEL	4	binary	Cache structure only: Total data element count.
256	100 R744SNLH	4	binary	List structure only: Number of list headers.
260	104 R744SMAE	4	binary	List structure only: maximum number of elements. The estimated maximum number of list elements that may reside in storage class memory is not included.
264	108 R744SCUE	4	binary	List structure only: current number of elements in use. The number of list elements that currently reside in storage class memory is not included.
268	10C R744CDSI	2	binary	Index to first Cache data section.
270	10E R744CDNE	2	binary	Number of Cache data section entries.
272	110 R744SPLN	8	L_float	Count of peer-link-not-available conditions.
280	118 R744SPES	8	L_float	Count of execution-suppressed conditions.
288	120 R744SPTC	8	L_float	Count of waiting-for-peer-subchannel conditions.
296	128 R744SPST	8	binary	Total peer-subchannel-wait time (microseconds).
304	130 R744SPSS	8	binary	Square of total peer-subchannel-wait time (microseconds squared).
312	138 R744SRTC	8	L_float	Count of condition 'waiting for peer subchannel with reserve held'.
320	140 R744SRST	8	binary	Total peer-subchannel-wait-with-reserve time (microseconds).
328	148 R744SRSS	8	binary	Square of total peer-subchannel-wait-with-reserve time (microseconds squared).
336	150 R744SCTC	8	L_float	Count of condition 'waiting for peer completion'.
344	158 R744SCST	8	binary	Total waiting-for-peer-completion time (microseconds).
352	160 R744SCSS	8	binary	Square of total waiting-for-peer-completion time (microseconds squared).
360	168 R744SLSV	8	binary	Logical structure version number.
368	170 R744SETM	8	L_float	Structure execution time (microseconds). Valid if R744FLVL > 14.

Record type 74

Offsets	Name	Length	Format	Description
376	178 R744SISC	2	binary	Index to Storage Class Memory data section. This field is zero if there is no SCM information available.
378	17A R744SNSC	2	binary	Number of Storage Class Memory data sections.
380	17C R744SSAC	4	binary	Count of Storage Class Memory Access Required conditions that require the request to be restarted.
384	180 R744SOSA	4	binary	Count of successful operations to the coupling facility that encountered an SCM Access Required condition.

Processor Utilization Data Section

One for each processor

Offsets	Name	Length	Format	Description						
0	0 R744PNUM	4	binary	CPU number.						
4	4 R744PBSY	4	binary	Busy time (in microseconds).						
8	8 R744PWAI	4	binary	Wait time (in microseconds).						
12	C R744PTYF	1	binary	Processor flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Processor is dedicated. Valid if R744FLVL > 14.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Processor is dedicated. Valid if R744FLVL > 14.	1-7	Reserved.
Bit	Meaning when set									
0	Processor is dedicated. Valid if R744FLVL > 14.									
1-7	Reserved.									
13	D	1		Reserved.						
14	E R744PWGT	2	binary	Shared processor weight. Valid if R744FLVL > 14.						

Cache Data Section

Several sections for each request section are possible, depending on applications using the coupling facility.

Offsets	Name	Length	Format	Description
0	0 R744CRHC	8	l_float	Read hit counter.
8	8 R744CRMD	8	l_float	Read miss, directory hit counter.
16	10 R744CRMA	8	l_float	Read miss, assignment suppressed counter.
24	18 R744CRMN	8	l_float	Read miss, name assigned counter.
32	20 R744CRMT	8	l_float	Read miss, target storage class full.
40	28 R744CWH0	8	l_float	Write hit change bit 0 - number of times unchanged data was written.
48	30 R744CWH1	8	l_float	Write hit change bit 1 - number of times changed data was written.
56	38 R744CWMN	8	l_float	Write miss not registered counter.
64	40 R744CWMI	8	l_float	Write miss invalid state counter.
72	48 R744CWMT	8	l_float	Write miss storage class full counter.
80	50 R744CDER	8	l_float	Directory entry reclaim counter.
88	58 R744CDTR	8	l_float	Data entry reclaim counter.
96	60 R744CXDR	8	l_float	XI directory reclaim counter.
104	68 R744CXFW	8	l_float	XI write counter.
112	70 R744CXNI	8	l_float	XI name invalidation counter.
120	78 R744CXCI	8	l_float	XI complement invalidation counter.
128	80 R744CCOC	8	l_float	Castout counter.
136	88 R744CRSM	8	l_float	Reference signal miss counter.
144	90 R744CTSF	8	l_float	Target storage class full counter.

Offsets	Name	Length	Format	Description
152	98 R744CDEC	4	binary	Directory entry counter snapshot.
156	9C R744CDAC	4	binary	Data element counter snapshot.
160	A0 R744CTCC	4	binary	Total changed counter.
164	A4 R744CDTA	4	binary	Data area counter.
168	A8 R744CRLC	8	l_float	Completed reference list counter.
176	B0 R744CPRL	8	l_float	Partially completed reference list counter.
184	B8 R744CXRL	8	l_float	XI for local cache vector index replacement.
192	C0 R744CWUC	8	l_float	Write unchanged counter.

Remote Facility Data Section

One section for each duplexing coupling facility.

Offsets	Name	Length	Format	Description
0	0 R744RNDE	32	EBCDIC	Hardware node descriptor for the remotely connected CF.
32	20 R744RSYS	8	EBCDIC	System identification value for the remotely connected CF.
40	28 R744RNAM	8	EBCDIC	CF name (if applicable, else X'0').
48	30 R744RPGS	1	binary	Path group size.
49	31	3		Reserved.
52	34 R744RRES	4	binary	Ready-to-execute signal counter.
56	38 R744RRCS	4	binary	Ready-to-complete signal counter.
60	3C R744RHES	4	binary	Halt-execution signal counter.
64	40 R744RRSS	4	binary	Request-for-suppression signal counter.
68	44 R744RRSA	4	binary	Request-for-suppression-accepted signal counter.
72	48 R744RSST	4	binary	Unused. Value is now in R744RSSE.
76	4C R744RSSS	8	binary	Total squares of signal service times.
84	54 R744RDSC	4	binary	Delayed signal counter.
88	58 R744RSDT	4	binary	Total signal delay times in microseconds.
92	5C R744RSSD	8	binary	Total squares of signal times.
100	64 R744RSRS	4	binary	Signal-redrives signal counter.
The following field is available eight times for eight possible channel paths.				
104	68 R744RTAP	5	EBCDIC	Channel path type acronym. A CHPID type is provided for each active message path in the path group. The number of valid entries is equal to the path group size.
144	90 R744RSSE	8	binary	Sum of signal service times in microseconds.
The following field is available eight times for eight possible channel paths.				
152	98 R744RIDP	1	binary	Channel path identifier. The range of values is X'00' to X'FF'.
160	A0 R744RCPI	2	binary	Index to first channel path data section associated with this remote coupling facility.
162	A2 R744RCPN	2	binary	Number of channel path data sections for channel paths of type CIB, CFP, or CS5 connected to this remote coupling facility. This count matches the number of subsequent channel path data sections.

Channel path data section

One section for each channel path of type CIB, CFP, or CS5 associated with a coupling facility.

Offsets	Name	Length	Format	Description
0	0 R744HCPI	1	binary	Channel path identifier. The range of values is X'00' to X'FF'.

Record type 74

Offsets	Name	Length	Format	Description
1	1 R744HTAP	5	EBCDIC	Channel path type acronym.
6	6 R744HFLA	4	binary	Validity bit mask. Each bit position represents the validity of a channel path attribute. Bit Meaning when set 0 HCA ID and port number are valid. 1 Channel path operation mode is valid. 2 Channel path latency time is valid. 3 Degraded status flag is valid. 4-7 The corresponding field in the array of I/O processors is valid. 8 Physical channel ID is valid. 9-31 Reserved.
10	A R744HOPM	1	binary	Channel path operation mode. It describes the channel path type, data rate, protocol and adapter type. Value Meaning X'01' CFP path supporting a 1.0625 Gbit/s data rate X'02' CFP path supporting a 2.125 Gbit/s data rate X'10' CIB path operating at 1x bandwidth using the IFB protocol, adapter type HCA2-0 LR X'11' CIB path operating at 12x bandwidth using the IFB protocol, adapter type HCA2-0 X'20' CIB path operating at 1x bandwidth using the IFB protocol, adapter type HCA3-0 LR X'21' CIB path operating at 12x bandwidth using the IFB protocol, adapter type HCA3-0 X'30' CIB path operating at 12x bandwidth using the IFB3 protocol, adapter type HCA3-0 X'40' CS5 path operating at 8x bandwidth using the PCIe third generation protocol, adapter type PCIe-0 Other Unknown
11	B R744HCHF	1	binary	Status flags. Bit Meaning when set 0 Channel path is operating at reduced capacity (degraded) or is not operating at the end of the interval. 1-7 Reserved.
12	C R744HLAT	4	binary	Channel path latency time. This is the average round-trip path time in microseconds. A value of 0 means that the time was not measured. A value of 1 means a time less than or equal to one microsecond.
16	10 R744HPCP	2	binary	Physical channel ID (PCHID)
18	12 R744HAID	2	binary	Host channel adapter ID
20	14 R744HAPN	1	binary	Host channel adapter port number
21	15	3		Reserved.
The following field is available four times for each I/O processor.				
24	18 R744HSAP	1	binary	I/O processor (System Assist Processor) to which this path is accessible. The range of values is X'00' to X'FF'.

Offsets	Name	Length	Format	Description
28	1C	4		Reserved.

Storage Class Memory Data Section

One for each structure that is allocated with storage class memory.

Offsets	Name	Length	Format	Description
0	0 R744MSMA	8	binary	Maximum amount of storage class memory the structure can use (4K-block units).
8	8 R744MALG	1	binary	SCM algorithm type.
9	9 *	3	binary	Reserved.
12	C R744MFAU	4	binary	Fixed augmented space (4K-block units).
16	10 *	4	binary	Reserved.
20	14 R744MIUA	4	binary	Amount of augmented space that is in use by this structure (4K-block units).
24	18 R744MIUS	8	binary	Amount of storage class memory that is in use by this structure (4K-block units).
32	20 *	4	binary	Reserved.
36	24 R744MEMA	4	binary	Estimated maximum amount of space that may be assigned as augmented space for this structure (4K-block units).
40	28 R744MEML	8	binary	Estimated maximum number of list entries that may reside in storage class memory for this structure.
48	30 R744MEME	8	binary	Estimated maximum number of list elements that may reside in storage class memory for this structure.
56	38 R744MENL	8	binary	Number of existing structure list entries that reside in storage class memory for this structure.
64	40 R744MENE	8	binary	Number of existing structure list elements that reside in storage class memory for this structure.
72	48 R744MSLT	1	binary	Percentage of the list entry and list element counts that determines the lower threshold for migration from storage class memory to CF storage.
73	49 R744MSUT	1	binary	Percentage of the list entry and list element counts that determines the upper threshold for migration from CF storage to storage class memory.
74	4A R744MSLR	1	binary	Percentage of the list entry and list element counts that determines the lower threshold regulator for migration from CF storage class memory to CF real storage. The lower threshold regulators are used to stop migration from CF SCM into CF real storage after being triggered by the lower threshold.
75	4B R744MSUR	1	binary	Percentage of the list entry and list element counts that determines the upper threshold regulator for migration from CF real storage to CF storage class memory. The upper threshold regulators are used to stop migration from CF real storage into CF SCM after being triggered by the upper threshold.
76	4C R744MSWC	4	binary	SCM write count. The number of list write operations performed to storage class memory.
80	50 R744MRFC	4	binary	The number of read operations against storage class memory that were initiated by a reference to list structure objects residing in storage class memory.
84	54 R744MRPC	4	binary	The number of read operations against storage class memory that were initiated as a prefetch operation in order to retrieve list structure objects in storage class memory that are expected to be referenced.

Record type 74

Offsets	Name	Length	Format	Description
88	58 R744MRST	8	binary	Total amount of service times for read operations from storage class memory in microseconds.
96	60 R744MRSQ	8	binary	Total amount of squares of service times for read operations from storage class memory in square-microseconds.
104	68 R744MWST	8	binary	Total amount of service times for write operations to storage class memory in microseconds.
112	70 R744MWSQ	8	binary	Total amount of squares of service times for write operations to storage class memory in square-microseconds.
120	78 R744MRBT	8	binary	SCM read bytes transferred. This is the number of bytes in 4K units transferred from storage class memory to CF storage.
128	80 R744MWBT	8	binary	SCM write bytes transferred. This is the number of bytes in 4K units transferred from CF storage to storage class memory.
136	88 R744MAEC	4	binary	SCM auxiliary enabled command count. This is the number of commands that required the use of CF auxiliary frames.
140	8C R744MSRL	4	binary	The number of references against storage class memory to locate list structure objects.
144	90 R744MSRR	4	binary	The number of references against storage class memory to resolve list entry key hashing.
148	94 R744MSRM	4	binary	The number of references against storage class memory for the purpose of migrating list structure objects from CF storage to storage class memory to allow the creation of new list structure objects in CF storage.
152	98 R744MMLBL	4	binary	The maximum number of list entries that can be stored in a single storage class memory buffer.
156	9C R744MMBE	4	binary	The maximum number of list elements that can be stored in a single storage class memory buffer.
160	A0 R744MNEL	4	binary	The minimum number of list elements that must be available for assignment after the specified allocation process completes.
164	A4 R744MNEC	4	binary	The minimum number of list entries that must be available for assignment after the specified allocation process completes.
168	A8 R744MSRK	4	binary	The number of references against storage class memory for the purpose of migrating list structure objects from storage class memory to CF storage to allow for key-range initialization to complete.

Subtype 5 — Cache Subsystem Device Activity

Cache Control Section

There is one section per record.

Offsets	Name	Length	Format	Description
0	0 R745CLVL	1	binary	Gatherer level.
1	1 R745CMDL	1	binary	Caching subsystem model.
2	2 R745CCNT	1	binary	Record sequence number.
3	3 R745CUID	1	EBCDIC	Real control unit ID.

Offsets	Name	Length	Format	Description										
4	4 R745CSC	1	binary	Status code. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Successful processed.</td> </tr> <tr> <td>4</td> <td>IOS return code R745CIOC \neq 0.</td> </tr> <tr> <td>8</td> <td>IDCSS01 return code R745CRTN \neq 0.</td> </tr> <tr> <td>98</td> <td>SYSTEM or USER ABEND R745CEA \neq 0.</td> </tr> </tbody> </table>	Value	Meaning	0	Successful processed.	4	IOS return code R745CIOC \neq 0.	8	IDCSS01 return code R745CRTN \neq 0.	98	SYSTEM or USER ABEND R745CEA \neq 0.
Value	Meaning													
0	Successful processed.													
4	IOS return code R745CIOC \neq 0.													
8	IDCSS01 return code R745CRTN \neq 0.													
98	SYSTEM or USER ABEND R745CEA \neq 0.													
5	5 R745CAE	3	binary	ABEND CODE (SDWACMPC): First 12 bits = System completion code. Second 12 bits = User completion code.										
8	8 R745CRTN	2	binary	IDCSS01 return code. If not zero, record has no Device data sections (SMF745DN=0).										
10	A R745CIOC	1	binary	IOS return code. If not zero, record has no Device data sections (SMF745DN = 0).										
11	B	1		Reserved.										
12	C R745CINT	4	binary	Number of seconds since subsystem statistics last collected.										
16	10 R745CCMT	28	EBCDIC	Hardware type and model of the control unit.										
44	2C	1		Reserved										
45	2D R745CFDV	3	binary	Failing device										

Cache device data section

There is one section per device.

Offsets	Name	Length	Format	Description								
0	0 R745DVOL	6	EBCDIC	Volume serial of device.								
6	6 R745DFL4	1	binary	Flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>4-digit device address.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	4-digit device address.	1-7	Reserved.		
Bit	Meaning when set											
0	4-digit device address.											
1-7	Reserved.											
7	7 R745DCID	1	EBCDIC	Real control unit type code.								
7	7 R745DCCU	1	EBCDIC	Configured control unit type code if R745CMDL = 1.								
8	8 R745DUNT	3	binary	Unit address for sense command.								
11	B	1		Reserved.								
12	C R745DEVN	2	binary	Device number.								
14	E	2		Reserved.								
16	10 R745DFLG	1	binary	Flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem storage not available.</td> </tr> <tr> <td>1-3</td> <td>Reserved.</td> </tr> <tr> <td>4-7</td> <td>Format of data returned: B'0000' = 40 bytes sense. B'1111' = 44 bytes sense. </td> </tr> </tbody> </table>	Bit	Meaning when set	0	Subsystem storage not available.	1-3	Reserved.	4-7	Format of data returned: B'0000' = 40 bytes sense. B'1111' = 44 bytes sense.
Bit	Meaning when set											
0	Subsystem storage not available.											
1-3	Reserved.											
4-7	Format of data returned: B'0000' = 40 bytes sense. B'1111' = 44 bytes sense.											

Record type 74

Offsets	Name	Length	Format	Description												
17	11 R745DVID	1	binary	Device address.												
18	12 R745DVS1	1	binary	Addressed device status flag # 1: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Device caching status: B'00' = Caching activated. B'01' = Not used. B'10' = Deactivate pending. B'11' = Caching deactivated.</td> </tr> <tr> <td>2-3</td> <td>DASD fast write device status: B'00' = DFW allowed B'01' = DFW not used B'10' = DFW deactivate pending B'11' = DFW deactivate</td> </tr> <tr> <td>4</td> <td>Primary of duplex pair.</td> </tr> <tr> <td>5</td> <td>Secondary of duplex pair.</td> </tr> <tr> <td>6-7</td> <td>Duplex pair status: B'00' = Duplex pair available. B'01' = Duplex pair pending. B'10' = Failed duplex primary. B'11' = Failed duplex not primary.</td> </tr> </tbody> </table>	Bit	Meaning	0-1	Device caching status: B'00' = Caching activated. B'01' = Not used. B'10' = Deactivate pending. B'11' = Caching deactivated.	2-3	DASD fast write device status: B'00' = DFW allowed B'01' = DFW not used B'10' = DFW deactivate pending B'11' = DFW deactivate	4	Primary of duplex pair.	5	Secondary of duplex pair.	6-7	Duplex pair status: B'00' = Duplex pair available. B'01' = Duplex pair pending. B'10' = Failed duplex primary. B'11' = Failed duplex not primary.
Bit	Meaning															
0-1	Device caching status: B'00' = Caching activated. B'01' = Not used. B'10' = Deactivate pending. B'11' = Caching deactivated.															
2-3	DASD fast write device status: B'00' = DFW allowed B'01' = DFW not used B'10' = DFW deactivate pending B'11' = DFW deactivate															
4	Primary of duplex pair.															
5	Secondary of duplex pair.															
6-7	Duplex pair status: B'00' = Duplex pair available. B'01' = Duplex pair pending. B'10' = Failed duplex primary. B'11' = Failed duplex not primary.															
19	13 R745DVS2	1	binary	Addressed device status flag # 2. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Device is failed duplex.</td> </tr> <tr> <td>1</td> <td>Pinned data exits for device.</td> </tr> <tr> <td>2-7</td> <td>Other device in duplex pair.</td> </tr> </tbody> </table>	Bit	Meaning	0	Device is failed duplex.	1	Pinned data exits for device.	2-7	Other device in duplex pair.				
Bit	Meaning															
0	Device is failed duplex.															
1	Pinned data exits for device.															
2-7	Other device in duplex pair.															
20	14 R745DRCR	4	s_float	Search read caching requests.												
24	18 R745DCRH	4	s_float	Search read caching hits.												
28	1C R745DWRC	4	s_float	Write caching requests.												
32	20 R745DWCH	4	s_float	Write caching request hits.												
36	24 R745DRSR	4	s_float	Read sequential requests.												
40	28 R745DRSH	4	s_float	Read sequential request hits.												
44	2C R745DWSR	4	s_float	Write sequential requests.												
48	30 R745DWSH	4	s_float	Write sequential request hits.												
52	34 R745DRNR	4	s_float	Search read non-retentive requests.												
56	38 R745DNRH	4	s_float	Search read non-retentive request hits.												
60	3C R745DWNR	4	s_float	Write non-retentive requests.												
64	40 R745DWNH	4	s_float	Write non-retentive hits.												
68	44 R745DICL	4	s_float	Inhibit cache load requests.												
72	48 R745DBCR	4	s_float	Bypass cache requests.												
76	4C R745DTC	4	s_float	Sequential DASD to cache XFRs.												
80	50 R745DNTD	4	s_float	Normal cache requests DASD to cache XFRs.												
84	54 R745DCTD	4	s_float	Cache to DASD XFRs.												
88	58 R745DFWB	4	s_float.	Fast write bypass count.												
92	5C R745DFWC	4	s_float	Fast write caching requests.												
96	60 R745DFWS	4	s_float	Fast write sequential requests.												

Offsets	Name	Length	Format	Description
100	64 R745DCRM	4	s_float	Record cache read misses.
104	68 R745DSG2	1	binary	Device status group 2. Bit Meaning 0-1 Record cache optimization level: B'00' = Full adapt rec cache B'01' = Adapt rec. cache writes B'10' = Rec cache on def ext B'11' = Track mode 2 Data exits in failed NVS. 3 Defective battery, destage pending. 4-5 Volume state: B'00' = Non spare. B'01' = Reserved. B'10' = Spare. B'11' = Broken spare. 6-7 Pinned data: B'00' = No pinned data and FW. B'01' = Pinned data and not FW suspend. B'10' = Reserved. B'11' = Pinned data and FW suspend.
105	69 R745INCR	1	binary	Status code. 0 Transfer statistics not valid. 1 Transfer statistics valid. Bytes in units of 128K. Times in units of 16 milliseconds.
106	6A R745DSID	2	binary	Subsystem ID.
108	6C R745DCWP	4	s_float	RCD cache write promotions.
112	70 R745DKDW	4	s_float	CKD writes, collected for 3990-03/06 and 2105.
116	74 R745DKDWH	4	s_float	CKD write hits, collected for 3990-03/06 and 2105.
120	78 R745DFWR	4	s_float	CFW bypass, collected for 3990-03/06 and 2105.
124	7C R745BYTR	4	s_float	Bytes read. See R745INCR.
128	80 R745BYTW	4	s_float	Bytes written. See R745INCR.
132	84 R745RTIR	4	s_float	Response time to read bytes. See R745INCR.
136	88 R745RTIW	4	s_float	Response time to write bytes. See R745INCR.

Cache device data section extension

There is one section per device.

This extension applies only to control unit types 3990-03/06. It is collected by RMF to provide the same data as in the corresponding CRR record.

Offsets	Name	Length	Format	Description
0	0 R745XDVN	2	binary	Device number.
2	2	2		Reserved.
4	4 R745XRSV	4	s_float	Lower interface I/O response time (in milliseconds).
8	8 R745XCTC	4	s_float	Not used by RMF.
12	C R745XCTR	4	s_float	Not used by RMF.

Record type 74

Offsets	Name	Length	Format	Description
16	10 R745XVRD	4	s_float	Not used by RMF.
20	14 R745XVRH	4	s_float	Not used by RMF.
24	18 R745XVWR	4	s_float	Not used by RMF.
28	1C R745XVWH	4	s_float	Not used by RMF.
32	20 R745XSRR	4	s_float	Not used by RMF.
36	24 R745XFRD	4	s_float	Not used by RMF.
40	28 R745XWCC	4	s_float	Not used by RMF.
44	2C R745XPRC	4	s_float	Not used by RMF.
48	30 R745XCT1	4	s_float	Not used by RMF.
52	34 R745XCT2	4	s_float	Not used by RMF.
56	38 R745XCT3	4	s_float	Not used by RMF.
60	3C R745XCT4	4	s_float	Not used by RMF.
64	40 R745XCT5	4	s_float	Not used by RMF.
68	44 R745XCT6	4	s_float	Not used by RMF.
72	48 R745XCT7	4	s_float	Not used by RMF.
76	4C R745XCT8	4	s_float	Not used by RMF.
80	50 R745XCT9	4	s_float	Not used by RMF.
84	54 R745XCTA	4	s_float	Not used by RMF.

Cache control unit status data section

There is one section per record.

Offsets	Name	Length	Format	Description												
0	0 R745SVOL	6	EBCDIC	Volume serial of device.												
6	6	2		Reserved.												
8	8 R745SUNT	3	binary	Unit address for sense command.												
11	B	1		Reserved.												
12	C R745SDEV	2	binary	Device number.												
14	E R745SLN	2	binary	Length of data section.												
16	10 R745SFT	1	binary	Status data format. <table border="0"> <tr> <td>Bit</td> <td>Meaning</td> </tr> <tr> <td>0-3</td> <td>Reserved.</td> </tr> <tr> <td>4-7</td> <td>Format of data returned:</td> </tr> <tr> <td></td> <td>B'....0000' = 40 bytes sense</td> </tr> <tr> <td></td> <td>B'.....1' = 44 bytes sense/unit KB</td> </tr> <tr> <td></td> <td>B'.....10' = 96 bytes sense/unit KB</td> </tr> </table>	Bit	Meaning	0-3	Reserved.	4-7	Format of data returned:		B'....0000' = 40 bytes sense		B'.....1' = 44 bytes sense/unit KB		B'.....10' = 96 bytes sense/unit KB
Bit	Meaning															
0-3	Reserved.															
4-7	Format of data returned:															
	B'....0000' = 40 bytes sense															
	B'.....1' = 44 bytes sense/unit KB															
	B'.....10' = 96 bytes sense/unit KB															
17	11 R745SDID	1	binary	Device ID.												
18	12 R745SNAD	1	binary	Number of attached devices.												
19	13 R745SNSS	1	binary	Number of statistic sets.												

Offsets	Name	Length	Format	Description
20	14 R745SCS	1	binary	Caching status. Bit Meaning 0-2 Overall caching status: B'000' = Caching active. B'001' = Pending active. B'010' = Subsystem error. B'011' = Reserved. B'100' = Host or support facility deactivated. B'101' = Cache suspended. B'110' = Pending off in process. B'111' = Pending off failure. 3 Disabled for maintenance. 4-5 Reserved. 6 IML device not available. 7 Non-retentive deactivated.
21	15 R745SVSS	1	binary	Non-volatile storage status. Bit Meaning 0 Host termination. 1 Problem termination. 2 Reserved. 3 Disabled for maintenance. 4 Pending due to problem. 5-7 Reserved.
22	16 R745SCLN	2	binary	Length of subsystem count area.
24	18	2		Reserved.
26	1A R745SCNF	4	binary	Configured subsystem storage.
30	1E R745SAVL	4	binary	Available subsystem storage.
34	22 R745SPIN	4	binary	Pinned subsystem storage, collected for 3990-03/06 and 2105 only.
38	26 R745SOFF	4	binary	Offline subsystem storage, collected for 3990-03/06 and 2105 only.

Record type 74

Offsets	Name	Length	Format	Description																																				
42	2A R745SDS1	1	binary	<p>Addressed device status 1.</p> <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Device caching status:</td> </tr> <tr> <td></td> <td>B'00' = Activated.</td> </tr> <tr> <td></td> <td>B'01' = Not used.</td> </tr> <tr> <td></td> <td>B'10' = Deactivate pending.</td> </tr> <tr> <td></td> <td>B'11' = Deactivated.</td> </tr> <tr> <td>2-3</td> <td>DASD fast write status:</td> </tr> <tr> <td></td> <td>B'00' = DFW allowed.</td> </tr> <tr> <td></td> <td>B'01' = Not used.</td> </tr> <tr> <td></td> <td>B'10' = Deactivate pending.</td> </tr> <tr> <td></td> <td>B'11' = Deactivated.</td> </tr> <tr> <td>4</td> <td>Primary duplex pair.</td> </tr> <tr> <td>5</td> <td>Secondary duplex pair.</td> </tr> <tr> <td>6-7</td> <td>Duplex pair status:</td> </tr> <tr> <td></td> <td>B'00' = Available.</td> </tr> <tr> <td></td> <td>B'01' = Pending.</td> </tr> <tr> <td></td> <td>B'10' = Failed primary.</td> </tr> <tr> <td></td> <td>B'11' = Failed not primary.</td> </tr> </tbody> </table>	Bit	Meaning	0-1	Device caching status:		B'00' = Activated.		B'01' = Not used.		B'10' = Deactivate pending.		B'11' = Deactivated.	2-3	DASD fast write status:		B'00' = DFW allowed.		B'01' = Not used.		B'10' = Deactivate pending.		B'11' = Deactivated.	4	Primary duplex pair.	5	Secondary duplex pair.	6-7	Duplex pair status:		B'00' = Available.		B'01' = Pending.		B'10' = Failed primary.		B'11' = Failed not primary.
Bit	Meaning																																							
0-1	Device caching status:																																							
	B'00' = Activated.																																							
	B'01' = Not used.																																							
	B'10' = Deactivate pending.																																							
	B'11' = Deactivated.																																							
2-3	DASD fast write status:																																							
	B'00' = DFW allowed.																																							
	B'01' = Not used.																																							
	B'10' = Deactivate pending.																																							
	B'11' = Deactivated.																																							
4	Primary duplex pair.																																							
5	Secondary duplex pair.																																							
6-7	Duplex pair status:																																							
	B'00' = Available.																																							
	B'01' = Pending.																																							
	B'10' = Failed primary.																																							
	B'11' = Failed not primary.																																							
43	2B R745SDS2	1	binary	<p>Addressed device status 2.</p> <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Device is failed duplex.</td> </tr> <tr> <td>1</td> <td>Pinned data.</td> </tr> <tr> <td>2-7</td> <td>Other device in duplex.</td> </tr> </tbody> </table>	Bit	Meaning	0	Device is failed duplex.	1	Pinned data.	2-7	Other device in duplex.																												
Bit	Meaning																																							
0	Device is failed duplex.																																							
1	Pinned data.																																							
2-7	Other device in duplex.																																							
44	2C R745SCNV	4	binary	Configured non-volatile cache, collected for 3990-03/06 and 2105 only.																																				
48	30 R745SPND	4	binary	Pinned non-volatile cache, collected for 3990-03/06 and 2105 only.																																				

Offsets	Name	Length	Format	Description
52	34 R745SG2	1	binary	Device status group 2. Bit Meaning 0-1 Cache optimization level: B'00' = Rec full adapt. B'01' = Write rec adapt. B'10' = Def ext record. B'11' = Track mode. 2 Data on failed NVS. 3 Defective battery destage pending. 4-5 Volume state: B'00' = Non spare. B'01' = Reserved. B'10' = Spare. B'11' = Broken spare. 6-7 Pinned data: B'00' = Not pinned and FW. B'01' = Pinned and not FW suspended. B'10' = Reserved. B'11' = Pinned and FW suspended.
53	35 R745SGL	1	binary	Global status. Bit Meaning 0 CFW and DFW suspended. 1-7 Reserved.
54	36 R745SSID	2	binary	Subsystem ID.
56	38	1		Reserved.
57	39	1		Reserved.
58	3A	1		Reserved.
59	3B	1		Reserved.
60	3C	12		Reserved.

RAID Rank/Extent Pool Data Section

There is one section per device.

Offsets	Name	Length	Format	Description
0	0 R7451DVN	2	binary	Device number (binary).
2	2 R7451INC	1	binary	Flag Bit Meaning when set 0-3 Reserved. 4 zHPF read and write I/O requests R7451CT5 and R7451CT6 are available. 5-6 Measurement units: • B'00' = Bytes in units of 128K, and times in units of 16 milliseconds. • B'01', B'10', B'11' = Reserved. 7 Transfer statistics R7451XFR are valid.
3	3	1		Reserved.

Record type 74

Offsets	Name	Length	Format	Description										
4	4 R7451RSV	4	s_float	Lower interface I/O response time (in milliseconds).										
8	8 R7451FLG	1	binary	Flag. <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No additional information</td> </tr> <tr> <td>1</td> <td>RAID rank data.</td> </tr> <tr> <td>2</td> <td>Extent pool and physical storage data.</td> </tr> </tbody> </table>	Value	Meaning	0	No additional information	1	RAID rank data.	2	Extent pool and physical storage data.		
Value	Meaning													
0	No additional information													
1	RAID rank data.													
2	Extent pool and physical storage data.													
9	9 R7451AID	1	binary	Device adapter ID. Only valid with RAID rank data.										
10	A R7451RID ⁽²⁾	2	binary	RAID rank ID.										
10	A R7451XID ⁽³⁾	2	binary	Extent pool ID.										
12	C R7451HDD ⁽¹⁾⁽²⁾	1	binary	Number of HDDs in RAID rank.										
12	C R7452XTY ⁽³⁾	1	binary	Extent type: <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'04'</td> <td>FB 1Gb</td> </tr> <tr> <td>X'84'</td> <td>CKD 1Gb</td> </tr> </tbody> </table>	Value	Meaning	X'04'	FB 1Gb	X'84'	CKD 1Gb				
Value	Meaning													
X'04'	FB 1Gb													
X'84'	CKD 1Gb													
13	D R7451RTY ⁽²⁾	1	binary	RAID rank type. <table> <thead> <tr> <th>Value</th> <th>Type</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>RAID-5</td> </tr> <tr> <td>1</td> <td>JBOD</td> </tr> <tr> <td>2</td> <td>RAID-10</td> </tr> </tbody> </table>	Value	Type	0	RAID-5	1	JBOD	2	RAID-10		
Value	Type													
0	RAID-5													
1	JBOD													
2	RAID-10													
13	D R7452XFL ⁽³⁾	1	binary	Extent pool flag: <table> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Dynamic extent allocation</td> </tr> <tr> <td>1</td> <td>Data sharing</td> </tr> <tr> <td>2</td> <td>Migrating/migration state</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Dynamic extent allocation	1	Data sharing	2	Migrating/migration state	3-7	Reserved.
Bit	Meaning when set													
0	Dynamic extent allocation													
1	Data sharing													
2	Migrating/migration state													
3-7	Reserved.													
14	E R7451HSS ⁽¹⁾	2	binary	HDD sector size.										
16	10 R7451RRQ ⁽¹⁾⁽²⁾	4	s_float	RAID rank read requests.										
16	10 R7452PRO ⁽³⁾	4	s_float	Physical storage read operations.										
20	14 R7451WRQ ⁽¹⁾⁽²⁾	4	s_float	RAID rank write requests.										
20	14 R7452PWO ⁽³⁾	4	s_float	Physical storage write operations.										
24	18 R7451SR ⁽¹⁾⁽²⁾	4	s_float	RAID rank FB sectors read.										
24	18 R7452PBR ⁽³⁾	4	s_float	Physical storage bytes read. For units, see bits 5 and 6 of R7451INC.										
28	1C R7451SW ⁽¹⁾⁽²⁾	4	s_float	RAID rank FB sectors written.										
28	1C R7452PBW ⁽³⁾	4	s_float	Physical storage bytes written. For units, see bits 5 and 6 of R7451INC.										
32	20 R7451RMR	4	s_float	Record mode read request.										
36	24 R7451XSF	4	s_float	Extended-Remote-Copy(XRC) or Concurrent-Copy(CC) sidefile read request.										
40	28 R7451XCW	4	s_float	XRC or CC contaminated writes.										
44	2C R7451TSP	4	s_float	Number of tracks transferred to secondary Peer-to-Peer-Remote-Copy(PPRC) volume.										
48	30 R7451NVS	4	s_float	NVS space allocation.										
52	34 R7451RRT ⁽¹⁾⁽²⁾	4	s_float	RAID rank read response time (in milliseconds).										

Offsets	Name	Length	Format	Description
52	34 R7452PRT ⁽³⁾	4	s_float	Physical storage read response time. For units, see bits 5 and 6 of R7451INC.
56	38 R7451WRT ⁽¹⁾⁽²⁾	4	s_float	RAID rank write response time (in milliseconds).
56	38 R7452PWT ⁽³⁾	4	s_float	Physical storage write response time. For units, see bits 5 and 6 of R7451INC.
60	3C R7451CT1	4	s_float	Bytes read. For units, see bits 5 and 6 of R7451INC.
64	40 R7451CT2	4	s_float	Bytes written. For units, see bits 5 and 6 of R7451INC.
68	44 R7451CT3	4	s_float	Read response time. For units, see bits 5 and 6 of R7451INC.
72	48 R7451CT4	4	s_float	Write response time. For units, see bits 5 and 6 of R7451INC.
76	4C R7451CT5	4	s_float	Number of zHPF read I/O requests (valid if bit 4 in R7451INC is set).
80	50 R7451CT6	4	s_float	Number of zHPF write I/O requests (valid if bit 4 in R7451INC is set).
84	54 *	4	CHAR	Reserved.
88	58 R7451ZHL	4	s_float	zHPF List Pre-fetch I/O Requests. Number of command chains, where the Transport Mode operation specified a non-zero Imbedded Locate Record Count.
92	5C R7451ZHH	4	s_float	zHPF List Pre-fetch I/O Request Hits. Number of command chains, where <ul style="list-style-type: none"> the Transport Mode operation specified a non-zero Imbedded Locate Record Count. the chain was completed without requiring access to any DDM.
96	60 R7451GSF	4	s_float	Global Mirror Collisions sidefile count. A GMC occurs when, during the sending of data in the secondary to create a consistency group, a subsequent host update is attempted before the modified track has been transmitted to the secondary volume. The modified track will be moved to the sidefile before allowing a new host write. The counter will be incremented by one when a track is added to the sidefile.
100	64 R7451GSS	4	s_float	Global Mirror Collisions synchronous count. When a write collision occurs, the modified track data which belongs to the current consistency group may be sent to the remote control unit before allowing the write. The data may come from the sidefile if it is full or from cache if the collision sidefile is not being utilized.
104	68 *	32	CHAR	Reserved
Note:				
1. The information in this field is available only for one device belonging to the rank, as indicated by flag R7451FLG.				
2. This field is valid if R7451FLG is set to 1.				
3. This field is valid if R7451FLG is set to 2.				

Subtype 6 — Hierarchical File System Statistics

HFS Global Data Section

Offsets	Name	Length	Format	Description
0	0 R746GMXV	4	binary	Value of VIRTUAL(MAX) (in MB).
4	4 R746GUSV	4	binary	Total amount (in pages) of virtual storage in use.
8	8 R746GMNF	4	binary	Value of FIXED(MIN) (in MB).
12	C R746GUSF	4	binary	Total amount (in pages) of permanently fixed storage in use.

Record type 74

Offsets	Name	Length	Format	Description												
16	10 R746GMC	8	l_float	Number of times the metadata for a file was found in virtual storage (cache) during file lookup.												
24	18 R746GMNC	8	l_float	Number of times the metadata for a file was not found in virtual storage (cache) during file lookup and an index call was necessary which may result in an I/O.												
32	20 R746G1C	8	l_float	Number of times the first page of a data file was requested and found in virtual storage (cache).												
40	28 R746G1NC	8	l_float	Number of times the first page of a data file was requested and not found in virtual storage (cache) and an I/O was necessary.												
48	30 R746GLRC	4	binary	Return code from OMVS BPX1PCT for DisplayBufferLimits command.												
52	34 R746GLRS	4	binary	Reason code from OMVS BPX1PCT for DisplayBufferLimits command.												
56	38 R746GSRC	4	binary	Return code from OMVS BPX1PCT for DisplayGlobalStats command.												
60	3C R746GSRS	4	binary	Reason code from OMVS BPX1PCT for DisplayGlobalStats command.												
64	40 R746GSFL	1	binary	Status flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>OMVS kernel not ready</td> </tr> <tr> <td>1</td> <td>No buffer limit data</td> </tr> <tr> <td>2</td> <td>No global data</td> </tr> <tr> <td>3</td> <td>Partial global data</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	OMVS kernel not ready	1	No buffer limit data	2	No global data	3	Partial global data	4-7	Reserved.
Bit	Meaning when set															
0	OMVS kernel not ready															
1	No buffer limit data															
2	No global data															
3	Partial global data															
4-7	Reserved.															
65	41	7		Reserved.												

HFS Global Buffer Section

Offsets	Name	Length	Format	Description
0	0 R746GSB	2	binary	Size of buffers in buffer pool (in pages).
2	2 R746GNDS	2	binary	Number of data spaces for buffer pool.
4	4 R746GSBP	4	binary	Size of buffer pool (in pages).
8	8 R746GSBF	4	binary	Size of permanently fixed buffers in buffer pool (in pages).
12	C	4		Reserved.
16	10 R746GBF	8	l_float	Number of times a buffer was already fixed prior to an I/O request in buffer pool.
24	18 R746GBNF	8	l_float	Number of times a buffer was not already fixed prior to an I/O request in buffer pool.

HFS File System Section

Offsets	Name	Length	Format	Description
0	0 R746FSNM	44	EBCDIC	File system name (cataloged dataset name).
44	2C R746FSNL	1	binary	Length of file system name.

Offsets	Name	Length	Format	Description										
45	2D R746FSFL	1	binary	Status flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No HFS file system statistics.</td> </tr> <tr> <td>1</td> <td>Mount time changed.</td> </tr> <tr> <td>2</td> <td>File system now mounted.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	No HFS file system statistics.	1	Mount time changed.	2	File system now mounted.	3-7	Reserved.
Bit	Meaning when set													
0	No HFS file system statistics.													
1	Mount time changed.													
2	File system now mounted.													
3-7	Reserved.													
46	2E	2		Reserved.										
48	30 R746FCTM	8	EBCDIC	Current time stamp (when was data obtained).										
56	38 R746FMTM	8	EBCDIC	Mount time stamp.										
64	40 R746FSF	4	binary	Size of file system (in pages).										
68	44 R746FPF	4	binary	Number of pages internally used by HFS.										
72	48 R746FPD	4	binary	Number of pages used for the attribute directory.										
76	4C R746FPC	4	binary	Number of data buffer pages cached by this file system.										
80	50 R746FSFI	8	l_float	Number of sequential file data I/O requests issued.										
88	58 R746FRFI	8	l_float	Number of random file data I/O requests issued.										
96	60 R746FMC	8	l_float	Number of times the metadata for a file was found in virtual storage (cache) during file lookup.										
104	68 R746FMNC	8	l_float	Number of times the metadata for a file was not found in virtual storage (cache) during file lookup and an index call was necessary which may result in an I/O.										
112	70 R746F1C	8	l_float	Number of times the first page of a data file was requested and found in virtual storage (cache).										
120	78 R746F1NC	8	l_float	Number of times the first page of a data file was requested and not found in virtual storage (cache) and an I/O was necessary.										
128	80 R746FINT	8	l_float	Number of index new tops.										
136	88 R746FIS	8	l_float	Number of index splits.										
144	90 R746FIJ	8	l_float	Number of index joins.										
152	98 R746FIRH	8	l_float	Number of index page read hits.										
160	A0 R746FIRM	8	l_float	Number of index page read misses.										
168	A8 R746FIWH	8	l_float	Number of index page write hits.										
176	B0 R746FIWM	8	l_float	Number of index page write misses.										
184	B8 R746FSRC	4	binary	Return code from OMVS BPX1PCT for DisplayFSStats command.										
188	BC R746FSRS	4	binary	Reason code from OMVS BPX1PCT for DisplayFSStats command.										

Subtype 7 — FICON Director Statistics

FCD Global Data Section

Offsets	Name	Length	Format	Description												
0	0 R747GCFL	1	binary	Configuration change flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Configuration changed during interval.</td> </tr> <tr> <td>1</td> <td>Configuration changed since IPL.</td> </tr> <tr> <td>2</td> <td>System IPLed by way of IODF.</td> </tr> <tr> <td>3</td> <td>I/O configuration token is valid.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Configuration changed during interval.	1	Configuration changed since IPL.	2	System IPLed by way of IODF.	3	I/O configuration token is valid.	4-7	Reserved.
Bit	Meaning when set															
0	Configuration changed during interval.															
1	Configuration changed since IPL.															
2	System IPLed by way of IODF.															
3	I/O configuration token is valid.															
4-7	Reserved.															
1	1	1		Reserved.												
2	2 R747GNFD	2	binary	Number of installed FCD switches.												
4	4 R747GINM	44	EBCDIC	IODF name.												
48	30 R747GISF	2	EBCDIC	Suffix of IODF name.												
50	32 R747GICI	18	EBCDIC	IODF creation information.												
50	32 R747GICD	10	EBCDIC	IODF creation date (mm/dd/yyyy).												
60	3C R747GICT	8	EBCDIC	IODF creation time (hh.mm.ss).												
68	44	12		Reserved.												

FCD Switch Data Section

Offsets	Name	Length	Format	Description														
0	0 R747SDEV	2	binary	Switch device number.														
2	2 R747SLSN	1	binary	Logical switch number.														
3	3 R747SPFL	1	binary	Switch processing flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Status of switch has changed.</td> </tr> <tr> <td>1</td> <td>Number of ports has changed.</td> </tr> <tr> <td>2</td> <td>Switch is offline.</td> </tr> <tr> <td>3</td> <td>Switch is now online.</td> </tr> <tr> <td>4</td> <td>Cascaded switch.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Status of switch has changed.	1	Number of ports has changed.	2	Switch is offline.	3	Switch is now online.	4	Cascaded switch.	5-7	Reserved.
Bit	Meaning when set																	
0	Status of switch has changed.																	
1	Number of ports has changed.																	
2	Switch is offline.																	
3	Switch is now online.																	
4	Cascaded switch.																	
5-7	Reserved.																	
4	4 R747SND	32	EBCDIC	ND associated with switch device.														
36	24 R747SNSP	2	binary	Number of supported ports for this switch.														
38	26 R747SNIP	2	binary	Number of installed ports for this switch.														
40	28	8		Reserved.														

FCD Port Data Section

Offsets	Name	Length	Format	Description
0	0 R747PNUM	1	EBCDIC	Port number.
1	1 R747PADR	1	EBCDIC	Port address.

Offsets	Name	Length	Format	Description
2	2 R747PTFL	1	binary	Port type flags. Bit Meaning when set 0 Port type is single CU. 1 Port type is multiple CU. 2 Port type is CHPID. 3 Port type is switch. 4-7 Reserved.
3	3 R747PSFL	1	binary	Status flags. Bit Meaning when set 0 Port type is not unique. 1 ID is not unique or not known. 2 Channel on caller's system. 3 Port installed. 4 Port status changed. 5 Port has been removed. 6 Port has been activated. 7 No measurement data available for this port.
4	4 R747PCU	2	binary	Connector id (CU) or channel path. Note: In case of a channel path, the CHPID can also be addressed as a one-byte field R747PCP at offset 5.
6	6 R747PCUN	1	binary	Number of connector CUs.
7	7 R747PNPC	1	binary	Number of Connector sections.
8	8 R747PXPC	2	binary	Index of first Connector section.
10	A R747PPFL	1	binary	Port flags. Bit Meaning when set 0 Port information was returned at least once for this port. 1 Port information showed this port not installed. 2 Port information showed link failure condition. 3 Port information showed this port offline. 4 Statistics were returned at least once for this port. 5-7 Reserved.
11	B	5		Reserved.
16	10 R747PFPT	8	l_float	Frame pacing time (in units of 2.5 microseconds).
24	18 R747PNWR	8	l_float	Number of words received.
32	20 R747PNWT	8	l_float	Number of words transmitted.
40	28 R747PNFR	8	l_float	Number of frames received.
48	30 R747PNFT	8	l_float	Number of frames transmitted.
56	38 R747PNER	8	l_float	Number of errors.
64	40	8		Reserved.
72	48 R747PAND	32	EBCDIC	Node descriptor of attached unit.

Record type 74

FCD Connector Data Section

Offsets	Name	Length	Format	Description																		
0	0 R747CNUM	1	EBCDIC	Port number.																		
1	1 R747CADR	1	EBCDIC	Port address.																		
2	2 R747CTFL	1	binary	Port type flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Port type is single CU.</td> </tr> <tr> <td>1</td> <td>Port type is multiple CU.</td> </tr> <tr> <td>2</td> <td>Port type is CHPID.</td> </tr> <tr> <td>3</td> <td>Port type is switch.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Port type is single CU.	1	Port type is multiple CU.	2	Port type is CHPID.	3	Port type is switch.	4-7	Reserved.						
Bit	Meaning when set																					
0	Port type is single CU.																					
1	Port type is multiple CU.																					
2	Port type is CHPID.																					
3	Port type is switch.																					
4-7	Reserved.																					
3	3 R747CSFL	1	binary	Status flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Port type is not unique.</td> </tr> <tr> <td>1</td> <td>ID is not unique or not known.</td> </tr> <tr> <td>2</td> <td>Channel on caller's system.</td> </tr> <tr> <td>3</td> <td>Port installed.</td> </tr> <tr> <td>4</td> <td>Port status changed.</td> </tr> <tr> <td>5</td> <td>Port has been removed.</td> </tr> <tr> <td>6</td> <td>Port has been activated.</td> </tr> <tr> <td>7</td> <td>No measurement data available for this port.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Port type is not unique.	1	ID is not unique or not known.	2	Channel on caller's system.	3	Port installed.	4	Port status changed.	5	Port has been removed.	6	Port has been activated.	7	No measurement data available for this port.
Bit	Meaning when set																					
0	Port type is not unique.																					
1	ID is not unique or not known.																					
2	Channel on caller's system.																					
3	Port installed.																					
4	Port status changed.																					
5	Port has been removed.																					
6	Port has been activated.																					
7	No measurement data available for this port.																					
4	4 R747CCU	2	binary	Connector id (CU).																		
6	6 R747CCUN	1	binary	Number of connector CUs.																		
7	7	1		Reserved.																		

Subtype 8 — Enterprise Disk System Statistics

There is one section per record.

Control data section

Offsets	Name	Length	Format	Description
0	0 R748CLVL	1	binary	Gatherer level.
1	1 R748CTYP	6	EBCDIC	Control unit type.
7	7 R748CMDL	3	EBCDIC	Control unit model.
10	A R748CSER	10	EBCDIC	Primary control unit serial number.
20	14 R748CVSN	1	binary	Version of link statistics definition: X'00' = Original version of link statistics X'01' = Link statistics extended
21	15 R748CAE	3	binary	Abend code (SDWACMPC) with: First 12 bits = System completion code. Second 12 bits = User completion code.
24	18 R748CRTN	2	binary	IDCSS01 return code.

Offsets	Name	Length	Format	Description
26	1A R748CSC	1	binary	Status code: 00 successfully processed. 04 IOS return code. R748CIOC \neq 0. 08 IDCSS01 return code. R748CRTN \neq 0. 98 SYSTEM or USER ABEND. R748CAE \neq 0.
27	1B R748CIOC	1	binary	IOS return code. If this field is not zero, no Link Statistic sections are available.
28	1C R748CFDV	2	binary	Failing device.
30	1E R748CVOL	6	EBCDIC	Volume serial of the device from which statistics are measured.
36	24 R748CDEV	2	EBCDIC	Device number of the device from which statistics are measured.
38	26 R748CFLG	1	binary	Flags Bit Meaning when set 0 Extent pool statistics valid 1-7 Reserved.
39	27	1		Reserved.
40	28 R748CINT	4	binary	Number of seconds that passed since the link statistics have been collected for the last time.
44	2C R748CFTM	4	EBCDIC	Time when first record was written. Reserved for duration processing.
48	30 R748CFDT	4	EBCDIC	Date when first record was written. Reserved for duration processing.
52	34 R748CFCI	4	EBCDIC	Interval length of first record. Reserved for duration processing.

Link Statistics Section

There is one section per adapter.

Offsets	Name	Length	Format	Description
0	0 R748LAID	2	binary	Adapter ID.
2	2 R748LTYP	1	binary	Link Type: 1 ESCON 2 Fibre Channel 1 Gbit/s 3 Fibre Channel 2 Gbit/s 4 Fibre Channel 4 Gbit/s 5 Fibre Channel 8 Gbit/s 6 Fibre Channel 16 Gbit/s 10 Ethernet Channel 10 Gbit/s
3	3 R748LFLG	1	binary	Flags. Bit Meaning when set 0 Units of bytes indeterminable. Byte values incorrect. 1 Units of time indeterminable. Time values incorrect.
4	4	4		Reserved.
8	8 R748LERB	8	l_float	ECKD™ read activity in units of 128KB.

Record type 74

Offsets	Name	Length	Format	Description
16	10 R748LEWB	8	l_float	ECKD write activity in units of 128KB.
24	18 R748LERO	8	l_float	Number of ECKD read operations. For ESCON ports, one count is added per chain which transfers customer data (no administration data) to the host. For FICON ports, one count is added per command which transfers customer data to the host.
32	20 R748LEWO	8	l_float	Number of ECKD write operations. For ESCON ports, one count is added per chain which transfers customer data (no administration data) from the host. For FICON ports, one count is added per command which transfers customer data from the host.
40	28 R748LERT	8	l_float	Accumulated time for ECKD read activity on the channel in milliseconds. The active processing time for each command is accumulated.
48	30 R748LEWT	8	l_float	Accumulated time for ECKD write activity on the channel in milliseconds. The active processing time for each command is accumulated.
56	38 R748LPSB	8	l_float	PPRC send activity in units of 128KB.
64	40 R748LPRB	8	l_float	PPRC received activity in units of 128KB.
72	48 R748LPPO	8	l_float	PPRC send operations. Each PPRC write command sent by the PPRC primary is counted.
80	50 R748LPRO	8	l_float	PPRC received operations. Each PPRC write command received by the PPRC secondary is counted.
88	58 R748LPST	8	l_float	Accumulated time for PPRC send activity in milliseconds.
96	60 R748LPRT	8	l_float	Accumulated time for PPRC received activity in milliseconds.
104	68 R748LSRB	8	l_float	SCSI read activity in units of 128KB.
112	70 R748LSWB	8	l_float	SCSI write activity in units of 128KB.
120	78 R748LSRO	8	l_float	SCSI read operations. Each read operation is counted.
128	80 R748LSWO	8	l_float	SCSI write operations. Each write operation is counted.
136	88 R748LSRT	8	l_float	Accumulated time for SCSI read operations on the channel in milliseconds.
144	90 R748LSWT	8	l_float	Accumulated time for SCSI write operations on the channel in milliseconds.
152	98 R748LFLF	4	s_float	Fibre channel link failures. Number of times the port lost meaningful communication on the link. This can cause I/O failures.
156	9C R748LFLY	4	s_float	Fibre channel synchronization failures. Number of times the fibre channel signal lost synchronization.
160	A0 R748LFLS	4	s_float	Fibre channel signal failures. Number of times the fibre channel signal was lost.
164	A4 R748LFPQ	4	s_float	Number of fibre channel primitive sequence errors. Such errors can occur during loss of synchronization, loss of signal, or during a link failure.
168	A8 R748LFIT	4	s_float	Fibre channel invalid transmission word errors. Number of bit errors, which can lead to a loss of synchronization and/or to lost fibre channel traffic.
172	AC R748LFCR	4	s_float	Fibre channel Cyclic Redundancy Check (CRC) errors. Number of fibre channel frames lost due to CRC errors. This causes an I/O abort or timeout.
176	B0 R748LFR1	4	s_float	Fibre channel link recovery (LR) sent. Number of times the ESS port reset the link due to a timeout on fibre channel buffer-to-buffer credit to send a frame. Such errors can cause timeouts or aborts or queued I/O frames to be lost.

Offsets	Name	Length	Format	Description
180	B4 R748LFR2	4	s_float	Fibre channel link recovery (LR) received. Number of times the attached port reset the link due to a timeout on fibre channel buffer-to-buffer credit to send a frame. Such errors can cause timeouts or aborts or queued I/O frames to be lost.
184	B8 R748LFIF	4	s_float	Fibre channel illegal frame errors. Number of frames that violated the Fibre channel protocol. The most common cause is a missing frame. Another example is an invalid frame header. Illegal frames will cause I/O aborts or timeouts.
188	BC R748LFOD	4	s_float	Fibre channel out of order data errors. Number of times that an out of order frame is detected. The most common cause is a missing frame. Such errors will cause I/O aborts or timeouts.
192	C0 R748LFOA	4	s_float	Fibre channel out of order ACK errors. Number of ACK frames identified as out of order. The most common cause is a missing frame. Such errors are not expected during I/O, since I/O does not use ACK.
196	C4 R748LDFD	4	s_float	Fibre channel duplicate frame errors. Number of times a duplicate frame was received. Such errors will cause I/O aborts or timeouts.
200	C8 R748LFIO	4	s_float	Fibre channel invalid relative offset failures. Number of frames that were received with an invalid relative offset field in the frame header. Such errors will cause I/O aborts or timeouts.
204	CC R748LFTC	4	s_float	Fibre channel sequence timeout errors. Number of times the ESS port has detected a timeout on a receiving sequence initiative for a fibre channel exchange.
208	D0 R748LFBC	4	binary	Fibre channel bit error rate. A non-zero rate means that bit errors have occurred on the link within the last five minutes. This is not an accumulated error rate, but a snapshot of the last five minute interval.

Extent Pool Statistics Section

There is one section per extent pool.

Offsets	Name	Length	Format	Description
0	0 R748XPID	2	binary	Extent pool identifier.
2	2 R748XPLT	1	binary	Extent type: Value Meaning 0-3 Reserved 4 FIBER 1Gb 5-131 Reserved 132 CKD 1Gb 133-255 Reserved.
3	3 R748XPTQ	1	binary	Extent pool type qualifier: Bit Meaning when set 0 Data encrypted extent pool 1-7 Reserved.
4	4 R748XRCP	4	binary	Real extent pool capacity in GB.
8	8 R748XRNS	4	binary	Number of real extents in extent pool.
12	C R748XRNA	4	binary	Number of allocated real extents in extent pool.
16	10 R748XRSC	4	binary	Real extent conversions. Valid if bit 0 of R748CFLG is set.

Record type 74

Offsets	Name	Length	Format	Description
20	14 R748XVCP	4	binary	Virtual extent pool capacity in GB. Valid if bit 0 of R748CFLG is set.
24	18 R748XVNS	4	binary	Number of virtual extents in extent pool. Valid if bit 0 of R748CFLG is set.
28	1C R748XVSC	4	binary	Virtual extent conversions. Valid if bit 0 of R748CFLG is set.
32	20 R748XSDY	4	binary	Number of extents that were sources of dynamic extent relocations. Valid if bit 0 of R748CFLG is set.
36	24 R748XTDY	4	binary	Number of extents that were targets of dynamic extent relocations. Valid if bit 0 of R748CFLG is set.

Rank Statistics Section

There is one section per rank in a extent pool.

Offsets	Name	Length	Format	Description								
0	0 R748RRID	2	binary	Rank identifier.								
2	2 R748RPNM	2	binary	Extent pool number.								
4	4 R748RCNT	2	binary	Count of arrays in rank.								
6	6 R748RAIX	2	binary	Index to first Array section of rank.								
8	8 R748RBYR	8	l_float	Rank 128 KB read.								
16	10 R748RBYW	8	l_float	Rank 128 KB write.								
24	18 R748RROP	8	l_float	Rank read operations.								
32	20 R748RWOP	8	l_float	Rank write operations.								
40	28 R748RKRT	8	l_float	Rank read response time in units of 16 milliseconds.								
48	30 R748RKWT	8	l_float	Rank write response time in units of 16 milliseconds.								
56	38 R748RTQ	1	binary	Rank type qualifier: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Data encrypted rank</td> </tr> <tr> <td>1-6</td> <td>Reserved</td> </tr> <tr> <td>7</td> <td>Rank adapter pair ID valid</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Data encrypted rank	1-6	Reserved	7	Rank adapter pair ID valid
Bit	Meaning when set											
0	Data encrypted rank											
1-6	Reserved											
7	Rank adapter pair ID valid											
57	39	1		Reserved								
58	3A R748RAI	2	Character	Rank adapter pair ID								
60	3C	4		Reserved								

Rank Array Data Section

There is one section per rank in a extent pool.

Offsets	Name	Length	Format	Description								
0	0 R748AAID	2	binary	Rank array identifier.								
2	2 R748ARID	2	binary	Rank identifier.								
4	4 R748AEBC	16	EBCDIC	Description of array type, for example: RAID-10.								
20	14 R748ATYP	1	binary	Array type: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>RAID-5</td> </tr> <tr> <td>2</td> <td>RAID-10</td> </tr> <tr> <td>3</td> <td>RAID-6</td> </tr> </tbody> </table>	Value	Meaning	1	RAID-5	2	RAID-10	3	RAID-6
Value	Meaning											
1	RAID-5											
2	RAID-10											
3	RAID-6											
21	15 R748AASP	1	binary	Array speed in 1000 RPM.								
22	16 R748AAWD	2	binary	Array width.								

Offsets	Name	Length	Format	Description																				
24	18 R748AACP	4	binary	Array capacity in GB.																				
28	1C R748AAST	1	binary	Array device class and array status																				
				<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Device class</td> </tr> <tr> <td></td> <td>B'00' = Enterprise drive</td> </tr> <tr> <td></td> <td>B'01' = Near-line drive</td> </tr> <tr> <td></td> <td>B'10' = SATA drive</td> </tr> <tr> <td></td> <td>B'11' = Solid state drive</td> </tr> <tr> <td>2</td> <td>Raid degraded</td> </tr> <tr> <td>3</td> <td>DDM throttling</td> </tr> <tr> <td>4</td> <td>RPM exception</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-1	Device class		B'00' = Enterprise drive		B'01' = Near-line drive		B'10' = SATA drive		B'11' = Solid state drive	2	Raid degraded	3	DDM throttling	4	RPM exception	5-7	Reserved.
Bit	Meaning when set																							
0-1	Device class																							
	B'00' = Enterprise drive																							
	B'01' = Near-line drive																							
	B'10' = SATA drive																							
	B'11' = Solid state drive																							
2	Raid degraded																							
3	DDM throttling																							
4	RPM exception																							
5-7	Reserved.																							

Subtype 9 — PCI Express Based Function Activity

This record subtype is written by the RMF Monitor III data gatherer for all PCI Express based functions that were allocated by an address space for a period of time within the RMF reporting interval.

PCIE function data section

RMF produces one PCIE Function data section for each PCIE function for which at least one of the following conditions are met:

- The PCIE function is allocated by a z/OS address space at the end of the reporting interval.
- The PCIE function is in the process of being deallocated from a z/OS address space at the end of the reporting interval.
- The PCIE function has been de-allocated from a z/OS address space during the reporting interval.
- The PCIE function has been in error during the reporting interval but there is performance data available.

There are one or more sections per PCIE function.

Dec offset	Hex offset	Name	Length	Format	Description										
0	0	R749PFID	4	binary	PCIE Function ID (PFID) for the PCIE function for which performance data is returned.										
4	4	R749PFFL	2	binary	PFID function status merged over all MINTIME intervals for this reporting interval.										
					<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>PFID was allocated during this interval.</td> </tr> <tr> <td>1</td> <td>PFID was in status <i>De-Allocate-Pending</i> during this interval.</td> </tr> <tr> <td>2</td> <td>PFID was in error during this interval.</td> </tr> <tr> <td>3-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	PFID was allocated during this interval.	1	PFID was in status <i>De-Allocate-Pending</i> during this interval.	2	PFID was in error during this interval.	3-15	Reserved.
Bit	Meaning when set														
0	PFID was allocated during this interval.														
1	PFID was in status <i>De-Allocate-Pending</i> during this interval.														
2	PFID was in error during this interval.														
3-15	Reserved.														

Record type 74

Dec offset	Hex offset	Name	Length	Format	Description								
6	6	R749PFF1	2	binary	Final PFID function status at the end of this reporting interval. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>PFID is de-allocated at the end of this interval.</td> </tr> <tr> <td>1</td> <td>PFID is re-allocated at the end of this interval.</td> </tr> <tr> <td>2-15</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	PFID is de-allocated at the end of this interval.	1	PFID is re-allocated at the end of this interval.	2-15	Reserved.
Bit	Meaning when set												
0	PFID is de-allocated at the end of this interval.												
1	PFID is re-allocated at the end of this interval.												
2-15	Reserved.												
8	8	R749ERRT	4	binary	Time in milliseconds for which no valid data was reported for the PCIE function within this reporting interval.								
12	C	R749DEVT	4	binary	Device type for the PCIE function.								
16	10	R749DEVN	24	EBCDIC	Device name for the PCIE function.								
40	28	R749JOBN	8	EBCDIC	Job name of owner who allocated the PCIE function.								
48	30	R749ASID	2	binary	Address space ID of owner who allocated the PCIE function.								
50	32	R749PCID	2	binary	Physical channel identifier for the PCIE function.								
52	34	R749ATST	8	binary	Timestamp in STCK format, showing the last point in time when a PCIE function was allocated.								
60	3C	R749ALLT	4	binary	Time in milliseconds for which the PCIE function was allocated or was in status <i>De-Allocate-Pending</i> .								
64	40		4		Reserved.								
68	44	R749SCNT	4	binary	Sequence number for the last time the PCI operations counters or DMA read/write counters have been updated by the firmware.								
72	48	R749LOOP	8	binary	Count of PCI Load operations for the PCIE function.								
80	50	R749STOP	8	binary	Count of PCI Store operations for the PCIE function.								
88	58	R749SBOP	8	binary	Count of PCI Store Block operations for the PCIE function.								
96	60	R749RFOP	8	binary	Count of PCI Refresh Translation operations for the PCIE function.								
104	68	R749DMAO	2	binary	The PCIE Function Type data blocks for all PCIE functions are grouped together in the record. To get to the PCIE Function Type data block associated with this PCIE Function data section, skip over the number of PCIE Function Type data blocks specified by this field, starting at the first PCIE Function Type data block in the record.								
106	6A	R749DMAN	2	binary	Count of PCIE Function Type data blocks allocated for this PCIE function data section.								
108	6C	R749FPFO	2	binary	The data blocks for all hardware accelerators are grouped together in the record. To get to the hardware accelerator data block associated with this PCIE Function data section, skip over the number of hardware accelerator data blocks specified by this field, starting at the first hardware accelerator block in the record.								
110	6E	R749FPFN	2	binary	Count of hardware accelerator data blocks allocated for this PCIE Function data section.								
112	70	R749FP1O	2	binary	The data blocks for all hardware accelerators used for compression acceleration are grouped together in the record. To get to the hardware accelerator compression data block associated with this PCIE Function data section, skip over the number of hardware accelerator compression data blocks specified by this field, starting at the first hardware accelerator compression data block in the record.								
114	72	R749FP1N	2	binary	Count of hardware accelerator compression data blocks allocated for this PCIE Function data section.								

PCIE Function Type data section

This section contains exactly one PCIE Function Type data block per PCIE Function data section.

Information provided for format x'00':

Dec offset	Hex offset	Name	Length	Format	Description
0	0	R749DMAR	8	binary	DMA read counter that reports the number of bytes transferred from all defined DMA address spaces to the PCIE function.
8	8	R749DMAW	8	binary	DMA write counter that reports the number of bytes transferred from the PCIE function to all defined DMA address spaces.
16	10	R749DFMT	1	binary	Format x'00'
17	11		23		Reserved.

Information provided for format x'01':

Dec offset	Hex offset	Name	Length	Format	Description
0	0	R749DBYR	8	binary	Number of bytes received on the external Ethernet interface.
8	8	R749DBYT	8	binary	Number of bytes transmitted on the external Ethernet interface.
16	10	R749DFMT	1	binary	Format x'01'
17	11		7		Reserved.
24	18	R749DPKR	8	binary	Number of packets received on the external Ethernet interface.
32	20	R749DPKT	8	binary	Number of packets transmitted on the external Ethernet interface.

Information provided for format x'02':

Dec offset	Hex offset	Name	Length	Format	Description
0	0	R749DWUP	8	binary	Number of work units processed by the PCI function.
8	8	R749DWUM	8	binary	Maximum number of work units that the PCI function is capable of processing per second.
16	10	R749DFMT	1	binary	Format x'02'
17	11		23		Reserved.

Hardware accelerator data section

This section contains up to one hardware accelerator data block per PCIE Function data section. This section only exists if the device name of the PCIE function provided in R749DEVN is set to *Hardware Accelerator*.

Offsets	Name	Length	Format	Description
0	0 R749FTYP	4	binary	Hardware accelerator application type.
4	4 R749FDSC	32	EBCDIC	Hardware accelerator application description.
36	24 R749FRQC	4	binary	Total number of hardware accelerator requests that completed successfully.

Record type 74

Offsets	Name	Length	Format	Description
40	28 R749FRQE	4	binary	Total number of hardware accelerator requests that completed with an error. Statistics for these requests are not included in the other fields of this data section.
44	2C R749FQFL	4	binary	Number of times that the adapter queue was full when a new request was submitted.
48	30 R749FTET	8	binary	Total execution time of all requests in microseconds.
56	38 R749FSQE	16	binary	Sum of the squares of the individual execution times.
72	48 R749FTQT	8	binary	Total queue time of all requests in microseconds.
80	50 R749FSQQ	16	binary	Sum of the squares of the individual queue times.
96	60 R749FDRD	8	binary	Total DMA reads in units of 256 bytes.
104	68 R749FDWR	8	binary	Total DMA writes in units of 256 bytes.

Hardware accelerator compression data section

This section contains one hardware accelerator compression data block per hardware accelerator if the accelerator is used for compression acceleration. This data section only exists if the application name provided in R749FDSC is set to *zEDC* (zEnterprise Data Compression).

Offsets	Name	Length	Format	Description
0	0 R7491DIB	8	binary	Total number of deflate input bytes.
8	8 R7491DIS	16	binary	Sum of the squares of the individual deflate input bytes.
24	18 R7491DOB	8	binary	Total number of deflate output bytes.
32	20 R7491DOS	16	binary	Sum of the squares of the individual deflate output bytes.
48	30 R7491DCT	4	binary	Total number of deflate requests.
52	34	4		Reserved.
56	38 R7491IIB	8	binary	Total number of inflate input bytes.
64	40 R7491IIS	16	binary	Sum of the squares of the individual inflate input bytes.
80	50 R7491IOB	8	binary	Total number of inflate output bytes.
88	58 R7491IOS	16	binary	Sum of the squares of the individual inflate output bytes.
104	68 R7491ICT	4	binary	Total number of inflate requests.
108	6C	4		Reserved.
112	70 R7491BPS	4	binary	Total size of memory in megabytes allocated to the buffer pool.
116	74 R7491BPC	8	binary	Accumulated size of memory in megabytes for in-use buffers. To get the average buffer pool utilization, this value must be divided by the total number of requests.

Subtype 10 — Storage Class Memory (SCM) Statistics

This record subtype is written by the RMF Monitor III data gatherer for all storage class memory (SCM) resources.

Storage class memory (SCM) configuration measurement section

There is one section per SCM-resource part.

Offsets	Name	Length	Format	Description
0	0 R7410CM	56	Structure	
0	0 R7410CRID	2	binary	SCM resource identifier.
2	2 R7410CPID	2	binary	Part identifier.
4	4 R7410CDUS	4	binary	Data unit size in bytes.

Offsets	Name	Length	Format	Description
8	8 R7410CRQC	4	binary	Internal requests processed at CPC level.
12	C R7410CRQ	4	binary	Internal requests processed at LPAR level.
16	10 R7410CDWC	4	binary	Data units written at CPC level.
20	14 R7410CDW	4	binary	Data units written at LPAR level.
24	18 R7410CDRC	4	binary	Data units read at CPC level.
28	1C R7410CDR	4	binary	Data units read at LPAR level.
32	20 R7410CRTC	4	binary	Aggregate time spent on execution of requests involving resource part in units of 128 microseconds at CPC level.
36	24 R7410CRT	4	binary	Aggregate time spent on execution of requests involving resource part in units of 128 microseconds at LPAR level.
40	28 R7410CIQC	4	binary	Accumulated IOP queue time in units of 128 microseconds at CPC level.
44	2C R7410CWUC	4	binary	Count of work units (utilization) at CPC level.
48	30 R7410CWU	4	binary	Count of work units (utilization) at LPAR level.

Record Type 75 (4B) — RMF Page Data Set Activity

For information on using RMF, see *z/OS RMF User's Guide*.

For information on Monitor I and II, see *z/OS RMF Report Analysis*.

Record type 75 is written at the end of each RMF measurement interval. One record is written for each page data set monitored during the interval.

As with all SMF records RMF produces, record type 75 contains a header section and RMF Product section. These are followed by:

Page Data Set data section

Provides information on the use of auxiliary storage page slots and the use of the page data set by the auxiliary storage manager (ASM).

Macro to Symbolically Address Record Type 75: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Record type 75

Offsets	Name	Length	Format	Description												
0	0 SMF75LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF75SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF75FLG	1	binary	System indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators (See "Standard SMF record header" on page 162 for details.)</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </table>	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved.	3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved.															
3-6	Version indicators (See "Standard SMF record header" on page 162 for details.)															
7	System is running in PR/SM mode.															
5	5 SMF75RTY	1	binary	Record type 75 (X'4B').												
6	6 SMF75TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF75DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details.												
14	E SMF75SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF75SSI	4	EBCDIC	Subsystem identification ('RMF').												
22	16 SMF75STY	2	binary	Record subtype=1.												
24	18 SMF75TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.												
26	1A	2		Reserved.												
28	1C SMF75PRS	4	binary	Offset to RMF Product section from RDW.												
32	20 SMF75PRL	2	binary	Length of RMF Product section.												
34	22 SMF75PRN	2	binary	Number of RMF Product sections.												
36	24 SMF75PSS	4	binary	Offset to Page Data Set data section from RDW.												
40	28 SMF75PSL	2	binary	Length of Page Data Set data section.												
42	2A SMF75PSN	2	binary	Number of Page Data Set data sections.												

RMF Product Section

Offsets	Name	Length	Format	Description
0	0 SMF75MFV	2	packed	RMF version number.
2	2 SMF75PRD	8	EBCDIC	Product name ('RMF').
10	A SMF75IST	4	packed	Time that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.
14	E SMF75DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details.
18	12 SMF75INT	4	packed	Duration of the RMF measurement interval, in the form <i>mmssttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>tt</i> is the milliseconds, and <i>F</i> is the sign. The end of the measurement interval is the sum of the recorded start time (and this field.)
22	16	2		Reserved.
24	18 SMF75SAM	4	binary	Number of RMF samples.
28	1C	2		Reserved.

Offsets	Name	Length	Format	Description																		
30	1E SMF75FLA	2	binary	Flags <table> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.						
Bit	Meaning when set																					
0	Reserved																					
1	Samples have been skipped																					
2	Record was written by RMF Monitor III																					
3	Interval was synchronized with SMF																					
4-15	Reserved.																					
32	20	4		Reserved.																		
36	24 SMF75CYC	4	packed	Sampling cycle length, in the form 000ttttF, where tttt is the milliseconds and F is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.																		
40	28 SMF75MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - ZVvrrmm).																		
48	30 SMF75IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries														
Value	Meaning																					
3	9672, zSeries																					
49	31 SMF75PRF	1	binary	Processor flags. <table> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF75PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF75SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF75IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).																		
60	3C SMF75LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF75RAO	4	binary	Offset to reassembly area relative to start of RMF Product section.																		
72	48 SMF75RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		
74	4A SMF75RAN	2	binary	Reassembly area indicator. <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF75RAO) and length (SMF75RAL) are only valid if SMF75RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken	1	Record is broken.												
Value	Meaning																					
0	Record is not broken																					
1	Record is broken.																					
76	4C SMF75OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).																		
78	4E SMF75SYN	2	binary	SYNC value in seconds.																		
80	50 SMF75GIE	8	binary	Projected gathering interval end (STCK format) GMT time.																		

Record type 75

Offsets	Name	Length	Format	Description
88	58 SMF75XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.
96	60 SMF75SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.
Reassembly Area:				
0	0 SMF75RBR	2	binary	Total number of broken records built from the original large record.
2	2 SMF75RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF75RBR.
4	4 SMF75RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.
8	8 SMF75RIL	2	binary	Length of reassembly information block.
10	A SMF75RIN	2	binary	Number of reassembly information blocks (same value as SMF75TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF75RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF75RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF75RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Page Data Set Data Section

Offsets	Name	Length	Format	Description																		
0	0 SMF75DSN	44	EBCDIC	Page data set name. Valid only when bit 4 of SMF75FL2 is not set.																		
44	2C SMF75PST	1	binary	Page space type <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>PLPA</td> </tr> <tr> <td>1</td> <td>COMMON</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>LOCAL</td> </tr> <tr> <td>4</td> <td>Reserved</td> </tr> <tr> <td>5</td> <td>Data set unusable</td> </tr> <tr> <td>6</td> <td>Data set brought online during interval</td> </tr> <tr> <td>7</td> <td>Data set taken offline during interval.</td> </tr> </table>	Bit	Meaning when set	0	PLPA	1	COMMON	2	Reserved	3	LOCAL	4	Reserved	5	Data set unusable	6	Data set brought online during interval	7	Data set taken offline during interval.
Bit	Meaning when set																					
0	PLPA																					
1	COMMON																					
2	Reserved																					
3	LOCAL																					
4	Reserved																					
5	Data set unusable																					
6	Data set brought online during interval																					
7	Data set taken offline during interval.																					
45	2D SMF75FL2	1	binary	Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Data set accepts VIO pages</td> </tr> <tr> <td>1</td> <td>Data set is on a multiple exposure device</td> </tr> <tr> <td>2</td> <td>Data set is on a device with an alternate control unit</td> </tr> <tr> <td>3</td> <td>SMF75DEV contains a valid device name</td> </tr> <tr> <td>4</td> <td>Page space type is SCM</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Data set accepts VIO pages	1	Data set is on a multiple exposure device	2	Data set is on a device with an alternate control unit	3	SMF75DEV contains a valid device name	4	Page space type is SCM	5-7	Reserved.				
Bit	Meaning when set																					
0	Data set accepts VIO pages																					
1	Data set is on a multiple exposure device																					
2	Data set is on a device with an alternate control unit																					
3	SMF75DEV contains a valid device name																					
4	Page space type is SCM																					
5-7	Reserved.																					
46	2E	1		Reserved.																		

Offsets	Name	Length	Format	Description
47	2F SMF75TYP	4	binary	Unit type. Valid only when bit 4 of SMF75FL2 is not set.
51	33 SMF75CHA	2	binary	Device number in the form <i>hhhh</i> (hex digits). Valid only when bit 4 of SMF75FL2 is not set.
53	35 SMF75VOL	6	EBCDIC	Volume serial number. Valid only when bit 4 of SMF75FL2 is not set.
59	3B	5		Reserved.
64	40 SMF75SLA	4	binary	Total number of slots contained within the page data set.
68	44 SMF75MXU	4	binary	Maximum number of slots used.
72	48 SMF75MNU	4	binary	Minimum number of slots used.
76	4C SMF75AVU	4	binary	Average number of slots used.
80	50 SMF75BDS	4	binary	Number of unusable slots.
84	54 SMF75USE	4	binary	Number of samples indicating data set was being used by ASM.
88	5A SMF75REQ	4	binary	The value is the same as SMF75USE.
92	5C SMF75SIO	4	binary	Number of I/O requests for the data set.
96	60 SMF75PGX	4	binary	Number of pages transferred to or from page data set.
100	64 SMF75DEV	8	EBCDIC	Device name (blank if device name cannot be determined). Valid only when bit 4 of SMF75FL2 is not set.
108	6C SMF75CU	8	EBCDIC	Control unit name (blank if control unit name cannot be determined). Valid only when bit 4 of SMF75FL2 is not set.

Record Type 76 (4C) — RMF Trace Activity

Record type 76 is written at the end of each measurement interval. One record is written for each field name sampled during the interval. As with all SMF records produced by RMF, record type 76 contains a header section and RMF Product section. These are followed by:

Trace Control section

Contains the number of sample sets in the trace.

Trace data section

Contains information on the minimum value of the field, the maximum value of the field, the sum of the squared values of the field, and the final value sampled from the field.

Variable Trace data section

Contains the trace values collected for each set grouped at the end of the record.

Macro to Symbolically Address Record Type 76: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

For information on using RMF, see *z/OS RMF User's Guide*. For information on Monitor I and II, see *z/OS RMF Report Analysis*.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Record type 76

Mode Task

Storage Residency

31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF76LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description. This field and the next are collectively referred to as the RDW. (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF76SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF76FLG	1	binary	System indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators (see "Standard SMF record header" on page 162 for details)</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved.	3-6	Version indicators (see "Standard SMF record header" on page 162 for details)	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved.															
3-6	Version indicators (see "Standard SMF record header" on page 162 for details)															
7	System is running in PR/SM mode.															
5	5 SMF76RTY	1	binary	Record type 76 (X'4C').												
6	6 SMF76TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF76DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF76SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF76SSI	4	EBCDIC	Subsystem identification ('RMF').												
22	16 SMF76STY	2	binary	Record subtype=1.												
24	18 SMF76TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.												
26	1A	2		Reserved.												
28	1C SMF76PRS	4	binary	Offset to RMF Product section from start of record, including record descriptor word (RDW).												
32	20 SMF76PRL	2	binary	Length of RMF Product section.												
34	22 SMF76PRN	2	binary	Number of RMF Product sections.												
36	24 SMF76TCS	4	binary	Offset to Trace Control section from start of record, including record descriptor word (RDW).												
40	28 SMF76TCL	2	binary	Length of Trace Control section.												
42	2A SMF76TCN	2	binary	Number of Trace Control sections.												
44	2C SMF76TDS	4	binary	Offset to Trace data section from start of record, including record descriptor word (RDW).												
48	30 SMF76TDL	2	binary	Length of Trace data section.												
50	32 SMF76TDN	2	binary	Number of Trace data sections.												

Offsets	Name	Length	Format	Description
52	34 SMF76VFS	4	binary	Offset to variable format set from start of record, including record descriptor word (RDW).
56	38 SMF76VFL	2	binary	Length of variable format set.
58	3A SMF76VFN	4	binary	Number of variable format sets.

RMF Product Section

Offsets	Name	Length	Format	Description												
0	0 SMF76MFV	2	packed	RMF version number.												
2	2 SMF76PRD	8	EBCDIC	Product name ('RMF').												
10	A SMF76IST	4	packed	Time that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.												
14	E SMF76DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
18	12 SMF76INT	4	packed	Duration of the RMF measurement interval, in the form <i>mmsstttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign. (The end of the measurement interval is the sum of the recorded start time and this field.)												
22	16	2		Reserved.												
24	18 SMF76SAM	4	binary	Number of RMF samples.												
28	1C	2		Reserved.												
30	1E SMF76FLA	2	binary	Flags <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.
Bit	Meaning when set															
0	Reserved															
1	Samples have been skipped															
2	Record was written by RMF Monitor III															
3	Interval was synchronized with SMF															
4-15	Reserved.															
32	20	4		Reserved.												
36	24 SMF76CYC	4	packed	Sampling cycle length, in the form <i>000tttF</i> , where <i>ttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.												
40	28 SMF76MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).												
48	30 SMF76IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries								
Value	Meaning															
3	9672, zSeries															

Record type 76

Offsets	Name	Length	Format	Description																		
49	31 SMF76PRF	1	binary	Processor flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF76PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF76SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF76IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).																		
60	3C SMF76LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF76RAO	4	binary	Offset to reassembly area relative to start of RMF product section.																		
72	48 SMF76RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		
74	4A SMF76RAN	2	binary	Reassembly area indicator. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF76RAO) and length (SMF76RAL) are only valid if SMF76RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken	1	Record is broken.												
Value	Meaning																					
0	Record is not broken																					
1	Record is broken.																					
76	4C SMF76OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).																		
78	4E SMF76SYN	2	binary	SYNC value in seconds.																		
80	50 SMF76GIE	8	binary	Projected gathering interval end (STCK format) GMT time.																		
88	58 SMF76XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.																		
96	60 SMF76SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.																		
Reassembly Area:																						
0	0 SMF76RBR	2	binary	Total number of broken records built from the original large record.																		
2	2 SMF76RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF76RBR.																		
4	4 SMF76RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.																		
8	8 SMF76RIL	2	binary	Length of reassembly information block.																		

Offsets	Name	Length	Format	Description
10	A SMF76RIN	2	binary	Number of reassembly information blocks (same value as SMF76TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF76RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF76RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF76RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Trace Control Section

Offsets	Name	Length	Format	Description
0	0 SMF76NUM	2	binary	Number of sample sets (lines of data) in the trace.
2	2	2		Reserved.

Trace Data Section

Offsets	Name	Length	Format	Description																		
0	0 SMF76NAM	8	EBCDIC	Field name.																		
8	8 SMF76OPT	1	binary	Trace options <table border="1" data-bbox="860 1155 1445 1680"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Minimum value of the field is contained in the SMF record</td> </tr> <tr> <td>1</td> <td>Maximum value of the field is contained in the SMF record</td> </tr> <tr> <td>2</td> <td>The sum of the values required to calculate the average of the field is contained in the SMF record</td> </tr> <tr> <td>3</td> <td>The sum of the squared values required to calculate the standard deviation of the field is contained in the SMF record</td> </tr> <tr> <td>4</td> <td>End value of the field is contained in the SMF record</td> </tr> <tr> <td>5</td> <td>All options selected</td> </tr> <tr> <td>6</td> <td>Domain tracing terminated</td> </tr> <tr> <td>7</td> <td>This entry is a domain field.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Minimum value of the field is contained in the SMF record	1	Maximum value of the field is contained in the SMF record	2	The sum of the values required to calculate the average of the field is contained in the SMF record	3	The sum of the squared values required to calculate the standard deviation of the field is contained in the SMF record	4	End value of the field is contained in the SMF record	5	All options selected	6	Domain tracing terminated	7	This entry is a domain field.
Bit	Meaning when set																					
0	Minimum value of the field is contained in the SMF record																					
1	Maximum value of the field is contained in the SMF record																					
2	The sum of the values required to calculate the average of the field is contained in the SMF record																					
3	The sum of the squared values required to calculate the standard deviation of the field is contained in the SMF record																					
4	End value of the field is contained in the SMF record																					
5	All options selected																					
6	Domain tracing terminated																					
7	This entry is a domain field.																					
9	9 SMF76OP1	1	binary	Trace options <table border="1" data-bbox="860 1722 1445 1932"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>LPB trace requested</td> </tr> <tr> <td>1</td> <td>LPB trace request ended</td> </tr> <tr> <td>2</td> <td>Traced data in record is valid</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	LPB trace requested	1	LPB trace request ended	2	Traced data in record is valid	3-7	Reserved.								
Bit	Meaning when set																					
0	LPB trace requested																					
1	LPB trace request ended																					
2	Traced data in record is valid																					
3-7	Reserved.																					

Record type 76

Offsets	Name	Length	Format	Description
10	A SMF76SLN	1	binary	Length of a set.
11	B SMF76DLN	1	binary	Length of a field sampled.
12	C SMF76SSS	2	binary	Standard samples per set used.
14	E SMF76SSL	2	binary	Samples per set.
16	10 SMF76MIN	4	binary	Minimum value during interval.
20	14 SMF76MAX	4	binary	Maximum value during interval.
24	18 SMF76AVG	8	binary	Accumulated value used to compute the average.
32	20 SMF76STD	12	binary	Sum of squares (used to compute standard deviation).
44	2C SMF76ENV	4	binary	End value of field.

Variable Trace Data Section

Offsets	Name	Length	Format	Description
0	0 SMF76C or SMF76D	4	binary	Trace values collected for each set, stored in an array of either fullwords or halfwords, depending on the length of the field being sampled (SMF76C if fullwords; SMF76D if halfwords). There will be one group of values for each sample set (line of data) in the trace.

Record type 77 (4D) — RMF enqueue activity

Reference information:

- The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.
- For information on Monitor I and II, see *z/OS RMF Report Analysis*.

Record type 77 is written at the end of each measurement interval and when the session is terminated. As with all SMF records RMF produces, it contains a header section followed by the RMF product section. These are followed by:

Enqueue Control section

Contains the status indicator.

Enqueue data section

Identifies the resources for which ENQ/DEQ contention occurred during the measurement interval and describes any contention that occurred.

Macro to Symbolically Address Record Type 77: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF77LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF77SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF77FLG	1	binary	System indicator <table border="0" style="margin-left: 20px;"> <thead> <tr> <th style="text-align: left;">Bit</th> <th style="text-align: left;">Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </tbody> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved.	3-6	Version indicators*	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved.															
3-6	Version indicators*															
7	System is running in PR/SM mode.															
5	5 SMF77RTY	1	binary	Record type 77 (X'4D').												
6	6 SMF77TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF77DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>OcyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF77SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF77SSI	4	EBCDIC	Subsystem identification ('RMF').												
22	16 SMF77STY	2	binary	Record subtype=1.												
24	18 SMF77TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record.												
26	1A	2		Reserved.												
28	1C SMF77PRS	4	binary	Offset to RMF Product section from start of record, including record descriptor word (RDW).												
32	20 SMF77PRL	2	binary	Length of RMF Product section from start of record, including record descriptor word (RDW).												
34	22 SMF77PRN	2	binary	Number of RMF Product sections.												
36	24 SMF77EQS	4	binary	Offset to Enqueue Control section from start of record, including record descriptor word (RDW).												
40	28 SMF77EQL	2	binary	Length of Enqueue Control section.												
42	2A SMF77EQN	2	binary	Number of Enqueue Control sections.												
44	2C SMF77EDS	4	binary	Offset to Enqueue data section from start of record, including record descriptor word (RDW).												
48	30 SMF77EDL	2	binary	Length of Enqueue data section.												
50	32 SMF77EDN	2	binary	Number of Enqueue data sections.												

Record type 77

RMF Product Section

Offsets	Name	Length	Format	Description																		
0	0 SMF77MFV	2	packed	RMF version number.																		
2	2 SMF77PRD	8	EBCDIC	Product name ('RMF').																		
10	A SMF77IST	4	packed	Time since midnight that the RMF measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.																		
14	E SMF77DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.																		
18	12 SMF77INT	4	packed	Duration of RMF measurement interval, in the form <i>mmsstttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign. (The end of the measurement interval is the sum of the recorded start time and this field.)																		
22	16	2		Reserved.																		
24	18 SMF77SAM	4	binary	Number of RMF samples.																		
28	1C	2		Reserved.																		
30	1E SMF77FLA	2	binary	Flags <table border="1" data-bbox="860 808 1347 1050"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.						
Bit	Meaning when set																					
0	Reserved																					
1	Samples have been skipped																					
2	Record was written by RMF Monitor III																					
3	Interval was synchronized with SMF																					
4-15	Reserved.																					
32	20	4		Reserved.																		
36	24 SMF77CYC	4	packed	Sampling cycle length, in the form <i>000ttttF</i> , where <i>tttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.																		
40	28 SMF77MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).																		
48	30 SMF77IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table border="1" data-bbox="860 1312 1079 1386"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries														
Value	Meaning																					
3	9672, zSeries																					
49	31 SMF77PRF	1	binary	Processor flags. <table border="1" data-bbox="860 1438 1372 1858"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF77PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		

Offsets	Name	Length	Format	Description						
51	33 SMF77SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.						
52	34 SMF77IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).						
60	3C SMF77LGO	8	binary	Offset GMT to local time (STCK format).						
68	44 SMF77RAO	4	binary	Offset to reassembly area relative to start of RMF Product section.						
72	48 SMF77RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.						
74	4A SMF77RAN	2	binary	Reassembly area indicator. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF77RAO) and length (SMF77RAL) are only valid if SMF77RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken	1	Record is broken.
Value	Meaning									
0	Record is not broken									
1	Record is broken.									
76	4C SMF77OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).						
78	4E SMF77SYN	2	binary	SYNC value in seconds.						
80	50 SMF77GIE	8	binary	Projected gathering interval end (STCK format) GMT time.						
88	58 SMF77XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.						
96	60 SMF77SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.						
Reassembly Area:										
0	0 SMF77RBR	2	binary	Total number of broken records built from the original large record.						
2	2 SMF77RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF77RBR.						
4	4 SMF77RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.						
8	8 SMF77RIL	2	binary	Length of reassembly information block.						
10	A SMF77RIN	2	binary	Number of reassembly information blocks (same value as SMF77TRN in header section).						
12	C	4		Reserved.						
Reassembly Area Information Block:										
0	0 SMF77RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.						

Record type 77

Offsets	Name	Length	Format	Description
2	2 SMF77RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF77RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Enqueue Control Section

Offsets	Name	Length	Format	Description																		
0	0 SMF77FG1	1	binary	Enqueue status indicator <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Enqueue summary table full</td> </tr> <tr> <td>1</td> <td>Specified resource had no contention</td> </tr> <tr> <td>2</td> <td>Enqueue had bad CPU clock</td> </tr> <tr> <td>3</td> <td>Enqueue event processing abend</td> </tr> <tr> <td>4</td> <td>On — detail data requested Off — summary data requested</td> </tr> <tr> <td>5</td> <td>On — GRS=NONE (local sysplex)</td> </tr> <tr> <td>6</td> <td>Off — GRS=RING, if bit 5 = '0'</td> </tr> <tr> <td>7</td> <td>On — bits 5 and 6 are valid</td> </tr> </tbody> </table>	Bit	Meaning	0	Enqueue summary table full	1	Specified resource had no contention	2	Enqueue had bad CPU clock	3	Enqueue event processing abend	4	On — detail data requested Off — summary data requested	5	On — GRS=NONE (local sysplex)	6	Off — GRS=RING, if bit 5 = '0'	7	On — bits 5 and 6 are valid
Bit	Meaning																					
0	Enqueue summary table full																					
1	Specified resource had no contention																					
2	Enqueue had bad CPU clock																					
3	Enqueue event processing abend																					
4	On — detail data requested Off — summary data requested																					
5	On — GRS=NONE (local sysplex)																					
6	Off — GRS=RING, if bit 5 = '0'																					
7	On — bits 5 and 6 are valid																					
1	1 SMF77RF2	1	binary	Second status indicator <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>GRS system problems</td> </tr> <tr> <td>1</td> <td>RMF/GRS interface problems</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning	0	GRS system problems	1	RMF/GRS interface problems	2-7	Reserved.										
Bit	Meaning																					
0	GRS system problems																					
1	RMF/GRS interface problems																					
2-7	Reserved.																					
2	2	2		Reserved.																		

Enqueue Data Section

Offsets	Name	Length	Format	Description
0	0 SMF77QNM	8	EBCDIC	Major name of resource.
8	8 SMF77RNM	44	EBCDIC	Minor name of resource.
52	34 SMF77WTM	4	binary	Minimum resource contention time during the measurement interval, in 1024-microsecond units. After an internal RMF restart (for example, due to a change of gatherer options) the contention time can be larger than the measurement interval.
56	38 SMF77WTX	4	binary	Maximum resource contention time during the measurement interval, in 1024-microsecond units. After an internal RMF restart (for example, due to a change of gatherer options) the contention time can be larger than the measurement interval.

Offsets	Name	Length	Format	Description																
60	3C SMF77WTT	4	binary	Total resource contention time during the measurement interval, in 1024-microsecond units. After an internal RMF restart (for example, due to a change of gatherer options) the contention time can be larger than the measurement interval.																
64	40	2		Reserved.																
66	42 SMF77QL1	2	binary	Counter for queue length of 1.																
68	44 SMF77QL2	2	binary	Counter for queue length of 2.																
70	46 SMF77QL3	2	binary	Counter for queue length of 3.																
72	48 SMF77QL4	2	binary	Counter for queue length of 4 or more.																
74	4A	2		Reserved.																
76	4C SMF77EXM	2	binary	Minimum number of exclusive requests waiting.																
78	4E SMF77EXX	2	binary	Maximum number of exclusive requests waiting.																
80	50 SMF77SHM	2	binary	Minimum number of share requests waiting.																
82	52 SMF77SHX	2	binary	Maximum number of share requests waiting.																
84	54 SMF77EVT	2	binary	Total number of contention events that occurred during the measurement interval. A contention event is the period starting from the time when the resource has contention until the resource no longer has contention.																
86	56 SMF77RLN	1	binary	Minor name length.																
87	57 SMF77DFG	1	binary	Current resource detail indicator <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Resource still in contention</td> </tr> <tr> <td>1</td> <td>On — scope of systems Off — scope of system</td> </tr> <tr> <td>2</td> <td>On — owner has exclusive control of the resource Off — owner shares the resource</td> </tr> <tr> <td>3</td> <td>On — first job is waiting for exclusive use Off — first job is waiting for shared use</td> </tr> <tr> <td>4</td> <td>On — second job is waiting for exclusive use Off — second job is waiting for shared use</td> </tr> <tr> <td>5</td> <td>Resource is global</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Resource still in contention	1	On — scope of systems Off — scope of system	2	On — owner has exclusive control of the resource Off — owner shares the resource	3	On — first job is waiting for exclusive use Off — first job is waiting for shared use	4	On — second job is waiting for exclusive use Off — second job is waiting for shared use	5	Resource is global	6-7	Reserved.
Bit	Meaning when set																			
0	Resource still in contention																			
1	On — scope of systems Off — scope of system																			
2	On — owner has exclusive control of the resource Off — owner shares the resource																			
3	On — first job is waiting for exclusive use Off — first job is waiting for shared use																			
4	On — second job is waiting for exclusive use Off — second job is waiting for shared use																			
5	Resource is global																			
6-7	Reserved.																			
88	58 SMF77DOW	2	binary	Number of owners using the resource at maximum contention.																
90	5A SMF77DWR	2	binary	Number of jobs waiting for the resource at maximum contention.																
92	5C SMF77DO1	8	EBCDIC	Job name 1 of resource owner during period of maximum contention.																
100	64 SMF77DO2	8	EBCDIC	Job name 2 of resource owner during period of maximum contention.																
108	6C SMF77DW1	8	EBCDIC	Job name 1 waiting for the resource owner during period of maximum contention.																
116	74 SMF77DW2	8	EBCDIC	Job name 2 waiting for the resource owner during period of maximum contention.																
124	7C SMF77SY1	8	EBCDIC	System identifier of job name 1 (resource owner at maximum contention).																

Record type 77

Offsets	Name	Length	Format	Description
132	84 SMF77SY2	8	EBCDIC	System identifier of job name 2 (resource owner at maximum contention).
140	8C SMF77SY3	8	EBCDIC	System identifier of job name 1 (waiting for the resource at maximum contention).
148	94 SMF77SY4	8	EBCDIC	System identifier of job name 2 (waiting for the resource at maximum contention).
156	9C SMF77AQL	4	binary	Total number of waiting requests during the measurement interval.
160	A0 SMF77CSC	4	binary	Total number of contention status change events that occurred during the measurement interval.
164	A4 SMF77NOD	4	binary	Total number of contention status change events accumulated during the measurement interval which did not provide separate contention detail data.

Record Type 78 (4E) — RMF Virtual Storage and I/O Queuing Activity

RMF writes record type 78 during a Monitor I session. It has these subtypes:

- **Subtype 2** — reports virtual storage activity. It contains a Common Storage data section and may contain one or more Private Area data sections. The minimum length of subtype 2 is 1836 bytes if no private area is included. Otherwise the length is 112 bytes plus 1724 bytes plus at least 392 bytes for each private area that is monitored.
- **Subtype 3** — reports I/O queuing activity and HyperPAV activity. It contains an entry for each logical control unit that had any activity during the interval.

Note: Your installation may produce several type 78 subtype 3 records.

This subtype contains the following sections:

- Control section
- IOP Initiative Queue and Utilization data section
- I/O Queuing Configuration control section
- I/O Queuing Configuration data section
- I/O Queuing data section
- HyperPAV data section

Each subtype contains a header section followed by the RMF Product section.

Macro to Symbolically Address Record Type 78: The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

For more information on using RMF, see *z/OS RMF User's Guide*. For information on Monitor I and II, see *z/OS RMF Report Analysis*.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF78LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF78SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF78FLG	1	binary	System indicator <table style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>New record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved.	3-6	Version indicators*	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved.															
3-6	Version indicators*															
7	System is running in PR/SM mode.															
5	5 SMF78RTY	1	binary	Record type 78 (X'4E').												
6	6 SMF78TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF78DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF78SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF78SSI	4	EBCDIC	Subsystem identification ('RMF').												
22	16 SMF78STY	2	binary	Subtype.												
24	18 SMF78TRN	2	binary	Number of triplets in record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record.												
26	1A	2		Reserved.												
28	1C SMF78PRS	4	binary	Offset to RMF Product section from start of record, including record descriptor word (RDW).												
32	20 SMF78PRL	2	binary	Length of RMF Product section.												
34	22 SMF78PRN	2	binary	Number of RMF Product sections.												
Individual header extension for subtype 2:																
36	24 SMF78DCS	4	binary	Offset to Virtual Storage Common Storage data section.												
40	28 SMF78DCL	2	binary	Length of Virtual Storage Common Storage data section.												
42	2A SMF78DCN	2	binary	Number of Virtual Storage Common Storage data sections.												
44	2C SMF78ASS	4	binary	Offset to Virtual Storage Private Area data section.												
48	30 SMF78ASL	2	binary	Length of Virtual Storage Private Area data section.												
50	32 SMF78ASN	2	binary	Number of Virtual Storage Private Area data sections.												
52	34 SMF78SPS	4	binary	Offset to Private Area Subpool section.												
56	38 SMF78SPL	2	binary	Length of Private Area Subpool section.												

Record type 78

Offsets	Name	Length	Format	Description
58	3A SMF78SPN	2	binary	Number of Private Area Subpool sections.
Individual header extension for subtype 3:				
36	24 SMF78DCS	4	binary	Offset to Queuing control section.
40	28 SMF78DCL	2	binary	Length of Queuing control section.
42	2A SMF78DCN	2	binary	Number of Queuing control sections.
44	2C SMF78ASS	4	binary	Offset to Queuing data section.
48	30 SMF78ASL	2	binary	Length of Queuing data section.
50	32 SMF78ASN	2	binary	Number of Queuing data sections.
52	34 SMF78QDS	4	binary	Offset to I/O Queue (IOQ) global section.
56	38 SMF78QDL	2	binary	Length of IOQ global section.
58	3A SMF78QDN	2	binary	Number of IOQ global sections.
60	3C SMF78HPS	4	binary	Offset to HyperPAV data sections.
64	40 SMF78HPL	2	binary	Length of HyperPAV data section.
66	42 SMF78HPN	2	binary	Number of HyperPAV data sections.

RMF Product Section

Offsets	Name	Length	Format	Description												
0	0 SMF78MFV	2	packed	RMF version number.												
2	2 SMF78PRD	8	EBCDIC	Product name ('RMF').												
10	A SMF78IST	4	packed	Time that the RMF Monitor I measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.												
14	E SMF78DAT	4	packed	Date when the RMF Monitor I measurement interval started, in the form <i>0cyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
18	12 SMF78INT	4	packed	Duration of the RMF Monitor I measurement interval, in the form <i>mmsstttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign, (The end of the measurement interval is the sum of the recorded start time and this field.)												
22	16	2		Reserved.												
24	18 SMF78SAM	4	binary	Number of RMF samples.												
28	1C	2		Reserved.												
30	1E SMF78FLA	2	binary	Flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.
Bit	Meaning when set															
0	Reserved															
1	Samples have been skipped															
2	Record was written by RMF Monitor III															
3	Interval was synchronized with SMF															
4-15	Reserved.															
32	20	4		Reserved.												
36	24 SMF78CYC	4	packed	Sampling cycle length, in the form <i>000ttttF</i> , where <i>tttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.												
40	28 SMF78MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).												

Offsets	Name	Length	Format	Description
48	30 SMF78IML	1	binary	Indicates the type of processor complex on which data measurements were taken. Value Meaning 3 9672, zSeries
49	31 SMF78PRF	1	binary	Processor flags. Bit Meaning when set 0 The system has expanded storage 1 The processor is enabled for ES connection architecture (ESCA) 2 There is an ES connection director in the configuration 3 System is running in z/Architecture mode 4 At least one zAAP is currently installed 5 At least one zIIP is currently installed 6 Enhanced DAT architecture available 7 Reserved.
50	32 SMF78PTN	1	binary	PR/SM partition number of the partition that wrote this record.
51	33 SMF78SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.
52	34 SMF78IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF).
60	3C SMF78LGO	8	binary	Offset GMT to local time (STCK format).
68	44 SMF78RAO	4	binary	Offset to reassembly area relative to start of RMF Product section.
72	48 SMF78RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.
74	4A SMF78RAN	2	binary	Reassembly area indicator. Value Meaning 0 Record is not broken 1 Record is broken. Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF78RAO) and length (SMF78RAL) are only valid if SMF78RAN = 1. A reassembly area is only present in broken records.
76	4C SMF78OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).
78	4E SMF78SYN	2	binary	SYNC value in seconds.
80	50 SMF78GIE	8	binary	Projected gathering interval end (STCK format) GMT time.
88	58 SMF78XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.
96	60 SMF78SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.
Reassembly Area:				
0	0 SMF78RBR	2	binary	Total number of broken records built from the original large record.

Record type 78

Offsets	Name	Length	Format	Description
2	2 SMF78RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF78RBR.
4	4 SMF78RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.
8	8 SMF78RIL	2	binary	Length of reassembly information block.
10	A SMF78RIN	2	binary	Number of reassembly information blocks (same value as SMF78TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF78RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF78RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF78RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Subtype 2 Virtual Storage Activity

Virtual Storage Common Storage Data Section

This section describes triplet SMF78DCS.

Offsets	Name	Length	Format	Description
Virtual Storage Common Storage data section (described by triplet SMF78DCS):				
0	0 R782PA	4	binary	Private area address below 16 megabytes.
4	4 R782PS	4	binary	Private area size (in bytes) below 16 megabytes.
8	8 R782EPA	4	binary	Private area address above 16 megabytes.
12	C R782EPS	4	binary	Private area size (in bytes) above 16 megabytes.
16	10 R782CA	4	binary	CSA address below 16 megabytes.
20	14 R782CS	4	binary	CSA size (in bytes) below 16 megabytes.
24	18 R782ECA	4	binary	CSA address above 16 megabytes.
28	1C R782ECS	4	binary	CSA size (in bytes) above 16 megabytes.
32	20	8		Reserved.
40	28 R782MLA	4	binary	Modified link pack area (MLPA) address below 16 megabytes.
44	2C R782MLS	4	binary	Modified link pack area (MLPA) size (in bytes) below 16 megabytes.
48	30 R782EMLA	4	binary	Modified link pack area (MLPA) address above 16 megabytes.
52	34 R782EMLS	4	binary	Modified link pack area (MLPA) size (in bytes) above 16 megabytes.
56	38 R782FLA	4	binary	Fixed link pack area (FLPA) address below 16 megabytes.
60	3C R782FLS	4	binary	Fixed link pack area (FLPA) size (in bytes) below 16 megabytes.
64	40 R782EFLA	4	binary	Fixed link pack area (FLPA) address above 16 megabytes.

Offsets	Name	Length	Format	Description
68	44 R782EFLS	4	binary	Fixed link pack area (FLPA) size (in bytes) above 16 megabytes.
72	48 R782PLA	4	binary	Pageable link pack area (PLPA) address below 16 megabytes.
76	4C R782PLS	4	binary	Pageable link pack area (PLPA) size (in bytes) below 16 megabytes.
80	50 R782ELPA	4	binary	Pageable link pack area (PLPA) address above 16 megabytes.
84	54 R782ELPS	4	binary	Pageable link pack area (PLPA) size (in bytes) above 16 megabytes.
88	58 R782SA	4	binary	System queue area (SQA) address below 16 megabytes.
92	5C R782SS	4	binary	System queue area (SQA) size (in bytes) below 16 megabytes.
96	60 R782ESA	4	binary	System queue area (SQA) address above 16 megabytes.
100	64 R782ESS	4	binary	System queue area (SQA) size (in bytes) above 16 megabytes.
104	68 R782NA	4	binary	Nucleus address below 16 megabytes.
108	6C R782NS	4	binary	Nucleus size (in bytes) below 16 megabytes.
112	70 R782ENA	4	binary	Nucleus address above 16 megabytes.
116	74 R782ENS	4	binary	Nucleus size (in bytes) above 16 megabytes.
120	78 R782NL	4	binary	Pageable link pack area (PLPA) space redundant with MLPA/FLPA below 16 megabytes.
124	7C R782ENL	4	binary	Pageable link pack area (PLPA) space redundant with MLPA/FLPA above 16 megabytes.
128	80 R782LPAI	4	binary	Intermodule space in Pageable link pack area (PLPA) below 16 megabytes.
132	84 R782ELPI	4	binary	Intermodule space in Pageable link pack area (PLPA) above 16 megabytes.
136	88 R782MR	4	binary	Maximum possible user region below 16 megabytes.
140	8C R782EMR	4	binary	Maximum possible user region above 16 megabytes.
144	90 R782SQUAU	40	Mixed(1)	System queue area (SQA) usage both above and below 16 megabytes. The description of the format of all fields being marked as 'Mixed(1)' can be found in Table 11 on page 650 and Table 12 on page 650.
184	B8 R782CSAU	40	Mixed(1)	CSA usage both above and below 16 megabytes.
224	E0 R782CSAK	360	Mixed(1)	CSA used both above and below 16 megabytes by subpool key. 40 bytes for each of 9 keys.
584	248 R782CSAF	40	Mixed(1)	Free CSA both above and below 16 megabytes.
624	270 R782CSLF	40	Mixed(1)	Largest free block of CSA both above and below 16 megabytes.
664	298 R782CSAL	40	Mixed(1)	CSA allocated area size (in bytes) both above and below 16 megabytes.
704	2C0 R782SQUAF	40	Mixed(1)	Free system queue area (SQA) both above and below 16 megabytes.
744	2E8 R782SQLF	40	Mixed(1)	Largest free block of system queue area (SQA) both above and below 16 megabytes.
784	310 R782SQAL	40	Mixed(1)	System queue area (SQA) allocated area size (in bytes) both above and below 16 megabytes.
824	338 R782SQEX	40	Mixed(1)	System queue area (SQA) expansion into CSA both above and below 16 megabytes.

Record type 78

Offsets	Name	Length	Format	Description
864	360 R782227K	200	Mixed(1)	CSA subpool 227 (below 16 megabytes) by key. The key data appears in the following order: 0, 1, 2, 3, 4, 5, 6, 7, 8-F, ALL. 20 bytes for each of 10 keys.
1064	428 R782228K	200	Mixed(1)	CSA subpool 228 (below 16 megabytes) by key. The key data appears in the following order: 0, 1, 2, 3, 4, 5, 6, 7, 8-F, ALL. 20 bytes for each of 10 keys.
1264	4F0 R782231K	200	Mixed(1)	CSA subpool 231 (below 16 megabytes) by key. The key data appears in the following order: 0, 1, 2, 3, 4, 5, 6, 7, 8-F, ALL. 20 bytes for each of 10 keys.
1464	5B8 R782241K	200	Mixed(1)	CSA subpool 241 (below 16 megabytes) by key. The key data appears in the following order: 0, 1, 2, 3, 4, 5, 6, 7, 8-F, ALL. 20 bytes for each of 10 keys.
1664	680 R782226	20	Mixed(1)	System queue area (SQA) subpool 226 (below 16 megabytes).
1684	694 R782239	20	Mixed(1)	System queue area (SQA) subpool 239 (below 16 megabytes).
1704	6A8 R782245	20	Mixed(1)	System queue area (SQA) subpool 245 (below 16 megabytes).

Virtual Storage Private Area Data Section

This section contains triplet SMF78ASS.

Offsets	Name	Length	Format	Description												
0	0 R782JOBN	8	EBCDIC	Name of job being monitored.												
8	8 R782RDTM	4	binary	Reader start time.												
12	C R782RDDT	4	packed	Reader start date.												
16	10 R782SUBI	2	binary	Index of first subpool entry in the Private Area Subpool section for this job. This field provides the first array element for this job's Private Area Subpool sections.												
18	12 R782SUBN	2	binary	Index of last subpool entry for this job. This field provides the last array element for this job's private area subpools.												
20	14 R782STEP	8	EBCDIC	Name of step active when monitoring began.												
28	1C R782PGMN	8	EBCDIC	Program name (taken from PGM= parameter on EXEC card) of job being monitored.												
36	24 R782FLGS	2	binary	Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Job active at start of interval</td> </tr> <tr> <td>1</td> <td>Job terminated during interval</td> </tr> <tr> <td>2</td> <td>GETMAIN limit changed during interval</td> </tr> <tr> <td>3</td> <td>Data incorrect because RMF terminated abnormally while sampling</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Job active at start of interval	1	Job terminated during interval	2	GETMAIN limit changed during interval	3	Data incorrect because RMF terminated abnormally while sampling	4-15	Reserved.
Bit	Meaning when set															
0	Job active at start of interval															
1	Job terminated during interval															
2	GETMAIN limit changed during interval															
3	Data incorrect because RMF terminated abnormally while sampling															
4-15	Reserved.															
38	26	2		Reserved.												
40	28 R782SAMP	4	binary	Number of samples. This field is used to calculate the averages in the private area data and Private Area Subpool sections.												
44	2C R782REGR	4	binary	Region requested by JCL (in bytes).												
48	30 R782RGAB	4	binary	Region below 16 megabytes assigned by exits (in bytes).												
52	34 R782RGAA	4	binary	Region above 16 megabytes assigned by exits (in bytes).												
56	38 R782GMLB	4	binary	GETMAIN limit below 16 megabytes (in bytes).												
60	3C R782GMLA	4	binary	GETMAIN limit above 16 megabytes (in bytes).												
64	40 R782URAB	4	binary	User region address below 16 megabytes.												
68	44 R782URAA	4	binary	User region address above 16 megabytes.												

Offsets	Name	Length	Format	Description
72	48 R782LSFP	40	Mixed(1) ¹	LSQA/SWA/229/230/249 free pages both above and below 16 megabytes.
112	70 R782LSFB	40	Mixed(1)	LSQA/SWA/229/230/249 largest free block both above and below 16 megabytes.
152	98 R782LSAL	40	Mixed(1)	LSQA/SWA/229/230/249 allocated area size (in bytes) both above and below 16 megabytes.
192	C0 R782LSPA	40	Mixed(1)	LSQA/SWA/229/230/249 allocated pages both above and below 16 megabytes.
232	E8 R782USFP	40	Mixed(1)	User region free pages both above and below 16 megabytes.
272	110 R782USFB	40	Mixed(1)	User region largest free block both above and below 16 megabytes.
312	138 R782USAL	40	Mixed(1)	User region allocated area size (in bytes) above 16 megabytes.
352	160 R782USPA	40	Mixed(1)	User region pages allocated both below and above 16 megabytes.
392	188 R782TOBY	48	Mixed(2) ²	Number of bytes allocated in storage above the 2-GB-line.
440	1B8 R782SHBY	48	Mixed(2)	Number of shared bytes allocated in storage above the 2-GB-line.
488	1E8 R782COBY	48	Mixed(2)	Number of high virtual common bytes allocated.
536	218 R782TOMO	40	Mixed(3) ³	Total number of memory objects allocated in high virtual storage.
576	240 R782SHMO	40	Mixed(3)	Number of memory objects allocated in high virtual shared storage.
616	268 R782COMO	40	Mixed(3)	Number of memory objects allocated in high virtual common storage.
656	290 R782LGMO	40	Mixed(3)	Number of fixed memory objects that can be backed in 1 MB frames.
696	2B8 R782TOFR	40	Mixed(3)	Number of 1 MB frames that are fixed in central storage.
736	2E0 R782MEML	8	binary	Address space memory limit in MB.
744	2E8 R782FIFR	40	Mixed(3)	Number of 1 MB frames that can be used by fixed memory objects.
784	310 R782PAFR	40	Mixed(3)	Number of 1 MB frames that are used by pageable/DREF memory objects.
824	338 R782LSMO	40	Mixed(3)	Number of shared memory objects that can be backed in 1 MB frames.
¹ Mixed(1): These bytes have formats as described in Table 11 on page 650 and Table 12 on page 650.				
² Mixed(2): These bytes have formats as described in Table 13 on page 650.				
³ Mixed(3): These bytes have formats as described in Table 14 on page 650.				

Virtual Storage Private Area Subpool Section

This section contains triplet SMF78SPS.

Offsets	Name	Length	Format	Description
0	0 R782SPN	2	binary	Subpool number. Each Private Area data section occurs one after the other. All Private Area Subpool sections follow all Private Area data sections. To relate a subpool to a job, see the R782SUBN fields in the Private Area data section.
2	2	2		Reserved.
4	4 R782SPD	20	Mixed(1) ¹	Subpool data.
¹ Mixed(1): These bytes have formats as described in Table 11 on page 650 and Table 12 on page 650.				

Record type 78

Format descriptions

For fields of format Mixed(1) containing data from below 16 megabytes, use only the first 20 bytes. For fields of this format containing data from both below and above 16 megabytes, use all 40 bytes.

Table 11. Byte structure for data collected below 16 megabytes - Mixed(1)

Offsets	Name	Length	Format	Description
0	0 VSDBMIN	4	binary	Minimum value for below 16 megabytes.
4	4 VSDBNTME	4	binary	Time stamp for minimum. Format is high-order bytes of time-of-day (TOD) clock.
8	8 VSDBMAX	4	binary	Maximum value for below 16 megabytes.
12	C VSDBXTME	4	binary	Time stamp for maximum. Format is high-order bytes of time-of-day (TOD) clock.
16	10 VSDBTOTL	4	floating	Total for all samples below 16 megabytes (used to calculate average). See SMF78SAM to calculate averages for Common Storage data section fields, and R782SAMP to calculate averages for private area data and Private Subpool section fields.

Table 12. Byte structure for data collected above 16 megabytes - Mixed(1)

Offsets	Name	Length	Format	Description
20	14 VSDAMIN	4	binary	Minimum value for above 16 megabytes.
24	18 VSDANTME	4	binary	Time stamp for minimum. Format is high-order bytes of time-of-day (TOD) clock.
28	1C VSDAMAX	4	binary	Maximum value for above 16 megabytes.
32	20 VSDAXTME	4	binary	Time stamp for maximum. Format is high-order bytes of time-of-day (TOD) clock.
36	24 VSDATOTL	4	floating	Total for all samples above 16 megabytes (used to calculate average).

Table 13. Byte structure for Mixed(2)

Offsets	Name	Length	Format	Description
0	0 VSDGMIN	8	floating	Minimum number of bytes allocated above 2GB.
8	8 VSDGNTME	4	binary	Time stamp for minimum value.
12	C	4		Reserved.
16	10 VSDGMAX	8	floating	Maximum number of bytes allocated above 2GB.
24	18 VSDGXTME	4	binary	Time stamp for maximum value.
28	1C	4		Reserved.
32	20 VSDGTOTL	8	floating	Total for all samples above 2GB (used to calculate the average).
40	28 VSDGHWM	8	floating	Peak number of bytes allocated in storage above 2GB.

Table 14. Byte structure for Mixed(3)

Offsets	Name	Length	Format	Description
0	0 VSDCMIN	8	floating	Minimum number high virtual memory objects / frames
8	8 VSDCNTME	4	binary	Time stamp for minimum value.
12	C	4		Reserved.
16	10 VSDCMAX	8	floating	Maximum number of high virtual memory objects / frames
24	18 VSDCXTME	4	binary	Time stamp for maximum value.
28	1C	4		Reserved.
32	20 VSDCTOTL	8	floating	Total for all samples (used to calculate the average).

Subtype 3 I/O Queuing Activity

I/O Queuing Global Section

This section contains triplet SMF78QDS.

Offsets	Name	Length	Format	Description																		
0	0 R783GFLG	1	binary	IOQ global flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Incorrect data because channel measurement facility failed</td> </tr> <tr> <td>1</td> <td>DIAGNOSE interface failed</td> </tr> <tr> <td>2</td> <td>Store Primary Queue Data not supported</td> </tr> <tr> <td>3</td> <td>DCM supported by hardware</td> </tr> <tr> <td>4</td> <td>Configuration contains DCM managed channels</td> </tr> <tr> <td>5</td> <td>IOP utilization data supported</td> </tr> <tr> <td>6</td> <td>Initial command response time measurements supported</td> </tr> <tr> <td>7</td> <td>First-transfer-ready-disabled data available</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Incorrect data because channel measurement facility failed	1	DIAGNOSE interface failed	2	Store Primary Queue Data not supported	3	DCM supported by hardware	4	Configuration contains DCM managed channels	5	IOP utilization data supported	6	Initial command response time measurements supported	7	First-transfer-ready-disabled data available
Bit	Meaning when set																					
0	Incorrect data because channel measurement facility failed																					
1	DIAGNOSE interface failed																					
2	Store Primary Queue Data not supported																					
3	DCM supported by hardware																					
4	Configuration contains DCM managed channels																					
5	IOP utilization data supported																					
6	Initial command response time measurements supported																					
7	First-transfer-ready-disabled data available																					
1	1	1		Reserved.																		
2	2 R783GNTR	2	binary	Number of descriptor triplets following.																		
4	4 R783GIDS	4	binary	Offset to I/O Processor (IOP) Initiative Queue data section.																		
8	8 R783GIDL	2	binary	Length of I/O Processor (IOP) Initiative Queue data section.																		
10	A R783GIDN	2	binary	Number of I/O Processor (IOP) Initiative Queue data sections.																		
12	C	4		Reserved.																		
16	10 R783TSR	2	binary	Total number of small records written during interval.																		
18	12	2		Reserved.																		
20	14 R783TOT	4	binary	Total number of data sections recorded during the interval.																		
24	18 R783NXT	4	binary	Total number of data sections in the following record.																		
28	1C R783CFL	1	binary	Configuration change flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Configuration changed. Used to decide whether to provide the text "POR" or "ACTIVATE" on reports. Also used to check whether data can be combined in a duration report.</td> </tr> <tr> <td>1</td> <td>Configuration change since power on reset (POR).</td> </tr> <tr> <td>2</td> <td>POR using IOC data set that contains a token.</td> </tr> <tr> <td>3</td> <td>I/O token is valid.</td> </tr> <tr> <td>4</td> <td>Hardware allows multiple channel subsystems.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Configuration changed. Used to decide whether to provide the text "POR" or "ACTIVATE" on reports. Also used to check whether data can be combined in a duration report.	1	Configuration change since power on reset (POR).	2	POR using IOC data set that contains a token.	3	I/O token is valid.	4	Hardware allows multiple channel subsystems.	5-7	Reserved.				
Bit	Meaning when set																					
0	Configuration changed. Used to decide whether to provide the text "POR" or "ACTIVATE" on reports. Also used to check whether data can be combined in a duration report.																					
1	Configuration change since power on reset (POR).																					
2	POR using IOC data set that contains a token.																					
3	I/O token is valid.																					
4	Hardware allows multiple channel subsystems.																					
5-7	Reserved.																					
29	1D R783CSS	1	binary	Channel Subsystem ID. Only valid if bit 4 of R783CFL is set.																		
30	1E	2		Reserved.																		
32	20 R783TNM	44	EBCDIC	IODF name.																		
76	4C R783TSF	2	EBCDIC	IODF name suffix.																		
78	4E	2		Reserved.																		
80	50 R783TOK	16	EBCDIC	Partial token information.																		
80	50 R783TDT	8	EBCDIC	IODF creation date, in the form <i>mm/dd/yy</i> .																		
88	58 R783TTM	8	EBCDIC	IODF creation time, in the form <i>hh.mm.ss</i> .																		

Record type 78

Offsets	Name	Length	Format	Description
96	60 R783TDY	10	EBCDIC	IODF creation date, in the form <i>mm/dd/yyyy</i> .
106	6A	2		Reserved.

IOP Initiative Queue and Utilization Data Section

This section contains one entry per IP described by triplet R783GIDS. The contents of the fields R783IIPB through R783IDVB are valid if bit 5 of R783GFLG is set.

Offsets	Name	Length	Format	Description										
0	0 R783IQID	2	binary	Input output processor (IOP) initiative queue identifier.										
2	2 R783IFLG	1	binary	Input output processor (IOP) Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Input output processor (IOP) is installed.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Input output processor (IOP) is installed.	1-7	Reserved.				
Bit	Meaning when set													
0	Input output processor (IOP) is installed.													
1-7	Reserved.													
3	3 R783DSTX	1	binary	Data status extension. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>LCU contains at least one FICON channel.</td> </tr> <tr> <td>1</td> <td>Connect time of at least one device is invalid.</td> </tr> <tr> <td>2</td> <td>Disconnect time of at least one device is invalid.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	LCU contains at least one FICON channel.	1	Connect time of at least one device is invalid.	2	Disconnect time of at least one device is invalid.	3-7	Reserved.
Bit	Meaning when set													
0	LCU contains at least one FICON channel.													
1	Connect time of at least one device is invalid.													
2	Disconnect time of at least one device is invalid.													
3-7	Reserved.													
4	4 R783IQSM	4	binary	Accumulator is incremented by the current queue length in the Input output processor (IOP) whenever a request is enqueued.										
8	8 R783IQCT	4	binary	Number of elements enqueued on the Input output processor (IOP) initiative queue.										
12	C	4		Reserved.										
16	10 R783IIPB	8	floating	Number of times the I/O processor was busy.										
24	18 R783IUPI	8	floating	Number of times the I/O processor was idle.										
32	20 R783IIFS	8	floating	Number of I/O functions initially started.										
40	28 R783IPII	8	floating	Number of processed I/O interrupts.										
48	30 R783ICPB	8	floating	Number of times an I/O was retried due to channel path busy.										
56	38 R783IDPB	8	floating	Number of times an I/O was retried due to director port busy.										
64	40 R783ICUB	8	floating	Number of times an I/O was retried due to control unit busy.										
72	48 R783IDVB	8	floating	Number of times an I/O was retried due to device busy.										

I/O Queuing Configuration Control Section

This section contains one entry per LCU, described by triplet SMF78DCS.

Offsets	Name	Length	Format	Description
0	0 R783ID1	2	binary	Logical control unit identifier.
2	2 R783NTR	2	binary	Number of triplets following.
4	4 R783CPDS	4	binary	Offset to I/O Queuing Configuration data section from start of section.
8	8 R783CPDL	2	binary	Length of I/O Queuing Configuration data section.
10	A R783CPDN	2	binary	Number of I/O Queuing Configuration data sections.

I/O Queuing Configuration Data Section

This section contains one entry per channel path, described by triplet R783CPDS in the I/O Queuing Configuration control section.

Offsets	Name	Length	Format	Description																		
0	0 R783CPID	1	binary	Channel path identifier.																		
1	1 R783CPST	1	binary	Channel path status <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Channel path installed</td> </tr> <tr> <td>1</td> <td>Channel path online</td> </tr> <tr> <td>2</td> <td>Channel path varied</td> </tr> <tr> <td>3</td> <td>Channel path offline to all devices of the LCU</td> </tr> <tr> <td>4</td> <td>Channel path connection to all devices of the LCU altered by VARY PATH command during interval</td> </tr> <tr> <td>5</td> <td>Measured channel path data incorrect</td> </tr> <tr> <td>6</td> <td>Channel path is DCM managed</td> </tr> <tr> <td>7</td> <td>CHPID manipulated, requiring data reset</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Channel path installed	1	Channel path online	2	Channel path varied	3	Channel path offline to all devices of the LCU	4	Channel path connection to all devices of the LCU altered by VARY PATH command during interval	5	Measured channel path data incorrect	6	Channel path is DCM managed	7	CHPID manipulated, requiring data reset
Bit	Meaning when set																					
0	Channel path installed																					
1	Channel path online																					
2	Channel path varied																					
3	Channel path offline to all devices of the LCU																					
4	Channel path connection to all devices of the LCU altered by VARY PATH command during interval																					
5	Measured channel path data incorrect																					
6	Channel path is DCM managed																					
7	CHPID manipulated, requiring data reset																					
2	2 R783CUN	2	binary	Number of control units attached.																		
4	4 R783CU1	2	binary	First control unit attached.																		
6	6 R783CU2	2	binary	Second control unit attached.																		
8	8 R783CU3	2	binary	Third control unit attached.																		
10	A R783CU4	2	binary	Fourth control unit attached.																		
12	C R783CUB	4	binary	Number of times control unit was busy.																		
16	10 R783PT	4	binary	Number of times channel path was taken.																		
20	14	4		Reserved.																		
24	18 R783DPB	4	binary	Number of times that the Director Port was busy.																		
28	1C R783CBT	4	binary	Delay time of an I/O request because the control unit was busy.																		
32	20 R783CMR	4	binary	Initial command response time until the first command is indicated as accepted by the device.																		
36	24 R783SBS	4	binary	Switch busy count summation: contains the switch busy counts received for all partitions.																		
40	28	4		Reserved.																		
44	2C R783CPXF	1	binary	Channel path extended flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Extended I/O measurement-block format-1 data available</td> </tr> <tr> <td>1</td> <td>Extended I/O measurement-block format-2 data available</td> </tr> <tr> <td>2</td> <td>First-transfer-ready-disabled supported</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Extended I/O measurement-block format-1 data available	1	Extended I/O measurement-block format-2 data available	2	First-transfer-ready-disabled supported	3-7	Reserved.								
Bit	Meaning when set																					
0	Extended I/O measurement-block format-1 data available																					
1	Extended I/O measurement-block format-2 data available																					
2	First-transfer-ready-disabled supported																					
3-7	Reserved.																					
45	2D R783CPAT	1	binary	Path attributes <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Not specified for this path.</td> </tr> <tr> <td>1</td> <td>Preferred path.</td> </tr> <tr> <td>2</td> <td>Non-preferred path.</td> </tr> </tbody> </table>	Value	Meaning	0	Not specified for this path.	1	Preferred path.	2	Non-preferred path.										
Value	Meaning																					
0	Not specified for this path.																					
1	Preferred path.																					
2	Non-preferred path.																					
46	2E	2		Reserved.																		

Record type 78

Offsets	Name	Length	Format	Description
48	30 R783CTMW	4	Binary	Transport mode write count
52	34 R783CTRD	4	Binary	First-transfer-ready-disabled write count
56	38	8		Reserved.

I/O Queuing Data Section

This section contains entry one per LCU, described by triplet SMF78ASS.

Offsets	Name	Length	Format	Description																		
0	0 R783ID2	2	binary	Logical control unit identifier.																		
2	2 R783DST	1	binary	Data Status <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No hardware measurements available</td> </tr> <tr> <td>1</td> <td>Dynamically changed</td> </tr> <tr> <td>2</td> <td>Dynamically added</td> </tr> <tr> <td>3</td> <td>Configuration change attempted</td> </tr> <tr> <td>4</td> <td>LCU contains DCM managed channels</td> </tr> <tr> <td>5</td> <td>Path attributes are valid.</td> </tr> <tr> <td>6</td> <td>LCU has HyperPAV devices.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	No hardware measurements available	1	Dynamically changed	2	Dynamically added	3	Configuration change attempted	4	LCU contains DCM managed channels	5	Path attributes are valid.	6	LCU has HyperPAV devices.	7	Reserved.
Bit	Meaning when set																					
0	No hardware measurements available																					
1	Dynamically changed																					
2	Dynamically added																					
3	Configuration change attempted																					
4	LCU contains DCM managed channels																					
5	Path attributes are valid.																					
6	LCU has HyperPAV devices.																					
7	Reserved.																					
3	3	1		Reserved.																		
4	4 R783QSM	4	binary	Sum of total length of the CU-HDR queue.																		
8	8 R783QCT	4	binary	Number of entries on the CU-HDR queue.																		
12	C R783MCMN	2	binary	Minimum number of DCM managed channels used.																		
14	E R783MCMX	2	binary	Maximum number of DCM managed channels used.																		
16	10 R783MCDF	2	binary	Defined number of DCM managed channels.																		
18	12	2		Reserved.																		
20	14 R783PTM	4	binary	Accumulated path taken count for DCM managed channels.																		
24	18 R783DPBM	4	binary	Accumulated director port busy count for DCM managed channels.																		
28	1C R783CUBM	4	binary	Accumulated control unit busy count for DCM managed channels.																		
32	20 R783CBTM	4	binary	Accumulated delay time for DCM-managed channels because of a busy control unit.																		
36	24 R783CMRM	4	binary	Accumulated initial command response time for DCM-managed channels.																		
40	28 R783SBSM	4	binary	Switch busy count summation for DCM-managed channels.																		
44	2C R783DCTM	4		Accumulated device connect time in units of 128 microseconds.																		
48	30 R783DDTM	4		Accumulated device disconnect time in units of 128 microseconds.																		
52	34 R783CSST	4	binary	Channel subsystem wait time in units of 128 microseconds.																		
56	38 R783HCNT	2	binary	Number of HyperPAV data sections for that LCU.																		
58	3A R783HIX	2	binary	Index to first HyperPAV data section for that LCU.																		
60	3C R783TMWM	4	Binary	Accumulated transport mode write count for DCM managed channels																		
64	40 R783TRDM	4	Binary	Accumulated first-transfer-ready-disabled write count for DCM managed channels																		
68	44	8		Reserved.																		

HyperPAV Data Section

This section contains one entry per CU, described by SMF78HPS.

Offsets	Name	Length	Format	Description
0	0 R783HLCU	2	binary	HyperPAV Logical control unit identifier.
2	2 R783HCU	2	binary	HyperPAV control unit identifier.
4	4 *	4	*	Reserved.
8	8 R783HNAI	4	floating	The number of times an I/O could not start because no HyperPAV-aliases were available.
12	C R783HTIO	4	floating	The total number of HyperPAV I/O requests for the LSS.
16	10 R783HAIU	4	binary	The high water mark of the number of in-use HyperPAV-alias devices for the LSS.
20	14 R783HCAD	4	binary	The high water mark of the number of aliases concurrently in use by one of the HyperPAV-base devices of the LSS.
24	18 R783HIOQ	4	binary	The high water mark of queued I/O requests.

Record type 79 (4F) — RMF Monitor II activity

Reference information:

- For information on using RMF, see *z/OS RMF User's Guide*.
- For information on Monitor I and II, see *z/OS RMF Report Analysis*.
- For more information on performance groups, see *z/OS MVS Initialization and Tuning Guide*.

Record type 79 is written during a Monitor II background session when feedback is requested as SMF records. It is written at each measurement interval and when the session is terminated. It contains a section that is identical for all Monitor II reports and a subtype section that is unique for each report. The subtypes are:

Subtype 1

Contains information that describes address space state data (and address space state data by job name) for each address space identifier included.

Subtype 2

Contains information that describes address space resource data (and address space resource data by job name) activity. The length depends on the number of devices.

Subtype 3

Contains information that describes central storage/processor/SRM activity.

Subtype 4

Contains information that describes paging activity.

Subtype 5

Contains information that describes address space SRM data (and address space SRM data by job name).

Subtype 6

Contains information that describes reserve data.

Subtype 7

Contains information that describes enqueue contention data.

Record type 79

Subtype 9

Contains information that describes device activity. The length depends upon the number of devices.

Subtype 11

Contains information that describes paging data set activity. The length is variable.

Subtype 12

Contains information that describes channel path activity. The length is variable.

Subtype 14

contains information that describes I/O queuing activity by logical control unit. The length is variable.

Note: Your installation may produce several type 79 subtype 14 records.

Subtype 15

contains information about IRLM long locks.

Note: The records of this subtype have no RMF Product section (as indicated in field SMF79PRN) and have no Monitor II control section.

Note: All fields with format *s_float* have the type *short format floating point*.

Macro to symbolically address record type 79

The SMF record mapping macro for all records produced by RMF is ERBSMFR. Its format is ERBSMFR (*n1,n2,...*) where *n1,n2, ...* are the SMF record types you want to map. Note that the parentheses are required only when two or more record types are specified. The mapping macro resides in SYS1.MACLIB.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency
31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF79LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF79SEG	2	binary	Segment descriptor (see record length field).

Offsets	Name	Length	Format	Description												
4	4 SMG79FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>New SMF record format</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>System is running in PR/SM mode.</td> </tr> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	New SMF record format	1	Subtypes used	2	Reserved.	3-6	Version indicators*	7	System is running in PR/SM mode.
Bit	Meaning when set															
0	New SMF record format															
1	Subtypes used															
2	Reserved.															
3-6	Version indicators*															
7	System is running in PR/SM mode.															
5	5 SMF79RTY	1	binary	Record type 79 (X'4F').												
6	6 SMF79TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF79DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF79SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF79SSI	4	EBCDIC	Sub-system identification ('RMF').												
22	16 SMF79STY	2	binary	Record subtype.												
24	18 SMF79TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record.												
26	1A	2		Reserved.												
28	1C SMF79PRS	4	binary	Offset to RMF Product section from start of record, including record descriptor word (RDW).												
32	20 SMF79PRL	2	binary	Length of RMF Product section.												
34	22 SMF79PRN	2	binary	Number of RMF Product sections.												
Individual header extension for subtypes 1 - 14:																
36	24 SMF79MCS	4	binary	Offset to Monitor II control section from start of record, including record descriptor word (RDW).												
40	28 SMF79MCL	2	binary	Length of Monitor II control section.												
42	2A SMF79MCN	2	binary	Number of Monitor II control sections.												
44	2C SMF79ASS	4	binary	Offset to data section from start of record, including record descriptor word (RDW).												
48	30 SMF79ASL	2	binary	Length of data section.												
50	32 SMF79ASN	2	binary	Number of data sections.												
The following six fields are not present for all subtypes:																
52	34 SMF79DCS	4	binary	Offset to control section from start of record, including record descriptor word (RDW).												
56	38 SMF79DCL	2	binary	Length of control section.												
58	3A SMF79DCN	2	binary	Number of control sections.												
60	3C SMF79QSS	4	binary	Offset to Input/Output Queue (IOQ) queuing control from start of record, including record descriptor word (RDW).												
64	40 SMF79QSL	2	binary	Length of Input/Output Queue (IOQ) global section.												
66	42 SMF79QSN	2	binary	Number of Input/Output Queue (IOQ) global sections.												
Individual header extension for subtype 15:																
36	24 SMF79FPO	4	binary	Offset to IMS Long Lock data section.												
40	28 SMF79FPL	2	binary	Length of IMS Long Lock data section.												

Record type 79

Offsets	Name	Length	Format	Description
42	2A SMF79FPN	2	binary	Number of IMS Long Lock data sections.

RMF Product Section

Offsets	Name	Length	Format	Description												
0	0 SMF79MFV	2	packed	RMF version number.												
2	2 SMF79PRD	8	EBCDIC	Product name.												
10	A SMF79IST	4	packed	Snap shot time for Monitor II report, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.												
14	E SMF79DAT	4	packed	Snap shot date for Monitor I report, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
18	12 SMF79INT	4	packed	Duration of the RMF Monitor I measurement interval, in the form <i>mmssttF</i> where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign. (The end of the measurement interval is the sum of the recorded start time and this field.)												
22	16	2		Reserved.												
24	18 SMF79SAM	4	binary	Number of RMF samples.												
28	1C	2		Reserved.												
30	1E SMF79FLA	2	binary	Flags <table border="1" data-bbox="857 940 1344 1180"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Samples have been skipped</td> </tr> <tr> <td>2</td> <td>Record was written by RMF Monitor III</td> </tr> <tr> <td>3</td> <td>Interval was synchronized with SMF</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	Samples have been skipped	2	Record was written by RMF Monitor III	3	Interval was synchronized with SMF	4-15	Reserved.
Bit	Meaning when set															
0	Reserved															
1	Samples have been skipped															
2	Record was written by RMF Monitor III															
3	Interval was synchronized with SMF															
4-15	Reserved.															
32	20	4		Reserved.												
36	24 SMF79CYC	4	packed	Sampling cycle length, in the form <i>000tttF</i> , where <i>ttt</i> is the milliseconds and <i>F</i> is the sign (taken from CYCLE option). The range of values is 0.050 to 9.999 seconds.												
40	28 SMF79MVS	8	EBCDIC	z/OS software level (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).												
48	30 SMF79IML	1	binary	Indicates the type of processor complex on which data measurements were taken. <table border="1" data-bbox="857 1444 1084 1518"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>9672, zSeries</td> </tr> </tbody> </table>	Value	Meaning	3	9672, zSeries								
Value	Meaning															
3	9672, zSeries															

Offsets	Name	Length	Format	Description																		
49	31 SMF79PRF	1	binary	Processor flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The system has expanded storage</td> </tr> <tr> <td>1</td> <td>The processor is enabled for ES connection architecture (ESCA)</td> </tr> <tr> <td>2</td> <td>There is an ES connection director in the configuration</td> </tr> <tr> <td>3</td> <td>System is running in z/Architecture mode</td> </tr> <tr> <td>4</td> <td>At least one zAAP is currently installed</td> </tr> <tr> <td>5</td> <td>At least one zIIP is currently installed</td> </tr> <tr> <td>6</td> <td>Enhanced DAT architecture available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The system has expanded storage	1	The processor is enabled for ES connection architecture (ESCA)	2	There is an ES connection director in the configuration	3	System is running in z/Architecture mode	4	At least one zAAP is currently installed	5	At least one zIIP is currently installed	6	Enhanced DAT architecture available	7	Reserved.
Bit	Meaning when set																					
0	The system has expanded storage																					
1	The processor is enabled for ES connection architecture (ESCA)																					
2	There is an ES connection director in the configuration																					
3	System is running in z/Architecture mode																					
4	At least one zAAP is currently installed																					
5	At least one zIIP is currently installed																					
6	Enhanced DAT architecture available																					
7	Reserved.																					
50	32 SMF79PTN	1	binary	PR/SM partition number of the partition that wrote this record.																		
51	33 SMF79SRL	1	binary	SMF record level change number (X'76' for z/OS V2R2 RMF). This field enables processing of SMF record level changes in an existing release.																		
52	34 SMF79IET	8	char	Interval expiration time token. This token can be used to identify other than RMF records that belong to the same interval (if interval was synchronized with SMF). (The value of the field is zero for Monitor II records.)																		
60	3C SMF79LGO	8	binary	Offset GMT to local time (STCK format).																		
68	44 SMF79RAO	4	binary	Offset to reassembly area relative to start of RMF Product section.																		
72	48 SMF79RAL	2	binary	Length of reassembly area. Area consists of a fixed header and a variable number of information blocks. Length depends on the record type/subtype, but is fixed for a specific type/subtype.																		
74	4A SMF79RAN	2	binary	Reassembly area indicator. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Record is not broken.</td> </tr> <tr> <td>1</td> <td>Record is broken.</td> </tr> </tbody> </table> <p>Note: This field is used to indicate whether an SMF record is a broken record. Therefore, offset (SMF79RAO) and length (SMF79RAL) are only valid if SMF79RAN = 1. A reassembly area is only present in broken records.</p>	Value	Meaning	0	Record is not broken.	1	Record is broken.												
Value	Meaning																					
0	Record is not broken.																					
1	Record is broken.																					
76	4C SMF79OIL	2	binary	Original interval length as defined in the session or by SMF (in seconds).																		
78	4E SMF79SYN	2	binary	SYNC value in seconds.																		
80	50 SMF79GIE	8	binary	Projected gathering interval end (STCK format) GMT time.																		
88	58 SMF79XNM	8	EBCDIC	Sysplex name as defined in parmlib member COUPLExx.																		
96	60 SMF79SNM	8	EBCDIC	System name for current system as defined in parmlib member IEASYSxx SYSNAME parameter.																		
Reassembly Area:																						
0	0 SMF79RBR	2	binary	Total number of broken records built from the original large record.																		
2	2 SMF79RSQ	2	binary	Sequence number of this broken record. Every broken record built from the same large record must have a unique sequence number, it is in the range from 1 to SMF79RBR.																		

Record type 79

Offsets	Name	Length	Format	Description
4	4 SMF79RIO	4	binary	Offset to first reassembly information block relative to start of reassembly area header.
8	8 RMF79RIL	2	binary	Length of reassembly information block.
10	A SMF79RIN	2	binary	Number of reassembly information blocks (same value as SMF79TRN in header section).
12	C	4		Reserved.
Reassembly Area Information Block:				
0	0 SMF79RNN	2	binary	Total number of sections in the original large record. This field contains information of how many sections of a specific type were contained in the original SMF record. This field is a copy of the number field of the triplet in the original (non broken) record.
2	2 SMF79RPP	2	binary	Position of the first of one or more consecutive sections described by this block as in the original record. Values in the range of 1 to SMF79RNN are valid for correct processing. A value of 0 will skip processing of this information block. This field provides information where the sections that are part of this broken record were placed in the original record before the split took place. The actual number of consecutive sections contained in this record is available from the actual triplet in the header extension.

Monitor II Control Section

Offsets	Name	Length	Format	Description																		
0	0 R79GTOD	4	packed	Time when the call to data gatherer was issued, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.																		
4	4 R79LF2	1	binary	Flags <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Not enough relocate data sections to complete data gathering</td> </tr> <tr> <td>1</td> <td>Report will be sorted by storage group</td> </tr> <tr> <td>2</td> <td>Incorrect RSM data obtained</td> </tr> <tr> <td>3</td> <td>Reserved.</td> </tr> <tr> <td>4</td> <td>Invalid transaction data</td> </tr> <tr> <td>5</td> <td>SRM mode changed</td> </tr> <tr> <td>6</td> <td>Invalid data from Monitor I (DEV PGSP IOQ).</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Not enough relocate data sections to complete data gathering	1	Report will be sorted by storage group	2	Incorrect RSM data obtained	3	Reserved.	4	Invalid transaction data	5	SRM mode changed	6	Invalid data from Monitor I (DEV PGSP IOQ).	7	Reserved.
Bit	Meaning when set																					
0	Not enough relocate data sections to complete data gathering																					
1	Report will be sorted by storage group																					
2	Incorrect RSM data obtained																					
3	Reserved.																					
4	Invalid transaction data																					
5	SRM mode changed																					
6	Invalid data from Monitor I (DEV PGSP IOQ).																					
7	Reserved.																					
5	5	1		Reserved.																		
6	6 R79SES	2	EBCDIC	RMF session identifier.																		
8	8	2		Reserved.																		
10	A	2		Reserved for user.																		
12	C R79RID	8	EBCDIC	Measurement name.																		
20	14 R79CTXTL	2	binary	Length of command text.																		
22	16 R79CTEXT	32	EBCDIC	Text of command.																		
54	36 R79DTXTL	2	binary	Length of data reporter default text.																		
56	38 R79DTEXT	32	EBCDIC	Default data reporter text.																		

Offsets	Name	Length	Format	Description
88	58 R79IST	4	EBCDIC	Monitor I internal start time, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.
92	5C R79TSR	2	binary	Total number of small records.
94	5E	2		Reserved.
96	60 R79TOT	4	binary	Total number of data sections in large record.
100	64 R79NXT	4	binary	Number of data sections in following small records.
104	68 R79IWMTK	8	EBCDIC	Token returned from IWMRCOLL service.

Subtype 1 — Address Space State Data

ASD and ASDJ data section

Offsets	Name	Length	Format	Description
0	0 R791ASID	2	binary	Address space identifier.
2	2 R791JBN	8	EBCDIC	Name of job.
10	A R791DMN	2	binary	Reserved.
12	C R791NPG	2	binary	Reserved.
14	E R791PGP	2	binary	Reserved.
16	10 R791TTOD	4	binary	Real time into transaction (milliseconds).
20	14 R791CL	2	EBCDIC	Current location. (Set to IN when all other indicators are off.) Contents Meaning DL Out queue/delayed IN In storage LO Logically swapped out NS Non-swappable PR Privileged OT Swapped out and ready WL Wait queue/long wait WM Wait queue/MSO WO Wait queue/reasons other than WM, WL, or WT WT Wait queue/terminal wait >> Transitioning out << Transitioning in.
22	16 R791TAS	2	binary	Type of user Contents Meaning 0 Batch 1 Started task 2 Mount task 3 TSO/E 4 ASCH 5 OMVS address space.

Record type 79

Offsets	Name	Length	Format	Description
24	18 R791SRC	2	EBCDIC	Reason for last swap-out Contents Meaning
				TI Terminal input
				TO Terminal output
				LW Long wait
				XS Auxiliary storage shortage
				RS Central storage shortage
				DW Detected wait
				RQ Request swap
				NQ CAP enqueue
				EX CAP exchange
				US CAP uni-swap
				TS Transition swap
				IC Improve central storage usage
				IP Improve system paging rate
				MR Make room for a user who has been swapped out too long
				AW APPC WAIT (swapped out, because waiting for APPC services)
				IW OMVS input wait
				OW OMVS output wait
				SR In-real swap
				00 Unknown.
26	1A R791DP	2	binary	Dispatcher priority.
28	1C	6		Reserved.
34	22 R791SWC	2	binary	Transaction swap count.
36	24 R791SWMR	2	binary	SRM work load recommendation value.
38	26	4		Reserved.
42	2A R791WMS	4	binary	SRM service for the current transaction since the last swap-in.
46	2E R791TCPU	4	binary	CPU time (TCB + SRB) for current job step, in milliseconds.
50	32	4		Reserved.
54	36 R791ESCT	4	binary	Number of pages on expanded storage frames.
58	3A	2		Reserved.
60	3C R791PIN	4	binary	Page-in count.
64	40 R791TRTM	4	binary	Transaction residency time, in milliseconds.

Offsets	Name	Length	Format	Description
68	44 R791FLG	1	binary	<p>Bit Meaning when set</p> <p>0 Cross memory address space</p> <p>1 Data in R791CTAR is valid</p> <p>2 Data in R791VAL is valid</p> <p>3 Reserved.</p> <p>4 If ON: this address space is a server address space If OFF: goal specified for this address space is being honored by WLM</p> <p>5 Address space has been quiesced by a RESET command</p> <p>6 Address space matched a classification rule in the active policy which prevents managing the region based on the response time goals of its served transactions</p> <p>7 Server has temporal affinity to clients.</p>
69	45 R791FLG2	1	binary	<p>Additional bits.</p> <p>Bit Meaning when set</p> <p>0 Service class assigned by classification, or RESET SRVCLASS was designated CPU-critical in the active policy.</p> <p>1 Address space matched a classification rule in the active policy which was designated storage-critical.</p> <p>2 Address space is serving transactions which belong to a service class that was designated storage-critical in the active policy's classification rules, or is running in SYSTEM/SYSSTC.</p> <p>3 CPU protection was assigned either to the address space or to transaction service classes being served by the space.</p> <p>4 Storage protection was assigned either to the address space or to transaction service classes being served by the space.</p> <p>5 The dispatching priority of the address space is currently promoted due to a chronic resource contention.</p> <p>6 Address space is a CICS TOR that matched a classification rule in the active policy which allows managing the region based on the region goals but also ensures that completed transactions are reported and used for management of the CICS AORs.</p> <p>7 Reserved.</p>
70	46 R791FMCT	4	binary	Number of central storage frames.
74	4A R791WSS	4	binary	Working set at last swap in.
78	4E R791TWSS	4	binary	RSM target working set size.
82	52 R791ESHPI	4	binary	Number of hiperspace expanded storage pages used by job.
86	56 R791ESVI	4	binary	Number of VIO expanded storage pages used by job.
90	5A R791HIN	4	binary	Number of ESO hiperspace page-ins by block.

Record type 79

Offsets	Name	Length	Format	Description
94	5E R791HRMS	4	binary	Number of ESO hiperspace read misses by job (a read miss is an attempt to read a frame that is not in expanded storage).
98	62 R791BPIN	4	binary	Number of blocked pages brought in from DASD.
102	66 R791PINE	4	binary	Number of pages brought in from expanded storage.
106	6A R791BPNE	4	binary	Number of blocked pages brought in from expanded storage.
110	6E R791CTAR	4	binary	Central storage target number of frames.
114	72 R791VAL	4	binary	Recommendation value for working-set-managed address spaces.
118	76 R791SCL	8	EBCDIC	Service class name.
126	7E R791SCP	2	binary	Service class period.
128	80 R791WKLD	8	EBCDIC	Workload name.
136	88 R791RGRP	8	EBCDIC	Resource group name.
144	90 R791SPI	4	binary	Number of page-ins from auxiliary storage for shared page groups.
148	94 R791CMNI	4	binary	Number of common pages for current transaction.
152	98 R791PNV	4	binary	Number of non-VIO pages for current transaction.
156	9C R791PVIO	4	binary	Number of VIO pages for current transaction.
160	A0 R791EXCT	4	binary	EXCP count for this step.
164	A4 R791TCPC	4	binary	Total CPU time consumed in this address space, in milliseconds.
168	A8 R791ASST	4	binary	CPU time consumed by preemptible-class SRBs running on behalf of this address space, in milliseconds.
172	AC R791PHTM	4	binary	CPU time consumed by preemptible-class SRBs running in this address space, in milliseconds.
176	B0 R791RCL	8	EBCDIC	Report class name.
184	B8 R791MLIM	8	binary	Address space memory limit, in megabytes.
192	C0 R791TIFA	4	binary	CPU time in milliseconds consumed on zAAPs.
196	C4 R791TCP	4	binary	CPU time in milliseconds consumed on standard CPs. Only valid if zAAPs or zIIPs are in the configuration.
200	C8 R791TIFC	4	binary	CPU time in milliseconds consumed on standard CPs by work that was eligible for zAAP.
204	CC R791NFFI	4	binary	Normalization factor for zAAP time. Used to convert between real zAAP times and "normalized" zAAP times, that is, the equivalent time on a standard CP. Multiply R791TIFA by this value and divide by 256 to calculate the normalized zAAP time.
208	D0 R791TSUP	4	binary	CPU time in milliseconds consumed on zIIPs
212	D4 R791TSUC	4	binary	CPU time in milliseconds consumed on standard CPs by work that was eligible for zIIP.
216	D8 R791NFFS	4	binary	Normalization factor for zIIP time. Used to convert between real zIIP times and "normalized" zIIP times, that is, the equivalent time on a standard CP. Multiply R791TSUP by this value and divide by 256 to calculate the normalized zIIP time.
220	DC R791EXCW	8	binary	EXCP count (double word).
228	E4 R791PHTA	4	binary	zAAP-only equivalent of R791PHTM. This is normalized time.
232	E8 R791PHTI	4	binary	zIIP-only equivalent of R791PHTM. This is normalized time.

Offsets	Name	Length	Format	Description								
236	EC R791FLG3	1	binary	Additional flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Service class was assigned by classification, or RESET SRVCLASS belongs to I/O priority group HIGH in the active policy.</td> </tr> <tr> <td>1</td> <td>I/O priority group HIGH was assigned either to the address space or to transaction service classes served by the address space.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Service class was assigned by classification, or RESET SRVCLASS belongs to I/O priority group HIGH in the active policy.	1	I/O priority group HIGH was assigned either to the address space or to transaction service classes served by the address space.	2-7	Reserved.
Bit	Meaning when set											
0	Service class was assigned by classification, or RESET SRVCLASS belongs to I/O priority group HIGH in the active policy.											
1	I/O priority group HIGH was assigned either to the address space or to transaction service classes served by the address space.											
2-7	Reserved.											
237	ED	3		Reserved.								

Subtype 2 — Address Space Resource Data

ARD and ARDJ data section

Offsets	Name	Length	Format	Description																										
0	0 R792ASID	2	binary	Address space identifier.																										
2	2 R792JBN	8	EBCDIC	Name of job.																										
10	A R792DMN	2	binary	Reserved.																										
12	C R792NPG	2	binary	Reserved.																										
14	E R792CL	2	EBCDIC	Current location <table border="0"> <thead> <tr> <th>Contents</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>DL</td> <td>Out queue/delayed</td> </tr> <tr> <td>IN</td> <td>In storage</td> </tr> <tr> <td>LO</td> <td>Logically swapped out</td> </tr> <tr> <td>NS</td> <td>Non-swappable</td> </tr> <tr> <td>PR</td> <td>Privileged</td> </tr> <tr> <td>OT</td> <td>Swapped out and ready</td> </tr> <tr> <td>WL</td> <td>Wait queue/long wait</td> </tr> <tr> <td>WM</td> <td>Wait queue/MSO</td> </tr> <tr> <td>WO</td> <td>Wait queue/reasons other than WM, WL, or WT</td> </tr> <tr> <td>WT</td> <td>Wait queue/terminal wait</td> </tr> <tr> <td>>></td> <td>Transitioning out</td> </tr> <tr> <td><<</td> <td>Transitioning in.</td> </tr> </tbody> </table>	Contents	Meaning	DL	Out queue/delayed	IN	In storage	LO	Logically swapped out	NS	Non-swappable	PR	Privileged	OT	Swapped out and ready	WL	Wait queue/long wait	WM	Wait queue/MSO	WO	Wait queue/reasons other than WM, WL, or WT	WT	Wait queue/terminal wait	>>	Transitioning out	<<	Transitioning in.
Contents	Meaning																													
DL	Out queue/delayed																													
IN	In storage																													
LO	Logically swapped out																													
NS	Non-swappable																													
PR	Privileged																													
OT	Swapped out and ready																													
WL	Wait queue/long wait																													
WM	Wait queue/MSO																													
WO	Wait queue/reasons other than WM, WL, or WT																													
WT	Wait queue/terminal wait																													
>>	Transitioning out																													
<<	Transitioning in.																													
16	10 R792TAS	2	binary	Type of user <table border="0"> <thead> <tr> <th>Contents</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Batch</td> </tr> <tr> <td>1</td> <td>Started task</td> </tr> <tr> <td>2</td> <td>Mount task</td> </tr> <tr> <td>3</td> <td>TSO/E</td> </tr> <tr> <td>4</td> <td>ASCH</td> </tr> <tr> <td>5</td> <td>OMVS address space.</td> </tr> </tbody> </table>	Contents	Meaning	0	Batch	1	Started task	2	Mount task	3	TSO/E	4	ASCH	5	OMVS address space.												
Contents	Meaning																													
0	Batch																													
1	Started task																													
2	Mount task																													
3	TSO/E																													
4	ASCH																													
5	OMVS address space.																													
18	12 R792TRC	2	binary	Transaction count.																										
20	14 R792TTOD	4	binary	Transaction elapsed time, in milliseconds.																										

Record type 79

Offsets	Name	Length	Format	Description																		
24	18 R792PRFX	4	binary	Number of private fixed frames.																		
28	1C	2		Reserved.																		
30	1E R792SVAR	4	binary	SRM service absorption rate for step.																		
34	22 R792TCPU	4	binary	Total TCB time for step, in milliseconds.																		
38	26 R792PSS1	4	binary	High order word - CPU page seconds, in milliseconds. One page in storage for one second is one page second.																		
42	2A R792PSS2	4	binary	Low order word - step product of frame, in milliseconds. One page in storage for one second is one page second.																		
46	2E R792EJST	4	binary	Total processor time (TCB+SRB), in milliseconds.																		
50	32 R792TSRM	4	binary	Total SRM service for job or session.																		
54	36 R792RTM	4	binary	Resident time for step, in milliseconds.																		
58	3A R792EXCP	2	binary	EXCP count for this step.																		
60	3C R792CMNI	4	binary	Number of common pages for current transaction.																		
64	40 R792PNV	4	binary	Number of non-VIO pages for current transaction.																		
68	44 R792PVIO	4	binary	Number of VIO pages for current transaction.																		
72	48 R792FXBL	4	binary	Number of fixed frames below 16 megabytes.																		
76	4C R792PSWP	4	binary	Number of pages swapped in and out for current transaction.																		
80	50 R792LPAI	4	binary	Number of link pack area (LPA) pages paged in for current transaction.																		
84	54 R792CSAI	4	binary	Number of CSA pages paged in for current transaction.																		
88	58 R792LSQA	4	binary	Number of fixed local system queue area (LSQA) fixed frames.																		
92	5C R792NLQF	4	binary	Number of non-local system queue area (LSQA) fixed frames.																		
96	5E R792TDEV	4	binary	Total device connect time in milliseconds.																		
100	64	2		Reserved.																		
102	66 R792PIN	4	binary	Page-in count.																		
106	6A R792TRTM	4	binary	Transaction residency time.																		
110	6E R792FLG	1	binary	Flags <table border="1" data-bbox="860 1260 1412 1848"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Cross-memory address space</td> </tr> <tr> <td>1</td> <td>Incorrect RSM data obtained for address space</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>Reserved</td> </tr> <tr> <td>4</td> <td>If ON: this address space is a server address space If OFF: goal specified for this address space is being honored by WLM</td> </tr> <tr> <td>5</td> <td>Address space has been quiesced by a RESET command</td> </tr> <tr> <td>6</td> <td>Address space matched a classification rule in the active policy which prevents managing the region based on the response time goals of its served transactions</td> </tr> <tr> <td>7</td> <td>Server has temporal affinity to clients.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Cross-memory address space	1	Incorrect RSM data obtained for address space	2	Reserved	3	Reserved	4	If ON: this address space is a server address space If OFF: goal specified for this address space is being honored by WLM	5	Address space has been quiesced by a RESET command	6	Address space matched a classification rule in the active policy which prevents managing the region based on the response time goals of its served transactions	7	Server has temporal affinity to clients.
Bit	Meaning when set																					
0	Cross-memory address space																					
1	Incorrect RSM data obtained for address space																					
2	Reserved																					
3	Reserved																					
4	If ON: this address space is a server address space If OFF: goal specified for this address space is being honored by WLM																					
5	Address space has been quiesced by a RESET command																					
6	Address space matched a classification rule in the active policy which prevents managing the region based on the response time goals of its served transactions																					
7	Server has temporal affinity to clients.																					

Offsets	Name	Length	Format	Description																		
111	6F R792FLG2	1	binary	Additional bits. <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Service class assigned by classification, or RESET SRVCLASS was designated CPU-critical in the active policy.</td> </tr> <tr> <td>1</td> <td>Address space matched a classification rule in the active policy which was designated storage-critical.</td> </tr> <tr> <td>2</td> <td>Address space is serving transactions which belong to a service class that was designated storage-critical in the active policy's classification rules, or is running in SYSTEM/SYSSTC.</td> </tr> <tr> <td>3</td> <td>CPU protection was assigned either to the address space or to transaction service classes being served by the space.</td> </tr> <tr> <td>4</td> <td>Storage protection was assigned either to the address space or to transaction service classes being served by the space.</td> </tr> <tr> <td>5</td> <td>The dispatching priority of the address space is currently promoted due to a chronic resource contention.</td> </tr> <tr> <td>6</td> <td>Address space is a CICS TOR that matched a classification rule in the active policy which allows managing the region based on the region goals but also ensures that completed transactions are reported and used for management of the CICS AORs.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Service class assigned by classification, or RESET SRVCLASS was designated CPU-critical in the active policy.	1	Address space matched a classification rule in the active policy which was designated storage-critical.	2	Address space is serving transactions which belong to a service class that was designated storage-critical in the active policy's classification rules, or is running in SYSTEM/SYSSTC.	3	CPU protection was assigned either to the address space or to transaction service classes being served by the space.	4	Storage protection was assigned either to the address space or to transaction service classes being served by the space.	5	The dispatching priority of the address space is currently promoted due to a chronic resource contention.	6	Address space is a CICS TOR that matched a classification rule in the active policy which allows managing the region based on the region goals but also ensures that completed transactions are reported and used for management of the CICS AORs.	7	Reserved.
Bit	Meaning when set																					
0	Service class assigned by classification, or RESET SRVCLASS was designated CPU-critical in the active policy.																					
1	Address space matched a classification rule in the active policy which was designated storage-critical.																					
2	Address space is serving transactions which belong to a service class that was designated storage-critical in the active policy's classification rules, or is running in SYSTEM/SYSSTC.																					
3	CPU protection was assigned either to the address space or to transaction service classes being served by the space.																					
4	Storage protection was assigned either to the address space or to transaction service classes being served by the space.																					
5	The dispatching priority of the address space is currently promoted due to a chronic resource contention.																					
6	Address space is a CICS TOR that matched a classification rule in the active policy which allows managing the region based on the region goals but also ensures that completed transactions are reported and used for management of the CICS AORs.																					
7	Reserved.																					
112	70 R792LSQR	4	binary	Local system queue area (LSQA) pages in central storage.																		
116	74 R792LSQE	4	binary	Local system queue area (LSQA) pages in expanded storage.																		
120	78 R792ARS	4	binary	Average number of real frames for step.																		
124	7C R792TWSS	4	binary	SRM target working set size for this job.																		
128	80 R792PHSP	4	binary	Number of hiperspace pages for the current transaction.																		
132	84 R792EXCT	4	binary	EXCP count for this step.																		
136	88 R792SCL	8	EBCDIC	Service class name.																		
144	90 R792SCP	2	binary	Service class period.																		
146	92 R792WKLD	8	EBCDIC	Workload name.																		
154	9A R792RGRP	8	EBCDIC	Resource group name.																		
162	A2	2		Reserved.																		
164	A4 R792TCPC	4	binary	Total CPU time consumed in this address space, in milliseconds.																		
168	A8 R792ASST	4	binary	CPU time consumed by preemptible-class SRBs running on behalf of this address space, in milliseconds.																		
172	AC R792PHTM	4	binary	CPU time consumed by preemptible-class SRBs running in this address space, in milliseconds.																		
176	B0 R792FXAB	4	binary	Number of fixed frames between 16M and 2G (z/Architecture mode).																		
180	B4 R792TIFA	4	binary	CPU time in milliseconds consumed on zAAPs.																		
184	B8 R792TCP	4	binary	CPU time in milliseconds consumed on standard CPs. Only valid if zAAPs or zIIPs are in the configuration.																		

Record type 79

Offsets	Name	Length	Format	Description								
188	BC R792TIFC	4	binary	CPU time in milliseconds consumed on standard CPs by work that was eligible for zAAP.								
192	C0 R792NFFI	4	binary	Normalization factor for zAAP time. Used to convert between real zAAP times and "normalized" zAAP times, that is, the equivalent time on a standard CP. Multiply R792TIFA by this value and divide by 256 to calculate the normalized zAAP time.								
196	C4 R792TSUP	4	binary	CPU time in milliseconds consumed on zIIPs.								
200	C8 R792TSUC	4	binary	CPU time in milliseconds consumed on standard CPs by work that was eligible for zIIP.								
204	CC R792NFFS	4	binary	Normalization factor for zIIP time. Used to convert between real zIIP times and "normalized" zIIP times, that is, the equivalent time on a standard CP. Multiply R792TSUP by this value and divide by 256 to calculate the normalized zIIP time.								
208	D0 R792EXCW	8	binary	EXCP count (double word).								
216	D8 R792PHTA	4	binary	zAAP-only equivalent of R792PHTM. This is normalized time.								
220	DC R792PHTI	4	binary	zIIP-only equivalent of R792PHTM. This is normalized time.								
224	E0 R792FLG3	1	binary	Additional flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Service class was assigned by classification, or RESET SRVCLASS belongs to I/O priority group HIGH in the active policy.</td> </tr> <tr> <td>1</td> <td>I/O priority group HIGH was assigned either to the address space or to transaction service classes served by the address space.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Service class was assigned by classification, or RESET SRVCLASS belongs to I/O priority group HIGH in the active policy.	1	I/O priority group HIGH was assigned either to the address space or to transaction service classes served by the address space.	2-7	Reserved.
Bit	Meaning when set											
0	Service class was assigned by classification, or RESET SRVCLASS belongs to I/O priority group HIGH in the active policy.											
1	I/O priority group HIGH was assigned either to the address space or to transaction service classes served by the address space.											
2-7	Reserved.											
225	E1	3		Reserved.								

Subtype 3 — Storage/Processor Data

SRCS Data Section

Offsets	Name	Length	Format	Description
0	0	2		Reserved.
2	2 R793CRI	2	binary	Current system UIC (MCTCurSystemUIC).
4	4 R793SQA	2	binary	Number of system queue area (SQA) frames (replaced by R793SQA4).
6	6 R793CMNF	2	binary	Number of frames allocated to the common area (replaced by R793CMN4).
8	8 R793CMFF	2	binary	Number of common (LPA + CSA) fixed frames (replaced by R793CMF4).
10	A R793PRFX	2	binary	Number of private fixed frames (local system queue area (LSQA) + non-LSQA) (replaced by R793PFX4).
12	C R793CPUU	2	binary	LPAR utilization, if in LPAR mode and RMF Monitor I is active. X'7FFF' indicates no value available in PR/SM environment.
14	E R793DQ	2	binary	Length of out wait queue.
16	10 R793INC	2	binary	Number of address spaces swapped in storage (SRM in queue).

Offsets	Name	Length	Format	Description
18	12 R793OUTU	2	binary	Number of address spaces swapped out of storage (SRM out queue).
20	14	4		Reserved.
24	18 R793LPAF	2	binary	Number of link pack area (LPA) pageable frames (replaced by R793LPF4).
26	1A R793CSAF	2	binary	Number of CSA pageable frames (replaced by R793CSF4).
28	1C R793LPFX	2	binary	Number of link pack area (LPA) fixed frames (replaced by R793LFX4).
30	1E R793CSFX	2	binary	Number of CSA fixed frames (replaced by R793CFX4).
32	20 R793LSQA	2	binary	Number of local system queue area (LSQA) frames (replaced by R793LSQ4).
34	22 R793NLQF	2	binary	Number of private non-local system queue area (LSQA) fixed frames (replaced by R793NLF4).
36	24 R793LOUT	2	binary	Number of address spaces logically swapped out.
38	26 R793SQR	4	binary	System queue area (SQA) pages in central storage.
42	2A R793SQE	4	binary	System queue area (SQA) pages in expanded storage.
46	2E R793LSQR	4	binary	Local system queue area (LSQA) pages in central storage.
50	32 R793LSQE	4	binary	Local system queue area (LSQA) pages in expanded storage.
54	36 R793AFC	4	binary	Number of available frames.
58	3A R793CUT	4	binary	MVS utilization, that is, MVS non-wait time as a percentage of the interval length. For systems not running in LPAR mode in a PR/SM environment, this field is identical to R793CPUU. For details, see <i>z/OS RMF Report Analysis</i> .
62	3E R793SQA4	4	unsigned binary	Number of fixed system queue area (SQA) frames (replaces R793SQA).
66	42 R793CMN4	4	unsigned binary	Number of common (LPA+CSA) pageable and fixed frames (replaces R793CMNF).
70	46 R793CMF4	4	unsigned binary	Number of common (LPA+CSA) fixed frames (replaces R793CMFF).
74	4A R793PFX4	4	unsigned binary	Number of private fixed frames (LSQA+NON-LSQA) (replaces R793PREX).
78	4E R793LPF4	4	unsigned binary	Number of total link pack area (LPA) frames (replaces R793LPAF).
82	52 R793CSF4	4	unsigned binary	Number of total CSA frames (replaces R793CSAF).
86	56 R793LFX4	4	unsigned binary	Number of link pack area (LPA) fixed frames (replaces R793LPFX).
90	5A R793CFX4	4	unsigned binary	Number of CSA fixed frames (replaces R793CSFX).
94	5E R793LSQ4	4	unsigned binary	Number of fixed local system queue area (LSQA) frames (replaces R793LSQA).
98	62 R793NLF4	4	unsigned binary	Number of private NON-LSQA fixed frames (replaces R793NLQF).

Subtype 4 — Paging Activity

SPAG Data Section

Offsets	Name	Length	Format	Description
0	0 R794CMNI	4	binary	System common (LPA + CSA) pages in to central storage from auxiliary storage.
4	4 R794CMNO	4	binary	System common (CSA) pages out from central storage to auxiliary storage.
8	8	4		Reserved.
12	C R794SWPO	4	binary	Number of swap-outs between central storage and auxiliary storage.
16	10 R794PSPI	4	binary	Number of pages swapped in to central storage from auxiliary storage.
20	14 R794PSPO	4	binary	Number of pages swapped out from central storage to auxiliary storage.
24	18 R794PRVI	4	binary	Number of private pages (VIO + non-VIO) swapped in to central storage from auxiliary storage.
28	1C R794PRVO	4	binary	Number of private pages (VIO + non-VIO) swapped out from central storage to auxiliary storage.
32	20	4		Reserved.
36	24 R794VIO	4	binary	Number of VIO pages (in + out) between central storage and auxiliary storage.
40	28	2		Reserved.
42	2A R794CRI	2	binary	Current system UIC (MCTCurSystemUIC).
44	2C	4		Reserved.
48	30 R794LPAI	4	binary	System link pack area (LPA) pages in to central storage from auxiliary storage.
52	34 R794CSAI	4	binary	System CSA pages out from central storage to auxiliary storage.
56	38	12		Reserved.
68	44 R794ERTE	4	binary	Number of pages sent from central storage to expanded storage.
72	48 R794EVAL	4	binary	Number of available expanded storage frames not in use.
76	4C	4		Reserved.
80	50 R794MRTE	4	binary	Number of pages migrated from expanded storage to auxiliary storage.
84	54 R794MAGE	4	binary	Migration age.
88	58 R794AFC	4	binary	Number of available frames.
92	5C R794TWSS	4	binary	Target working set size for the common area.
96	60 R794HSP	4	binary	Number of hiperspace pages (in + out) between central storage and auxiliary storage.
100	64 R794PPIA	4	binary	Number of blocked pages paged in from private auxiliary storage.
104	68 R794LPPIA	4	binary	Number of blocks paged in from private auxiliary storage.

Subtype 5 — Address Space SRM Data

ASRM and ASRMJ Data Section

Offsets	Name	Length	Format	Description
0	0 R795ASID	2	binary	Address space identifier.

Offsets	Name	Length	Format	Description
2	2 R795JBN	8	EBCDIC	Name of job.
10	A R795DMN	2	binary	Reserved.
12	C R795NPG	2	binary	Reserved.
14	E R795PGP	2	binary	Reserved.
16	10 R795TTOD	4	binary	Real time into transaction.
20	14 R795CL	2	EBCDIC	Current location (set to IN when all other indicators are off) Contents Meaning DL Out queue/delayed IN In storage LO Logically swapped out NS Non-swappable PR Privileged OT Swapped out and ready WL Wait queue/long wait WM Wait queue/MSO WO Wait queue/reasons other than WM, WL, or WT WT Wait queue/terminal wait >> Transitioning out << Transitioning in.
22	16 R795TAS	2	binary	Type of user Contents Meaning 0 Batch 1 Started task 2 Mount task 3 TSO/E 4 ASCH 5 OMVS address space.
24	18 R795TROD	4	binary	Transaction resident time.
28	1C R795TCNT	2	binary	Transaction count.
30	1E R795SWC	2	binary	Transaction swap count.
32	20 R795CPUS	4	binary	Total processor service units for transaction (zeros when ASID is out of storage).
36	24 R795MSOS	4	binary	Total main storage origin (MSO) service units for transaction (zeros when ASID is out of storage).
40	28 R795IOCS	4	binary	Total IOC service units for transaction (zeros when ASID is out of storage).
44	2C R795WMS	4	binary	Total service units for transaction (zeros when ASID is out of storage).
48	30 R795TOTL	4	binary	Total service units for job or TSO/E session (zeros when ASID is out of storage).
52	34 R795TOT	4	binary	Total service units for transaction since last swap-in.
56	38 R795SRBS	4	binary	Total SRB service units for transaction (zeros when ASID is out of storage).

Record type 79

Offsets	Name	Length	Format	Description												
60	3C R795FLG	1	binary	Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>Reserved</td> </tr> <tr> <td>4</td> <td>If ON: this address space is a server address space If OFF: goal specified for this address space is being honored by WLM</td> </tr> <tr> <td>5</td> <td>Address space has been quiesced by a RESET command</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-2	Reserved	3	Reserved	4	If ON: this address space is a server address space If OFF: goal specified for this address space is being honored by WLM	5	Address space has been quiesced by a RESET command	6-7	Reserved.
Bit	Meaning when set															
0-2	Reserved															
3	Reserved															
4	If ON: this address space is a server address space If OFF: goal specified for this address space is being honored by WLM															
5	Address space has been quiesced by a RESET command															
6-7	Reserved.															
61	3D R795SCL	8	EBCDIC	Service class name.												
69	45 R795SCP	2	binary	Service class period.												
71	47 R795WKLD	8	EBCDIC	Workload name.												
79	4F R795RGRP	8	EBCDIC	Resource group name.												

Subtype 6 — Reserve Data

SENQR Data Section

Offsets	Name	Length	Format	Description												
0	0 R796ASID	2	binary	Address space ID of the job that issued the RESERVE.												
2	2 R796MAJ	8	EBCDIC	Major name of the resource.												
10	A R796MIN	44	EBCDIC	Minor name of the resource.												
54	36 R796JBN	8	EBCDIC	Name of the job that issued the RESERVE.												
62	3E R796VOLS	6	EBCDIC	Volume serial of the volume against which the RESERVE was issued.												
68	44 R796UCB	3	EBCDIC	Device number or 'UCB' for 4-digit device numbers.												
71	47 R796REQ	2	EBCDIC	Type and status of request for the resource.												
73	49 R796MINL	2	binary	Length of the minor name field (used for reporting).												
75	4B R796FLG	1	binary	Reserve flag byte <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Device reserved by this processor</td> </tr> <tr> <td>1</td> <td>Minor name truncated</td> </tr> <tr> <td>2</td> <td>Global resource</td> </tr> <tr> <td>3</td> <td>Reserve request converted to global enqueue</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Device reserved by this processor	1	Minor name truncated	2	Global resource	3	Reserve request converted to global enqueue	4-7	Reserved.
Bit	Meaning when set															
0	Device reserved by this processor															
1	Minor name truncated															
2	Global resource															
3	Reserve request converted to global enqueue															
4-7	Reserved.															
76	4C R796SID	8	EBCDIC	System identifier of the job that issued the RESERVE.												
84	54 R796DVN	2	binary	Device number (binary).												

Subtype 7 — Enqueue Contention Data

SENQ Data Section

Offsets	Name	Length	Format	Description
0	0 R797MAJ	8	EBCDIC	Major name of resource.

Offsets	Name	Length	Format	Description																		
8	8 R797MIN	44	EBCDIC	Minor name of resource.																		
52	34 R797FLG	1	binary	Data type flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>ON=detail data OFF=summary data</td> </tr> <tr> <td>1</td> <td>ON=major name specified</td> </tr> <tr> <td>2</td> <td>ON=minor name specified</td> </tr> <tr> <td>3</td> <td>ON=minor name truncated</td> </tr> <tr> <td>4</td> <td>Global resource</td> </tr> <tr> <td>5</td> <td>Data is for all resources held by a specified system in a global resource serialization complex.</td> </tr> <tr> <td>6</td> <td>Data is for all resources held exclusively by a specified system in a global resource serialization complex.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	ON=detail data OFF=summary data	1	ON=major name specified	2	ON=minor name specified	3	ON=minor name truncated	4	Global resource	5	Data is for all resources held by a specified system in a global resource serialization complex.	6	Data is for all resources held exclusively by a specified system in a global resource serialization complex.	7	Reserved.
Bit	Meaning when set																					
0	ON=detail data OFF=summary data																					
1	ON=major name specified																					
2	ON=minor name specified																					
3	ON=minor name truncated																					
4	Global resource																					
5	Data is for all resources held by a specified system in a global resource serialization complex.																					
6	Data is for all resources held exclusively by a specified system in a global resource serialization complex.																					
7	Reserved.																					
53	35 R797MINL	4	binary	Length of the minor name field (used for reporting).																		
57	39 R797OWN	2	binary	Count of requestors that own the resource.																		
59	3B R797EXCW	2	binary	Count of requestors waiting for exclusive use of a resource.																		
61	3D R797SHRW	2	binary	Count of requestors waiting for shared use of a resource.																		
63	3F R797REQ	2	EBCDIC	Type and status of request for a resource ('SO', 'SW', 'EO', or 'EW').																		
65	41 R797JBN	8	EBCDIC	Name of the job that issued the ENQ.																		
73	49 R797ASID	2	binary	Address space ID of the job that issued the ENQ.																		
75	4B R797SCOP	4	EBCDIC	Scope of the resource ('SYS', 'SYSS', or 'STEP').																		
79	4F	2		Reserved.																		
81	51 R797SID	8	EBCDIC	System identifier of the job that issued the ENQ.																		
89	59	3		Reserved.																		

Subtype 9 — Device Activity

Device Data Section

This section contains one per device.

Offsets	Name	Length	Format	Description
0	0 R799NUM	2	packed	Device number.
2	2 R799LCU	2	binary	Logical control unit number X'00' to X'FF'.
4	4	1		Reserved.

Record type 79

Offsets	Name	Length	Format	Description																
5	5 R799CNF	1	binary	Device flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>IOS queue-length incorrect</td> </tr> <tr> <td>1</td> <td>No logical control unit information</td> </tr> <tr> <td>2</td> <td>Data contained in fields R799SSC through R799DIS is incorrect</td> </tr> <tr> <td>3</td> <td>Connect, pending, or disconnect time for device is not valid</td> </tr> <tr> <td>4-5</td> <td>Reserved</td> </tr> <tr> <td>6</td> <td>Device was reconfigured or DDR activity was detected through Monitor I interval</td> </tr> <tr> <td>7</td> <td>Device is currently online.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	IOS queue-length incorrect	1	No logical control unit information	2	Data contained in fields R799SSC through R799DIS is incorrect	3	Connect, pending, or disconnect time for device is not valid	4-5	Reserved	6	Device was reconfigured or DDR activity was detected through Monitor I interval	7	Device is currently online.
Bit	Meaning when set																			
0	IOS queue-length incorrect																			
1	No logical control unit information																			
2	Data contained in fields R799SSC through R799DIS is incorrect																			
3	Connect, pending, or disconnect time for device is not valid																			
4-5	Reserved																			
6	Device was reconfigured or DDR activity was detected through Monitor I interval																			
7	Device is currently online.																			
6	6 R799SER	6	EBCDIC	Volume serial number of the volume mounted on this device.																
12	C R799TYP	4	binary	Device type.																
16	10 R799NUX	4	binary	Number of base and alias devices for a parallel access volume (PAV). This field is 1 for a non-PAV device. For HyperPAV base devices (bit 6 of R799CNX is set), this is the accumulated number of HyperPAV aliases.																
20	14 R799SSC	4	binary	Start subchannel (SSCH) count.																
24	18 R799MEC	4	binary	Measurement event count; number of SSCH instructions for which connect, pending, and active times were stored.																
28	1C R799CNN	4	binary	Device connect time.																
32	20 R799PEN	4	binary	Function pending time.																
36	24 R799ATV	4	binary	Function active time.																
40	28 R799DIS	4	binary	Device disconnect time.																
44	2C R799QUE	4	binary	Number of requests queued in IOS for this device.																
48	30 R799UTL	4	binary	Number of samples when the device was reserved but an SSCH had not been issued to the device.																
52	34 R799RSV	4	binary	Number of samples taken during the measurement interval that indicated that the device was reserved.																
56	38	4		Reserved.																
60	3C R799ALC	4	binary	Number of samples taken during the measurement interval that indicated that the device was allocated.																
64	40 R799DVB	4	binary	Device busy delay time.																
68	44 R799CUB	4	binary	Shows control unit busy delay time if bit 4 in R799CNX is set off.																
72	48 R799ICT	2	binary	Incorrect sample count.																

Offsets	Name	Length	Format	Description																		
74	4A R799CNX	1	binary	Device flag extensions. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Base exposure of a parallel access volume</td> </tr> <tr> <td>1</td> <td>Number of alias exposures has changed</td> </tr> <tr> <td>2</td> <td>Timing facility not active</td> </tr> <tr> <td>3</td> <td>Extended CMB mode</td> </tr> <tr> <td>4</td> <td>Model-dependant data not available by STSCH</td> </tr> <tr> <td>5</td> <td>Initial command response time available</td> </tr> <tr> <td>6</td> <td>HyperPAV base device.</td> </tr> <tr> <td>7</td> <td>Interrupt-Delay-Time facility is provided by channel subsystem.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Base exposure of a parallel access volume	1	Number of alias exposures has changed	2	Timing facility not active	3	Extended CMB mode	4	Model-dependant data not available by STSCH	5	Initial command response time available	6	HyperPAV base device.	7	Interrupt-Delay-Time facility is provided by channel subsystem.
Bit	Meaning when set																					
0	Base exposure of a parallel access volume																					
1	Number of alias exposures has changed																					
2	Timing facility not active																					
3	Extended CMB mode																					
4	Model-dependant data not available by STSCH																					
5	Initial command response time available																					
6	HyperPAV base device.																					
7	Interrupt-Delay-Time facility is provided by channel subsystem.																					
75	4B	1		Reserved.																		
76	4C R799SGN	8	EBCDIC	Storage group name.																		
84	54 R799NDA	4	binary	Total number of allocations in effect for the device.																		
88	58 R799DPB	4	binary	Shows the amount of time during the measurement interval that I/O requests to a device were delayed because a director port was busy if bit 4 of R799CNX is set off.																		
92	5C R799CMR	4	unsigned binary	Shows initial command response time in units of 128 microseconds if bit 5 of R799CNX is set on.																		
96	60 R799PCT	4	binary	Number of unsuccessful PAV samples.																		
100	64 R799PSM	4	binary	Number of successful PAV samples.																		
104	68 R799IDT	4	binary	Interrupt delay time in units of 128 microseconds. This field is zero if not supported by the hardware.																		
108	6C R799CUQ	4	binary	Control Unit Queuing Time.																		
112	70 R799CN2	1	binary	Device flag extension 2 <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Device connected to FICON.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Device connected to FICON.														
Bit	Meaning when set																					
0	Device connected to FICON.																					
113	71 R799SCS	1	binary	Subchannel set ID.																		
114	72 R799NM2	2	binary	Device number (same as R799NUM).																		

Subtype 11 — Page Data Set Activity

PGSP Control Section

This section contains one control section followed by a data set section for each data set in the report.

Offsets	Name	Length	Format	Description
0	0 R79BETYP	1	EBCDIC	Type of data that follows: P — PAGE data sets
1	1	3		Reserved.
PGSP Data Set Section:				
0	0 R79BSALC	4	binary	Number of slots/sets in this data set.
4	4 R79BSAVL	4	binary	Number of slots/sets available.
8	8 R79BSLBD	4	binary	Number of bad slots/sets.
12	C R79BSUSE	4	binary	Number of samples that indicate ASM is using the data set.

Record type 79

Offsets	Name	Length	Format	Description																		
16	10 R79BSIOS	4	binary	Number of SSCH instructions issued for the data set.																		
20	14 R79BREQS	4	binary	Number of pages transferred to/from the data set.																		
24	18 R79BFLG	1	binary	Flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Indicates that the data set is bad</td> </tr> <tr> <td>1</td> <td>Indicates a pageable link pack area (PLPA) data set</td> </tr> <tr> <td>2</td> <td>Indicates a common data set</td> </tr> <tr> <td>3</td> <td>Reserved</td> </tr> <tr> <td>4</td> <td>Indicates a local data set</td> </tr> <tr> <td>5</td> <td>Indicates a paging data</td> </tr> <tr> <td>6</td> <td>Reserved</td> </tr> <tr> <td>7</td> <td>Indicates that the data set accepts VIO pages.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Indicates that the data set is bad	1	Indicates a pageable link pack area (PLPA) data set	2	Indicates a common data set	3	Reserved	4	Indicates a local data set	5	Indicates a paging data	6	Reserved	7	Indicates that the data set accepts VIO pages.
Bit	Meaning when set																					
0	Indicates that the data set is bad																					
1	Indicates a pageable link pack area (PLPA) data set																					
2	Indicates a common data set																					
3	Reserved																					
4	Indicates a local data set																					
5	Indicates a paging data																					
6	Reserved																					
7	Indicates that the data set accepts VIO pages.																					
25	19 R79BDEV	1	binary	Device type.																		
26	1A R79BDADR	3	EBCDIC	Device number or 'UCB' for 4-digit device numbers.																		
29	1D R79BVSER	6	EBCDIC	Volume serial number.																		
35	23 R79BDSN	44	EBCDIC	Data set name.																		
79	4F R79BFL2	1	binary	Flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Multiple exposure device indicator</td> </tr> <tr> <td>1</td> <td>Alternate control unit device indicator</td> </tr> <tr> <td>2</td> <td>R79BDEVN contains a valid device name</td> </tr> <tr> <td>3</td> <td>Page space type SCM</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Multiple exposure device indicator	1	Alternate control unit device indicator	2	R79BDEVN contains a valid device name	3	Page space type SCM	4-7	Reserved.						
Bit	Meaning when set																					
0	Multiple exposure device indicator																					
1	Alternate control unit device indicator																					
2	R79BDEVN contains a valid device name																					
3	Page space type SCM																					
4-7	Reserved.																					
80	50 R79BDEVN	8	EBCDIC	Device name (blank if device name cannot be determined).																		
88	58 R79BCU	8	EBCDIC	Control unit name (blank if control unit name cannot be determined).																		
96	60 R79BDVN	2	binary	Device number (binary).																		

Subtype 12 — Channel Path Activity

Channel Path Control Section

This section contains one per record.

Offsets	Name	Length	Format	Description
0	0 R79CSMP	4	binary	Number of samples as weighted by SRM. Only valid if bit 5 of R79CFLG1 is not set.

Offsets	Name	Length	Format	Description																		
4	4 R79CFLG1	1	binary	Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>CPMF (channel path measurement facility) available</td> </tr> <tr> <td>1</td> <td>Configuration change</td> </tr> <tr> <td>2</td> <td>DCM supported by hardware</td> </tr> <tr> <td>3</td> <td>Configuration contains DCM managed channels</td> </tr> <tr> <td>4</td> <td>RMF address space not active</td> </tr> <tr> <td>5</td> <td>Hardware allows multiple logical channel subsystems</td> </tr> <tr> <td>6</td> <td>Enhanced channel path measurement facility available</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	CPMF (channel path measurement facility) available	1	Configuration change	2	DCM supported by hardware	3	Configuration contains DCM managed channels	4	RMF address space not active	5	Hardware allows multiple logical channel subsystems	6	Enhanced channel path measurement facility available	7	Reserved.
Bit	Meaning when set																					
0	CPMF (channel path measurement facility) available																					
1	Configuration change																					
2	DCM supported by hardware																					
3	Configuration contains DCM managed channels																					
4	RMF address space not active																					
5	Hardware allows multiple logical channel subsystems																					
6	Enhanced channel path measurement facility available																					
7	Reserved.																					
5	5 R79CCMI	1	binary	CPMF mode. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>CPMF is not active</td> </tr> <tr> <td>1</td> <td>Compatibility mode</td> </tr> <tr> <td>2</td> <td>Extended mode</td> </tr> </tbody> </table>	Value	Meaning	0	CPMF is not active	1	Compatibility mode	2	Extended mode										
Value	Meaning																					
0	CPMF is not active																					
1	Compatibility mode																					
2	Extended mode																					
6	6	2		Reserved.																		
8	8 R79CCFRC	4	binary	CPMF (channel path measurement facility) restart count.																		
12	12 R79CCFSC	4	binary	CPMF (channel path measurement facility) sample count.																		
16	10 R79CCSS	1	binary	Channel subsystem ID. Only valid if bit 5 of R79CFLG1 is set.																		
17	11	3		Reserved.																		

Channel Path Data Section

This section contains one per channel path.

Offsets	Name	Length	Format	Description																
0	0 R79CCPID	1	binary	Channel path identification. The range of values is X'00' to X'FF'.																
1	1 R79CFG2	1	binary	Channel flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Reserved</td> </tr> <tr> <td>2</td> <td>Block multiplexor</td> </tr> <tr> <td>3</td> <td>Byte multiplexor</td> </tr> <tr> <td>4</td> <td>ES conversion channel</td> </tr> <tr> <td>5</td> <td>ES connection channel</td> </tr> <tr> <td>6</td> <td>ES connection director attached to channel path</td> </tr> <tr> <td>7</td> <td>CTC adapter.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-1	Reserved	2	Block multiplexor	3	Byte multiplexor	4	ES conversion channel	5	ES connection channel	6	ES connection director attached to channel path	7	CTC adapter.
Bit	Meaning when set																			
0-1	Reserved																			
2	Block multiplexor																			
3	Byte multiplexor																			
4	ES conversion channel																			
5	ES connection channel																			
6	ES connection director attached to channel path																			
7	CTC adapter.																			

Record type 79

Offsets	Name	Length	Format	Description																		
2	2 R79CFG3	1	binary	<p>Channel flags</p> <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Channel path is shared between logical partitions</td> </tr> <tr> <td>1</td> <td>CPMF (channel path measurement facility) indicator, this entry is not valid</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3</td> <td>Channel converter 3090</td> </tr> <tr> <td>4</td> <td>Channel path is DCM managed</td> </tr> <tr> <td>5</td> <td>Channel characteristics changed</td> </tr> <tr> <td>6</td> <td>Extended channel path measurement supported</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Channel path is shared between logical partitions	1	CPMF (channel path measurement facility) indicator, this entry is not valid	2	Reserved	3	Channel converter 3090	4	Channel path is DCM managed	5	Channel characteristics changed	6	Extended channel path measurement supported	7	Reserved.
Bit	Meaning when set																					
0	Channel path is shared between logical partitions																					
1	CPMF (channel path measurement facility) indicator, this entry is not valid																					
2	Reserved																					
3	Channel converter 3090																					
4	Channel path is DCM managed																					
5	Channel characteristics changed																					
6	Extended channel path measurement supported																					
7	Reserved.																					
3	3 R79CCPD	1	binary	Channel path description. For an explanation, you can issue the command <code>D M=CHP</code> .																		
4	4 R79CBSY	4	binary	Number of samples in which the channel path was busy, weighted by SRM.																		
8	8 R79CPBY	4	binary	Channel-path-busy time of the partition since the last interval in units of 128 microseconds.																		
12	C	1		Reserved.																		
13	D R79CCPTS	3	binary	Last CPMB (channel path measurement block) entry time stamp in units of 128 microseconds. This value wraps approximately every 35.79 minutes.																		
16	10 R79CACR	5	EBCDIC	Channel path acronym.																		
21	15 R79CCMG	1	binary	CPMF Channel measurement group.																		
22	16 R79CFG4	1	binary	<p>CPMF validation flags - each bit (if on) indicates that the corresponding measurement data is available and valid. This refers to the first five words of the channel measurement data in field R79CCCM.</p> <table border="0"> <thead> <tr> <th>Bit</th> <th>Measurement Data</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Channel measurement data — word 1</td> </tr> <tr> <td>1</td> <td>Channel measurement data — word 2</td> </tr> <tr> <td>2</td> <td>Channel measurement data — word 3</td> </tr> <tr> <td>3</td> <td>Channel measurement data — word 4</td> </tr> <tr> <td>4</td> <td>Channel measurement data — word 5</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Measurement Data	0	Channel measurement data — word 1	1	Channel measurement data — word 2	2	Channel measurement data — word 3	3	Channel measurement data — word 4	4	Channel measurement data — word 5	5-7	Reserved.				
Bit	Measurement Data																					
0	Channel measurement data — word 1																					
1	Channel measurement data — word 2																					
2	Channel measurement data — word 3																					
3	Channel measurement data — word 4																					
4	Channel measurement data — word 5																					
5-7	Reserved.																					
23	17 R79CCPP	1	binary	Channel path parameter.																		
24	18 R79CCCM	48	*	<p>CPMF Channel measurement data (extended mode).</p> <p>The contents of this field is different for each measurement group, as described in the following tables.</p>																		
72	48 R79CGEN	1	binary	Channel type generation.																		
73	49	3		Reserved.																		
76	4C R79CCCMX	32		Extended CPMF measurement data. This field is only available for measurement group 2. See table "R79CCCMX - CPMF Extended Channel Measurement Data (Measurement Group 2)" on page 679 for the contents of the field.																		

R79CCCM - CPMF Channel Measurement Data (Measurement Group 1):

Offsets	Name	Length	Format	Description
0	0 R79CTUT	4	binary	Total channel path busy time (in units of 128 microseconds).
4	4 R79CPUT	4	binary	LPAR channel path busy time (in units of 128 microseconds).
8	8	40		Reserved.

R79CCCM - CPMF Channel Measurement Data (Measurement Group 2):

Offsets	Name	Length	Format	Description
0	0 R79CMBC	4	binary	Maximum bus cycles per second.
4	4 R79CMCU	4	binary	Maximum channel work units per second.
8	8 R79CMWU	4	binary	Maximum WRITE data units per second.
12	C R79CMRU	4	binary	Maximum READ data units per second.
16	10 R79CUS	4	binary	Data unit size (in bytes).
20	14 R79CTBC	4	binary	Total bus cycles count.
24	18 R79CTUC	4	binary	Total channel work unit count.
28	1C R79CPUC	4	binary	LPAR channel work units count.
32	20 R79CTWU	4	binary	Total WRITE data units count.
36	24 R79CPWU	4	binary	LPAR WRITE data units count.
40	28 R79CTRU	4	binary	Total READ data units count.
44	2C R79CPRU	4	binary	LPAR READ data units count.

R79CCCM - CPMF Channel Measurement Data (Measurement Group 3):

Offsets	Name	Length	Format	Description
0	0 R79CPDU	4	binary	LPAR data unit size (in bytes).
4	4 R79CTDU	4	binary	Total data unit size (in bytes).
8	8 R79CPUM	4	binary	LPAR message sent unit size (in bytes)
12	C R79CTUM	4	binary	Total message sent unit size (in bytes)
16	10	4		Reserved.
20	14 R79CPMS	4	binary	LPAR count of message sent units.
24	18 R79CTMS	4	binary	Total count of message sent units.
28	1C R79CPUS	4	binary	LPAR count of unsuccessful attempts to send messages.
32	20 R79CPUB	4	binary	LPAR count of unsuccessful attempts to receive messages due to unavailable buffers.
36	24 R79CTUB	4	binary	Total count of unsuccessful attempts to receive messages due to unavailable buffers.
40	28 R79CPDS	4	binary	LPAR count of data units sent.
44	2C R79CTDS	4	binary	Total count of data units sent.

R79CCCMX - CPMF Extended Channel Measurement Data (Measurement Group 2):

Offsets	Name	Length	Format	Description
0	0 R79CXOC	4	binary	Total number of FICON command-mode operations (CPC) that have been attempted by the channel.

Record type 79

Offsets	Name	Length	Format	Description
4	4 R79CXOD	4	binary	Total number of FICON command-mode operations (CPC) that could not be initiated by the channel because of a lack of available resources.
8	8 R79CXOS	8	binary	Summation count of FICON command-mode operations (CPC). Each time the number of FICON command-mode operations is incremented, the number of FICON command-mode operations active at the channel, including the one being initiated, is added to this field.
16	10 R79CXTC	4	binary	Total number of FICON transport-mode operations (CPC) that have been attempted by the channel. Zero when zHPF is not available.
20	14 R79CXTD	4	binary	Total number of FICON transport-mode operations (CPC) that could not be initiated by the channel because of a lack of available resources. Zero when zHPF is not available.
24	18 R79CXTS	8	binary	Summation count of FICON transport-mode operations (CPC). Each time the number of FICON transport-mode operations is incremented, the number of transport-mode operations active at the channel, including the one being initiated, is added to this field. Zero when zHPF is not available.

Subtype 14 — I/O Queuing Activity

I/O Queuing Global Section

This section contains processors described by triplet SMF79QSS.

Offsets	Name	Length	Format	Description
0	0 R79EGFLG	1	binary	Global input/output queue (IOQ) status
			Bit	Meaning when set
			0	Data is invalid due to failure of the channel measurement facility
			1	Diagnose interface failure
			2	ESCON director in the configuration
			3	CHSC store secondary queue data not supported
			4	DCM is supported by hardware
			5	Configuration contains DCM managed channels
			6	Measurement of initial command response time supported
			7	First-transfer-ready-disabled data available
1	1	7		Reserved.

I/O Queuing Configuration Control Section

This section contains one per logical control unit described by SMF79.

Offsets	Name	Length	Format	Description
0	0 R79EID1	2	EBCDIC	Logical control unit identifier.
2	2 R79ENTR	2	binary	Number of triplets following.
4	4 R79ECPDS	4	binary	Offset to I/O Queuing Configuration data section (relative to beginning of I/O Queuing Configuration control section).

Offsets	Name	Length	Format	Description
8	8 R79ECPDL	2	binary	Length of I/O Queuing Configuration data section.
10	A R79ECPDN	2	binary	Number of I/O Queuing Configuration data sections for the LCU.

I/O Queuing Configuration Data Section

This section contains one per channel path within a logical control unit described by triplet R79ECPDS.

Offsets	Name	Length	Format	Description																		
0	0 R79ECPID	1	binary	Channel path identifier.																		
1	1 R79ECPST	1	binary	Channel path status <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Channel path installed</td> </tr> <tr> <td>1</td> <td>Channel path online</td> </tr> <tr> <td>2</td> <td>Channel path varied</td> </tr> <tr> <td>3</td> <td>Channel path offline to all devices of the LCU</td> </tr> <tr> <td>4</td> <td>Channel path connection to devices of the LCU altered by VARY PATH processing</td> </tr> <tr> <td>5</td> <td>Reserved.</td> </tr> <tr> <td>6</td> <td>Channel path is DCM managed.</td> </tr> <tr> <td>7</td> <td>CHPID manipulated, requiring data reset.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Channel path installed	1	Channel path online	2	Channel path varied	3	Channel path offline to all devices of the LCU	4	Channel path connection to devices of the LCU altered by VARY PATH processing	5	Reserved.	6	Channel path is DCM managed.	7	CHPID manipulated, requiring data reset.
Bit	Meaning when set																					
0	Channel path installed																					
1	Channel path online																					
2	Channel path varied																					
3	Channel path offline to all devices of the LCU																					
4	Channel path connection to devices of the LCU altered by VARY PATH processing																					
5	Reserved.																					
6	Channel path is DCM managed.																					
7	CHPID manipulated, requiring data reset.																					
2	2 R79ECUN	2	binary	Number of control units attached.																		
4	4 R79ECU1	2	binary	First control unit identifier.																		
6	6 R79ECU2	2	binary	Second control unit identifier.																		
8	8 R79ECU3	2	binary	Third control unit identifier.																		
10	A R79ECU4	2	binary	Fourth control unit identifier.																		
12	C R79ECUB	4	binary	Number of initial selection attempts that were unsuccessful because the control unit was busy.																		
16	10 R79EPT	4	binary	Number of I/O operations accepted on this channel path.																		
20	14	4		Reserved.																		
24	18 R79EDPBC	4	binary	Number of initial selection attempts that were unsuccessful because the director port was busy.																		
28	1C R79ECBT	4	binary	Control unit busy delay time.																		
32	20 R79ECMR	4	binary	Initial command response time.																		
36	24 R79ESBS	4	binary	Switch busy count summation; contains the switch busy counts received for all partitions.																		
40	28	4		Reserved.																		
44	2C R79ECPXF	1	binary	Channel path extended flags <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Extended I/O measurement block format-1 data available</td> </tr> <tr> <td>1</td> <td>Extended I/O measurement block format-2 data available</td> </tr> <tr> <td>2</td> <td>First-transfer-ready-disabled supported</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Extended I/O measurement block format-1 data available	1	Extended I/O measurement block format-2 data available	2	First-transfer-ready-disabled supported	3-7	Reserved.								
Bit	Meaning when set																					
0	Extended I/O measurement block format-1 data available																					
1	Extended I/O measurement block format-2 data available																					
2	First-transfer-ready-disabled supported																					
3-7	Reserved.																					

Record type 79

Offsets	Name	Length	Format	Description								
45	2D R79ECPAT	1	binary	Path attributes <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Not specified for this path.</td> </tr> <tr> <td>1</td> <td>Preferred path.</td> </tr> <tr> <td>2</td> <td>Non-preferred path.</td> </tr> </tbody> </table>	Value	Meaning	0	Not specified for this path.	1	Preferred path.	2	Non-preferred path.
Value	Meaning											
0	Not specified for this path.											
1	Preferred path.											
2	Non-preferred path.											
46	2E	2		Reserved.								
48	30 R79ECTMW	4	Binary	Transport mode write count								
52	34 R79ECTRDR	4	Binary	First-transfer-ready-disabled write count								
56	38 *	8		Reserved for future use								

I/O Queuing Data Section

This section contains one per logical control unit, described by triplet SMF79ASS.

Offsets	Name	Length	Format	Description														
0	0 R79EID2	2	EBCDIC	Logical control unit identifier.														
2	2 R79EDST	1	binary	Data status <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>No hardware measurements available</td> </tr> <tr> <td>2-3</td> <td>Reserved.</td> </tr> <tr> <td>4</td> <td>LCU contains DCM managed channels.</td> </tr> <tr> <td>5</td> <td>Path attributes are valid.</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	No hardware measurements available	2-3	Reserved.	4	LCU contains DCM managed channels.	5	Path attributes are valid.	6-7	Reserved.
Bit	Meaning when set																	
0	Reserved																	
1	No hardware measurements available																	
2-3	Reserved.																	
4	LCU contains DCM managed channels.																	
5	Path attributes are valid.																	
6-7	Reserved.																	
3	3	1		Reserved.														
4	4 R79EQSM	4	binary	Accumulated length of CU-HDR queue.														
8	8 R79EQCT	4	binary	Number of entries placed on the CU-HDR queue.														
12	C R79EMCMN	2	binary	Minimum number of DCM managed channels used.														
14	E R79EMCMX	2	binary	Maximum number of DCM managed channels used.														
16	10 R79EMCDF	2	binary	Defined number of DCM managed channels.														
18	12	2		Reserved.														
20	14 R79EPTM	4	binary	Accumulated path taken count for DCM managed channels.														
24	18 R79EDPBM	4	binary	Accumulated director port busy count for DCM managed channels.														
28	1C R79ECUBM	4	binary	Accumulated control unit busy count for DCM managed channels.														
32	20 R79ECBTM	4	binary	Accumulated control unit busy delay time for DCM managed channels.														
36	24 R79ECMRM	4	binary	Accumulated initial command response time for DCM managed channels.														
40	28 R79ESBSM	4	binary	Accumulated switch busy count summation for DCM managed channels.														
44	2C R79ETMWM	4	binary	Accumulated transport mode write count for DCM managed channels														
48	30 R79ETRDM	4	binary	Accumulated first-transfer-ready-disabled write count for DCM managed channels														
52	34 R79ECSST	4	binary	Channel subsystem wait time.														

Subtype 15 — IRLM Long Lock Detection

IMS Long Lock Data Section

Offsets	Name	Length	Format	Description
0	0 R79FISTN	16	EBCDIC	IRLM lock structure name.
16	10 R79FDLKC	4	binary	Dead lock cycle number.
20	14 R79FETYP	1	EBCDIC	'B'=Blocker / 'W'=Waiter.
21	15	3		Reserved.
24	18 R79FIMSI	8	EBCDIC	IMS subsystem ID.
32	20 R79FPSTN	2	EBCDIC	PST number.
34	22 R79FPSBN	8	EBCDIC	PSB name.
42	2A R79FRGTY	1	EBCDIC	Region type.
43	2B R79FRCVT	16	EBCDIC	Recovery token.
59	3B R79FCTID	8	EBCDIC	CICS task ID (if CICS).
67	43 R79FLHTI	8	binary	Scheduled elapsed time (TOD format).
75	4B R79FLHCN	4	binary	Max lock held.
79	4F R79FLKNA	16	EBCDIC	Lock name.
95	5F R79FTRNM	8	EBCDIC	Transaction name / Job name.
103	67 R79FRSNA	8	EBCDIC	Resource (DB/Area) name.

Record Type 80 (50) — Security Product Processing

Record type 80 is produced during Resource Access Control Facility (RACF) processing and Public Key Infrastructure (PKI) Services processing. RACF writes a record whenever one of the following events is detected:

- Unauthorized attempts to enter the system
- Authorized accesses or unauthorized attempts to access RACF-protected resources
- Authorized or unauthorized attempts to modify profiles on a RACF data base
- Successful or unsuccessful partner LU verification.

PKI Services writes a record for each CRL that is successfully published to LDAP.

For information, see *z/OS Security Server RACF Macros and Interfaces*.

Record Type 81 (51) — RACF Initialization

Record type 81 is written at the completion of the initialization of Resource Access Control Facility (RACF). For more information, see *z/OS Security Server RACF Macros and Interfaces*.

Record Type 82 (52) — CUSP Record

Record type 82 is used to record information about the events and operations of the Cryptographic Unit Support Program (CUSP).

Record type 82 is written to the SMF data set at the completion of each of the following cryptography functions:

- **Initialization:**

Record type 82

The record is written when the Cryptographic Unit Support Program is initialized, either when cryptography is started or as a part of the key generator utility program.

- **Start:**
The record is written when a START command is issued for cryptography.
- **Stop:**
The record is written when a STOP command is issued for cryptography.
- **Modify:**
The record is written when a MODIFY command is issued for cryptography.
- **Unit check:**
The record is written when the cryptographic unit is switched offline and then brought online again.
- **Generation of an operational key:**
If specified in the installation options for cryptography, a record is written after processing each GENKEY macro instruction.
- **Transformation of an operational key:**
If specified in the installation options for cryptography, a record is written after processing each RETKEY macro instruction.
- **Execution of the key generator utility:**
The record is written after the execution of the key generator utility program, thus providing a record of changes to the cryptographic key data set (CKDS).

Record type 82 consists of a header section and six possible relocate sections. The header section identifies the RACF user ID and group name or the job and step name of the non-RACF cryptography user, the cryptography function when the record describes, and the return code issued by the function. The header section is 45 bytes long.

The six possible variable relocate sections are:

- Key generator utility, which indicates changes made by the utility to the host system master key, the local keys, the cross keys, and the remote keys.
- GENKEY function, which indicates the action taken in response to a GENKEY macro instruction.
- RETKEY function, which indicates the action taken in response to a RETKEY macro instruction.
- Cryptography initialization, which describes the SMF recording options in effect at initialization and the cryptography function and key manager user SVC numbers.
- Installation data, which contains any information supplied by an installation exit routine.
- Cryptographic unit data, which indicates the status of the cryptographic unit.

Note: The number of relocate sections depends on the type of action taken. For instance, the record written when the Cryptographic Unit Support Program stops consists only of the header section. The number of relocate sections is indicated in CRY82CVT (offset 41).

Macros to Symbolically Address Record Type 82: The SMF record mapping macros to symbolically address record type 82 are ICUSMF82 and ICUCRY82.

ICUSMF82 maps the fields in record type 82 whose name starts with SMF.
 ICUCRY82 maps the fields in record type 82 whose name starts with CRY. The
 macros are supplied on SYS1.MACLIB.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF82LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF82SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF82FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF82RTY	1	binary	Record type 82 (X'52').								
6	6 SMF82TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF82DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF82SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF82LNG	4	binary	Length of record header.								
22	16 SMF82TID	2	binary	Security product identifier: X'0002' for Cryptographic Unit Support Program.								
24	18 CRY82USR	8	EBCDIC	Job name (for RACF users, user ID).								
32	20 CRY82GRP	8	EBCDIC	Step-name (for RACF users, RACF group-name).								
40	28 CRY82FLG	1	binary	Flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Fields CRY82USR and CRY82GRP contain RACF user ID and group name. (When this bit is off, the fields contain the job name and step name).</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Fields CRY82USR and CRY82GRP contain RACF user ID and group name. (When this bit is off, the fields contain the job name and step name).	1-7	Reserved.		
Bit	Meaning when set											
0	Fields CRY82USR and CRY82GRP contain RACF user ID and group name. (When this bit is off, the fields contain the job name and step name).											
1-7	Reserved.											
41	29 CRY82VCT	2	binary	Number of variable relocate sections.								

Record type 82

Offsets	Name	Length	Format	Description																
43	2B CRY82FTN	1	binary	Function code <table border="0"> <thead> <tr> <th>Code</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Key generator function</td> </tr> <tr> <td>2</td> <td>GENKEY function</td> </tr> <tr> <td>3</td> <td>RETKEY function</td> </tr> <tr> <td>4</td> <td>Start cryptography</td> </tr> <tr> <td>5</td> <td>Stop cryptography</td> </tr> <tr> <td>6</td> <td>Modify cryptography</td> </tr> <tr> <td>7</td> <td>Hardware check.</td> </tr> </tbody> </table>	Code	Meaning	1	Key generator function	2	GENKEY function	3	RETKEY function	4	Start cryptography	5	Stop cryptography	6	Modify cryptography	7	Hardware check.
Code	Meaning																			
1	Key generator function																			
2	GENKEY function																			
3	RETKEY function																			
4	Start cryptography																			
5	Stop cryptography																			
6	Modify cryptography																			
7	Hardware check.																			
44	2C CRY82RTC	1	binary	Return code issued by function or X'FF' if function terminated abnormally.																

Key Generator Utility Relocate Section

Offsets	Name	Length	Format	Description										
0	0 CRY82DTP	1	binary	Data type indicator: X'01' for key generator utility.										
1	1 CRY82DLN	1	binary	Length of the data that follows.										
2	2 CRY82SMK	1	binary	Host system master key flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Host system master key was successfully changed (this bit is set even if an error occurs in the key generator).</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Host system master key was successfully changed (this bit is set even if an error occurs in the key generator).	1-7	Reserved.				
Bit	Meaning when set													
0	Host system master key was successfully changed (this bit is set even if an error occurs in the key generator).													
1-7	Reserved.													
3	3 CRY82LMK	1	binary	Local key flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>At least one local key was updated</td> </tr> <tr> <td>1</td> <td>At least one local key was added</td> </tr> <tr> <td>2</td> <td>At least one local key was deleted from the CKDS</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	At least one local key was updated	1	At least one local key was added	2	At least one local key was deleted from the CKDS	3-7	Reserved.
Bit	Meaning when set													
0	At least one local key was updated													
1	At least one local key was added													
2	At least one local key was deleted from the CKDS													
3-7	Reserved.													
4	4 CRY82CMK	1	binary	Cross key flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>At least one pair of cross keys was updated</td> </tr> <tr> <td>1</td> <td>At least one pair of cross keys was added</td> </tr> <tr> <td>2</td> <td>At least one pair of cross keys was deleted from the CKDS</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	At least one pair of cross keys was updated	1	At least one pair of cross keys was added	2	At least one pair of cross keys was deleted from the CKDS	3-7	Reserved.
Bit	Meaning when set													
0	At least one pair of cross keys was updated													
1	At least one pair of cross keys was added													
2	At least one pair of cross keys was deleted from the CKDS													
3-7	Reserved.													
5	5 CRY82RMK	1	binary	Remote key flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>At least one remote key was updated</td> </tr> <tr> <td>1</td> <td>At least one remote key was added</td> </tr> <tr> <td>2</td> <td>At least one remote key was deleted from the CKDS</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	At least one remote key was updated	1	At least one remote key was added	2	At least one remote key was deleted from the CKDS	3-7	Reserved.
Bit	Meaning when set													
0	At least one remote key was updated													
1	At least one remote key was added													
2	At least one remote key was deleted from the CKDS													
3-7	Reserved.													

GENKEY Function Relocate Section

Offsets	Name	Length	Format	Description														
0	0 CRY82DTP	1	binary	Data type indicator: X'02' for GENKEY function.														
1	1 CRY82DLN	1	binary	Length of the data that follows.														
2	2 CRY82GFG	1	binary	GENKEY activity flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>'LOCKEY' parameter was in error</td> </tr> <tr> <td>1</td> <td>'LOCKEY2' parameter was in error</td> </tr> <tr> <td>2</td> <td>'REMKEY' parameter was in error</td> </tr> <tr> <td>3</td> <td>'OPKEY' was generated by the key manager. When bit 3 is off, 'OPKEY' was supplied to the key manager.</td> </tr> <tr> <td>4</td> <td>Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	'LOCKEY' parameter was in error	1	'LOCKEY2' parameter was in error	2	'REMKEY' parameter was in error	3	'OPKEY' was generated by the key manager. When bit 3 is off, 'OPKEY' was supplied to the key manager.	4	Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)	5-7	Reserved.
Bit	Meaning when set																	
0	'LOCKEY' parameter was in error																	
1	'LOCKEY2' parameter was in error																	
2	'REMKEY' parameter was in error																	
3	'OPKEY' was generated by the key manager. When bit 3 is off, 'OPKEY' was supplied to the key manager.																	
4	Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)																	
5-7	Reserved.																	
3	3 CRY82LK1	8	EBCDIC	'LOCKEY' key name.														
11	B CRY82LK2	8	EBCDIC	'LOCKEY2' key name.														
19	13 CRY82REM	8	EBCDIC	'REMKEY' key name.														

RETKEY Function Relocate Section

Offsets	Name	Length	Format	Description						
0	0 CRY82DTP	1	binary	Data type indicator: X'03' for RETKEY function.						
1	1 CRY82DLN	1	binary	Length of the data that follows.						
2	2 CRY82RFG	1	binary	RETKEY activity flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)	1-7	Reserved.
Bit	Meaning when set									
0	Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)									
1-7	Reserved.									
3	3 CRY82RKN	8	EBCDIC	'REMKEY' key name.						

Cryptography Initialization Relocate Section

Offsets	Name	Length	Format	Description								
0	0 CRY82DTP	1	binary	Data type indicator, X'04' for initialization.								
1	1 CRY82DLN	1	binary	Length of the data that follows.								
2	2 CRY82SMF	1	binary	SMF option flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF records not written for GENKEY function</td> </tr> <tr> <td>1</td> <td>SMF records not written for RETKEY function</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	SMF records not written for GENKEY function	1	SMF records not written for RETKEY function	2-7	Reserved.
Bit	Meaning when set											
0	SMF records not written for GENKEY function											
1	SMF records not written for RETKEY function											
2-7	Reserved.											
3	3 CRY82SIM	2	binary	Cryptography function user SVC number in the form X'cccc'.								
5	5 CRY82KMG	2	binary	Key manager user SVC number in the form X'cccc'.								

Record type 82

Installation Data Relocate Section

Offsets	Name	Length	Format	Description
0	0 CRY82DTP	1	binary	Data type indicator: X'05' for installation data.
1	1 CRY82DLN	1	binary	Length of the data that follows.
2	2 CRY82ID	VAR	EBCDIC	Installation data written by an installation exit routine (the maximum length is 64 bytes).

Cryptographic Unit Data Relocate Section

Offsets	Name	Length	Format	Description												
0	0 CRY82DTP	1	binary	Data type indicator: X'06' for Cryptographic unit data.												
1	1 CRY82DLN	1	binary	Length of the data that follows.												
2	2 CRY82CID	1	EBCDIC	Cryptographic unit address.												
5	5 CRY82CST	1	binary	Cryptographic unit status <table border="1"><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0</td><td>Unit is online and available</td></tr><tr><td>1</td><td>Unit is unavailable</td></tr><tr><td>2</td><td>Unit check-key verification has failed</td></tr><tr><td>3</td><td>Unit check-key verification was successful</td></tr><tr><td>4-7</td><td>Reserved.</td></tr></tbody></table>	Bit	Meaning when set	0	Unit is online and available	1	Unit is unavailable	2	Unit check-key verification has failed	3	Unit check-key verification was successful	4-7	Reserved.
Bit	Meaning when set															
0	Unit is online and available															
1	Unit is unavailable															
2	Unit check-key verification has failed															
3	Unit check-key verification was successful															
4-7	Reserved.															

Record type 82 (52) — ICSF record

Reference information: For information about ICSF events and operations, see *z/OS Cryptographic Services ICSF System Programmer's Guide* and *z/OS Cryptographic Services ICSF Administrator's Guide*.

Record type 82 is used to record information about the events and operations of the Integrated Cryptographic Service Facility (ICSF) program product. Record type 82 is written to the SMF data set at the completion of certain cryptographic functions.

For a description of the Type 82 SMF Record, see *z/OS Cryptographic Services ICSF System Programmer's Guide* for your ICSF release.

Record Type 82 (52) — PCF Record

Record type 82 is used to record information about the events and operations of the Programmed Cryptographic Facility (PCF).

Record type 82 is written to the SMF data set at the completion of each of the following cryptography functions:

- **Initialization:**

The record is written when the Programmed Cryptographic Facility is initialized, either when cryptography is started or as a part of the key generator utility program.

- **Start:**

The record is written when a START command is issued for cryptography.

- **Stop:**

The record is written when a STOP command is issued for cryptography.

- **Generation of an operational key:**

If specified in the initialization options for cryptography, a record is written after processing each GENKEY macro instruction.

- **Transformation of an operational key:**

If specified in the initialization options for cryptography, a record is written after processing each RETKEY macro instruction.

- **Execution of the key generator utility:**

The record is written after the execution of the key generator utility program, thus providing a record of changes to the cryptographic key data set (CKDS).

Record type 82 consists of a header section and five possible relocate sections. The header section identifies the RACF user ID and group name or the job and step name of the non-RACF cryptography user, the cryptography function when the record describes, and the return code issued by the function. The header section is 45 bytes long.

The five possible variable relocate sections are:

- Key generator utility, which indicates changes made by the utility to the host system master key, the local keys, the cross keys, and the remote keys.
- GENKEY function, which indicates the action taken in response to a GENKEY macro instruction.
- RETKEY function, which indicates the action taken in response to a RETKEY macro instruction.
- Cryptography initialization, which describes the SMF recording options in effect at initialization and the cryptography function and key manager user SVC numbers.
- Installation data, which contains any information supplied by an installation exit routine.

Note: The number of relocate sections depends on the type of action taken. For instance, the record written when the Programmed Cryptographic Facility stops consists only of the header section. When the Programmed Cryptographic Facility has previously been initialized within the same IPL, the record written when cryptography starts consists of only the header section. The number of relocate sections is indicated in CRY82VCT (offset 37).

Macros to Symbolically Address Record Type 82: The SMF record mapping macros to symbolically address record type 82 are ICTSMF82 and ICTCRY82. ICTSMF82 maps the fields in record type 82 whose name starts with SMF. ICTCRY82 maps the fields in record type 82 whose name starts with CRY. The macros are supplied on SYS1.MACLIB.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Record type 82

Offsets	Name	Length	Format	Description												
0	0 SMF82LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF82SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF82FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.				
Bit	Meaning when set															
0-2	Reserved															
3-6	Version indicators*															
7	Reserved.															
5	5 SMF82RTY	1	binary	Record type 82 (X'52').												
6	6 SMF82TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF82DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF82SID	4	EBCDIC	System identification (from the SID parameter).												
18	12 SMF82LNG	4	binary	Length of record header.												
22	16 SMF82TID	2	binary	Security product identifier: X'0001' for Programmed Cryptographic Facility.												
24	18 CRY82USR	8	EBCDIC	Job name (for RACF users, user ID).												
32	20 CRY82GRP	8	EBCDIC	Step-name (for RACF users, RACF group-name).												
40	28 CRY82FLG	1	binary	Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Fields CRY82USR and CRY82GRP contain RACF user ID and group name. (When this bit is off, the fields contain the job name and step name).</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Fields CRY82USR and CRY82GRP contain RACF user ID and group name. (When this bit is off, the fields contain the job name and step name).	1-7	Reserved.						
Bit	Meaning when set															
0	Fields CRY82USR and CRY82GRP contain RACF user ID and group name. (When this bit is off, the fields contain the job name and step name).															
1-7	Reserved.															
41	29 CRY82VCT	2	binary	Number of variable relocate sections.												
43	2B CRY82FTN	1	binary	Function code <table border="0"> <tr> <td>Code</td> <td>Meaning</td> </tr> <tr> <td>1</td> <td>Key generator function</td> </tr> <tr> <td>2</td> <td>GENKEY function</td> </tr> <tr> <td>3</td> <td>RETKEY function</td> </tr> <tr> <td>4</td> <td>Start cryptography</td> </tr> <tr> <td>5</td> <td>Stop cryptography.</td> </tr> </table>	Code	Meaning	1	Key generator function	2	GENKEY function	3	RETKEY function	4	Start cryptography	5	Stop cryptography.
Code	Meaning															
1	Key generator function															
2	GENKEY function															
3	RETKEY function															
4	Start cryptography															
5	Stop cryptography.															
44	2C CRY82RTC	1	binary	Return code issued by function or X'FF' if function terminated abnormally.												

Key Generator Utility Relocate Section

Offsets	Name	Length	Format	Description
0	0 CRY82DTP	1	binary	Data type indicator: X'01' for key generator utility.
1	1 CRY82DLN	1	binary	Length of the data that follows.

Offsets	Name	Length	Format	Description
2	2 CRY82SMK	1	binary	Host system master key flags Bit Meaning when set 0 Host system master key was successfully changed 1-7 Reserved.
3	3 CRY82LMK	1	binary	Local key flags Bit Meaning when set 0 At least one local key was updated 1 At least once local key was added 2 At least one local key was deleted from the CKDS 3-7 Reserved.
4	4 CRY82CMK	1	binary	Cross key flags Bit Meaning when set 0 At least one pair of cross keys was updated 1 At least one pair of cross keys was added 2 At least one pair of cross keys was deleted from the CKDS 3-7 Reserved.
5	5 CRY82RMK	1	binary	Remote key flags Bit Meaning when set 0 At least one remote key was updated 1 At least one remote key was added 2 At least one remote key was deleted from the CKDS 3-7 Reserved.

GENKEY Function Relocate Section

Offsets	Name	Length	Format	Description
0	0 CRY82DTP	1	binary	Data type indicator: X'02' for GENKEY function.
1	1 CRY82DLN	1	binary	Length of the data that follows.
2	2 CRY82GFG	1	binary	GENKEY activity flags Bit Meaning when set 0 'LOCKEY' parameter was in error 1 'LOCKEY2' parameter was in error 2 'REMKEY' parameter was in error 3 'OPKEY' was generated by the key manager. When bit 3 is off, 'OPKEY' was supplied to the key manager. 4 Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes). 5-7 Reserved.
3	3 CRY82LK1	8	EBCDIC	'LOCKEY' key name.

Record type 82

Offsets	Name	Length	Format	Description
11	B CRY82LK2	8	EBCDIC	'LOCKKEY2' key name.
19	13 CRY82REM	8	EBCDIC	'REMKEY' key name.

RETKEY Function Relocate Section

Offsets	Name	Length	Format	Description						
0	0 CRY82DTP	1	binary	Data type indicator: X'03' for RETKEY function.						
1	1 CRY82DLN	1	binary	Length of the data that follows.						
2	2 CRY82RFG	1	binary	RETKEY activity flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)	1-7	Reserved.
Bit	Meaning when set									
0	Installation data relocate section was omitted from this record because the data supplied by the installation exit exceeded the length of CRY82ID (64 bytes)									
1-7	Reserved.									
3	3 CRY82RKN	8	EBCDIC	'REMKEY' key name.						

Cryptography Initialization Relocate Section

Offsets	Name	Length	Format	Description								
0	0 CRY82DTP	1	binary	Data type indicator, X'04' for initialization.								
1	1 CRY82DLN	1	binary	Length of the data that follows.								
2	2 CRY82SMF	1	binary	SMF option flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF records not written for GENKEY function</td> </tr> <tr> <td>1</td> <td>SMF records not written for RETKEY function</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	SMF records not written for GENKEY function	1	SMF records not written for RETKEY function	2-7	Reserved.
Bit	Meaning when set											
0	SMF records not written for GENKEY function											
1	SMF records not written for RETKEY function											
2-7	Reserved.											
3	3 CRY82SIM	2	binary	Cryptography function user SVC number in the form X'cccc'.								
5	5 CRY82KMG	2	binary	Key manager user SVC number in the form X'cccc'.								

Installation Data Relocate Section

Offsets	Name	Length	Format	Description
0	0 CRY82DTP	1	binary	Data type indicator: X'05' for installation data.
1	1 CRY82DLN	1	binary	Length of the data that follows.
2	2 CRY82ID	VAR	EBCDIC	Installation data written by an installation exit routine (the maximum length is 64 bytes).

Record Type 83 (53) — RACF Audit Record For Data Sets

Record type 83 is a Resource Access Control Facility (RACF) processing record. Subtype 1 is written in order to audit data sets that are affected by a RACF command (ADDSD, ALTDSD, and DELDSD) that caused the security label associated with a data set to be changed. For more information, see *z/OS Security Server RACF Macros and Interfaces*.

Record type 84 (54) — JES3 monitoring facility (JMF) data

Reference information:

For additional information on producing and using this record, a description of JMF, and how multi-segmented subtypes can be handled, see *z/OS JES3 Diagnosis*.

Record type 84 contains JES3 information collected by the JES3 monitoring facility (JMF). When JMF is called with the SMF option selected, then these records will be generated for each JMF interval. SMF records can be produced on both the global and local processors.

Each record type 84 contains a common section (with header, product, and general information portions) and a subtype section unique for each record. Subtypes 1, 2, 5, and 6 can be multi-segmented due to the large amount of information that is produced. The subtypes are:

Subtype 1

FCT (Function Control Table) analysis

Subtype 2

FCT summary and highlight

Subtype 3

Spool data management

Subtype 4

Resqueue cellpool, JCT and control block utilization

Subtype 5

Job analysis

Subtype 6

JES3 hot spot analysis

Subtype 7

JES3 internal reader DSP analysis

Subtype 8

JES3 SSI response time analysis

Subtype 9

JES3 SSI destination queue analysis

Subtype 10

JES3 Workload Manager Analysis

Macro to symbolically address record type 84

The mapping macro for SMF type 84 record is IAZSMF84. IAZSMF84 resides in SYS1.MACLIB.

Record Environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=NO (record exit: IEFU83)

Storage Residency

31-bit

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF84LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 Standard SMF Record Header for a detailed description.								
2	2 SMF84SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF84FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF84RTY	1	binary	Record type 84 (X'54').								
6	6 SMF84TME	4	packed	Time since midnight, in hundredths of a second, that the record was written to the SMF buffer.								
10	A SMF84DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF84SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF84SBS	2	binary	Subsystem identification — (X'0005' signifies JES3).								
20	14 SMF84SGN	2	binary	Segment number.								
22	16 SMF84FL1	1	binary	Flag byte <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>Indicates last SMF segment.</td> </tr> </tbody> </table>	Value	Meaning	X'80'	Indicates last SMF segment.				
Value	Meaning											
X'80'	Indicates last SMF segment.											
23	17 SMF84VER	1		SMF 84 version number <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'03'</td> <td>Indicates OS/390® JES3 2.4.0 level</td> </tr> </tbody> </table>	Value	Meaning	X'03'	Indicates OS/390® JES3 2.4.0 level				
Value	Meaning											
X'03'	Indicates OS/390® JES3 2.4.0 level											
24	18 SMF84STY	2	binary	Record subtype.								
26	1A SMF84TRN	2	binary	Number of triplets in this record. A triplet is a set of offset/length/number values that defines a section of the record.								
28	1C SMF84PRS	4	binary	Offset to JMF product section.								
32	20 SMF84PRL	2	binary	Length of JMF product section.								
34	22 SMF84PRN	2	binary	Number of JMF product sections.								
36	24 SMF84GNS	4	binary	Offset to JMF general section.								
40	28 SMF84GNL	2	binary	Length of JMF general section.								
42	2A SMF84GNN	2	binary	Number of JMF general sections.								
44	2C SMF84J1O	4	binary	Offset to JMF data section.								
48	30 SMF84J1L	2	binary	Length of JMF data section.								
50	32 SMF84J1N	2	binary	Number of JMF data sections.								

Product Section

This section contains information about JES3 and JMF.

Offsets	Name	Length	Format	Description								
0	0 R84MFVER	2	binary	JMF version number.								
2	2 R84PRDNM	8	EBCDIC	Product name ('SC1BA').								
10	A R84INTST	4	packed	Time of day that the JMF measurement interval started, in the form <i>hhmmssF</i> .								
14	E R84SDATE	4	packed	Date when the JMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
18	12 R84INTEN	4	packed	Time that the JMF measurement interval ended, in the form <i>hhmmssF</i> .								
22	16 R84EDATE	4	packed	Date when the JMF measurement interval ended, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.								
26	1A R84INTER	4	packed	Duration of the JMF measurement interval, in seconds.								
30	1E R84MFCYC	4	packed	Sampling cycle length, in the form <i>00ssstF</i> , (where <i>F</i> is the sign).								
34	22	2		Reserved.								
36	24 R84SAMPL	4	binary	Number of JMF samples.								
40	28 R84MFCMD	80	EBCDIC	*CALL, JMF command (first 80 characters).								
120	78 R84MVSRL	8	EBCDIC	MVS software level (consists of an acronym and the version, release, and modification level numbers).								
128	80 R84JESRL	8	EBCDIC	JES3 release level (consists of an acronym and the version, release, and modification level numbers).								
136	88 R84CPUM	4	EBCDIC	CPU model number.								
140	8C R84RSTO	4	binary	Central storage size in kilobytes.								
144	90 R84CPUNM	8	EBCDIC	CPU serial number.								
152	98 R84CPUID	4	EBCDIC	JES3 CPU ID.								
156	9C R84MPNAM	8	EBCDIC	Main processor name.								
164	A4 R84J3FLG	1		JES3 status indicator <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>JES3 local</td> </tr> <tr> <td>X'40'</td> <td>JES3 is in the APG priority level</td> </tr> <tr> <td>X'20'</td> <td>JES3 non-swappable.</td> </tr> </tbody> </table>	Bit	Meaning when set	X'80'	JES3 local	X'40'	JES3 is in the APG priority level	X'20'	JES3 non-swappable.
Bit	Meaning when set											
X'80'	JES3 local											
X'40'	JES3 is in the APG priority level											
X'20'	JES3 non-swappable.											
165	A5	1		Reserved.								
166	A6 R84JPRTY	2	binary	JES3 dispatching priority.								
168	A8 R84JFMFN	4	binary	Minimum JMF overhead time, in microseconds.								
172	AC R84JFMFX	4	binary	Maximum JMF overhead time, in microseconds.								
176	B0 R84JMFAV	4	binary	Average JMF overhead time, in microseconds. The percentage of JMF interval time is equal to (average JMF overhead time * number of JMF samples) / (JMF interval time, in microseconds * 100).								
180	B4 R84MVSMN	4	binary	Minimum MVS overhead time, in microseconds.								
184	B8 R84MVSMX	4	binary	Maximum MVS overhead time, in microseconds.								
188	BC R84MVS AV	4	binary	Average MVS overhead time, in microseconds. The percentage of JMF interval time is equal to (average MVS overhead time * number of JMF samples) / (JMF interval time in microseconds * 100).								

General Section

This section contains information about primary (nucleus) and auxiliary task activity.

Offsets	Name	Length	Format	Description
0	0 R84CPUSC	4	binary	CPU busy sample count.
4	4 R84NPA	4	binary	JES3 nucleus task posted-active count.
8	8 R84APA	4	binary	JES3 auxiliary task posted-active count.
12	C R84NPNA	4	binary	JES3 nucleus task posted-not active count.
16	10 R84APNA	4	binary	JES3 auxiliary task posted-not active count.
20	14 R84NNP	4	binary	JES3 nucleus task not-posted count.
24	18 R84ANP	4	binary	JES3 auxiliary task not-posted count.
28	1C R84NNW	4	binary	JES3 nucleus task non-standard wait count.
32	20 R84ANW	4	binary	JES3 auxiliary task non-standard wait count.
36	24 R84NSLLR	4	binary	JES3 nucleus suspended local lock request count.
40	28 R84ASLLR	4	binary	JES3 auxiliary task suspended local lock request count.
44	2C R84NSO	4	binary	JES3 nucleus task suspended-other count.
48	30 R84ASO	4	binary	JES3 auxiliary task suspended-other count.

Subtype 1 — FCT Analysis

This subtype consists of a header followed by three sections:

1. JES3 general information section. Contains general information about JES3 program activity including paging, working set sizes, and task information.
2. IRB header section. Contains general information about interruption request blocks (IRBs).
3. FCT and AWAIT analysis section. Contains information about each JES3 function control table (FCT) entry found during the JMF interval. Contains information about each FCT AWAIT entry found during the JMF interval.

Subtype Header Section

Offsets	Name	Length	Format	Description								
0	0 R84JES3O	4	binary	Offset to JES3 general information section.								
4	4 R84IRBSC	4	binary	Offset to the IRB section.								
8	8 R84FCTO	4	binary	Offset to FCT and AWAIT analysis section.								
12	C R84FFLG1	1	binary	Miscellaneous flag <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>Record contains JES3 general information section</td> </tr> <tr> <td>X'40'</td> <td>Record contains FCT and AWAIT analysis section</td> </tr> <tr> <td>X'20'</td> <td>Record contains IRB section.</td> </tr> </tbody> </table>	Bit	Meaning when set	X'80'	Record contains JES3 general information section	X'40'	Record contains FCT and AWAIT analysis section	X'20'	Record contains IRB section.
Bit	Meaning when set											
X'80'	Record contains JES3 general information section											
X'40'	Record contains FCT and AWAIT analysis section											
X'20'	Record contains IRB section.											
13	D	3		Reserved.								

General Information Section

Offsets	Name	Length	Format	Description
0	0 R84FOE	4	binary	Number of fixed pages in thousands.
4	4 R84FOESZ	4	binary	Total size of all fixed pages in thousands.

Offsets	Name	Length	Format	Description
8	8 R84SLOT	4	binary	Auxiliary slot count.
12	C R84SLOTS	4	binary	Total size of all auxiliary slots, in thousands.
16	10 R84JPIN	4	binary	JES3 page-ins during JMF monitoring.
20	14 R84JPOUT	4	binary	JES3 page-outs during JMF monitoring.
24	18 R84JPREC	4	binary	JES3 page reclaims during JMF monitoring.
28	1C R84JPGCT	4	binary	JES3 paging count during JMF monitoring.
32	20 R84SPGCT	4	binary	System paging count (non-swappable, non-VIO) during JMF monitoring.
JES3 working set information:				
36	24 R84WSPLO	4	binary	Low range of working set plot scale, in thousands.
40	28 R84WSPHI	4	binary	High range of working set plot scale, in thousands.
44	2C R84WSINC	4	binary	Increment for working set plot, in thousands.
48	30 R84WSMIN	4	binary	Minimal working set size, in thousands.
52	34 R84WSMAX	4	binary	Maximum working set size, in thousands.
56	38 R84WSAVG	4	binary	Average working set size, in thousands.
60	3C R84JMFSZ	4	binary	JMF size included in working set sizes, in thousands.
64	40 R84WSPTN	4	binary	Total number of working set plot counter entries.
68	44 R84WSPTO	4	binary	Offset of first working set plot counter entry.
JES3 subtasks information:				
72	48 R84ONES	4	binary	Number of times there was a single JES3 subtask posted.
76	4C R84TWO	4	binary	Number of times there were two JES3 subtasks posted concurrently.
80	50 R84THREE	4	binary	Number of times there were three JES3 subtasks posted concurrently.
84	54 R84FOURS	4	binary	Number of times there were four or more JES3 subtasks posted concurrently.
88	58 R84SUBNM	4	binary	Total number of JES3 subtask entries.
92	5C R84SUBOF	4	binary	Offset to the first JES3 subtask entry.
96	60 R84NNFCT	4	binary	Number of times JES3 nucleus task posted (but no FCT posted).
100	64 R84ANFCT	4	binary	Number of times JES3 auxiliary task posted (but no FCT posted).

JES3 Subtask Entry

This section contains one for each subtask.

Offsets	Name	Length	Format	Description
0	0 R84SSEQN	4	binary	Subtask sequence number.
4	4 R84SNAME	8	EBCDIC	Subtask name.
12	C R84SPPC	4	binary	Number of times subtask posted.

Working Set Plot Counter Entry

This section contains one for each working set plot counter.

Offsets	Name	Length	Format	Description
0	0 R84WSPTS	4	binary	Working set plot scale.
4	4 R84WSPTC	4	binary	Number of working set sizes for the working set plot scale.

Interruption Request Block Header Section

Offsets	Name	Length	Format	Description						
0	0 R84NIRBO	4	binary	Offset of the first nucleus task IRB table entry.						
4	4 R84NIRBC	4	binary	Total number of JES3 IRBs in JES3 nucleus task.						
8	8 R84NTOTA	4	binary	Total number of active nucleus task IRB entries.						
12	C R84NTOTS	4	binary	Total number of suspended nucleus task IRB entries.						
16	10 R84NTOTO	4	binary	Total number of IN-OS-WAIT IRB entries in JES3 nucleus task.						
20	14 R84AIRBO	4	binary	Offset of the first auxiliary task IRB table entry.						
24	18 R84AIRBC	4	binary	Total number of JES3 IRBs in JES3 auxiliary task.						
28	1C R84ATOTA	4	binary	Total number of active auxiliary task IRB entries.						
32	20 R84ATOTS	4	binary	Total number of suspended auxiliary task IRB entries.						
36	24 R84ATOTO	4	binary	Total number of IN-OS-WAIT IRB entries in JES3 auxiliary task.						
40	28 R84IRBFG	1	binary	Miscellaneous flag for the IRB section <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'40'</td> <td>Nucleus task IRB table has overflowed</td> </tr> <tr> <td>X'80'</td> <td>Auxiliary task IRB table has overflowed.</td> </tr> </tbody> </table>	Bit	Meaning	X'40'	Nucleus task IRB table has overflowed	X'80'	Auxiliary task IRB table has overflowed.
Bit	Meaning									
X'40'	Nucleus task IRB table has overflowed									
X'80'	Auxiliary task IRB table has overflowed.									
41	29	3		Reserved.						

IRB Table Entry

This section contains one for each nucleus task IRB and auxiliary task IRB.

Offsets	Name	Length	Format	Description
0	0 R84IRBNM	8	EBCDIC	Name or address of the JES3 IRB.
8	8 R84IRBAC	4	binary	Number of times for active JES3 IRB.
12	C R84IRBSU	4	binary	Number of times for suspended JES3 IRB.
16	10 R84IRBWT	4	binary	Number of times for IN-OS-WAIT JES3 IRB.

FCT and AWAIT Analysis Section

There is a header section for the FCT and AWAIT analysis section of subtype 1. After this header, there is an entry for each FCT. Each FCT is immediately followed by a series of entries, one for each type of AWAIT it incurred.

AWAIT entries have two formats. The format for the first part is the same for every AWAIT entry. The format for the second part depends on what type of AWAIT it is (based on the value of R84AWFL2).

Offsets	Name	Length	Format	Description
0	0 R84FAWLN	4	binary	Length of the FCT and AWAIT section.
4	4 R84NMFMA	4	binary	Number of times multi-function monitor active in JES3 nucleus task.
8	8 R84NMFMS	4	binary	Number of times multi-function monitor suspended in JES3 nucleus task.
12	C R84NFMFW	4	binary	Number of times multi-function monitor IN-OS-WAIT in JES3 nucleus task.
16	10 R84AMFMA	4	binary	Number of times multi-function monitor active in JES3 auxiliary task.
20	14 R84AMFMS	4	binary	Number of times multi-function monitor suspended in JES3 auxiliary task.

Offsets	Name	Length	Format	Description
24	18 R84AMFMW	4	binary	Number of times multi-function monitor IN-OS-WAIT JES3 auxiliary task.
28	1C R84FCTN	2	binary	Total number of FCT entries.
30	1E	2		Reserved.
32	20 R84FCTOF	4	binary	Offset of the first FCT entry.

FCT Entry

This section contains one for each FCT.

Offsets	Name	Length	Format	Description
0	0 R84FSEQN	2	binary	FCT sequence number.
2	2	2		Reserved.
4	4 R84FNEXT	4	binary	Length of next FCT entry.
8	8 R84FNAM	8	EBCDIC	Name of the Dynamic Support Program (DSP) associated with the FCT.
16	10 R84FDEV	8	EBCDIC	Name of the device associated with the FCT.
24	18 R84FPRTY	2	binary	FCT priority.
26	1A R84FCXOF	2	binary	Offset of FCT entry extension from the start of this FCT entry.
28	1C R84FFCT	4	binary	Number of times this FCT found on FCT chain.
32	20 R84FNUC	4	binary	Number of times this FCT in JES3 nucleus task.
36	24 R84FAUX	4	binary	Number of times this FCT in JES3 auxiliary task.
40	28 R84FNFP	4	binary	Number of times FCT found to be the active JES3 FCT in nucleus task.
44	2C R84FNFNA	4	binary	Number of times the FCT in nucleus task was dispatchable (posted) but not the active JES3 FCT.
48	30 R84FNFP	4	binary	Number of times in the nucleus task the FCT was found to be not the active JES3 FCT and not posted.
52	34 R84FNFW	4	binary	Number of times in the nucleus task the FCT was IN-OS-WAIT condition.
56	38 R84FNFS	4	binary	Number of times in the nucleus task the FCT was suspended because the local lock was unavailable.
60	3C R84FNFSO	4	binary	Number of times in the nucleus task the FCT was suspended for any reason other than waiting for local lock.
64	40 R84FNENT	2	binary	Total number of FCT AWAIT entries in the JES3 nucleus task.
66	42	2		Reserved.
68	44 R84FNOFF	4	binary	Offset to the first AWAIT entry in the JES3 nucleus task.
72	48 R84FAFPA	4	binary	Number of times FCT posted, active, in auxiliary task.
76	4C R84FAFNA	4	binary	Number of times FCT posted, but not active, in auxiliary task.
80	50 R84FAFNP	4	binary	Number of times FCT found to be not posted in auxiliary task.
84	54 R84FAFW	4	binary	Number of times FCT was found IN-OS-WAIT condition in auxiliary task.
88	58 R84FAFS	4	binary	Number of times FCT suspended in auxiliary task because local lock unavailable.
92	5C R84FAFSO	4	binary	Number of times FCT suspended in auxiliary task for any reason other than waiting for local lock.

Record type 84

Offsets	Name	Length	Format	Description
96	60 R84FAENT	2	binary	Total number of FCT AWAIT entries in JES3 auxiliary task.
98	62	2		Reserved.
100	64 R84FAOFF	4	binary	Offset of the first AWAIT entry in JES3 auxiliary task.

FCT Entry Extension

Offsets	Name	Length	Format	Description
0	0 R84FCXLN	2	binary	Length of extension.
2	2 R84FCXRS	2	binary	Reserved.
4	4 R84MRFRI	4	binary	Number of multi-record file read I/O's.
8	8 R84MRFWI	4	binary	Number of multi-record file write I/O's.
12	C R84SRFRI	4	binary	Number of single record file read I/O's.
16	10 R84SRFRB	4	binary	Number of single record file buffers read.
20	14 R84SRFWI	4	binary	Number of single record file write I/O's.
24	18 R84SRFWB	4	binary	Number of single record file buffers written.
28	1C R84FCXR2	100	binary	Reserved.

FCT AWAIT Entry (JES3)

This section contains one for each JES3 AWAIT entry that waits longer than one cycle.

Offsets	Name	Length	Format	Description																
0	0 R84AWFL1	1	binary	FCT AWAIT Flag 1 <table border="0"> <tr> <td>Value</td> <td>Meaning when set</td> </tr> <tr> <td>X'80'</td> <td>AWAIT is for generalized subtask</td> </tr> <tr> <td>X'40'</td> <td>AWAIT is for RJP I/O</td> </tr> <tr> <td>X'20'</td> <td>AWAIT is for specialized rescheduling</td> </tr> <tr> <td>X'10'</td> <td>AWAIT is for catalog locate</td> </tr> <tr> <td>X'08'</td> <td>AWAIT is for generalized subtask to become available</td> </tr> <tr> <td>X'04'</td> <td>AWAIT is for MVS/CI.</td> </tr> <tr> <td>X'02'</td> <td>AWAIT is described by a reason code.</td> </tr> </table>	Value	Meaning when set	X'80'	AWAIT is for generalized subtask	X'40'	AWAIT is for RJP I/O	X'20'	AWAIT is for specialized rescheduling	X'10'	AWAIT is for catalog locate	X'08'	AWAIT is for generalized subtask to become available	X'04'	AWAIT is for MVS/CI.	X'02'	AWAIT is described by a reason code.
Value	Meaning when set																			
X'80'	AWAIT is for generalized subtask																			
X'40'	AWAIT is for RJP I/O																			
X'20'	AWAIT is for specialized rescheduling																			
X'10'	AWAIT is for catalog locate																			
X'08'	AWAIT is for generalized subtask to become available																			
X'04'	AWAIT is for MVS/CI.																			
X'02'	AWAIT is described by a reason code.																			
1	1 R84AWFL2	1	binary	FCT AWAIT Flag 2 <table border="0"> <tr> <td>Value</td> <td>Meaning when set</td> </tr> <tr> <td>X'80'</td> <td>AWAIT is standard AWAIT</td> </tr> <tr> <td>X'40'</td> <td>AWAIT is for ALOAD of a module</td> </tr> <tr> <td>X'20'</td> <td>AWAIT is for FDB</td> </tr> <tr> <td>X'10'</td> <td>AWAIT is for SDM</td> </tr> <tr> <td>X'08'</td> <td>AWAIT is for AENQ on a resource</td> </tr> <tr> <td>X'04'</td> <td>AWAIT is for console buffers</td> </tr> <tr> <td>X'02'</td> <td>AWAIT is unknown.</td> </tr> </table>	Value	Meaning when set	X'80'	AWAIT is standard AWAIT	X'40'	AWAIT is for ALOAD of a module	X'20'	AWAIT is for FDB	X'10'	AWAIT is for SDM	X'08'	AWAIT is for AENQ on a resource	X'04'	AWAIT is for console buffers	X'02'	AWAIT is unknown.
Value	Meaning when set																			
X'80'	AWAIT is standard AWAIT																			
X'40'	AWAIT is for ALOAD of a module																			
X'20'	AWAIT is for FDB																			
X'10'	AWAIT is for SDM																			
X'08'	AWAIT is for AENQ on a resource																			
X'04'	AWAIT is for console buffers																			
X'02'	AWAIT is unknown.																			

Offsets	Name	Length	Format	Description
2	2 R84AWFL3	1	binary	FCT AWAIT Flag 3 Value Meaning when set 1 AWAIT is for locate schedule 2 AWAIT is for catalog setup.
3	3	1		Reserved.
4	4 R84AWUSE	4	binary	Number of times FCT found using this AWAIT.
8	8 R84AWPA	4	binary	Number of times FCT active after waiting on this AWAIT.
12	C R84AWPNA	4	binary	Number of times FCT waiting on this AWAIT, ECF is posted but FCT is not the active JES3 FCT.
16	10 R84AWNP	4	binary	Number of times FCT waiting on this AWAIT but the ECF not posted.
20	14 R84AWAVG	4	binary	Average AWAIT duration time.
24	18 R84AWTOT	4	binary	Total AWAIT duration time.
28	1C R84AWMAX	4	binary	Maximum AWAIT duration time.
32	20 R84AWMOD	8	EBCDIC	Name of module with maximum AWAIT duration time.
40	28 R84AWDIS	4	binary	Displacement in module to AWAIT with maximum duration time.
44	2C	8		Reserved.

FCT AWAIT Entry

The information in the AWAIT entry depends on the value of R84AWFL1 or R84AWFL2.

Offsets	Name	Length	Format	Description
For AWAITS described by a reason code (when R84AWFL1 = X'02'):				
52	34 R84AWRSN	2	binary	AWAIT reason code.
53	36 R84AWRSV	1	binary	Reserved.
54	37 R84AWDLN	1	binary	AWAIT data length or zero.
56	38 R84AWDAT	16	EBCDIC	Up to 16 bytes of AWAIT related data or zero.
For STANDARD AWAIT (when R84AWFL2 = X'80'):				
52	34 R84STDAW	8	EBCDIC	Standard AWAIT name.
60	3C	12		Reserved.

Offsets	Name	Length	Format	Description
For ALOAD AWAIT (when R84AWFL2 = X'40'):				
52	34 R84MODNM	8	EBCDIC	Name of module with this AWAIT.
60	3C	12		Reserved.

Offsets	Name	Length	Format	Description
For FDB AWAIT (when R84AWFL2 = X'20'):				
52	34 R84FDBIO	6	EBCDIC	Input/output FDB.
58	3A R84FDBRF	3	EBCDIC	MRF or SRF.
61	3D	1		Reserved.
62	3E R84FDBTY	3	EBCDIC	Set to 'I/O' or blanks.
65	41	7		Reserved.

Record type 84

Offsets	Name	Length	Format	Description
For SDM AWAIT (when R84AWFL2 = X'10'):				
52	34 R84SDMTY	20	EBCDIC	SDM AWAIT type; buffers or file directory space.

Offsets	Name	Length	Format	Description
For AENQ AWAIT (when R84AWFL2 = X'08'):				
52	34 R84ENQRN	8	EBCDIC	AENQ Resource name.
60	3C	12		Reserved.

Offsets	Name	Length	Format	Description
For CONSOLE BUFFERS AWAIT (when R84AWFL2 = X'04'):				
52	34 R84CNBTY	8	EBCDIC	Console buffers AWAIT type.
60	3C	12		Reserved.

Offsets	Name	Length	Format	Description
For Unknown AWAIT (when R84AWFL2 = X'02'):				
52	34 R84AWMSK	1	binary	AWAIT mask.
53	35	3		Reserved.
56	38 R84AWADR	4	EBCDIC	AWAIT address.
60	3C	12		Reserved.

Subtype 2 — FCT Summary and Highlight

This subtype consists of three sections:

1. FCT summary section. This section summarizes the FCT analysis report. Its length is variable depending on the number of FCT summary entries. It has a general section followed by an entry for each FCT describing nucleus and auxiliary mode activity.
2. FCT and AWAIT highlight section. This section lists FCTs in various categories for both nucleus and auxiliary modes:
 - Five most active FCTs
 - Five most posted and not active FCTs
 - Five most "IN-OS-WAIT" FCTs
 - Ten AWAIT entries with the largest total AWAIT duration time

The five most active, most posted-not-active, and most "IN-OS-WAIT" FCTs are mapped by a common DSECT. The format follows the FCT and AWAIT highlight section. The ten AWAIT entries with the largest total AWAIT duration time are each mapped by a common DSECT.

3. JES3 WAIT analysis section. This section lists the unexpected OS WAIT SVC occurrences within JES3. Its length is variable depending on the number of WAIT entries.

Subtype 2 Header

Offsets	Name	Length	Format	Description
0	0 R84FCTNM	4	binary	Number of FCT summary entries.
4	4 R84FSMLN	4	binary	Length of the FCT summary section.
8	8 R84FSMOF	4	binary	Offset to the first FCT summary entry.
12	C R84FAHOF	4	binary	Offset to the FCT and AWAIT highlight section.

Offsets	Name	Length	Format	Description
16	10 R84WAITO	4	binary	Offset to the JES3 WAIT analysis section.
20	14 R84S2FLG	1	binary	Subtype 2 header flag
				Value Meaning when set
				X'80' FCT summary and highlight segment
				X'40' WAIT analysis segment.
21	15	3		Reserved.

FCT Summary Entry

This section contains one for each FCT.

Offsets	Name	Length	Format	Description
0	0 R84FSNUM	4	binary	FCT sequence number.
4	4 R84FSNAM	8	EBCDIC	DSP name.
12	C R84DEV	8	EBCDIC	Device.
20	14 R84FSPRT	2	binary	FCT priority.
22	16	2		Reserved.
24	18 R84FCHN	4	binary	Number of times this FCT appeared on FCT chain.
28	1C R84FSNUC	4	binary	Number of times FCT in JES3 nucleus mode.
32	20 R84FSAUX	4	binary	Number of times FCT in JES3 auxiliary mode.
36	24 R84FNPA	4	binary	Number of times FCT was posted-active in the JES3 nucleus task.
40	28 R84FAPA	4	binary	Number of times FCT was posted-active in the JES3 auxiliary task.
44	2C R84FNPNA	4	binary	Number of times FCT was posted-not active in the JES3 nucleus task.
48	30 R84FAPNA	4	binary	Number of times FCT was posted-not active in the JES3 auxiliary task.
52	34 R84FNPNP	4	binary	Number of times FCT was not posted in the JES3 nucleus task.
56	38 R84FANP	4	binary	Number of times FCT was not posted in JES3 auxiliary task.
60	3C R84FNSOS	4	binary	Number of times FCT was IN-OS-Wait in the JES3 nucleus task.
64	40 R84FASOS	4	binary	Number of times FCT was IN-OS-WAIT in the JES3 auxiliary task.

FCT and AWAIT Highlight Section

Offsets	Name	Length	Format	Description
0	0 R84FHLNG	4	binary	Length of the FCT and AWAIT highlight data section.
4	4 R84N1MA	20	binary	Most active FCT in the JES3 nucleus.
24	18 R84N2MA	20	binary	Second most active FCT in the JES3 nucleus.
44	2C R84N3MA	20	binary	Third most active FCT in the JES3 nucleus.
64	40 R84N4MA	20	binary	Fourth most active FCT in the JES3 nucleus.
84	54 R84N5MA	20	binary	Fifth most active FCT in JES3 nucleus.
104	68 R84A1MA	20	binary	Most active FCT in JES3 auxiliary task.
124	7C R84A2MA	20	binary	Second most active FCT in JES3 auxiliary task.
144	90 R84A3MA	20	binary	Third most active FCT in JES3 auxiliary task.
164	A4 R84A4MA	20	binary	Fourth most active FCT in JES3 auxiliary task.

Record type 84

Offsets	Name	Length	Format	Description
184	B8 R84A5MA	20	binary	Fifth most active FCT in JES3 auxiliary task.
204	CC R84N1PNA	20	binary	Most posted-not-active FCT in JES3 nucleus.
224	E0 R84N2PNA	20	binary	Second most posted-not-active FCT in JES3 nucleus.
244	F4 R84N3PNA	20	binary	Third most posted-not-active FCT in JES3 nucleus.
264	108 R84N4PNA	20	binary	Fourth most posted-not-active FCT in JES3 nucleus.
284	11C R84N5PNA	20	binary	Fifth most posted-not-active FCT in JES3 nucleus.
304	130 R84A1PNA	20	binary	Most posted-not-active FCT in JES3 auxiliary task.
324	144 R84A2PNA	20	binary	Second most posted-not-active FCT in JES3 auxiliary task.
344	158 R84A3PNA	20	binary	Third most posted-not-active FCT in JES3 auxiliary task.
364	16C R84A4PNA	20	binary	Fourth most posted-not-active FCT in JES3 auxiliary task.
384	180 R84A5PNA	20	binary	Fifth most posted-not-active FCT in JES3 auxiliary task.
404	194 R84N1OSW	20	binary	FCT in JES3 nucleus with the most OS WAITs.
424	1A8 R84N2OSW	20	binary	FCT in JES3 nucleus with the second most OS WAITs.
444	1BC R84N3OSW	20	binary	FCT in JES3 nucleus with the third most OS WAITs.
464	1D0 R84N4OSW	20	binary	FCT in JES3 nucleus with the fourth most OS WAITs.
484	1E4 R84N5OSW	20	binary	FCT in JES3 nucleus with the fifth most OS WAITs.
504	1F8 R84A1OSW	20	binary	FCT in JES3 auxiliary task with the most OS WAITs.
524	20C R84A2OSW	20	binary	FCT in JES3 auxiliary task with the second most OS WAITs.
544	220 R84A3OSW	20	binary	FCT in JES3 auxiliary task with the third most OS WAITs.
564	234 R84A4OSW	20	binary	FCT in JES3 auxiliary task with the fourth most OS WAITs.
584	248 R84A5OSW	20	binary	FCT in JES3 auxiliary task with the fifth most OS WAITs.
604	25C R84AW1BN	48	binary	FCT causing the largest JES3 AWAIT delay.
652	28C R84AW2BN	48	binary	FCT causing the second largest JES3 AWAIT delay.
700	2BC R84AW3BN	48	binary	FCT causing the third largest JES3 AWAIT delay.
748	2EC R84AW4BN	48	binary	FCT causing the fourth largest JES3 AWAIT delay.
796	31C R84AW5BN	48	binary	FCT causing the fifth largest JES3 AWAIT delay.
844	34C R84AW6BN	48	binary	FCT causing the sixth largest JES3 AWAIT delay.
892	37C R84AW7BN	48	binary	FCT causing the seventh largest JES3 AWAIT delay.
940	3AC R84AW8BN	48	binary	FCT causing the eighth largest JES3 AWAIT delay.
988	3DC R84AW9BN	48	binary	FCT causing the ninth largest JES3 AWAIT delay.
1036	40C R84AWABN	48	binary	FCT causing the tenth largest JES3 AWAIT delay.
1084	43C R84DMMXA	4	binary	Maximum number of active DMJA FCTs allowed.
1088	440 R84DMMN	4	binary	Minimum number of active DMJA FCTs.
1092	444 R84DMMX	4	binary	Largest number of active DMJA FCTs.
1096	448 R84DMAV	4	binary	Average number of active DMJA FCTs.

The five most active, most posted-not-active, and five most in "OS WAIT" entries are mapped as follows:

Offsets	Name	Length	Format	Description
0	0 R84FSQNM	4	binary	FCT sequence number.
4	4 R84FNAME	8	EBCDIC	DSP name.
12	C R84TPA	4	binary	Number of times task posted — active.
16	10 R84FPA	4	binary	Number of times FCT posted — active.

Each of the 40-byte entries for the ten largest JES3 AWAIT delays is mapped as follows:

Offsets	Name	Length	Format	Description																		
0	0 R84BSEQN	4	binary	FCT sequence number.																		
4	4 R84BNAME	8	EBCDIC	DSP name.																		
12	C R84BTSK	8	EBCDIC	Task name.																		
20	14 R84BADAT	8	EBCDIC	Up to 8 bytes of AWAIT data.																		
28	1C R84BRSN	1	binary	Reason for awaiting <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>AENQ</td> </tr> <tr> <td>X'40'</td> <td>SDM - waiting for file directory</td> </tr> <tr> <td>X'20'</td> <td>SDM - waiting for JSAM buffers</td> </tr> <tr> <td>X'10'</td> <td>JES3 521 - Reserved</td> </tr> <tr> <td></td> <td>JES3 511 or prior releases - Waiting for console buffers</td> </tr> <tr> <td>X'08'</td> <td>Waiting for catalog locate</td> </tr> <tr> <td>X'04'</td> <td>Waiting for locate schedule.</td> </tr> <tr> <td>X'02'</td> <td>AWAIT reason code describes the bottleneck.</td> </tr> </tbody> </table>	Value	Meaning when set	X'80'	AENQ	X'40'	SDM - waiting for file directory	X'20'	SDM - waiting for JSAM buffers	X'10'	JES3 521 - Reserved		JES3 511 or prior releases - Waiting for console buffers	X'08'	Waiting for catalog locate	X'04'	Waiting for locate schedule.	X'02'	AWAIT reason code describes the bottleneck.
Value	Meaning when set																					
X'80'	AENQ																					
X'40'	SDM - waiting for file directory																					
X'20'	SDM - waiting for JSAM buffers																					
X'10'	JES3 521 - Reserved																					
	JES3 511 or prior releases - Waiting for console buffers																					
X'08'	Waiting for catalog locate																					
X'04'	Waiting for locate schedule.																					
X'02'	AWAIT reason code describes the bottleneck.																					
29	1D R84BARSN	2	binary	AWAIT reason code.																		
31	1F R84BADLN	1	binary	AWAIT data length.																		
32	20 R84CNNM	8	binary	Reserved.																		
40	28 R84BTOTD	4	binary	Total AWAIT duration time.																		
44	2C R84BMAXD	4	binary	Maximum AWAIT duration time.																		

JES3 Wait Analysis Section

Offsets	Name	Length	Format	Description
0	0 R84WTLNG	4	binary	Length of the JES3 WAIT analysis data section.
4	4 R84WTNUM	4	binary	Total number of WAIT analysis entries.
8	8 R84WTOFF	4	binary	Offset to the first entry.

WAIT analysis entry

This section contains one for each nucleus and auxiliary task WAIT.

Offsets	Name	Length	Format	Description								
0	0 R84WTNAM	8	EBCDIC	DSP name.								
8	8 R84WTFSN	4	binary	FCT sequence number.								
12	C R84WTTSK	8	EBCDIC	Task name.								
20	14 R84WTFOS	4	binary	Number of FCTs IN-OS-WAIT.								
24	18 R84WTF LG	1	binary	Type of WAIT: <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning when wet</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>Page fault</td> </tr> <tr> <td>X'40'</td> <td>SVC WAIT</td> </tr> <tr> <td>X'20'</td> <td>Load WAIT.</td> </tr> </tbody> </table>	Value	Meaning when wet	X'80'	Page fault	X'40'	SVC WAIT	X'20'	Load WAIT.
Value	Meaning when wet											
X'80'	Page fault											
X'40'	SVC WAIT											
X'20'	Load WAIT.											
25	19	3		Reserved.								

The following fields apply only to Page fault WAITs:

Record type 84

Offsets	Name	Length	Format	Description
28	1C R84PADR	4	binary	Address of location of page fault.
32	20 R84PNAM	8	EBCDIC	Module name.
40	28 R84PMOF	4	binary	Offset into the module.
44	2C R84PCNT	4	binary	Number of page faults.
48	30	12		Reserved.

Offsets	Name	Length	Format	Description
The following fields apply only to SVC WAITs:				
28	1C R84SNUM	4	binary	SVC number.
32	20 R84SNAM	8	EBCDIC	SVC name.
40	28 R84SADR	4	binary	Address of location of SVC WAIT.
44	2C R84SMNAM	8	EBCDIC	Module name.
52	34 R84SMOFS	4	binary	Offset into the module.
56	38 R84SCNT	4	binary	SVC count.
The following fields apply only to Load WAITs:				
28	1C R84LMNAM	8	EBCDIC	Name of module being loaded (LOAD).
36	24 R84LCNT	4	binary	Number of times LOAD invoked.
40	28	20		Reserved.

Subtype 3 — Spool Data Management (SDM)

This subtype contains data relating to JES3 spool data management. This subtype consists of eight sections:

1. General spool data management data
2. Spool data set description
3. Spool partition description
4. Spool space utilization snapshot
5. Single track table space allocation snapshot
6. Spool I/O activity
7. Buffers chaining by spool data set
8. Minimal/marginal track condition.

General Spool Data Management Data Section

Offsets	Name	Length	Format	Description
0	0 R84SDMLN	4	binary	Length of the SDM section.
4	4 R84BUFSZ	4	binary	Spool buffer size.
8	8 R84NBFBPG	4	binary	Number of buffers per 4K page.
12	C R84FDENT	4	binary	File directory entries.
16	10 R84SPDSU	4	binary	Number of spool data sets in use.
20	14 R84JSAMB	4	binary	Number of JSAM buffers.
24	18 R84JSAMT	4	binary	JSAM threshold for JSAM minbuf condition.
28	1C R84PBUFC	4	binary	Number of protected user spool access method (USAM) buffers in common service area.
32	20 R84PBUFA	4	binary	Number of protected user spool access method (USAM) buffers in AUX.
36	24 R84UPBUF	4	binary	Number of unprotected user spool access method (USAM) buffers per open USAM data set.

Offsets	Name	Length	Format	Description
40	28 R84MAXB	4	binary	Maximum data bytes in a user spool access method (USAM) buffer.
44	2C R84DSENT	4	binary	Total number of spool data set description entries.
48	30 R84DSOFF	4	binary	Offset to the first spool data set description entry.
52	34 R84PRENT	4	binary	Total number of spool partition description entries.
56	38 R84PROFF	4	binary	Offset to the first spool partition description entry.
60	3C R84SUENT	4	binary	Total number of spool space utilization snapshot entries.
64	40 R84SUOFF	4	binary	Address of the first spool space utilization snapshot entry.
68	44 R84STENT	4	binary	Total number of single track table space allocation snapshot entries.
72	48 R84STOFF	4	binary	Offset to the first single track table space allocation snapshot entry.
76	4C R84IOENT	4	binary	Total number of spool I/O activity — buffers read and written (entries).
80	50 R84IOOFF	4	binary	Offset to the first spool I/O activity — buffers read and written (entry).
84	54 R84BCENT	4	binary	Total number of buffer chaining by spool data set entries.
88	58 R84BCOFF	4	binary	Offset to the first buffer chaining by spool data set entry.
92	5C R84JSAMU	4	binary	Number of times JSAM buffers were unavailable.
96	60 R84USAMU	4	binary	Number of times user spool access method (USAM) unavailable buffers occurred.
100	64 R84MMENT	4	binary	Total number of minimal/marginal track condition entries.
104	68 R84MMOFF	4	binary	Offset to the first minimal/marginal track condition entry.
108	6C R84AWBUF	4	binary	Number of AWAITS of buffers during JMF monitoring.
112	70 R84AWEVR	4	binary	Number of AWAITS of buffers since JES3 initialization.

Spool Data Set Description Section

Offsets	Name	Length	Format	Description										
0	0 R84DSDSN	2	binary	Data set number.										
2	2 R84DSDDN	8	EBCDIC	Data definition name (DDNAME).										
10	A R84DSPRT	8	EBCDIC	Partition name.										
18	12 R84DSFLG	1		Extent status flag <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>Extent unavailable</td> </tr> <tr> <td>X'40'</td> <td>Extent moved to draining partition</td> </tr> <tr> <td>X'20'</td> <td>Extent held</td> </tr> <tr> <td>X'10'</td> <td>Extent in use.</td> </tr> </tbody> </table>	Value	Meaning when set	X'80'	Extent unavailable	X'40'	Extent moved to draining partition	X'20'	Extent held	X'10'	Extent in use.
Value	Meaning when set													
X'80'	Extent unavailable													
X'40'	Extent moved to draining partition													
X'20'	Extent held													
X'10'	Extent in use.													
19	13 R84DSDVA	3	EBCDIC	3-digit device number.										
22	16 R84DSVLS	6	EBCDIC	Volume serial (VOLSER).										
28	1C R84DSDVT	7	EBCDIC	Device type.										
35	23	1		Reserved.										
36	24 R84DSLWA	4	binary	Low address.										
36	24 R84DSLWC	2	binary	Low cylinder, lower portion.										
38	26 R84DSLWH	2	binary	Low head and low cylinder, upper portion.										

Record type 84

Offsets	Name	Length	Format	Description
40	28 R84DSHIA	4	binary	High address.
40	28 R84DSHIC	2	binary	High cylinder, lower portion.
42	2A R84DSHIH	2	binary	High head and high cylinder, upper portion.
44	2C R84DSRT	2	binary	Records per tracks.
46	2E R84DSRTG	2	binary	Records per track group.
48	30 R84DSBUF	4	binary	Buffer size in bytes.
52	34 R84DSDV4	4	EBCDIC	4-digit device number.

Spool Partition Description Section

Offsets	Name	Length	Format	Description
0	0 R84PRPRT	8	EBCDIC	Partition name.
8	8 R84PRMIN	1	binary	Minimal spool threshold percent.
9	9 R84PRMRG	1	binary	Marginal spool threshold percent.
10	A R84PROVP	8	EBCDIC	Name of overflow partition.
18	12 R84PRFLG	1	binary	Default partition indicator
				Value Meaning when set
				X'80' Default partition.
19	13	1		Reserved.

Spool Space Utilization Snapshot Section

Offsets	Name	Length	Format	Description
0	0 R84SUPRT	8	EBCDIC	Partition name.
8	8 R84SUDDN	8	EBCDIC	Data definition name (DDNAME).
16	10 R84SUDEF	4	binary	Number of track groups defined.
20	14 R84SUALO	4	binary	Track groups allocated.

Single Track Table Space Utilization Section

Offsets	Name	Length	Format	Description
0	0 R84STDSN	2	binary	Data set number.
2	2	2		Reserved.
4	4 R84STDDN	8	EBCDIC	Data definition name (DDNAME).
12	C R84STLWA	4	binary	Low address.
12	C R84STLWC	2	binary	Low cylinder, lower portion.
14	E R84STLWH	2	binary	Low head and low cylinder, upper portion.
16	10 R84STHIA	4	binary	High address.
16	10 R84STHIC	2	binary	High cylinder, lower portion.
18	12 R84STHIH	2	binary	High head and high cylinder, upper portion.
20	14 R84STDEF	4	binary	Number of records defined.
24	18 R84STALO	4	binary	Number of records allocated.
28	1C R84STFLG	1		Single track table flag
				Value Meaning when set
				X'80' Expansion indicator for any or all subsequent STT entries that match data set number.
29	1D	3		Reserved.

Spool I/O Activity Section

Offsets	Name	Length	Format	Description
0	0 R84IOVLS	6	EBCDIC	Volume serial (VOLSER).
6	6 R84IODDN	8	EBCDIC	Data definition name (DDNAME).
14	E	2		Reserved.
16	10 R84IOTOT	4	binary	Total I/O counts.
20	14 R84IOLOC	4	binary	I/O counts for low number cylinders.
24	18 R84IO2CY	4	binary	I/O counts for 2 cylinders.
28	1C R84IO3CY	4	binary	I/O counts for 3 cylinders.
32	20 R84IO4CY	4	binary	I/O counts for 4 cylinders.
36	24 R84IO5CY	4	binary	I/O counts for 5 cylinders.
40	28 R84IO6CY	4	binary	I/O counts for 6 cylinders.
44	2C R84IO7CY	4	binary	I/O counts for 7 cylinders.
48	30 R84IO8CY	4	binary	I/O counts for 8 cylinders.
52	34 R84IO9CY	4	binary	I/O counts for 9 cylinders.
56	38 R84IOHIC	4	binary	I/O counts for high number cylinders.

Buffers chaining by spool data set section

Offsets	Name	Length	Format	Description
0	0 R84BCDSN	2	binary	Data set number.
2	2	2		Reserved.
4	4 R84BCTOT	4	binary	Total number of I/O buffers.
8	8 R84BC1B	4	binary	Count for one chained buffer.
12	C R84BC2B	4	binary	Count for two chained buffers.
16	10 R84BC3B	4	binary	Count for three chained buffers.
20	14 R84BC4B	4	binary	Count for four chained buffers.
24	18 R84BC5B	4	binary	Count for five chained buffers.
28	1C R84BC6B	4	binary	Count for six chained buffers.
32	20 R84BC7B	4	binary	Count for seven chained buffers.
36	24 R84BC8B	4	binary	Count for eight chained buffers.
40	28 R84BC9B	4	binary	Count for nine chained buffers.
44	2C R84BC10B	4	binary	Count for ten chained buffers.
48	40 R84BC11B	4	binary	Count for eleven or more chained buffers.

Minimal/Marginal Track Condition Section

Offsets	Name	Length	Format	Description
0	0 R84MMPRT	8	EBCDIC	Name of partition.
8	8 R84MMMIN	4	binary	Count of samples partition in minimal track condition.
12	C R84MMMRG	4	binary	Count of samples partition in marginal track condition.

Subtype 4 — Resqueue Cellpool and Control Block Utilization

This subtype has three sections:

1. Resqueue cell pool statistics section
2. JCT access methods statistics section

Record type 84

3. JES3 control block utilization section.

Resqueue Cell Pool Statistics Section

Offsets	Name	Length	Format	Description
0	0 R84JCOFF	4	binary	Offset to JCT access method section.
4	4 R84CBOFF	4	binary	Offset to JES3 control block utilization section.
8	8 R84CIEXT	2	binary	Total number of CI secondary extents in pool.
10	A	2		Reserved.
12	C R84CICEL	4	binary	Total number of CI resqueues in pool.
16	10 R84CIUSE	4	binary	Total number of CI resqueues used in pool.
20	14 R84CIRQP	4	binary	Number of CI resqueues in primary extent.
20	14 R84NCISX	4	binary	Total number of CI resqueue secondary extent entries.
28	1C R84CISXO	4	binary	Offset to first CI resqueue secondary extent entry.
32	20 R84MNEXT	2	binary	Total number of MAIN secondary extents in pool.
34	22	2		Reserved.
36	24 R84MNCEL	4	binary	Total number of MAIN resqueues in pool.
40	28 R84MNUSE	4	binary	Total number of MAIN resqueues used in pool.
44	2C R84MNRQP	4	binary	Total number of MAIN resqueues in primary extent.
48	30 R84NMNSX	4	binary	Total number of MAIN resqueue secondary extent entries.
52	34 R84MNSXO	4	binary	Offset to first MAIN resqueue secondary extent.
56	38 R84OSEXT	2	binary	Total number of OUTSERV secondary extents in pool.
58	3A	2		Reserved.
60	3C R84OSCEL	4	binary	Total number of OUTSERV resqueues in pool.
64	40 R84OSUSE	4	binary	Total number of OUTSERV resqueues used in pool.
68	44 R84OSRQP	4	binary	Number of OUTSERV resqueues in primary extent.
72	48 R84NOSSX	4	binary	Total number of OUTSERV resqueue secondary extent entries.
76	4C R84OSSXO	4	binary	Offset to first OUTSERV resqueue secondary extent.
80	50 R84CMEXT	2	binary	Total number of COMMON secondary extents in pool.
82	52	2		Reserved.
84	54 R84CMCEL	4	binary	Total number of COMMON resqueues in pool.
88	58 R84CMUSE	4	binary	Total number of COMMON resqueues used in pool.
92	5C R84CMRQP	4	binary	Total number of COMMON resqueues in primary extent.
96	60 R84NCMSX	4	binary	Total number of COMMON resqueue secondary extent entries.
100	64 R84CMSXO	4	binary	Offset to first COMMON resqueue secondary extent.

Resqueue Secondary Extent Entry

Offsets	Name	Length	Format	Description
0	0 R84RQSXT	4	binary	Number of resqueues for secondary extent.

JCT Access Method Statistics Section

This section contains JCT data set information.

Offsets	Name	Length	Format	Description
0	0 R84SZJCT	4	binary	Size of a JCT (in bytes).
4	4 R84REDIO	4	binary	Number of JCT read I/Os.

Offsets	Name	Length	Format	Description
8	8 R84WRTIO	4	binary	Number of JCT write I/Os.
12	C R84JBADD	4	binary	Number of jobs added to the job queue.
16	10 R84JBDEL	4	binary	Number of jobs deleted from the job queue.
JCT data space information:				
20	14 R84DSPFL	1	binary	JCT data space flag one Value Meaning when set X'80' The JCT data space was disabled during some portion of the interval. The remainder of the JCT data space information is zero.
21	15	3		Reserved.
24	18 R84DSPSZ	4	binary	Maximum size of JCT data space, in hundredths of a megabyte.
JCT data space page fault information:				
28	1C R84RDINS	4	binary	Number of JCT read requests where the corresponding JCT data space page(s) were in central storage.
32	20 R84PRINS	4	binary	Percent of JCT read requests where the corresponding JCT data space page(s) were in central storage, in hundredths of a percent.
36	24 R84RDNIS	4	binary	Number of JCT read requests where the corresponding JCT data space page(s) were not in central storage.
40	28 R84PRNIS	4	binary	Percent of JCT read requests where the corresponding JCT data space page(s) were not in central storage.
44	2C R84WTINS	4	binary	Number of JCT write requests where the corresponding JCT data space page(s) were in central storage.
48	30 R84PWINS	4	binary	Percent of JCT write requests where the corresponding JCT data space pages were in central storage, in hundredths of a percent.
52	34 R84WTNIS	4	binary	Number of JCT write requests where the corresponding data space page(s) were not in central storage.
56	38 R84PWNIS	4	binary	Percent of JCT write requests where the corresponding JCT data space page(s) were not in central storage, in hundredths of a percent.
JCT data space page usage information:				
60	3C R84DUSMN	4	binary	Minimum number of JCT data space pages in use.
64	40 R84DUSAV	4	binary	Average number of JCT data space pages in use.
68	44 R84DUSMX	4	binary	Maximum number of JCT data space pages in use.
JCT data space page utilization:				
72	48 R84DUTMN	4	binary	Minimum use of JCT data space pages. This value shows the percentage of the total JCT data space pages that contain allocated JCTs. It is measured in hundredths of a percent.
76	4C R84DUTAV	4	binary	Average percentage of use of JCT data space pages. This value shows the percentage of the total JCT data space pages that contain allocated JCTs. It is measured in hundredths of a percent.
80	50 R84DUTMX	4	binary	Maximum percentage of use of JCT data space pages. This value shows the percentage of the total JCT data space pages that contain allocated JCTs. It is measured in hundredths of a percent.
84	54 R84PGSRL	4	binary	Number of JCT data space pages released.
Job queue element (JQE) information:				
88	58 R84JQ0SZ	4	binary	JQE0 table size, in hundredths of a kilobyte.
92	5C R84JQ1SZ	4	binary	JQE1 table size, in hundredths of a kilobyte.

Record type 84

Offsets	Name	Length	Format	Description
96	60 R84JQ2SZ	4	binary	JQE2 table size in, hundredths of a kilobyte.
100	64 R84JQ3SZ	4	binary	JQE3 table size, in hundredths of a kilobyte.
104	68 R84JQ4SZ	4	binary	JQE4 table size, in hundredths of a kilobyte.
JQE4 storage use information:				
108	6C R84JUSMN	4	binary	Minimum number of JQE4s in use during interval.
112	70 R84JUSAV	4	binary	Average number of JQE4s in use during interval.
116	74 R84JUSMX	4	binary	Maximum number of JQE4s in use during interval.
120	78 R84JUTMN	4	binary	Minimum percentage of total JQE4 pages that contained allocated JQE4s during this interval, in hundredths of a percent.
124	7C R84JUTAV	4	binary	Average percentage of total JQE4 pages that contained allocated JQE4s during this interval, in hundredths of a percent.
128	80 R84JUTMX	4	binary	Maximum percentage of total JQE4 pages that contained allocated JQE4s during this interval, in hundredths of a percent.

JES3 Control Block Utilization Section

This section contains FCT entry use.

Offsets	Name	Length	Format	Description
0	0 R84FCTPR	4	binary	Total number of preallocated FCTs.
4	4 R84FCTPM	4	binary	Total number of permanent FCTs.
8	8 R84FCTMN	4	binary	Minimum number of FCT entries used.
12	C R84FCTMX	4	binary	Maximum number of FCT entries used.
16	10 R84FCTAV	4	binary	Average number of FCT entries used.
20	14 R84PCNBF	4	binary	Total number of preallocated console buffers.
24	18 R84PCBPT	4	binary	JES3 521 - Reserved JES3 511 or prior releases Total number of preallocated console buffer pointers.
28	1C R84PDDBL	4	binary	JES3 521 - Reserved JES3 511 or prior releases Total number of preallocated DOM data blocks.
32	20 R84MNCBU	4	binary	Minimum number of console buffers used.
36	24 R84MNBPU	4	binary	Minimum number of console buffer pointers used.
40	28 R84MNDBU	4	binary	JES3 521 - Reserved JES3 511 or prior releases Minimum number of DOM data blocks used.
44	2C R84MXCBU	4	binary	Maximum number of console buffers used.
48	30 R84MXBPU	4	binary	JES3 521 - Reserved JES3 511 or prior releases Maximum number of console buffer pointers used.
52	34 R84MXDBU	4	binary	JES3 521 - Reserved JES3 511 or prior releases Maximum number of DOM data blocks used.
56	38 R84AVCBU	4	binary	Average number of console buffers used.
60	3C R84AVBPU	4	binary	JES3 521 - Reserved JES3 511 or prior releases Average number of console buffer pointers used.
64	40 R84AVDBU	4	binary	JES3 521 - Reserved JES3 511 or prior releases Average number of DOM data blocks used.

Offsets	Name	Length	Format	Description
68	44 R84SZCPE	4	binary	Size of console buffer primary extent.
72	48 R84SCBSE	4	binary	Size of console buffer secondary extent.
76	4C R84CBSEL	2	binary	Size of console buffer secondary extent limit.
78	4E	2		Reserved.
80	50 R84TNRCB	4	binary	Total number of reserved console buffers.
84	54 R84CBSEU	2	binary	JES3 521 - Reserved JES3 511 or prior releases Number of console buffer secondary extents in use.
86	56 R84BPSEU	2	binary	JES3 521 - Reserved JES3 511 or prior releases Number of buffer pointer secondary extents in use.
88	58 R84DBSEU	2	binary	JES3 521 - Reserved JES3 511 or prior releases Number of DOM data block secondary extents in use.
90	5A R84SEMAX	2	binary	Maximum number of secondary extents ever used.
92	5C R84RBMAX	4	binary	Maximum number of reserved buffers ever used.
96	60 R84SCBEE	4	binary	Number of secondary console buffer extents exceeded.
100	64 R84SCBPE	4	binary	Count of secondary console buffer pointer extents exceeded.
104	68 R84SAQPE	4	binary	JES3 521 - Reserved JES3 511 or prior releases Count of secondary action queue pointer extents exceeded.
JSAM buffer use:				
108	6C R84TOTJB	2	binary	Total defined JSAM buffers.
110	6E	2		Reserved.
112	70 R84MNJBU	4	binary	Minimum JSAM buffers used.
116	74 R84MXJBU	4	binary	Maximum JSAM buffers used.
120	78 R84AVJBU	4	binary	Average JSAM buffers used.
User spool access method (USAM) (protected) buffer use:				
124	7C R84TOTUB	2	binary	Total defined user spool access method (USAM) buffers.
126	7E	2		Reserved.
128	80 R84MNUBU	4	binary	Minimum user spool access method (USAM) buffers used.
132	84 R84MXUBU	4	binary	Maximum user spool access method (USAM) buffers used.
136	88 R84AVUBU	4	binary	Average user spool access method (USAM) buffers used.
Staging area use:				
140	8C R84SSAPE	2	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Size of staging area primary extent, in thousands of bytes
142	8E	2		Reserved.
144	90 R84TNPSA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Total number of primary staging areas.
148	94 R84SSASE	2	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Size of staging area secondary extent, in thousands of bytes.
150	96	2		Reserved.

Record type 84

Offsets	Name	Length	Format	Description
152	98 R84TNSSA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Total number of secondary staging areas.
156	9C R84SASEL	2	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Staging area secondary extent limit.
158	9E R84MNSAL	2	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Minimum staging area limit.
160	A0 R84SASIZ	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Size of staging area.
164	A4 R84TNSAD	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Total number of staging areas defined.
168	A8 R84MCSAI	4		JES3 SP511 - Reserved JES3 SP421 or prior releases Maximum common service area staging areas for interval.
172	A8 R84MASAI	4		JES3 SP511 - Reserved JES3 SP421 or prior releases Maximum auxiliary staging areas during this interval.
176	B0 R84ASACS	4	binary	Number of active staging areas from SVT.
180	B4 R84ACSCS	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Number of active common service area staging areas from SVT.
184	B8 R84AASCS	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Number of active auxiliary staging areas from SVT.
188	BC R84MCSAU	4	binary	Maximum number of staging areas ever used.
192	C0 R84MASAU	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Maximum number of auxiliary staging areas ever used.
196	C4 R84PUSAE	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Number of times user memory staging area limit exceeded.
200	C8 R84PMSAE	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Number of times minimal staging area limit was exceeded.
Total active staging areas:				
204	CC R84MNTSA	4	binary	Minimum number of total active staging areas.
208	D0 R84MXTSA	4	binary	Maximum number of total active staging areas.
212	D4 R84AVTSA	4	binary	Average number of total active staging areas.
216	D8 R84MNCSA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Minimum number of active common service area staging areas.
220	DC R84MXCSA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Maximum number of active common service area staging areas.

Offsets	Name	Length	Format	Description
224	E0 R84AVCSA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Average number of active common service area staging areas.
228	E4 R84MNASA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Minimum number of active auxiliary staging areas.
232	E8 R84MXASA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Maximum number of active auxiliary staging areas.
236	EC R84AVASA	4	binary	JES3 SP511 - Reserved JES3 SP421 or prior releases Average number of active auxiliary staging areas.
JSAM Buffer Extent Areas:				
240	F0 R84JBPSZ	4	binary	Size of primary extent.
244	F4 R84JBSSZ	4	binary	Size of secondary extent.
248	F48 R84JBLIM	4	binary	The number of secondary extents allowed.

Subtype 5 — Job Analysis

This subtype has four sections:

1. JES3 work-to-do section
2. Job analysis section
3. JES3 function summary section
4. Plot sections.

Subtype Header

Offsets	Name	Length	Format	Description																
0	0 R84JBLNG	4	binary	Length of the JES3 Job Analysis section.																
4	4 R84JBNUM	4	binary	Total number of JES3 job analysis entries.																
8	8 R84WTDO	4	binary	Offset to the work-to-do analysis section.																
12	C R84JBOF	4	binary	Offset to the Job Analysis section.																
16	10 R84FSUMO	4	binary	Offset to the JES3 Function Summary section.																
20	14 R84PLOT0	4	binary	Offset to the Plot section.																
24	18 R84S5FLG	1	binary	Job entry header flag																
				<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>There is a job analysis segment</td> </tr> <tr> <td>X'40'</td> <td>There is a function summary segment</td> </tr> <tr> <td>X'20'</td> <td>There is an initiator plot section</td> </tr> <tr> <td>X'10'</td> <td>There is an rqindex plot section segment</td> </tr> <tr> <td>X'08'</td> <td>There is a device class plot section segment</td> </tr> <tr> <td>X'04'</td> <td>There is a setname plot section segment</td> </tr> <tr> <td>X'02'</td> <td>There is a job class plot section segment.</td> </tr> </tbody> </table>	Bit	Meaning	X'80'	There is a job analysis segment	X'40'	There is a function summary segment	X'20'	There is an initiator plot section	X'10'	There is an rqindex plot section segment	X'08'	There is a device class plot section segment	X'04'	There is a setname plot section segment	X'02'	There is a job class plot section segment.
Bit	Meaning																			
X'80'	There is a job analysis segment																			
X'40'	There is a function summary segment																			
X'20'	There is an initiator plot section																			
X'10'	There is an rqindex plot section segment																			
X'08'	There is a device class plot section segment																			
X'04'	There is a setname plot section segment																			
X'02'	There is a job class plot section segment.																			
25	19	3		Reserved.																

JES3 Work-To-Do Section

Offsets	Name	Length	Format	Description
0	0 R84WKLNG	4	binary	Length of the JSS work-to-do queue section.
4	4 R84RDYMN	4	binary	Minimum length for the JSS ready queue.
8	8 R84RDYMX	4	binary	Maximum length for the JSS ready queue.
12	C R84RDYAV	4	binary	Average length for the JSS ready queue.
16	10 R84CATMN	4	binary	Minimum length for the CATLG wait queue.
20	14 R84CATMX	4	binary	Maximum length for the CATLG wait queue.
24	18 R84CATAV	4	binary	Average length for the CATLG wait queue.
28	1C R84RSQMN	4	binary	Minimum length for the RQ wait queue.
32	20 R84RSQMX	4	binary	Maximum length for the RQ wait queue.
36	24 R84RSQAV	4	binary	Average length for the RQ wait queue.
40	28 R84PLBMN	4	binary	Minimum length for the proclib wait queue.
44	2C R84PLBMX	4	binary	Maximum length for the proclib wait queue.
48	30 R84PLBAV	4	binary	Average length for the proclib wait queue.
52	34 R84MCGMN	4	binary	Minimum length for the main wait queue.
56	38 R84MCGMX	4	binary	Maximum length for the main wait queue.
60	3C R84MCGAV	4	binary	Average queue length for the main wait queue.
64	40 R84DSPMN	4	binary	Minimum length for the DSP wait queue.
68	44 R84DSPMX	4	binary	Maximum length for the DSP wait queue.
72	48 R84DSPA	4	binary	Average queue length for ISP wait queue.
76	4C R84MPLMN	4	binary	Minimum length for the MPLOC wait queue.
80	50 R84MPLMX	4	binary	Maximum length for the MPLOC wait queue.
84	54 R84MPLAV	4	binary	Average length for the MPLOC wait queue.
88	58 R84DUPMN	4	binary	Minimum length for duplicate jobname wait queue.
92	5C R84DUPMX	4	binary	Maximum length for the duplicate jobname wait queue.
96	60 R84DUPAV	4	binary	Average length for the duplicate jobname wait queue.
100	64 R84CIJMN	4	binary	Minimum queue length for C/I JSAM buffer queue.
104	68 R84CIJMX	4	binary	Maximum queue length for C/I JSAM buffer queue.
108	6C R84CIJAV	4	binary	Average QUEUE length for C/I JSAM buffer queue.

Job Analysis Section

Offsets	Name	Length	Format	Description
0	0 R84JBNAM	8	EBCDIC	Job name. The job name, time, and date that the reader recognized the JOB card (for this job) constitute the job log identification, or transaction name (for APPC output).
8	8 R84JBID	8	EBCDIC	Job ID.
16	10	3		Reserved.
19	13 R84JBRQP	1	binary	Job resqueue priority.
20	14 R84JBCLS	8	EBCDIC	Job class.
28	1C R84JSGRP	8	EBCDIC	Group name.
36	24 R84NXTJB	4	binary	Offset to next job analysis entry.
40	28 R84JSTAT	4	binary	Total number of JOBSTAT entries.
44	2C R84JSTOF	4	binary	Offset to the first JOBSTAT entry.
48	30 R84JBGMS	4	binary	Total number of GMS/MDS entries.

Offsets	Name	Length	Format	Description
52	34 R84JBGOF	4	binary	Offset to the first GMS/MDS entry.

Job Status Entry and GMS/MDS Entry

The format for each job status entry and each GMS/MDS entry follows:

Offsets	Name	Length	Format	Description
0	0 R84JBFNM	33	EBCDIC	Active function, DSP, or procedure name.
33	21	3		Reserved.
36	24 R84JBJSR	1	binary	JSTAT reason code (used for MDS/GMS only).
37	25	3		Reserved.
40	28 R84JBFTM	4	binary	Active function time, in seconds.

JES3 Function Summary Section

Offsets	Name	Length	Format	Description
0	0 R84JSLNG	4	binary	Length of the JES3 function summary section.
4	4 R84JSNUM	4	binary	Total number of JES3 function summary entries.
8	8 R84JSOF	4	binary	Offset to the first JES3 function summary entry.
12	C R84GSNUM	4	binary	Total number of GMS/MDS summary entries.
16	10 R84GSOF	4	binary	Offset to the first GMS/MDS summary entry.
MDS and GMS scheduling analysis summary information:				
20	14 R84ALRET	4	binary	Number of allocation retries during JMF interval.
24	18 R84ARLSK	4	binary	Number of allocation attempts rejected without reading the job summary table (JST) during the JMF interval.
28	1C R84ATMPT	4	binary	Number of allocation attempts allowed to read the JST during the JMF interval.
32	20 R84ARLF	4	binary	Number of allocation attempts rejected after reading the JST during the JMF interval.
36	24 R84SUCCS	4	binary	Successful allocations during JMF interval.

JES3 Function Summary Entry

This section contains one per JES3 function or DSP.

Offsets	Name	Length	Format	Description
0	0 R84JSNAM	33	EBCDIC	JES3 function name or DSP name.
33	21	3		Reserved.

Record type 84

Offsets	Name	Length	Format	Description
36	24 R84JSJSR	1	binary	Scheduling bypass code
				Code Meaning
				X'01' Insufficient storage
				X'02' Tlimit exceeded
				X'03' I/O rate inappropriate
				X'04' No match on RQMAINS
				X'05' Choice inappropriate
				X'06' No match on control program type
				X'07' Job class not enabled
				X'08' LSTOR update pending
				X'09' Class can't run on this main
				X'0A' Mix inappropriate (1)
				X'0B' Fit inappropriate (1)
				X'0C' Fit inappropriate (2)
				X'0D' Mix inappropriate (2)
				X'0E' Job in hold or active
				X'0F' RQINDEX not in select
				X'10' Job is in DJC hold
				X'11' Minpart not available
				X'12' Group disabled on this main
				X'13' Main is offline
				X'14' TDEPTH exceeded
				X'7E' No group initiators started
				X'7F' All group initiators in use
				X'80' Resource update only
				X'81' Job hold status
				X'82' Max region size exceeded
				X'83' Restart job pass only
				X'84' Eligible main not online or IPLed
				X'85' Incorrect control program type
				X'86' GMS group or class not enabled
				X'87' Required resource not available
				X'88' Device pool fence not built
				X'89' Main setup depth exceeded
				X'8A' Job class setup depth exceeded
				X'8B' Failed preallocation scan
				X'FF' Job selected for a main.
37	25	3		Reserved.
40	28 R84JSAV	4	binary	Average function time, in seconds.
44	2C R84JSCNT	4	binary	Active job count.
48	30 R84JSMIN	4	binary	Minimum function time, in seconds.

Offsets	Name	Length	Format	Description
52	34 R84JSMAX	4	binary	Maximum function time, in seconds.
56	38 R84JSMNJ	8	EBCDIC	ID of job using minimum function time.
64	40 R84JSMXJ	8	EBCDIC	ID of job using maximum function time.

Plot Section

Each plot counter entry contains two fields: scale and count. The scale field refers to the value along the vertical line on the JMF report. The count field can be used to calculate the points on the horizontal line.

Offsets	Name	Length	Format	Description
0	0 R84PLTLN	4	binary	Length of Plot section.
4	4 R84JOB CG	4	binary	Number of job sample counts.
8	8 R84INITN	4	binary	Number of plots for "jobs being processed by main processor".
12	C R84INITO	4	binary	Offset to the first entry of "jobs being processed by main processor".
16	10 R84RQNXN	4	binary	Number of plots for "job queue length by JES3 function".
20	14 R84RQNXO	4	binary	Offset to first entry of "job queue length by JES3 function".
24	18 R84DCLSN	4	binary	Number of plots for "Allocated JES3 devices by device class".
28	1C R84DCLSO	4	binary	Offset to first entry of "Allocated JES3 devices by device class".
32	20 R84SETNN	4	binary	Number of plots for "Allocated JES3 devices by setname".
36	24 R84SETNO	4	binary	Offset to the first entry of "Allocated JES3 devices by setname".
40	28 R84JCLSN	4	binary	Number of plots for "Jobs being processed by job class group".
44	2C R84JCLSO	4	binary	Offset to the first entry of "Jobs being processed by job class group".

Jobs Being Processed by Main Processor (Initiator Plot)

Offsets	Name	Length	Format	Description						
0	0 R84INEXT	4	binary	Offset to next initiator plot entry.						
4	4 R84INAME	8	EBCDIC	Processor name.						
12	C R84IFLG	1	binary	Flag 1 <table border="0"> <tr> <td style="padding-right: 20px;">Value</td> <td>Meaning when set</td> </tr> <tr> <td>X'80'</td> <td>JES3 Global</td> </tr> <tr> <td>X'40'</td> <td>JES3 Local.</td> </tr> </table>	Value	Meaning when set	X'80'	JES3 Global	X'40'	JES3 Local.
Value	Meaning when set									
X'80'	JES3 Global									
X'40'	JES3 Local.									
13	D	3		Reserved.						
16	10 R84IINIT	4	binary	Count for started initiators.						
20	14 R84IPLLO	4	binary	Smallest scale for initiator plot.						
24	18 R84IPLHI	4	binary	Largest scale for initiator plot.						
28	1C R84IPLIN	4	binary	Increment for plotting initiator plot.						
32	20 R84IPTMN	4	binary	Minimum plot value for initiator plot.						
36	24 R84IPTMX	4	binary	Maximum plot value for initiator plot.						
40	28 R84IPTAV	4	binary	Average plot value for initiator plot.						
44	2C R84IPTN	4	binary	Number of initiator plot counter entries.						
48	30 R84IPTO	4	binary	Offset to first initiator plot counter entry.						

Record type 84

Offsets	Name	Length	Format	Description
Initiator plot counter entry:				
0	0 R84IPTS	4	binary	Initiator plot scale.
4	4 R84IPTC	4	binary	Count for initiator plot scale.

Jobs Being Processed by Job Class Group Entry (Job Class Plot)

Offsets	Name	Length	Format	Description
0	0 R84JNEXT	4	binary	Offset to next entry for "jobs being processed by job class group".
4	4 R84JNAME	8	EBCDIC	Processor name.
12	C R84JCGRP	8	EBCDIC	Job class group name.
20	14 R84JCSIN	4	binary	Count for started initiators.
24	18 R84JPLLO	4	binary	Smallest scale for job class plot.
28	1C R84JPLHI	4	binary	Largest scale for job class plot.
32	20 R84JPLIN	4	binary	Increment for plotting job class plot.
36	24 R84JPTMN	4	binary	Minimum plot value for job class plot.
40	28 R84JPTMX	4	binary	Maximum plot value for job class plot.
44	2C R84JPTAV	4	binary	Average plot value for job class plot.
48	30 R84JPTN	4	binary	Number of plot counter entries for job class plot.
52	34 R84JPTO	4	binary	Offset to first plot counter entry for job class plot.

Job Class Group Plot Counter Entry

Offsets	Name	Length	Format	Description
0	0 R84JPTS	4	binary	Job class group plot scale.
4	4 R84JPTC	4	binary	Count for job class group plot scale.

Allocated JES3 devices by device class (device plot) entry

Offsets	Name	Length	Format	Description										
0	0 R84DNEXT	4	binary	Offset to next device plot.										
4	4 R84DFLG	1	binary	Flag <table border="0"> <tr> <td>Value</td> <td>Meaning when set</td> </tr> <tr> <td>X'80'</td> <td>Tape device</td> </tr> <tr> <td>X'40'</td> <td>Direct access device</td> </tr> <tr> <td>X'20'</td> <td>Unit record device</td> </tr> <tr> <td>X'10'</td> <td>Graphics device.</td> </tr> </table>	Value	Meaning when set	X'80'	Tape device	X'40'	Direct access device	X'20'	Unit record device	X'10'	Graphics device.
Value	Meaning when set													
X'80'	Tape device													
X'40'	Direct access device													
X'20'	Unit record device													
X'10'	Graphics device.													
5	5	1		Reserved.										
6	6 R84DNAME	2	EBCDIC	Device name.										
8	8 R84DCNT	4	binary	Total number of devices.										
12	C R84DPLLO	4	binary	Smallest scale for device plot.										
16	10 R84DPLHI	4	binary	Largest scale for device plot.										
20	14 R84DPLIN	4	binary	Increment for plotting device plot.										
24	18 R84DPTMN	4	binary	Minimum plot value for device plot.										
28	1C R84DPTMX	4	binary	Maximum plot value for device plot.										
32	20 R84DPTAV	4	binary	Average plot value for device plot.										

Offsets	Name	Length	Format	Description
36	24 R84DPTN	4	binary	Number of plot counter entries for device plot.
40	28 R84DPTO	4	binary	Offset to first plot counter entry for device plot.
Device plot counter entry:				
0	0 R84DPTS	4	binary	Device plot scale.
4	4 R84DPTC	4	binary	Count for device plot scale.

Allocated JES3 devices by Setname (Setname plot) entry

There is a common section (decimal offsets 0-40) followed by a section for Setname or J, M and X type devices.

Offsets	Name	Length	Format	Description
0	0 R84SNEXT	4	binary	Offset to next setname plot.
4	4 R84SMPCN	8	EBCDIC	Processor name.
12	C R84SFLG	1		Flag byte Value Meaning when set X'80' JES3 global X'40' JES3 local.
13	D	3		Reserved.
16	10 R84SXTYP	8	EBCDIC	Setname device name.
24	18 R84SXTOT	4	binary	Total number of setname devices.
28	1C R84SPLLO	4	binary	Smallest scale for setname plot.
32	20 R84SPLHI	4	binary	Largest scale for setname plot.
36	24 R84SPLIN	4	binary	Increment for plotting setname plot.
40	28 R84SPTMN	4	binary	Minimum plot value for setname plot.
44	2C R84SPTMX	4	binary	Maximum plot value for setname plot.
48	30 R84SPTAV	4	binary	Average plot value for setname plot.
52	34 R84SPTN	4	binary	Number of setname plot counter entries.
56	38 R84SPTO	4	binary	Offset to first setname plot counter entries.
J type device information:				
40	28 R84XJMIN	4	binary	Minimum plot value for J type devices. J type devices are setup devices allocated by JES3.
44	2C R84XJMAX	4	binary	Maximum plot value for J type devices.
48	30 R84XJAVG	4	binary	Average plot value for J type devices.
52	34 R84XJPTN	4	binary	Number of plot counter entries for J type devices.
56	38 R84XJPTO	4	binary	Offset to first plot counter entry for J type devices.
X type device information:				
60	3C R84XXMIN	4	binary	Minimum plot value for X type devices. X type devices are setup devices that are being processed on main (Class 1 devices only).
64	40 R84XXMAX	4	binary	Maximum plot value for X type devices.
68	44 R84XXAVG	4	binary	Average plot value for X type devices.
72	48 R84XXPTN	4	binary	Number of plot counter entries for X type devices.
76	4C R84XXPTO	4	binary	Offset to first plot counter entry for x type devices.
M type device information:				
80	50 R84XMMIN	4	binary	Minimum plot value for M type devices. M type devices are setup that are allocated by MVS.
84	54 R84XMMAX	4	binary	Maximum plot value for M type devices.

Record type 84

Offsets	Name	Length	Format	Description
88	58 R84XMAVG	4	binary	Average plot value for M type devices.
92	5C R84XMPTN	4	binary	Number of plot counter entries for M type devices.
96	60 R84XMPTO	4	binary	Offset to first plot counter entry for M type devices.

Entry for each J Type, X Type, and M Type Plot Counter

Offsets	Name	Length	Format	Description
0	0 R84XPTS	4	binary	XTYPE plot scale.
4	4 R84XPTC	4	binary	Count for XTYPE plot scale.

JES3 Queue Length by JES3 Function (RQINDEX Plot) Entry

Offsets	Name	Length	Format	Description
0	0 R84RNEXT	4	binary	Offset to next RQINDEX plot.
4	4 R84RQNAM	33	EBCDIC	Name of RQINDEX.
37	25	3		Reserved.
40	28 R84RPLLO	4	binary	Smallest scale for RQINDEX plot.
44	2C R84RPLHI	4	binary	Largest scale for RQINDEX plot.
48	30 R84RPLIN	4	binary	Increment for plotting RQINDEX plot.
52	34 R84RPTMN	4	binary	Minimum plot value for RQINDEX plot
56	38 R84RPTMX	4	binary	Maximum plot value for RQINDEX plot.
60	3C R84RPTAV	4	binary	Average plot value for RQINDEX plot.
64	40 R84RPTN	4	binary	Number of plot counter entries for RQINDEX plot.
68	44 R84RPTO	4	binary	Offset to first plot counter entry for RQINDEX plot.

RQINDEX Plot Counter Entry

Offsets	Name	Length	Format	Description
0	0 R84RQPTS	4	binary	RQINDEX plot scale.
4	4 R84RQPTC	4	binary	Count for RQINDEX plot scale.

Subtype 6 — JES3 Hot Spot Analysis

This subtype has one section.

Offsets	Name	Length	Format	Description
0	0 R84SPLNG	4	binary	Length of the JES3 hot spot analysis section.
4	4 R84SPNUM	4	binary	Total number of hot spot entries.
8	8 R84SPOF	4	binary	Offset to the first hot spot entry.
12	C R84SPOT	8	EBCDIC	SPOT = <i>value</i> .
20	14 R84WIDTH	8	EBCDIC	WIDTH = <i>value</i> .
28	1C R84NAME	8	EBCDIC	NAME = <i>value</i> .
36	24 R84HFCT	8	EBCDIC	HFCT = <i>value</i> .
44	2C R84HSPFL	1	binary	Hot spot flag
				Bit Meaning when set
				X'80' Hot spot table exceeded flag.
45	2D	3		Reserved.

Hot Spot Entry

Offsets	Name	Length	Format	Description																								
0	0 R84SCSCT	8	EBCDIC	CSECT name (if there is one).																								
8	8 R84STYPE	2	EBCDIC	CSECT type <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>C</td> <td>CSA</td> </tr> <tr> <td>J</td> <td>JES3 private</td> </tr> <tr> <td>L</td> <td>Modified link pack area (MLPA)</td> </tr> <tr> <td>P</td> <td>Pageable link pack area (PLPA)</td> </tr> <tr> <td>M</td> <td>MVS nucleus</td> </tr> <tr> <td>N</td> <td>JES3 nucleus</td> </tr> <tr> <td>R</td> <td>IATRJMN</td> </tr> <tr> <td>EC</td> <td>Extended CSA</td> </tr> <tr> <td>EJ</td> <td>Extended JES3 private</td> </tr> <tr> <td>EL</td> <td>Extended modified link pack area (MLPA)</td> </tr> <tr> <td>EP</td> <td>Extended pageable link pack area (PLPA).</td> </tr> </tbody> </table>	Value	Meaning	C	CSA	J	JES3 private	L	Modified link pack area (MLPA)	P	Pageable link pack area (PLPA)	M	MVS nucleus	N	JES3 nucleus	R	IATRJMN	EC	Extended CSA	EJ	Extended JES3 private	EL	Extended modified link pack area (MLPA)	EP	Extended pageable link pack area (PLPA).
Value	Meaning																											
C	CSA																											
J	JES3 private																											
L	Modified link pack area (MLPA)																											
P	Pageable link pack area (PLPA)																											
M	MVS nucleus																											
N	JES3 nucleus																											
R	IATRJMN																											
EC	Extended CSA																											
EJ	Extended JES3 private																											
EL	Extended modified link pack area (MLPA)																											
EP	Extended pageable link pack area (PLPA).																											
10	A	2		Reserved.																								
12	C R84SSTRT	4	binary	Starting address or displacement.																								
16	10 R84SEND	4	binary	Ending address or displacement.																								
20	14 R84SPCNT	4	binary	CSECT reference count.																								
24	18 R84SPNRF	4	binary	CSECT reference count in JES3 nucleus task.																								
28	1C R84SPARF	4	binary	CSECT reference count in JES3 auxiliary task.																								

Subtype 7 — JES3 Internal Reader DSP Analysis

This subtype has one section.

Offsets	Name	Length	Format	Description
0	0 R84IRLNG	4	binary	Length of JES3 internal reader DSP analysis data section.
4	4 R84IRMN	4	binary	Minimum number of active internal reader DSPs.
8	8 R84IRMX	4	binary	Maximum number of active internal reader DSPs.
12	C R84IRAV	4	binary	Average number of active internal reader DSPs.
16	10 R84IRIR	4	binary	Average number of idle internal reader DSPs.
20	14 R84IRHWM	4	binary	Internal reader DSP high water mark.
24	18 R84IRATM	4	binary	Active INTRDR-At-Max count.
28	1C R84IRAT0	4	binary	No-INTRDR-Active count.
32	20 R84IRAVL	4	binary	Average length of the INTRDR queue.
36	24 R84IRMXA	4	binary	Maximum internal reader DSPs allowed; if it is 0000FFFF, there is no limit on the number of INTRDR DSPs allowed.

Subtype 8 — JES3 Subsystem Interface (SSI) Response Time Analysis

This subtype has one section.

Offsets	Name	Length	Format	Description
0	0 R84SILNG	4	binary	Length of the SSI response time section.

Record type 84

Offsets	Name	Length	Format	Description
4	4 R84SSIN	4	binary	Total number of SSI entries.
8	8 R84SSIO	4	binary	Offset to the first SSI entry.

SSI Entry

Offsets	Name	Length	Format	Description
0	0 R84SIFN	12	EBCDIC	SSI function code name.
12	C R84SIREQ	4	binary	Number of requests received.
16	10 R84SIRSP	4	binary	Number of responses received.
20	14 R84SIMIN	4	binary	Minimum response time, in microseconds.
24	18 R84SIMAX	4	binary	Maximum response time, in microseconds.
28	1C R84SIAVG	4	binary	Average response time, in microseconds.

Subtype 9 — JES3 Subsystem Interface (SSI) Destination Queue Analysis

This subtype has one section.

Offsets	Name	Length	Format	Description
0	0 R84DQLNG	4	binary	Length of the SSI destination queue data section.
4	4 R84DQNUM	4	binary	Total number of SSI destination entries.
8	8 R84DQOF	4	binary	Offset to the first SSI destination queue entry.

SSI Destination Entry

Offsets	Name	Length	Format	Description										
0	0 R84DQNAM	30	EBCDIC	SSI destination queue name.										
30	1E R84MPCNM	8	EBCDIC	Name of main processor.										
38	26 R84DQFLG	1	binary	Dynamic destination queue flag byte <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>X'80'</td> <td>Dynamic destination queue / Global / FSS (Functional Subsystem) entry</td> </tr> <tr> <td>X'40'</td> <td>Dynamic destination queue / Global / FSS/FSA (Functional Subsystem Application) entry</td> </tr> <tr> <td>X'20'</td> <td>Dynamic destination queue / Local / FSS only entry</td> </tr> <tr> <td>X'10'</td> <td>Dynamic destination queue / Local / FSS/FSA entry.</td> </tr> </tbody> </table>	Value	Meaning when set	X'80'	Dynamic destination queue / Global / FSS (Functional Subsystem) entry	X'40'	Dynamic destination queue / Global / FSS/FSA (Functional Subsystem Application) entry	X'20'	Dynamic destination queue / Local / FSS only entry	X'10'	Dynamic destination queue / Local / FSS/FSA entry.
Value	Meaning when set													
X'80'	Dynamic destination queue / Global / FSS (Functional Subsystem) entry													
X'40'	Dynamic destination queue / Global / FSS/FSA (Functional Subsystem Application) entry													
X'20'	Dynamic destination queue / Local / FSS only entry													
X'10'	Dynamic destination queue / Local / FSS/FSA entry.													
39	27	1		Reserved.										
40	28 R84FSSNM	8	EBCDIC	FSS Name (Global/Dynamic Destination Queue).										
48	30 R84FSSID	2	binary	FSS ID (Local/Dynamic Destination Queue).										
50	32 R84FSANM	8	EBCDIC	FSA Name (Global/Dynamic Destination Queue and FSS/FSA entry).										
58	3A R84FSAID	2	binary	FSA ID (Local/Dynamic Destination Queue).										
60	3C R84DQMAX	4	binary	Maximum destination queue length.										
64	40 R84DQMIN	4	binary	Minimum destination queue length.										
68	44 R84DQAVG	4	binary	Average destination queue length.										

Subtype 10 — Workload Manager Analysis

The Workload Manager (WLM) analysis section consists of the following data sections:

- WLM general section contains offsets to the other sections.
- Service class section - information is collected for each service class that had activity during the sampling interval. The following sections are created for each service class:
 - Service class fixed section contains the service class name and offsets to the other sections.
 - Service class non-system information contains non-system related information such as the number of jobs in MDS, GMS etc.
 - Service class system information - one entry for every system that had activity during the sampling interval.

Offsets	Name	Length	Format	Description
WLM General Section:				
0	0 R84WMLN	4	binary	Length of the WLM general section.
4	4 R84SRVOF	4	binary	Offset from this section to the first service class section or zero.
8	8 R84WLMGR	80	binary	Reserved.
Service Class Fixed Section:				
0	0 R84 _SRVCLEN	4	binary	Length of this section.
4	4 R84 _SRVCNAME	8	EBCDIC	Service class name.
12	C R84 _SRVCSMPC	4	binary	Number of samples this service class was found.
16	10 R84 _SRVCNXOF	4	binary	Offset from this section to the next service class fixed section in this buffer.
20	14 R84 _SRVNSYOF	4	binary	Offset from this section to the non-system specific information for this service class. This will be zero if this is a continuation buffer for system specific information.
24	18 R84 _SRVSYOF	4	binary	Offset from this section to the system specific information for this service class in this buffer.
28	1C R84 _SRVCRSV1	16	binary	Reserved.
Service Class Non-System Specific Section:				
0	0 R84 _NSYSLEN	4	binary	Length of this section.
4	4 R84 _MAINWMIN	4	binary	Main service wait minimum count.
8	8 R84 _MAINWMAX	4	binary	Main service wait maximum count.
12	C R84 _MAINWAVG	4	binary	Main service wait average count.
16	10 R84 _MDSMIN	4	binary	MDS minimum count.
20	14 R84 _MDSMAX	4	binary	MDS maximum count.
24	18 R84 _MDSAVG	4	binary	MDS average count.
28	1C R84 _GMSMIN	4	binary	GMS minimum count.
32	20 R84 _GMSMAX	4	binary	GMS maximum count.
36	24 R84 _GMSAVG	4	binary	GMS average count.
40	28 R84 _MOFNMIN	4	binary	Main offline/not connected minimum count.
44	2C R84 _MOFNMAX	4	binary	Main offline/not connected maximum count.
48	30 R84 _MOFNCAVG	4	binary	Main offline/not connected average count.
52	34 R84 _GRPDMIN	4	binary	Group disabled minimum count.
56	38 R84 _GRPDMAX	4	binary	Group disabled maximum count.
60	3C R84 _GRPDCAVG	4	binary	Group disabled average count.

Record type 84

Offsets	Name	Length	Format	Description
64	40 R84 _JBHLDMIN	4	binary	Job held minimum count.
68	44 R84 _JBHLDMAX	4	binary	Job held maximum count.
72	48 R84 _JBHLDAVG	4	binary	Job held average count.
76	4C R84 _CLSDSMIN	4	binary	Class disabled minimum count.
80	50 R84 _CLSDSMAX	4	binary	Class disabled maximum count.
84	54 R84 _CLSDSA VG	4	binary	Class disabled average count.
88	58 R84 _SCHENMIN	4	binary	Scheduling environment not available minimum count.
92	5C R84 _SCHENMAX	4	binary	Scheduling environment not available maximum count.
96	60 R84 _SCHENAVG	4	binary	Scheduling environment not available average count.
100	64 R84 _SPOOLMIN	4	binary	Spool space shortage minimum count.
104	68 R84 _SPOOLMAX	4	binary	Spool space shortage maximum count.
108	6C R84 _SPOOLAVG	4	binary	Spool space shortage average count.
112	70 R84 _TDEPTMIN	4	binary	TDEPTH reached minimum count.
116	74 R84 _TDEPTMAX	4	binary	TDEPTH reached maximum count.
120	78 R84 _TDEPTAVG	4	binary	TDEPTH reached average count.
124	7C R84 _TLIMTMIN	4	binary	TLIMIT exceeded minimum count.
128	80 R84 _TLIMTMAX	4	binary	TLIMIT exceeded maximum count.
132	84 R84 _TLIMTAVG	4	binary	TLIMIT exceeded average count.
136	88 R84 _MDEPTMIN	4	binary	MDEPTH reached minimum count.
140	8C R84 _MDEPTMAX	4	binary	MDEPTH reached maximum count.
144	90 R84 _MDEPTAVG	4	binary	MDEPTH reached average count.
148	94 R84 _MLIMTMIN	4	binary	MLIMIT exceeded minimum count.
152	98 R84 _MLIMTMAX	4	binary	MLIMIT exceeded maximum count.
156	9C R84 _MLIMTAVG	4	binary	MLIMIT exceeded average count.
160	A0 R84 _PLELGMIN	4	binary	Number of jobs eligible to run anywhere in the SYSPLEX - minimum count.
164	A4 R84 _PLELGMAX	4	binary	Number of jobs eligible to run anywhere in the SYSPLEX - maximum count.
168	A8 R84 _PLELGA VG	4	binary	Number of jobs eligible to run anywhere in the SYSPLEX - average count.
172	AC R84 _PLINEMIN	4	binary	Number of jobs ineligible to run anywhere in the SYSPLEX for reasons other than class limits - minimum count.
176	B0 R84 _PLINEMAX	4	binary	Number of jobs ineligible to run anywhere in the SYSPLEX for reasons other than class limits - maximum count.
180	B4 R84 _PLINEAVG	4	binary	Number of jobs ineligible to run anywhere in the SYSPLEX for reasons other than class limits - average count.
184	B8 R84 _PLLMTMIN	4	binary	Number of jobs ineligible to run anywhere in the SYSPLEX because of class limits - minimum count.
188	BC R84 _PLLMTMAX	4	binary	Number of jobs ineligible to run anywhere in the SYSPLEX because of class limits - maximum count.
192	C0 R84 _PLLMTAVG	4	binary	Number of jobs ineligible to run anywhere in the SYSPLEX because of class limits - average count.
196	C4 R84 _PLEXEMIN	4	binary	Number of jobs in execution - minimum count.
200	C8 R84 _PLEXEMAX	4	binary	Number of jobs in execution - maximum count.
204	CC R84 _PLEXEAVG	4	binary	Number of jobs in execution - average count.
208	D0 R84 _NSYSRSV1	24	binary	Reserved.

Offsets	Name	Length	Format	Description
Service Class System Specific Section:				
0	0 R84 _SYSLEN	4	binary	Length of this section.
4	4 R84 _SYSNXOF	4	binary	Offset of next system specific information for this service class in this buffer.
8	8 R84 _SYSNAME	8	EBCDIC	System name.
16	10 R84 _SYELGMIN	4	binary	Number of jobs eligible to run on this system - minimum count.
20	14 R84 _SYELGMAX	4	binary	Number of jobs eligible to run on this system - maximum count.
24	18 R84 _SYELGAVG	4	binary	Number of jobs eligible to run on this system - average count.
28	1C R84 _SYINEMIN	4	binary	Number of jobs ineligible to run on this system - minimum count.
32	20 R84 _SYINEMAX	4	binary	Number of jobs ineligible to run on this system - maximum count.
36	24 R84 _SYINEAVG	4	binary	Number of jobs ineligible to run on this system - average count.
40	28 R84 _SYEXEMIN	4	binary	Number of jobs in execution on this system - minimum count.
44	2C R84 _SYEXEMAX	4	binary	Number of jobs in execution on this system - maximum count.
48	30 R84 _SYEXEAVG	4	binary	Number of jobs in execution on this system - average count.
52	34 R84 _SYSCONMIN	4	binary	Number of jobs that can execute on this system only – minimum count.
56	38 R84 _SYSCONMAX	4	binary	Number of jobs that can execute on this system only – maximum count.
60	3C R84 _SYSCONAVG	4	binary	Number of jobs that can execute on this system only – average count.
64	40 R84 _SYSRSVD1	12	binary	Reserved.

Record Type 85 (55) — Measuring OAM Transaction Performance Using SMF

OAM writes record type 85 to account for OAM activity. For more information about record type 85, see *z/OS DFSMS OAM Planning, Installation, and Storage Administration Guide for Object Support*.

Record type 86 (56) — CIM server audit

Reference information:

For additional information on the CIM server, see *z/OS Common Information Model User's Guide*.

Record type 86 presents data for user authorization to the CIM server, the change of data, and the modification of CIM server configuration. The SMF type 86 records are generated if the audit logging is enabled on the CIM server, and the type is with in the SMFPRMXX configuration.

Security notice

To write SMF records, the CIM server needs at least READ access to the BPX.SMF profile of the FACILITY class at your SAF product.

The following is an example for RACF:

```
RDEFINE FACILITY BPX.SMF UACC(NONE)
PERMIT BPX.SMF CL(FACILITY) ACCESS(READ) ID(CFZADM)
SETROPTS RACLIST(FACILITY) REFRESH
```

Subtype Description

Subtype 1 - Authentication

This subtype contains the records of the user authenticated to the CIM server.

Subtype 2 - Configuration

This subtype contains the CIM server configuration and the configure changes made.

Subtype 3 - Provider Status

This subtype contains the state of the provider registered and loaded into the CIM server and the provider state changes.

Subtype 4 - CIM Operations

This subtype contains the CIM operations performed on CIM classes and instances.

Record Mapping

The SMF record mappings are shown as two sections, a Common Section that appears on all subtypes and a Unique Section for all subtypes.

Common Section

The Common Section is divided into the Header Section and the Product Section. They appear on each of the Record Type 86 subtype and are included in the documentation once.

Header Section: This section contains the common SMF record header fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

This triplet information should be checked before accessing a section of the record. All three filed being non-zero mean that the section does not exist on the record. The 'number' triplet filed is the primary indication of the existence of the field.

Offsets	Name	Length	Format	Description
00	00 SMF86LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word).
02	02 SMF86SEG	2	binary	Segment description (see record length field).

Offsets	Name	Length	Format	Description
04	04 SMF86FLG	1	binary	System indicator: Bit Meaning when set 0 Reserved 1 Subtypes used 2 Reserved 3-6 Version indicators* 7 Reserved *See "Standard SMF record header" on page 162 for a detailed description.
05	05 SMF86RTY	1	binary	Record type 108 (X'56').
06	06 SMF86TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.
10	0A SMF86DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyyddF</i> .
14	0E SMF86SID	4	EBCDIC	System identification (from the SID parameter).
18	12 SMF86SSI	4	EBCDIC	Subsystem identification ('CFZ').
22	16 SMF86STY	2	binary	Record Subtype Subtype Description 1 Authentication 2 Configuration 3 Provider Status 4 CIM Operations
24	18 SMF86TRN	2	binary	Number of triplets in this record (including the Product Section). A triplet is a set of three MSF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.
28	1C SMF86PRO	4	binary	Offset to product section from RDW.
32	20 SMF86PRL	2	binary	Length of product section.
32	22 SMF86PRN	2	binary	Number of product sections.
Individual header extension for subtype 1:				
36	24 SMF86AUTHO	4	binary	Offset to authentication section from RDW.
40	28 SMF86AUTHL	2	binary	Length of authentication section.
42	2A SMF86AUTHN	2	binary	Number of authentication sections.
Individual header extension for subtype 2:				
36	24 SMF86CONFO	4	binary	Offset to configuration section from RDW.
40	28 SMF86CONFL	2	binary	Length of configuration section.
42	2A SMF86CONFN	2	binary	Number of configuration sections.
Individual header extension for subtype 3:				
36	24 SMF86PROVO	4	binary	Offset to provider section from RDW.
40	28 SMF86PROVL	2	binary	Length of provider section.
42	2A SMF86PROVN	2	binary	Number of provider sections.
Individual header extension for subtype 4:				
36	24 SMF86CIMOO	4	binary	Offset to CIM operation section from RDW.
40	28 SMF86CIMOL	2	binary	Length of CIM operation section.
42	2A SMF86CIMON	2	binary	Number of CIM operation sections.

Record type 86

Product Section: This section contains the general information about the server and the system that it is running. The triplet SMF86PRO, SMF86PRL and SMF86PRN of the header identify this section.

Offsets	Name	Length	Format	Description
00	00 SMF86PRRVN	4	binary	SMF Record version number. Set to 1 for CIM SMF for z/OS 1.10.
04	04 SMF86SSI	4	EBCDIC	Subsystem identification ('CFZ').
08	08 SMF86VRM	8	EBCDIC	The CIM Product software level. (version, release, and modification level numbers) For example: 02.06.01
16	10 SMF86OSL	8	EBCDIC	MVS software level. (consists of an acronym and the version, release, and modification level numbers)
24	18 SMF86SYN	8	EBCDIC	System name (from the SYSNAME parameter in the IEASYSxx parmlib member).
32	20 SMF86SYP	8	EBCDIC	Sysplex name (from the SYSPLEX parameter in the COUPLExx parmlib member).
40	28 SMF86OPI	4	binary	z/OS UNIX System Services process ID. Same format as SMF record 30, to be able to correlate records.
44	2B SMF86THID	22	EBCDIC	The char representation of the thread ID. The thread ID ends with the null character 'X'00'. Same format as used in CIM Trace, to be able to correlate records.
66	42	2		Reserved.

Subtype section

Subtype 1 - Authentication: The authentication record is written when you are authenticating yourself through the CIM Server. There are three different authentication mechanisms within CIM server on z/OS:

- Basic: UserID/Password (Passticket)
- Local: UNIX Domain Socket
- ATTLS: Certificate validation with UserID mapping

All successful and unsuccessful requests are logged. For Basic and ATTLS additionally, the IP of the client application is recorded. The triplet SMF86AUTHO, SMF86AUTHL and SMF86AUTHN of the header identify this section.

Offsets	Name	Length	Format	Description										
00	00 AuthMode	2	binary	The authentication mode: <table border="0"> <thead> <tr> <th colspan="2">AuthMode</th> </tr> <tr> <th></th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Local</td> </tr> <tr> <td>1</td> <td>Basic</td> </tr> <tr> <td>2</td> <td>ATTLS</td> </tr> </tbody> </table>	AuthMode			Description	0	Local	1	Basic	2	ATTLS
AuthMode														
	Description													
0	Local													
1	Basic													
2	ATTLS													
02	02 UserID	8	EBCDIC	The UserID to authentication.										
10	0A AuthResult	2	binary	The authentication result: <table border="0"> <thead> <tr> <th colspan="2">AuthResult</th> </tr> <tr> <th></th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Successful authenticated.</td> </tr> <tr> <td>1</td> <td>Authentication failed.</td> </tr> </tbody> </table>	AuthResult			Description	0	Successful authenticated.	1	Authentication failed.		
AuthResult														
	Description													
0	Successful authenticated.													
1	Authentication failed.													

Offsets	Name	Length	Format	Description
12	0C ClientIP	42	EBCDIC	The TCPI/IP address of the client requesting the authentication. If AuthMode is set to 0 (local authentication), the ClientIP is set to "localhost".
54	36	2		Reserved.

Subtype 2 - Configuration: In the Subtype 2, configuration of the CIM Server is monitored. As enabling the audit logging at the CIM server, the current configuration is recorded this SMF record. Each configuration property is written into an extra record. After that, all changes to the configuration are monitored. The triplet SMF86CONFO, SMF86CONFL and SMF86CONFN of the header identify this section.

Offsets	Name	Length	Format	Description
00	00 UserID	8	EBCDIC	The user ID updating the configuration property. The user ID is empty, if configuration is listed.
08	08 PropChange	2	binary	Mode of the property change: PropChange Comment 0 List Configuration 1 Current Configuration 2 Planed Configuration
10	0A	2		Reserved.
12	0C NameOf	4	binary	Offset to property name from section start.
16	10 NameLen	2	binary	Length of property name including the trailing null character X'00'.
18	12 NameNo	2	binary	Number of property names. (=1)
20	14 ValueOf	4	binary	Offset to property value from section start.
24	18 ValueLen	2	binary	Length of property value including trailing null character X'00'.
26	1A ValueNo	2	binary	Number of property values. (=1)
28	1C NewValueOf	4	binary	Offset to new property value from section start. This value is set to 0, if configuration is listed.
32	20 NewValueLen	2	binary	Length of new property value including trailing null character X'00'. This value is set to 0, if configuration is listed.
34	22 NewValueNo	2	binary	Number of new property values. This value is set to 0, if configuration is listed.
To determine the value of NVAL, use the value of NameOf.				
NVAL	Name	Var	EBCDIC	The property name including a trailing null character X'00'.
To determine the value of PVAL, use the value of ValueOf.				
PVAL	Value	Var	EBCDIC	The property value including a trailing null character X'00'.
To determine the value of PIVAL, use the value of NewValueOf.				
PIVAL	NewValue	Var	EBCDIC	The new property value including a trailing null character X'00'. This value is not set, if configuration is listed.

Subtype 3 - Provider Status: In the Subtype 3, the CIM server registered providers modules are monitored. As enabling the audit logging at the CIM server,

Record type 86

the current configuration is recorded this SMF record. Each provider status is written into an extra record. After that, all changes to the provider status are monitored.

A registered provider module can have or change into one or more status. The triplet SMF86PROVO, SMF86PROVL and SMF86PROVN of the header identify this section.

Offsets	Name	Length	Format	Description
00	00 CurrentStatus	4	binary	<p>The current status of the provider reflected in a bit field. If the field is set to 0, the current status is undefined.</p> <p>CurrentStatus</p> <p>Comment</p> <p>0x0001 "Unknown"</p> <p>0x0002 "Other"</p> <p>0x0004 "OK"</p> <p>0x0008 "Degraded"</p> <p>0x0010 "Stressed"</p> <p>0x0020 "Predictive Failure"</p> <p>0x0040 "Error"</p> <p>0x0080 "Non-Recoverable Error"</p> <p>0x0100 "Starting"</p> <p>0x0200 "Stopping"</p> <p>0x0400 "Stopped"</p> <p>0x0800 "In Service"</p> <p>0x1000 "No Contact"</p> <p>0x2000 "Lost Communication"</p>
04	04 IsChanging	2	binary	If set to 1, the provider is changing the state and the NewStatus value is valid.
06	06	2		Reserved.

Offsets	Name	Length	Format	Description
08	08 NewStatus	4	binary	The new status of the provider reflected in a bit field. If the field is set to 0 the new status is undefined. NewStatus Comment 0x0001 "Unknown" 0x0002 "Other" 0x0004 "OK" 0x0008 "Degraded" 0x0010 "Stressed" 0x0020 "Predictive Failure" 0x0040 "Error" 0x0080 "Non-Recoverable Error" 0x0100 "Starting" 0x0200 "Stopping" 0x0400 "Stopped" 0x0800 "In Service" 0x1000 "No Contact" 0x2000 "Lost Communication"
12	0C ProvNameOf	4	binary	Offset to provider name from section start.
14	0E ProvNameLen	2	binary	Length of provider name.
16	10 ProvNameNo	2	binary	Number of provider name.
To determine the value of PNAM, use the value of ProvNameOf.				
PNAM	ProviderName	Var	EBCDIC	The name of the provider involved in the operation including trailing null character X'00'.

Subtype 4 - CIM Operation: In the Subtype 4, CIM Operations are monitored. The triplet SMF86CIMOO, SMF86CIMOL and SMF86CIMON of the header identify this section.

Offsets	Name	Length	Format	Description
00	00 CIMOpType	2	binary	The CIM Operation type that was executed. CIMOpType Comment 0 Class Operations 1 Qualifier Operations 2 Instance Operations 3 Invoke Method
02	02 UserID	8	EBCDIC	The UserID requesting the operation.

Record type 86

Offsets	Name	Length	Format	Description
10	0A CIMStatusCode	2	binary	The result status of the operation: CIMStatusCode Comment 0 Success 1 Failed 2 Access denied 3 Invalid Namespace 4 Invalid Parameter 5 Invalid Class 6 Not found 7 Not supported 8 Class has children 9 Class has instances 10 Invalid Superclass 11 Already exists 12 No such property 13 Type mismatch 14 Query lang. not supported 15 Invalid query 16 Method not available 17 Method not found Any other value Unknown
12	0C ClientIP	42	EBCDIC	The TCPI/IP address of the client requesting the operation.
54	36	2		Reserved.
56	38 OperNameOf	4	binary	Offset to operation name from section start.
60	3C OperNameLen	2	binary	Length of operation name including trailing null character X'00'.
62	3E OperNameNo	2	binary	Number of operation names.
64	40 ObjPathOf	4	binary	Offset to object path from section start.
68	44 ObjPathLen	2	binary	Length of object path including trailing null character X'00'.
70	46 ObjPathNo	2	binary	Number of object paths.
72	48 NameSpaceOf	4	binary	Offset to name space from section start.
76	4C NameSpaceLen	2	binary	Length of name space including trailing null character X'00'.
78	4E NameSpaceNo	2	binary	Number of name spaces.
80	50 ProvNameOf	4	binary	Offset to provider name from section start.
84	54 ProvNameLen	2	binary	Length of provider name including trailing null character X'00'.
86	56 ProvNameNo	2	binary	Number of provider names. If it is set to 0, no provider name is provided.
88	58 ProvModNameOf	4	binary	Offset to provider module name from section start.
92	5C ProvModNameLen	2	binary	Length of provider module name including trailing null character X'00'.

Offsets	Name	Length	Format	Description
94	5E ProvModNameNo	2	binary	Number of provider module names. If it is set to 0, no provider name is provided.
To determine the value of OPRN, use the value of OperNameOf.				
OPRN	OperName	Var	EBCDIC	The operation name including trailing null character X'00'.
To determine the value of OBJP, use the value of ObjPathOf.				
OBJP	ObjPath	Var	EBCDIC	The object path at Instance Operations and Invoke Method or the class name at Class and Qualifier Operations including trailing null character X'00'.
To determine the value of NAMS, use the value of NameSpaceOf.				
NAMS	NameSpace	Var	EBCDIC	The name space of the operation including trailing null character X'00'.
To determine the value of PNAM, use the value of ProvNameOf.				
PNAM	ProviderName	Var	EBCDIC	The name of the provider involved in the operation including trailing null character X'00'.
To determine the value of PMOD, use the value of ProvModNameOf.				
PMOD	ProvModName	Var	EBCDIC	The name of the provider module involved in the operation including trailing null character X'00'.

Record Type 87 (57) - GRS Monitoring

GRS Monitoring writes record type 87 to monitor functions. For more information about record type 87, see *Diagnosing global resource serialization in z/OS MVS Planning: Global Resource Serialization*.

Record Type 88 (58) — System Logger Data

Record type 88 is produced in response to ENF signal 37, which indicates that the SMF global recording interval has ended. Each record reports system logger activity for one log stream or structure. Record values from multiple systems can be summed to give the sysplex view of system logger activity.

Record type 88 has the following subtypes; each contains a header and product section and sections unique for each record:

- **Subtype 1** - Records log stream activity.

You can use system logger activity data to identify high or low users of system logger services. System logger event data indicates conditions that cause system logger services to be unavailable, such as the STRUCTURE FULL condition for a coupling facility log stream. You can also use system logger activity data to perform capacity planning or configuration analysis.

The structure-related data in subtype 1 allows you to analyze input/output to interim storage for a log stream in terms of one input stream and two output streams. The input is the count of bytes written to interim storage (SMF88SWB). The two outputs are the count of the number of bytes deleted from interim storage under two scenarios:

- Bytes deleted before the data was offloaded to DASD log data sets (SMF88SIB).
- Bytes deleted after data was offloaded to DASD log data sets (SMF88SAB).

If the first output count is high and the second is low, system logger is successfully using interim storage to avoid the I/O incurred by offloading to DASD log data sets.

Record type 88

- **Subtype 11** - Records coupling facility structure alter activity, which is the changes to the entry-to-element ratio made by system logger for coupling facility structures associated with coupling facility log streams. This information allows you to monitor how system logger is managing the entry-to-element ratio for coupling facility structures.

Macro to Symbolically Address Record Type 88: The SMF record mapping macro to symbolically address record type 88 is IXGSMF88. The macro is supplied in SYS1.MACLIB.

For additional information about system logger see Chapter 9, “System Logger accounting,” on page 125.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number) that locate the other sections on the record.

This triplet information should be checked prior to accessing a section of the record. All three fields being non-zero mean that the section exists on the record; conversely any of the fields being zero indicates that the section does not exist on the record. The ‘number’ triplet field is the primary indication of the existence of the field.

Offsets	Name	Length	Format	Description								
0	0 SMF88LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See “Standard SMF record header” on page 162 for a detailed description.								
2	2 SMF88SEG	2	binary	Segment descriptor (see record length field)								
4	4 SMF88FLG	1	binary	System indicator: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See “Standard SMF record header” on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF88RTY	1	binary	Record Type 88 (X'58')								
6	6 SMF88TME	4	binary	Time since midnight, in hundredths of a second, that the record was built into the SMF buffer.								
10	A SMF88DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> . See “Standard SMF record header” on page 162 for a detailed description.								
14	E SMF88SID	4	EBCDIC	System Identification (from SMFPRMxx SID parameter).								
18	12 SMF88WID	4	EBCDIC	Subsystem identifier (STC)								
22	16 SMF88STP	2	binary	Record subtype								
24	18 SMF88SDL	4	binary	Length of Self-defining Section								
28	1C SMF88POF	4	binary	Offset to Product Section from start of record, including the record descriptor word (RDW).								
32	20 SMF88PLN	2	binary	Length of Product Section.								
34	22 SMF88PON	2	binary	Number of Product Sections in this record.								

Offsets	Name	Length	Format	Description
36	24 SMF88LOF	4	binary	Offset to Log Stream Section from start of record, including the record descriptor word (RDW).
40	28 SMF88LLN	2	binary	Length of Log Stream Section.
42	2A SMF88LON	2	binary	Number of Log Stream Sections in this record.
44	2C SMF88EOF	4	binary	Offset to Event Section from start of record, including the record descriptor word (RDW).
48	30 SMF88ELN	2	binary	Length of Event Section.
50	32 SMF88EON	2	binary	Number of Event Sections in this record.
52	34 SMF88SOF	4	binary	Offset to Structure (Interim Storage) Section from start of record, including the record descriptor word (RDW).
56	38 SMF88SLN	2	binary	Length of Structure (Interim Storage) Section.
58	3A SMF88SON	2	binary	Number of Structure (Interim Storage) Sections in this record.
60	3C SMF88AOF	4	binary	Offset to Structure Alter Section from start of record, including the record descriptor word (RDW).
64	40 SMF88ALN	2	binary	Length of Structure Alter Section.
66	42 SMF88AON	2	binary	Number of Structure Alter Sections in this record.

Product Section

This section contains general information about system logger and the system at the time the record was generated.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset

SMF88POF

Length

SMF88PLN

Number

SMF88PON

Offsets	Name	Length	Format	Description
0	0 SMF88TYP	2	binary	Record Subtype • 1—Log stream update
2	2 SMF88RVN	2	EBCDIC	Record version number — 01.
4	4 SMF88PNM	8	EBCDIC	Product name — SCLOG.
12	C SMF88OSL	8	EBCDIC	MVS operating system name.
20	14 SNF88SYN	8	EBCDIC	System name (from SYSNAME parameter in the IEASYSxx parmlib member)

Subtype 1

Log Stream Section

This section identifies the log stream that generated the record and provides general log stream usage statistics.

Also refer to the SMF88LSD DSECT Section in macro IXGSMF88 in SYS1.MACLIB.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Record type 88

Offset
 SMF88LOF
Length
 SMF88LLN
Number
 SMF88LON

Offsets	Name	Length	Format	Description												
0	0 SMF88LIT	8	EBCDIC	SMF-counter instance token identifies a connection to a log stream. It ties together SMF records for a given instance of a connection to a log stream.												
8	8 SMF88LSN	26	EBCDIC	Log stream name.												
34	22 SMF88LFL	2	EBCDIC	Log stream flags: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>This log stream used staging data sets during the expiring SMF interval.</td> </tr> <tr> <td>2</td> <td>When ON, the SMF record has been generated when the log stream disconnected from the system.</td> </tr> <tr> <td>3</td> <td>When ON, the log stream has ZAI (YES) specified and log data has been sent to the IBM zAware server.</td> </tr> <tr> <td>4-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved	1	This log stream used staging data sets during the expiring SMF interval.	2	When ON, the SMF record has been generated when the log stream disconnected from the system.	3	When ON, the log stream has ZAI (YES) specified and log data has been sent to the IBM zAware server.	4-15	Reserved.
Bit	Meaning when set															
0	Reserved															
1	This log stream used staging data sets during the expiring SMF interval.															
2	When ON, the SMF record has been generated when the log stream disconnected from the system.															
3	When ON, the log stream has ZAI (YES) specified and log data has been sent to the IBM zAware server.															
4-15	Reserved.															
36	24 SMF88LTD	8	EBCDIC	TOD-time when SMF global interval expired (from parameter list of ENF event 37, which requested this SMF record from logger). Time is reported in GMT.												
44	2C SMF88LWI	4	binary	IXGWRITE macro invocations for this log stream issued during the expiring SMF interval.												
48	30 SMF88LIB	4	binary	Minimum BLOCKLEN value of IXGWRITE seen during the expiring SMF interval. Initialized to 'X'7FFFFFFF' if no SMF activity occurs within an SMF interval.												
52	34 SMF88LAB	4	binary	Maximum BLOCKLEN value of IXGWRITE seen by this log stream during the expiring SMF interval. Initialized to zero if no SMF activity occurs within an SMF interval.												
56	38 SMF88LWB	8	EBCDIC	Bytes requested by user application(s) on IXGWRITE macro invocations for this log stream during the expiring SMF interval (FORMAT=LONG FLOATING POINT).												
64	40 SMF88LDB	8	EBCDIC	Bytes written to DASD for this log stream during the expiring SMF interval (FORMAT=LONG FLOATING POINT).												
72	48 SMF88LIO	4	binary	Number of times a request was made by system logger to write log stream data to DASD during the expiring SMF interval.												
76	52 SMF88LIS	4	binary	Number of times system logger had to suspend before writing log stream data to DASD because a previously-initiated write to DASD had not yet completed during the expiring SMF interval.												
80	50 SMF88GRP	8	EBCDIC	GROUP value for the log stream. Either PROD (production) or TEST.												

Events Section

This section contains flags and counters used for unusual events.

Also, see the SMF88ESD DSECT Section in macro IXGSMF88 in SYS1.MACLIB.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset

SMF88EOF

Length

SMF88ELN

Number

SMF88EON

Offsets	Name	Length	Format	Description
0	0 SMF88EDS	4	binary	Number of log stream DASD shifts initiated by this system during the expiring SMF interval. (FORMAT=32 bits)
4	4 SMF88ERI	4	binary	Number of structure rebuild events initiated for this log stream, as seen by this system. Cumulative from the creation of this SMF-counter instance. (FORMAT=32 bits)
8	8 SMF88ERC	4	binary	Number of structure rebuild events completed for this log stream, as seen by this system. Cumulative from the creation of this SMF-counter instance. (FORMAT=32 bits)
12	C SMF88ESF	4	binary	Number of times Logger detected structure full conditions for this Logstream on this system during the expiring SMF interval. (FORMAT=32 bits)
16	10 SMF88ETT	4	binary	Number of times system logger detected a Staging Data Set Threshold Hit condition for this log stream on this system during the expiring SMF interval. (FORMAT=32 bits)
20	14 SMF88ETF	4	binary	Number of times system logger detected a Staging Data Set Full condition for this log stream on this system during the expiring SMF interval. (FORMAT=32 bits)
24	18 SMF88EO	4	binary	Number of successful offloads (greater than one byte of data) performed for this log stream on this system during the expiring interval. (FORMAT=32 bits)
28	1C SMF88EFS	4	binary	Number of times IXGLOGR initiated an offload for all the log streams connected on this system to the structure due to the structure's total in-use list entries reaching 90% of the total available entries for the structure. This count is the number of occurrences of this condition for the expiring interval. (FORMAT=32 bits)
32	20 SMF88EDO	4	binary	Number of times an offload was requested from the IXGOFFLD service during the expiring SMF interval. (FORMAT=32 bits)
36	24 SMF88EAF	4	binary	Number of times IXGLOGR detected 'Staging-Dataset-Async-Buffer_Full' condition for this logstream on this system during the expiring SMF interval. (FORMAT=32 bits)
40	28	16	EBCDIC	Reserved.

Structure (Interim Storage) Section

This section contains information related to the interim storage for a log stream. For a coupling facility log stream, interim storage is coupling facility structure space allocated to the log stream. For a dasd only log stream, interim storage is staging data set space.

Also refer to the SMF88SSD DSECT Section in macro IXGSMF88 in SYS1.MACLIB.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Record type 88

Offset
SMF88SOF

Length
SMF88SLN

Number
SMF88SON

Offsets	Name	Length	Format	Description
0	0 SMF88STN	16	EBCDIC	Name of the structure used for this log stream. For a dasd only log stream, this field will show *DASDONLY*.
16	10 SMF88SWB	8	EBCDIC	Current written bytes count. Count of bytes written to interim storage during this interval (FORMAT= LONG FLOATING POINT).
24	18 SMF88SIB	8	EBCDIC	Current instead bytes count. Count of bytes deleted from interim storage during this interval, instead of being offloaded (FORMAT=LONG FLOATING POINT). This field is incremented due to either a user invocation of IXGDELET where the data had not been offloaded or system logger internal management of interim storage.
32	20 SMF88SAB	8	EBCDIC	Current after bytes count. Count of bytes deleted from interim storage during this interval, after being offloaded (FORMAT=LONG FLOATING POINT). This field is incremented by system logger's internal management of interim storage.
40	28	4	EBCDIC	Reserved.
44	2C SMF88SII	4	binary	Current instead invocation count. Count of times a deletion from interim storage for this log stream was performed during this interval, where the data was not first offloaded.
48	30 SMF88SAI	4	binary	Current after invocation count. Count of times a deletion from interim storage was performed during this interval, after being offloaded (occurs due to system logger management of interim storage).
52	34 SMF88SC1	4	binary	The count of type-1 completions during the expired SMF interval. The Logstream contents can remain in the primary storage. No need to move data from primary storage to DASD. This field is valid for both coupling facility and DASDONLY Logstreams.
56	38 SMF88SC2	4	binary	The count of type-2 completions during the expired SMF interval. Logstream is filling the primary storage but space is not critical. System Logger begins asynchronous offloading of Logstream data from the primary storage to DASD. This field is valid for both coupling facility and DASDONLY Logstreams.
60	3C SMF88SC3	4	binary	The count of type-3 completions during the expired SMF interval. Space used in the structure (by this Logstream) is critical but does not exceed 100 percent. This field is only valid for coupling facility based Logstreams.
64	40	4		Reserved

Subtype 11

Structure Alter Section

This section identifies a structure and provides statistics on system logger's management of the structures entry to element ratio.

Triplet Information: This section is located on the record using the following triplet fields, which are located in the 'Header/self-defining' section:

Offset
SMF88AOF

Length
SMF88ALN

Number
SMF88AON

Offsets	Name	Length	Format	Description								
0	0 SMF88ANM	16	EBCDIC	Structure Name								
16	10 SMF88ATK	8	binary	Alter Token, which is a STCK timestamp, showing last time the element to entry ratio was altered to accommodate the average buffer size being written to the structure.								
24	18 SMF88AIT	8	binary	SMF-counter instance token identifies a connection to structure. It ties together SMF records for a given instance of a connection to the structure.								
32	20 SMF88AWB	8	binary	Current written bytes count. Count of bytes written to the structure from this system and associated with this alter token, for this interval.								
40	28 SMF88AO	4	binary	The number of offloads that occurred on this system associated with this alter token, for this interval.								
44	2C SMF88ACB	4	binary	Current allocated average buffer size, which system logger uses to calculate entry-to-element ratio for the structure.								
48	30 SMF88ATB	4	binary	Targeted average buffer size that system logger tried to achieve by altering the element to entry ratio.								
52	34 SMF88ASZ	4	binary	Structure size in 4K blocks.								
56	38 SMF88ATW	4	binary	Total number of log writes to the structure during the interval.								
60	3C SMF88ALS	4	binary	Total number of log streams connected to the structure on this system at the recording.								
64	40 SMF88AFG	1	binary	Alter Flags <table border="1" data-bbox="889 1207 1453 1470"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>When ON, record was generated to report a change in the average buffer size being written to the structure.</td> </tr> <tr> <td>1</td> <td>When ON, record was generated due to the last log stream disconnecting which resulted in the structure being disconnected.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	When ON, record was generated to report a change in the average buffer size being written to the structure.	1	When ON, record was generated due to the last log stream disconnecting which resulted in the structure being disconnected.	2-7	Reserved.
Bit	Meaning when set											
0	When ON, record was generated to report a change in the average buffer size being written to the structure.											
1	When ON, record was generated due to the last log stream disconnecting which resulted in the structure being disconnected.											
2-7	Reserved.											

Record Type 89 (59) — Usage Data

The type 89 record provides information about product usage on a particular MVS system. The usage reporting program analyzes the data collected in the type 89 record. For more information see *z/OS MVS Product Management*. The record is generated on a scheduled interval (1 hour maximum).

Record type 89 has two subtypes:

- Subtype 1 — Usage data

Contains, for the scheduled interval, summary usage data for all products across the system that have registered to request usage recording. These products must issue the IFAUSAGE macro to specify:

Record type 89

- Registration information.
- Level and scope of data collection (task or address space level).
- Start and end of collection period.

For more information on the IFAUSAGE macro, see Chapter 12, “IFAUSAGE — Collecting usage data,” on page 137.

- Subtype 2 — State Data

Contains, for the scheduled interval, summary state data for all products across the system that have registered to indicate that they are running. These products issue the MVS Register service to indicate that they are running. MVS uses information a product supplies to determine if the product is enabled and to maintain a list of active products.

The installation controls the scheduling of the type 89 record by checking the INTERVAL value specified for the SMF address space. Because SMF is a started task, this is the INTERVAL value for SUBSYS=STC in the SMFPRMxx member. If the INTERVAL value is less than or equal to one hour, then that value is used as the reporting interval for type 89 records. If that value is greater than one hour, or if no INTERVAL value is specified, then one hour is used as the reporting interval for type 89 recording.

There are two sets of interval START and STOP times in the record:

- Usage data interval START/STOP.
- Reporting interval START/STOP.

The usage data interval represents the hourly buckets that the usage reporting program records product usage in. This interval is synchronized to the top of the hour.

The reporting interval represents the increment when the type 89 records are generated and is also synchronized to the top of the hour. For example, if you specified an interval value of 30 minutes, type 89 records would be generated at 9:00, 9:30, 10:00... If you are collecting usage data at the task level, you may want to synchronize interval processing to the top of the hour in your SMFPRMxx member because task level data collection is scheduled by interval processing.

SMF type 89 records are generated on the interval as requested; if no products are registered, then a type 89 record is generated with a product count of 0.

Product intersection time data sections are generated when a product registers at the ADDRSP level, and then invokes a product that registers at the TASK level. When no product intersections occur, the product intersection count in SMF89CNN is zero.

SMFPRMxx parameters are described in *z/OS MVS Initialization and Tuning Reference*. The usage reporting program is described in *z/OS MVS Product Management*. The Register service is described in *MVS Programming: Registration Services*.

Record environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro SMFEWTM, BRANCH=YES (record exit: IEFU84)

Mode

**Subtype
Mode**

1 SRB
2 SRB

Storage Residency
31-bit

SUBSYS
STC

Record mapping

Header: self-defining section

This section contains the common SMF record header fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF89LEN	2	binary	Record Length. This field along with the next, are referred to as the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF89SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF89FLG	1	binary	System indicator: <table style="margin-left: 20px; border: none;"> <thead> <tr> <th style="text-align: left;">Bit</th> <th style="text-align: left;">Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem identification follows system identification</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>MVS Version Indicators (Set by SMF)</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Subsystem identification follows system identification	1	Subtypes used	2	Reserved	3-6	MVS Version Indicators (Set by SMF)	7	Reserved.
Bit	Meaning when set															
0	Subsystem identification follows system identification															
1	Subtypes used															
2	Reserved															
3-6	MVS Version Indicators (Set by SMF)															
7	Reserved.															
5	5 SMF89RTY	1	binary	Record type 89 (X'59').												
6	6 SMF89TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved to the SMF buffer.												
10	A SMF89DTE	4	packed	Date that the record was moved to the SMF buffer, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF89SID	4	EBCDIC	System identification (from the SID parameter in the SMFPRMxx parmlib member).												
18	12 SMF89WID	4	EBCDIC	Subsystem identifier for the SMF address space - 'STC' for Started Task.												
22	16 SMF89STP	2	binary	Record subtype <table style="margin-left: 20px; border: none;"> <tbody> <tr> <td>1</td> <td>Usage Data Interval Record</td> </tr> <tr> <td>2</td> <td>State Data Interval Record</td> </tr> </tbody> </table>	1	Usage Data Interval Record	2	State Data Interval Record								
1	Usage Data Interval Record															
2	State Data Interval Record															
24	18 SMF89SDL	4	binary	Length of self-defining section - "28"												

Self-Defining section

This section contains the triplet fields (offset/length/number) that locate other sections on the record. This triplet information should be checked prior to accessing a section of the record. The 'number' triplet field is the primary indication of the existence of the field. This section is an extension of the header and follows it physically in the record.

Record type 89

Offsets	Name	Length	Format	Description
0	0 SMF89PRO	4	binary	Offset to Record Product section from start of record, including the record descriptor word (RDW).
4	4 SMF89PRL	2	binary	Length of Record Product section.
6	6 SMF89PRN	2	binary	Number of Record Product sections (1).
8	8 SMF89SIO	4	binary	Offset to System ID section from start of record, including the record descriptor word (RDW).
12	0C SMF89SIL	2	binary	Length of System ID section.
14	0E SMF89SIN	2	binary	Number of System ID sections on record (1).
16	10 SMF89UDO	4	binary	Offset to first Usage or State Data section from start of record, including the record descriptor word (RDW).
20	14 SMF89UDL	2	binary	Length of each Usage Data section or State Data section.
22	16 SMF89UDN	2	binary	Number of Usage or State Data sections on record (minimum of 0).
24	18 SMF89UDR	4	binary	Number of State Data sections remaining (or 0 for Usage Data section).
28	1C SMF89CNO	4	binary	Offset to first product intersection data section (from start of record including the RDW).
32	20 SMF89CNL	2	binary	Length of product intersection data section.
34	22 SMF89CNN	2	binary	Number of product intersection data sections (minimum of 0).

Record product section

This section provides information about the type 89 record, the system, and the recording interval.

Triplet information: This section is located in the record using the following triplet fields, which are located in the "self-defining" section:

Offset SMF89PRO

Length
SMF89PRL

Number
SMF89PRN - This field is always "1" because each type 89 record that is generated has one record product section.

Offsets	Name	Length	Format	Description
0	0 SMF89PNM	8	EBCDIC	Record product name - "SMF".
8	8 SMF89RVN	4	binary	Record version number - "1".
12	0C SMF89OSL	8	EBCDIC	MVS system level (For example, SP4.3.0).
20	14 SMF89IST	4	binary	Reporting interval START Time (local, hundredths of a second from midnight). This field and SMF89IET define the recording interval. This is different from the usage data interval that is used to collect data into hourly buckets.
24	18 SMF89ISD	4	packed	Reporting interval START Date in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.
28	1C SMF89IET	4	binary	Reporting interval END Time (local, hundredths of a second from midnight). This field and SMF89IST define the recording interval. This is different from the usage data interval that is used to collect data into hourly buckets.
32	20 SMF89IED	4	packed	Reporting interval END Date in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.

Offsets	Name	Length	Format	Description
36	24 SMF89PFL	1	binary	<p>Bit Meaning when set</p> <p>0 reserved</p> <p>1 Indicates that LICENSE=zNALC was specified in IEASYSxx. (SMF89ZNA)</p> <p>2 - 7 reserved</p>
37	25	3	binary	Reserved
40	28 SMF89HOF	8	binary	Hypervisor date/time offset in STCK format. When present, this field contains the sysplex timer offset value.
48	30 SMF89DTO	8	binary	Local data/time offset, copied from CVTLDTO.

System ID section

This section provides information about the system (both hardware and software) at the time the usage data was collected.

Triplet information: This section is located on the record using the following triplet fields, which are located in the "self-defining" section:

Offset SMF89SIO

Length
SMF89SIL

Number
SMF89SIN - This field is always "1" because each type 89 record that is generated has one system ID section.

Offsets	Name	Length	Format	Description
0	0 SMF89SYN	8	EBCDIC	MVS system name (SYSNAME from IEASYSxx).
8	8 SMF89UST	4	binary	<p>Usage data interval START time (local, hundredths of a second from midnight). This is usually an hour value (such as 01:00:00.00) except in the case of the first record during an IPL (which reports the "IPL" time). This is different from the recording interval that is used to report on the generation of the usage records. This field and SMF89UET define the hour "bucket" that the usage data reflects.</p> <p>This field is only filled in for the SMF89 subtype 1 records.</p>
12	0C SMF89USD	4	packed	<p>Usage data interval START Date in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.</p> <p>This field is only filled in for the SMF89 subtype 1 records.</p>
16	10 SMF89UET	4	binary	<p>Usage data interval END time (local, hundredths of a second from midnight). This is usually an hour value (such as 01:00:00.00). This field and SMF89UST define the hour "bucket" that the usage data reflects.</p> <p>This field is only filled in for the SMF89 subtype 1 records.</p>
20	14 SMF89UED	4	packed	<p>Usage data interval END date in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.</p> <p>This field is only filled in for the SMF89 subtype 1 records.</p>
24	18 *	4	binary	Reserved.
28	1C *	4	binary	Reserved.
32	20 SMF89CMN	2	packed	CPU model number.
34	22 SMF89CVN	1	binary	CPU version number.

Record type 89

Offsets	Name	Length	Format	Description										
35	23 SMF89LPI	1	binary	<p>LPAR indicators:</p> <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>The one digit LPAR ID contained in SMF89LP2 (bit 4) is valid (SMF89LPV).</td> </tr> <tr> <td>1</td> <td>The two digit LPAR ID contained in field SMF89LP3 is valid (SMF89LPM).</td> </tr> <tr> <td>2 - 3</td> <td>Reserved.</td> </tr> <tr> <td>4-7</td> <td>The one digit LPAR ID (X'0-F') (SMF89LP2).</td> </tr> </table> <p>Note:</p> <ol style="list-style-type: none"> For a one digit LPAR ID (X'0-F'), both SMF89LPV (bit 0) and SMF89LPM (bit 1) is on and both SMF89LP2 (bits 4-7) and field SMF89LP3 contain the LPAR ID. For the two digit LPAR ID (greater than X'F'), SMF89LPM (bit 1) is on, and SMF89LP3 contains the LPAR ID. 	Bit	Meaning when set	0	The one digit LPAR ID contained in SMF89LP2 (bit 4) is valid (SMF89LPV).	1	The two digit LPAR ID contained in field SMF89LP3 is valid (SMF89LPM).	2 - 3	Reserved.	4-7	The one digit LPAR ID (X'0-F') (SMF89LP2).
Bit	Meaning when set													
0	The one digit LPAR ID contained in SMF89LP2 (bit 4) is valid (SMF89LPV).													
1	The two digit LPAR ID contained in field SMF89LP3 is valid (SMF89LPM).													
2 - 3	Reserved.													
4-7	The one digit LPAR ID (X'0-F') (SMF89LP2).													
36	24 SMF89SER	1	packed	CPU serial number.										
39	27 SMF89LP3	1	binary	LPAR ID.										
40	28 SMF89RPP	4	binary	CPU relative processing power indicator.										
44	2C SMF89SPN	8	EBCDIC	Sysplex name (from the SYSPLEX parameter in the COUPLExx parmlib member).										
52	34 SMF89CPT	6	EBCDIC	CPC type number (blanks if data is not available).										
58	3A SMF89CPM	3	EBCDIC	CPC model number (blanks if data is not available).										
61	3D SMF89CPS	12	EBCDIC	CPC sequence number (blanks if data is not available).										
73	49 SMF89SIF	1	binary	<table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Field SMF89LPN is valid. (SMF89LNV)</td> </tr> <tr> <td>1</td> <td>This is the last record for this usage interval. (SMF89LCR)</td> </tr> <tr> <td>2 - 7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Field SMF89LPN is valid. (SMF89LNV)	1	This is the last record for this usage interval. (SMF89LCR)	2 - 7	Reserved.		
Bit	Meaning when set													
0	Field SMF89LPN is valid. (SMF89LNV)													
1	This is the last record for this usage interval. (SMF89LCR)													
2 - 7	Reserved.													
74	4A *	2	binary	Reserved.										
76	4C SMF89MNF	16	EBCDIC	V1-CPC manufacturer.										
92	5C SMF89TID	4	EBCDIC	V1-CPC type.										
96	60 SMF89MDL	16	EBCDIC	V1-CPC model.										
112	70 SMF89SQC	16	EBCDIC	V1-CPC sequence code.										
128	80 SMF89POM	4	EBCDIC	V1-CPC plant of manufacturer.										
132	84 SMF89CPC	4	binary	CPU capability.										
136	88 SMF89CCC	2	binary	Configured CPU count.										
138	8A SMF89SCC	2	binary	Standby CPU count.										
140	8C SMF89MAF	30	binary	Array of multiprocessing CPU capability adjustment factors. This array contains information for only the first 15 general processors. Obtain additional processor information from RMF records, or issuing the STSI instruction.										
170	AA SMF89LPN	8	EBCDIC	LPAR name when SYSIB 2.2.2 is valid, when returned by the STSI instruction (such as when running under z/VM). Bit SMF89LPV is on when the field is valid. Avoid looking at this field unless SMF89LNV is on.										
178	B2 SMF89_Capacity_Change_Cnt	2	binary	The number of processor capacity changes that occurred since the previous interval or event interval. This number is greater than 1 when the number of processor capacity changes exceeded the number specified in the MAXEVENTINTRECS parmlib option.										
180	B4 SMF89_RCTPCPUA_Actual	4	binary	Physical CPU adjustment factor (this is the adjustment factor for converting CPU time to equivalent service in basic-mode with all processors online). Based on model capacity rating.										
184	B8 SMF89_RCTPCPUA_Nominal	4	binary	Physical CPU adjustment factor (this is the adjustment factor for converting CPU time to equivalent service in basic-mode with all processors online). Based on nominal model capacity rating.										
188	BC SMF89_RCTPCPUA_scaling_factor	4	binary	Scaling factor for SMF89_RCTPCPUA_Actual and SMF89_RCTPCPUA_Nominal.										
192	C0 SMF89_Capacity_Adjustment_Ind	1	binary	<p>When:</p> <table border="0"> <tr> <td>0</td> <td>The indication is not reported.</td> </tr> <tr> <td>1-99</td> <td>Some amount of reduction is indicated.</td> </tr> <tr> <td>100</td> <td>The machine is operating in normal capacity.</td> </tr> </table> <p>The Primary CPU and all secondary-type CPU are similarly affected.</p>	0	The indication is not reported.	1-99	Some amount of reduction is indicated.	100	The machine is operating in normal capacity.				
0	The indication is not reported.													
1-99	Some amount of reduction is indicated.													
100	The machine is operating in normal capacity.													

Offsets	Name	Length	Format	Description
193	C1 SMF89_Capacity_Change_Rsn	1	binary	Indicates the reason that is associated with the present value contained in SMF89_Capacity_Adjustment_Ind. The bit values of this field correspond to those described in RMCTZ_Capacity_Adjustment_Indication of the IRARMCTZ mapping macro. (See <i>z/OS MVS Data Areas</i> .)
194	C2 SMF89_Capacity_Flags	1	binary	Processor capacity flags. Bit Meaning when set 0 SMF89_Event_Driven_Interval_Rec Meaning: When on, indicates that the current record was generated as a result of an event, rather than as a result of a standard interval expiration based on time. 1 SMF89_Capacity_Data_err Meaning: When on, indicates that an error occurred while collecting the processor capacity data, therefore the following fields are unreliable: SMF89_RCTPCPUA_Actual SMF89_RCTPCPUA_Nominal SMF89_RCTPCPUA_scaling_factor SMF89_Capacity_Adjustment_Ind SMF89_Capacity_Change_Rsn 2 SMF89_PCD_Rsvd_Exists Meaning: When on, indicates records generated on systems running z/OS V1R7 through z/OS V1R9. When off, indicates records generated on systems running z/OS V1R10 and later.
195	C3 *	1	binary	Reserved.
196	C4 SMF89ZNF	4	binary	zAAP normalization factor for IFA service time.
200	C8 SMF89SNF	4	binary	zIIP Normalization factor for zIIP service time.
204	CC SMF89SEQ	2	binary	Record sequence number when multiple records are written for the same interval.

Subtype 1 — Usage data section

This section contains the product information (specified on the IFAUSAGE REGISTER request) and the usage data that has been collected for the interval specified by the start and end times (SMF89UST and SMF89UET) for that product.

There is one usage data section for each unique product identification (specified by owner, name, version, qualifier) that is actively registered for any part of that specified interval. The data reported is accumulated for ALL address spaces that had any interaction with the product.

Triplet information: This section is located on the record using the following triplet fields, which are located in the "self-defining" section:

Offset SMF89UDO

Length
SMF89UDL

Number
SMF89UDN

Offsets	Name	Length	Format	Description
0	0 SMF89UPO	16	EBCDIC	Product owner or vendor name (specified on the PRODOWNER option of the IFAUSAGE macro).
16	10 SMF89UPN	16	EBCDIC	Product name (specified on the PRODNAME option of the IFAUSAGE macro).
32	20 SMF89UPV	8	EBCDIC	Product version (specified on the PRODVERS option of the IFAUSAGE macro).
40	28 SMF89UPQ	8	EBCDIC	Product qualifier (specified on the PRODQUAL option of the IFAUSAGE macro).

Record type 89

Offsets	Name	Length	Format	Description												
48	30 SMF89UPI	8	EBCDIC	Product ID number (specified on the PRODID option of the IFAUSAGE macro).												
56	38 SMF89UCT	8	long floating point	Product TCB time (in hundredths of a second).												
64	40 SMF89USR	8	long floating point	Product SRB time (in hundredths of a second).												
72	48 SMF89UFG	1	binary	Usage entry flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Unauthorized register</td> </tr> <tr> <td>1-7</td> <td>Unused</td> </tr> </table>	Bit	Meaning when set	0	Unauthorized register	1-7	Unused						
Bit	Meaning when set															
0	Unauthorized register															
1-7	Unused															
73	49 SMF89UF2	1	binary	<table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>This product has product intersection time sections (SMF89HCS).</td> </tr> <tr> <td>1</td> <td>All ADDRSP registrations of this product are the first registration in the respective address space (SMF89AFS).</td> </tr> <tr> <td>2</td> <td>An ADDRSP registration of this product registered or deregister while active TASK level registrations were present in one or more address spaces (SMF89TSH).</td> </tr> <tr> <td>3</td> <td>All ADDRSP level registrations were at a service level that support product intersection time.</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	This product has product intersection time sections (SMF89HCS).	1	All ADDRSP registrations of this product are the first registration in the respective address space (SMF89AFS).	2	An ADDRSP registration of this product registered or deregister while active TASK level registrations were present in one or more address spaces (SMF89TSH).	3	All ADDRSP level registrations were at a service level that support product intersection time.	4-7	Reserved.
Bit	Meaning when set															
0	This product has product intersection time sections (SMF89HCS).															
1	All ADDRSP registrations of this product are the first registration in the respective address space (SMF89AFS).															
2	An ADDRSP registration of this product registered or deregister while active TASK level registrations were present in one or more address spaces (SMF89TSH).															
3	All ADDRSP level registrations were at a service level that support product intersection time.															
4-7	Reserved.															
74	4A	1		Reserved.												
75	4B SMF89URT	1	binary	Data format of value in SMF89URD (specified on the FORMAT option of the IFAUSAGE macro FUNCTIONDATA request). <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>No data specified</td> </tr> <tr> <td>1</td> <td>CPU Time in long floating point (in hundredths of a second).</td> </tr> <tr> <td>2</td> <td>Binary (64-bit)</td> </tr> <tr> <td>3</td> <td>long floating point</td> </tr> </table>	Bit	Meaning when set	0	No data specified	1	CPU Time in long floating point (in hundredths of a second).	2	Binary (64-bit)	3	long floating point		
Bit	Meaning when set															
0	No data specified															
1	CPU Time in long floating point (in hundredths of a second).															
2	Binary (64-bit)															
3	long floating point															
76	4C SMF89URD	8	various	Product specific resource data (specified by the data option of the IFAUSAGE macro FUNCTIONDATA request). SMF89URT identifies the format of the data in this field.												
84	54 SMF89UZT	8	long floating point	Product offload engine time (hundredth of a second).												

Subtype 1 — Product intersection data section

This section contains information about intersections that occur between products registered with the IFAUSAGE service. Intersections are generated when a product registered at the ADDRSP level invokes a program that registers at the TASK level for a task in the current address space. The ADDRSP scope product is known as the containing product and the TASK scope product is known as the intersecting product.

There is one product intersection data section for each intersection detected. The data reported is accumulated for ALL address spaces that had any intersection between two products.

Triplet information: This section is located on the record using the following triplet fields, which are located in the "self-defining" section:

Offset SMF89CNO

Length
SMF89CNL

Number
SMF89UDN

Offsets	Name	Length	Format	Description														
0	0 SMF89CPO	16	EBCDIC	Product owner or vendor name (obtained PRODOWNER option of IFAUSAGE macro) of the containing product.														
16	10 SMF89CPN	16	EBCDIC	Product Name (obtained PRODNAME option of IFAUSAGE macro) of the containing product.														
32	20 SMF89CPV	8	EBCDIC	Product Version (obtained PRODVERS option of IFAUSAGE macro) of the containing product.														
40	28 SMF89CPQ	8	EBCDIC	Product Qualifier (obtained PRODQUAL option of IFAUSAGE macro) of the containing product.														
48	30 SMF89CPI	8	EBCDIC	Product ID (obtained PRODID option of IFAUSAGE macro) of the containing product.														
56	38 SMF89IPO	16	EBCDIC	Product Owner or Vendor Name (obtained PRODOWNER option of IFAUSAGE macro) of the intersecting product.														
72	48 SMF89IPN	16	EBCDIC	Product Name (obtained PRODNAME option of IFAUSAGE macro) of the intersecting product.														
88	58 SMF89IPV	8	EBCDIC	Product Version (obtained PRODVERS option of IFAUSAGE macro) of the intersecting product.														
96	60 SMF89IPQ	8	EBCDIC	Product Qualifier (obtained PRODQUAL option of IFAUSAGE macro) of the intersecting product.														
104	68 SMF89IPI	8	EBCDIC	Product ID (obtained PRODID option of IFAUSAGE macro) of the intersecting product.														
112	70 SMF89CFG	1	binary	<table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The container product was registered unauthorized (SMF89CUC).</td> </tr> <tr> <td>1</td> <td>The intersecting product was registered unauthorized (SMF89CUP).</td> </tr> <tr> <td>2</td> <td>Some time for the intersection was a result of a SCOPE(FUNCTION) registered product (SMF89CFC).</td> </tr> <tr> <td>3</td> <td>Some time for the intersection was a result of a SCOPE(ALL) registered product (SMF89CTC).</td> </tr> <tr> <td>4</td> <td>Intersection time might be complete for this product. Note: Not all products use (SMF89CGO).</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The container product was registered unauthorized (SMF89CUC).	1	The intersecting product was registered unauthorized (SMF89CUP).	2	Some time for the intersection was a result of a SCOPE(FUNCTION) registered product (SMF89CFC).	3	Some time for the intersection was a result of a SCOPE(ALL) registered product (SMF89CTC).	4	Intersection time might be complete for this product. Note: Not all products use (SMF89CGO).	5-7	Reserved.
Bit	Meaning when set																	
0	The container product was registered unauthorized (SMF89CUC).																	
1	The intersecting product was registered unauthorized (SMF89CUP).																	
2	Some time for the intersection was a result of a SCOPE(FUNCTION) registered product (SMF89CFC).																	
3	Some time for the intersection was a result of a SCOPE(ALL) registered product (SMF89CTC).																	
4	Intersection time might be complete for this product. Note: Not all products use (SMF89CGO).																	
5-7	Reserved.																	
113	71	7		Reserved														
120	78 SMF89CCT	8	long floating point	Product Intersect TCB Time (in hundredths of a second)														
128	80 SMF89CZT	8	long floating point	Product Intersect Offload Engine Time (in hundredths of a second)														

Subtype 2 — State data section

This section contains the product information (specified on the MVS register service or in the IFAPRDxx parmlib member) and the state data that has been collected for the interval at the time when the record was collected for that product.

There is one state data section for each unique product identification registered (specified by owner, name, feature, version, release, and modification level) for any part of the interval.

Triplet information: This section is located on the record using the following triplet fields, which are located in the "self-defining" section:

Offset SMF89UDO

Length
SMF89UDL

Number
SMF89UDN

Offsets	Name	Length	Format	Description																
0	0 SMF89T2ProdOwner	16	EBCDIC	Product owner or vendor name (from the prodowner parameter on the Register service or the OWNER field on the PROD statement in IFAPRDxx).																
16	10 SMF89T2ProdName	16	EBCDIC	Product name (from the prodname parameter on the Register service or the NAME field on the PROD statement in IFAPRDxx).																
32	20 SMF89T2FeatureName	16	EBCDIC	Feature name (from the featurename parameter on the Register service or the FEATURENAME field on the PROD statement in IFAPRDxx).																
48	30 SMF89T2ProdVers	2	EBCDIC	Product version (from the prodvers parameter on the Register service or the VERSION field on the PROD statement in IFAPRDxx).																
50	32 SMF89T2ProdRel	2	EBCDIC	Product release (from the prodrel parameter on the Register service or the RELEASE field on the PROD statement in IFAPRDxx).																
52	34 SMF89T2ProdMod	2	EBCDIC	Product modification level (from the prodmod parameter on the Register service or the MOD field on the PROD statement in IFAPRDxx).																
54	36 SMF89T2ProdID	8	EBCDIC	Product identifier (from the prodID parameter on the Register service or the ID field on the PROD statement in IFAPRDxx).																
62	3E SMF89T2Flags	1	binary	State entry flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Entry is not defined in IFAPRDxx</td> </tr> <tr> <td>1</td> <td>Entry is enabled in IFAPRDxx</td> </tr> <tr> <td>2-3</td> <td>Reserved</td> </tr> <tr> <td>4</td> <td>Register entry</td> </tr> <tr> <td>5</td> <td>State entry</td> </tr> <tr> <td>6</td> <td>"No Report" entry — registered with Ifaedreg_Type_NoReport</td> </tr> <tr> <td>7</td> <td>Registered with Ifaedreg_Type_LicensedUnderProd</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Entry is not defined in IFAPRDxx	1	Entry is enabled in IFAPRDxx	2-3	Reserved	4	Register entry	5	State entry	6	"No Report" entry — registered with Ifaedreg_Type_NoReport	7	Registered with Ifaedreg_Type_LicensedUnderProd
Bit	Meaning when set																			
0	Entry is not defined in IFAPRDxx																			
1	Entry is enabled in IFAPRDxx																			
2-3	Reserved																			
4	Register entry																			
5	State entry																			
6	"No Report" entry — registered with Ifaedreg_Type_NoReport																			
7	Registered with Ifaedreg_Type_LicensedUnderProd																			
63	3F	1	EBCDIC	Reserved.																
64	40 SMF89T2NumInstances	4	binary	Number of instances of registration for this product.																

Record type 90 (5A) — System status

Record type 90 is written during initialization processing and whenever certain operator commands are issued. This variable length record is created for operator tracking and reporting of reliability data. It allows the installation to establish availability statistics.

The following events cause the recording of this record during IPL. (See the Product Section for the individual subtype indicator.)

- HALT EOD command
- IPL
- RESET command
- SET DAE command
- SET DATE command
- SET IEFOPZ command
- SET MPF command
- SET OPT command
- SET PFK command
- SET PROG command
- SETSMF command
- SET SMF command
- SET SMFLIM command
- SET TIME command
- SWITCH SMF command
- VARY WLM command

Subtype 2 is written only if the CLOCK parameter is not specified on the SET DATE command. Any SET DATE command that uses the CLOCK parameter produces a subtype 1 record.

Subtype 8 is written only when the operator responds to message IEE956A, the system prompt for information about the IPL.

Subtype 23 is written each time the workload management service definition is installed on the WLM couple data set. A service definition is installed on the WLM couple data set by a function in the WLM ISPF application.

Subtype 24 is written each time a workload management service policy is activated. A service policy can be activated either by the VARY WLM command, or by a function in the WLM ISPF application.

Subtype 29 is written each time a LNKLST set is activated for the LNKLST concatenation, except during LNKLST set activation at IPL through the ACTIVATE statement in PROGxx - SMF is not active this early in IPL. Subtype 29 is written when the SET PROG and SETPROG LNKLST commands are issued after IPL to activate a new LNKLST set.

Subtype 30 is written each time a RESET operator command completes successfully. The record identifies the job that was reset, the operator who initiated the command, and the change that was requested. For an enclave, the record

Record type 90

identifies the name of the owner address space, the user and application that initiated the request, and the change that was requested.

Subtype 31 is written each time that a module has been added to or deleted from LPA after IPL through the SETPROG LPA command, the LPA statement of the PROGxx parmlib member through the SET PROG=xx command, or the CSVDYLPA macro.

Subtype 32 is written each time there is a successful policy change.

For information on operator system commands, see *z/OS MVS System Commands*. For information on SYS1.PARMLIB, see *z/OS MVS Initialization and Tuning Reference*.

Record environment

The following conditions exist for the generation of each of the subtypes of this record:

Subtype

Macro

5, 6, 8, 9, 13, 15

SMFEWTM(1), BRANCH=YES (record exit: IEFU84)

7

SMFWTM(1) (record exit: IEFU83)

Storage Residency

31-bit

Record mapping

Header/self-defining section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number) that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
0	0 SMF90LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for details.								
2	2 SMF90SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF90FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-2</td><td>Reserved.</td></tr><tr><td>3-6</td><td>Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)</td></tr><tr><td>7</td><td>Reserved.</td></tr></tbody></table>	Bit	Meaning when set	0-2	Reserved.	3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)	7	Reserved.
Bit	Meaning when set											
0-2	Reserved.											
3-6	Version indicators (See "Standard SMF record header" on page 162 for a detailed description.)											
7	Reserved.											
5	5 SMF90RTY	1	binary	Record type 90 (X'5A').								
6	6 SMF90TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	A SMF90DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								

Offsets	Name	Length	Format	Description
14	E SMF90SID	4	EBCDIC	System identification (from the SID parameter).
18	12	2		Reserved.
20	14 SMF90POF	4	binary	Offset to product section from start of record, including the record descriptor word (RDW).
24	18 SMF90PLN	2	binary	Length of the product section.
26	1A SMF90PON	2	binary	Number of product sections.
28	1C SMF90DOF	4	binary	Offset to subtype data section from start of record, including the record descriptor word (RDW).
32	20 SMF90DLN	2	binary	Length of subtype data section.
34	22 SMF90DON	2	binary	Number of subtype data sections.

Record type 90

Product section

Offsets	Name	Length	Format	Description
0	0 SMF90TID	2	binary	Sub-type identifier. 1 SET TIME 2 SET DATE 4 Reserved. 5 SET SMF 6 SWITCH SMF 7 HALT EOD 8 IPL PROMPT 9 IPL SMF 10 IPL SRM 11 SET OPT 12 Reserved. 13 SETSMF 14 SET MPF 15 SET SMF (to restart SMF) 16 SET DAE 17 SET PFK 18 SET GRSRNL 19 SET APPC 20 SET ASCH 21 SET SCH 22 SET CNGRP 23 IPL WLM 24 VARY WLM 25 MODIFY WLM 26 IPL LOGREC 27 SETXCF START (to enable automatic restart management) 28 SETXCF STOP (to disable automatic restart management) 29 SET PROG (for LNKLST set activation) 30 RESET 31 SET PROG (for LPALST activation) 32 WLM policy change 33 SET AUTOR 34 Processor capacity change 35 SETLOAD xx,IEASYM 36 SET CON 37 Dynamic APF 38 SET IEFOPZ 39 SET SMFLIM
2	SMF90RVN	2	EBCDIC	Record version number.
4	SMF90PNM	8	EBCDIC	Product name — SMF, SRM, SUP, etc.

Subtypes 1 or 2

SET TIME section and SET DATE section

Offsets	Name	Length	Format	Description
0	0 SMF90OTM	4	binary	Time before the SET command was issued, in the form hhmmsssth, where hh is hours, mm is minutes, ss is seconds, and th is hundredths of a second.
4	4 SMF90ODT	4	packed	Date before the SET command was issued, in the form 0cydddf.

Offsets	Name	Length	Format	Description
8	8 SMF90NTM	4	binary	Time after the SET command was issued, in the form hhmmssst, where hh is hours, mm is minutes, ss is seconds, and th is hundredths of a second.
12	C SMF90NDT	4	packed	Date after the SET command was issued, in the form 0cydddF.

Subtypes 5, 9, 13, and 15 only

Self-Defining section

Offsets	Name	Length	Format	Description
0	0 SMF90OSM	4	binary	Offset to IPL SMF or SET SMF section from start of record, including the record descriptor word (RDW).
4	4 SMF90LSM	2	binary	Length of IPL SMF or SET SMF section.
6	6 SMF90NSM	2	binary	Number of IPL SMF or SET SMF sections.
8	8 SMF90ODA	4	binary	Offset to data set section from the start of record, including the record descriptor word (RDW).
12	C SMF90LDA	2	binary	Length of the data set section.
14	E SMF90NDA	2	binary	Number of data set sections. For subtype 9 records, this field will be zero at IPL time, and will be filled in once the MANx data sets are established and known to SMF.
16	10 SMF90OWK	4	binary	Offset to subsystem section from the start of the record, including the record descriptor word (RDW).
20	14 SMF90LWK	2	binary	Length of subsystem section.
22	16 SMF90NWK	2	binary	Number of subsystem sections.
24	18 SMF90OOT	4	binary	Offset to subsystem parameter segment.
28	1C SMF90LOT	2	binary	Length of subsystem parameter segment.
30	1E SMF90NOT	2	binary	Number of subsystem parameter segments.

IPL SMF/SET SMF/SETSMF section

Offsets	Name	Length	Format	Description
0	0 SMF90MAX	4	EBCDIC	Current value for MAXDORM, in the form <i>mmss</i> .
4	4 SMF90STA	6	EBCDIC	Current value for STATUS, in the form <i>hhmmss</i> .
10	A SMF90JWT	4	EBCDIC	Current value for JWT, in the form <i>hhmm</i> .
14	E SMF90SYI	4	EBCDIC	System identification.
18	12 SMF90BUF	1		Reserved. (previously the minimum number of buffers)
19	13 SMF90BUM	1		Reserved. (previously the minimum number of buffers)

Record type 90

Offsets	Name	Length	Format	Description																		
20	14 SMF90SWT	1	binary	SMF Options <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr><td>0</td><td>PROMPT(ALL)</td></tr> <tr><td>1</td><td>PROMPT(LIST)</td></tr> <tr><td>2</td><td>PROMPT(IPLR)</td></tr> <tr><td>3</td><td>NOPROMPT</td></tr> <tr><td>4</td><td>REC(PERM)</td></tr> <tr><td>5</td><td>REC(ALL)</td></tr> <tr><td>6</td><td>LISTDSN</td></tr> <tr><td>7</td><td>NOLISTDSN.</td></tr> </tbody> </table>	Bit	Meaning when set	0	PROMPT(ALL)	1	PROMPT(LIST)	2	PROMPT(IPLR)	3	NOPROMPT	4	REC(PERM)	5	REC(ALL)	6	LISTDSN	7	NOLISTDSN.
Bit	Meaning when set																					
0	PROMPT(ALL)																					
1	PROMPT(LIST)																					
2	PROMPT(IPLR)																					
3	NOPROMPT																					
4	REC(PERM)																					
5	REC(ALL)																					
6	LISTDSN																					
7	NOLISTDSN.																					
21	15 SMF90SW2	1	binary	SMF Options <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr><td>0</td><td>NOBUFFS(MSG)</td></tr> <tr><td>1</td><td>NOBUFFS(HALT)</td></tr> <tr><td>2</td><td>LASTDS(MSG)</td></tr> <tr><td>3</td><td>LASTDS(HALT)</td></tr> <tr><td>4</td><td>AUTHSETSMF</td></tr> <tr><td>5</td><td>NOAUTHSETSMF</td></tr> <tr><td>6</td><td>SMF30COUNT</td></tr> <tr><td>7</td><td>NOSMF30COUNT</td></tr> </tbody> </table>	Bit	Meaning when set	0	NOBUFFS(MSG)	1	NOBUFFS(HALT)	2	LASTDS(MSG)	3	LASTDS(HALT)	4	AUTHSETSMF	5	NOAUTHSETSMF	6	SMF30COUNT	7	NOSMF30COUNT
Bit	Meaning when set																					
0	NOBUFFS(MSG)																					
1	NOBUFFS(HALT)																					
2	LASTDS(MSG)																					
3	LASTDS(HALT)																					
4	AUTHSETSMF																					
5	NOAUTHSETSMF																					
6	SMF30COUNT																					
7	NOSMF30COUNT																					
22	16 SMF90SBU	1	binary	SMF Options <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr><td>0</td><td>{Default}</td></tr> <tr><td>1</td><td>SID(xxxx)</td></tr> <tr><td>2</td><td>SID(xxxx,ser#[,ser#]...)</td></tr> <tr><td>3</td><td>SID(xxxx,SYSDNAME(sysname))</td></tr> <tr><td>4</td><td>Reserved.</td></tr> <tr><td>5</td><td>SID(xxxx,COMBIN(ser#[,ser#]...))</td></tr> <tr><td>6-7</td><td>Reserved.</td></tr> </tbody> </table>	Bit	Meaning when set	0	{Default}	1	SID(xxxx)	2	SID(xxxx,ser#[,ser#]...)	3	SID(xxxx,SYSDNAME(sysname))	4	Reserved.	5	SID(xxxx,COMBIN(ser#[,ser#]...))	6-7	Reserved.		
Bit	Meaning when set																					
0	{Default}																					
1	SID(xxxx)																					
2	SID(xxxx,ser#[,ser#]...)																					
3	SID(xxxx,SYSDNAME(sysname))																					
4	Reserved.																					
5	SID(xxxx,COMBIN(ser#[,ser#]...))																					
6-7	Reserved.																					
23	17 SMF90RV7	1		Reserved.																		
24	18 SMF90REL	4	EBCDIC	Operating system release number.																		
28	1C SMF90IIT	4	binary	Time since midnight, in hundredths of seconds, of IPL.																		
32	20 SMF90IDT	4	packed	Date of IPL, in the form 0cyydddF. See "Standard SMF record header" on page 162 for details.																		
36	24 SMF90BFM	5	EBCDIC	BUFSIZMAX value (ddd <u>du</u>).																		
41	29 SMF90BFL	2	EBCDIC	BUFUSEWARN value (d <u>d</u>).																		
43	2B SMF90ESWT	4	EBCDIC	SWT as entered in SMFPRMxx.																		
47	2F SMF90ETWT	4	EBCDIC	TWT as entered in SMFPRMxx.																		

SMF data set section

There is a data set section for every SMF recording data set. The first data set is the active data set at IPL or SET SMF time.

For subtype 9 records, this section will not be generated at IPL time. It is created once the MANx data sets are established and known to SMF.

Offsets	Name	Length	Format	Description
0	0 SMF90DSE	44	structure	SMF data set section
0	0 SMF90DSN	44	EBCDIC	SMF data set name.

Subsystem record section

There are entries defining sub-options specified for the SYS and each SUBSYS option specified in SMFPRMxx.

Offsets	Name	Length	Format	Description						
0	0 SMF90WKN	4	EBCDIC	Name of subsystem.						
4	4 SMF90DTL	1	binary	DETAIL recording indicator <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Detail recording on</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Detail recording on	1-7	Reserved.
Bit	Meaning when set									
0	Detail recording on									
1-7	Reserved.									
5	5 SMF90RS9	3		Reserved.						
8	8 SMF90SVL	8	binary	Length of interval, in TOD clock format, between checkpoint SMF records.						
16	10 SMF90SYS	32	binary	Bit representation of SMF record types. If the bit is on (1), the record is enabled for recording. If the bit is off (0), the record is not enabled for recording. Bit 0 corresponds to record type 0. Bit 255 corresponds to record type 255.						
48	30 SMF90EXN	120	EBCDIC	Names of the active exits for this subsystem. Each sequentially listed exit name is 8-characters long. Up to 15 exits can be specified. If less than 15 exits are specified, the remaining portion of the list is filled with binary zeros.						

Subsystem parameter section

There is an entry for each subsystem for which a subsystem parameter has been specified.

Offsets	Name	Length	Format	Description
0	0 SMF90ASN	4	EBCDIC	Subsystem name.
4	4 SMF90APM	60	EBCDIC	Accounting parameter.

Subtypes 6 or 7

Switch SMF/Halt EOD section

Offsets	Name	Length	Format	Description
0	0 SMF90T6	116	structure	Switch SMF/Halt EOD section.

Record type 90

Offsets	Name	Length	Format	Description
0	0 SMF90SWO	10	EBCDIC	Subtype 6: This field is the old recording data set name. This field will be blank if data is lost through a SWITCH SMF. Subtype 7: This field is blank. Note: If the data set name is greater than 10 characters, this field is blank. See SMF90SOD for the complete data set name.
10	A SMF90SWN	10	EBCDIC	Subtype 6: This field is the new recording data set name. Subtype 7: This field is blank. Note: If the data set name is greater than 10 characters, this field is blank. See SMF90SND for the complete data set name.
20	14 SMF90IT	4	binary	Time since midnight, in hundredths of seconds, of IPL.
24	18 SMF90ID	4	packed	Date of the IPL, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
28	1C SMF90SOD	44	EBCDIC	Subtype 6: This field is the old recording data set name. This field will be blank if data is lost through a SWITCH SMF. Subtype 7: This field is blank.
72	48 SMF90SND	44	EBCDIC	Subtype 6: This field is the new recording data set name. Subtype 7: This field is blank.

Subtype 8 only

System IPL prompt data section

Offsets	Name	Length	Format	Description
0	0 SMF90DTM	8	EBCDIC	System down time, in the form <i>hh-mm-ss</i> or 'u'.
8	8 SMF90RSN	65	EBCDIC	Reason for the IPL or 'u'.
73	49 SMF90OPR	20	EBCDIC	Operators name or 'u'.
93	5D SMF90ITM	4	binary	Time since midnight, in hundredths of seconds, of IPL.
97	61 SMF90DTT	4	packed	Date of the IPL, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for details.

Subtype 10

The fields in the second table appear only if SMF90DLN > 32.

IPL SRM command section

Offsets	Name	Length	Format	Description
0	0 SMF90IPT	8	binary	Time of IPL.
8	8 SMF90IPS	8	EBCDIC	Reserved.

Offsets	Name	Length	Format	Description
16	10 SMF90OPT	8	EBCDIC	OPT parmlib member used. IEAOPT-- indicates no OPT.
24	18 SMF90ICS	8	EBCDIC	Reserved.
32	20 SMF90SPN	8	EBCDIC	Active service policy name.
40	28 SMF90SPT	8	binary	Time/date (STCK format) that the active service policy was originally activated.
48	30 SMF90SPU	8	EBCDIC	User ID of the operator or service administrator that activated the service policy.
56	38 SMF90SPS	8	EBCDIC	Name of the system on which the service policy activation was initiated.
64	40 SMF90SDN	8	EBCDIC	Name of the installed service definition at the time the policy was activated.
72	48 SMF90SDT	8	EBCDIC	Time/date (STCK format) that the service definition was installed
80	50 SMF90SDU	8	EBCDIC	User ID of service administrator that installed the service definition.
88	58 SMF90SDS	8	EBCDIC	Name of the system on which the service definition was installed.

Subtype 11

SET OPT command section

Offsets	Name	Length	Format	Description
0	0 SMF90TOP	8	binary	Time (in STCK format) of OPT change. STCK format is indicated on the TIME macro.
8	8 SMF90OPO	8	EBCDIC	Old OPT parmlib member. IEAOPTxx indicates no OPT.
16	10 SMF90OPN	8	EBCDIC	New OPT parmlib member.

Subtype 14

SET MPF command section

Offsets	Name	Length	Format	Description
0	0 SMF90TMP	8	binary	Time and date of change.
8	8 SMF90MPO	8	EBCDIC	Reserved (was name of old parmlib member).
16	10 SMF90MPN	8	EBCDIC	Reserved (was name of new parmlib member, for color).
24	18 SMF90MPC	8	EBCDIC	Reserved (was name of old parmlib member, for color).
32	20 SMF90MCN	8	EBCDIC	Reserved (was name of new parmlib member, for command).
40	28 SMF90MCO	8	EBCDIC	Reserved (was name of old parmlib member, for command).
48	30 SMF90CMP	4	binary	Count of MPF entries.

Record type 90

Offsets	Name	Length	Format	Description
52	34 SMF9014D	78	EBCDIC	Array of 2-byte suffixes of specified parmlib members (39 maximum).

Subtype 16

SET DAE command section

Offsets	Name	Length	Format	Description
0	0 SMF90DAT	8	binary	Time of date and change.
8	8 SMF90DAO	8	EBCDIC	Name of the old parmlib member.
16	10 SMF90DAN	8	EBCDIC	Name of the new parmlib member.

Subtype 17

SET PFK command data section

Offsets	Name	Length	Format	Description
0	0 SMF90TPF	8	binary	Time of SET PFK change.
8	8 SMF90PFO	8	EBCDIC	Old PFK parmlib member (written to object).
16	10 SMF90PFN	8	EBCDIC	New PFK parmlib member.

Subtype 18

SET GRSRNL command data section

Offsets	Name	Length	Format	Description
0	0 SMF90SGT	8	binary	Time that the command was entered.
8	8 SMF90SGS	8	EBCDIC	System that issued the command.
16	10 SMF90SGC	4	binary	Count of suffixes of specified parmlib members. This field contains zeroes if the command was not issued on this system.
20	14 SMF90SGN	78	EBCDIC	Array of two-byte suffixes of specified parmlib members. When SMF90SGC is zero, this array is not valid (and contains zeroes).

Subtype 19

SET APPC command data section

Offsets	Name	Length	Format	Description
0	0 SMF90APT	8	binary	Time and date that the SET APPC command was issued.
8	8 SMF90APC	4	binary	Number of entries that follow.
12	C SMF90APN	8	EBCDIC	Name of the new parmlib member used to update the APPC/MVS (Advanced Program-to-Program Communication/MVS) configuration. This subtype is repeated.

Subtype 20

SET ASCH command data section

Offsets	Name	Length	Format	Description
0	0 SMF90SCT	8	binary	Time and date of the SET ASCH change.
8	8 SMF90SCC	4	binary	Number of entries that follow.
12	C SMF90SCN	8	EBCDIC	Name of the new parmlib member used to update the APPC/MVS scheduler configuration. This subtype is repeated for each member specified on the command.

Subtype 21

SET SCH command data section

Offsets	Name	Length	Format	Description
0	0 SMF90SHT	8	binary	Time and date of SET SCH change.
8	8 SMF90SHC	4	binary	Number of entries that follow.
12	C SMF90SHN	8	EBCDIC	Name of the new parmlib member used to update the APPC/MVS scheduler configuration. This subtype is repeated for each member specified on the command.

Subtype 22

SET CNGRP command section

Offsets	Name	Length	Format	Description
0	0 SMF90CGT	8	binary	Time and date of SET CNGRP change.
8	8 SMF90CGC	4	binary	Number of entries that follow.
12	C SMF90CGN	8	EBCDIC	Name of specified CNGRP parmlib member. This field is repeated for each member specified on the command.

Subtype 23

Install workload management service definition

Offsets	Name	Length	Format	Description
0	0 SMF90IDN	8	EBCDIC	Service definition name
8	8 SMF90TDI	8	EBCDIC	Time and date (STCK) of installation
16	10 SMF90IDU	8	EBCDIC	User ID of service level administrator that installed this service definition.
24	18 SMF90IDS	8	EBCDIC	Name of the system from which the service definition was installed.

Subtype 24

Subtype 24 contains the workload management service policy, as mapped by the IWMSVPOL macro. It has a size dependency of 32K. If the policy exceeds 32K,

Record type 90

additional subtype 24 records are written. Each subtype contains the header information. You must map the corresponding service policy information as mapped in IWMSVPOL. For a mapping of IWMSVPOL, see *z/OS MVS Data Areas* in *z/OS Internet library* (<http://www.ibm.com/systems/z/os/zos/bkserv/>).

The field SMF9024N contains the number of subtype 24 records that are written to map the service policy. The field SMF9024P contains the length of the subtype 24.

Mapping a single subtype 24 record

To map the WLM policy when there is one subtype 24 (SMF9024N = 1), base IWMSVPOL on ADDR(SMF9024) + LENGTH(SMF9024P).

Mapping multiple subtype 24 records

To map the WLM policy when there is more than one subtype 24 written (SMF9024N > 1), use the following procedure:

1. Determine the storage required by multiplying 32K times the number of subtype 24 records.
 $32K * SMF9024N$
2. Obtain a storage block equal to $32K * SMF9024N$
3. Read all (SMF9024N) subtype 24 records that have the same unique identifier (SMF9024I).
4. Copy the first subtype 24 record (SMF9024S=1) beginning at SMF9024A for a length of SMF90DLN - LENGTH(SMF9024P) to the start of the obtained storage.
5. Copy the next subtype 24 record (SMF9024S=2) beginning at SMF9024A for a length of SMF90DLN-LENGTH(SMF9024P) to the byte in the obtained storage immediately after the previous record.
6. Repeat the previous step for each additional subtype 24 record.

When you have merged all the subtype 24 records, map the resulting data to the IWMSVPOL mapping macro.

VARY WLM command data section - service policy header

Offsets	Name	Length	Format	Description
	SMF9024P			Prefix area to subtype 24. Allows assembling several records together to map the entire WLM service policy.
0	0 SMF9024S	4	binary	Sequence number. When the service policy is larger than will fit in 1 subtype 24 record, this field describes the order in which individual records must be combined to view the entire service policy.
4	4 SMF9024N	4	binary	Number of subtype 24 records which must be combined to map the policy. When 1 record is enough, both SMF9024S and SMF9024N will be 1.
8	8 SMF9024I	4	binary	Unique ID that is used to ensure all "N" records of 1 policy can be combined without mixing data from 2 rapid VARY policy commands.
12	C SMF9024A	*	EBCDIC	The active service policy. This area is mapped by IWMSVPOL.

Subtype 25

MODIFY WLM command data section

Offsets	Name	Length	Format	Description						
0	0 SMF90MOD	1	bitstring	Reserved. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved.	1	Reserved.
Bit	Meaning when set									
0	Reserved.									
1	Reserved.									
1	1 SMF90MRS	3	binary	Reserved.						
4	4 SMF90MTD	8	EBCDIC	Reserved.						
12	C SMF90NSP	8	EBCDIC	Name of the service policy activated by the VARY WLM command.						
20	14 SMF90TPA	8	EBCDIC	Time and date (STCK) associated with the initial activation of this service policy.						
28	1C SMF90IPU	8	EBCDIC	User ID of the system operator or service level administrator who activated this service policy. A service policy can be activated by the VARY WLM command, or by an option in the WLM ISPF administrative application.						
32	20 SMF90SNA	8	EBCDIC	System name (sysname) from which the service policy was activated.						
40	28 SMF9025N	8	EBCDIC	Service definition name from which this service policy was activated.						
48	30 SMF9025T	8	EBCDIC	Time and date (STCK) of the installation of this service definition.						
56	38 SMF9025U	8	EBCDIC	User ID of the service level administrator who installed the service definition.						
64	40 SMF9025S	8	EBCDIC	Name of the system from which the service definition was installed.						
72	48 SMF90MOU	8	EBCDIC	Reserved.						

Subtype 26

IPL Logrec data set section

Offsets	Name	Length	Format	Description
0	0 SMF90LOG	44	EBCDIC	Original logrec data set name or blanks.
44	2C SMF9026M	10	EBCDIC	Original logrec recording medium: <ul style="list-style-type: none"> • LOGSTREAM • DATASET • IGNORED
54	36 SMF9026G	26	EBCDIC	Original logrec log stream name or blanks
80	50 SMF9026N	44	EBCDIC	New logrec data set name or blanks
124	7C SMF9026R	10	EBCDIC	New logrec recording medium: <ul style="list-style-type: none"> • LOGSTREAM • DATASET • IGNORED
134	86 SMF9026H	26	EBCDIC	New logrec log stream name or blanks

Subtypes 27 and 28

Automatic restart management policy section

Offsets	Name	Length	Format	Description
0	0 SMF90PN7	8	EBCDIC	Name of policy being processed (blank if no policy specified on start, or if no policy is active on stop).
8	8 SMF90PS7	8	EBCDIC	System name from parmlib member IEASYSxx SYSNAME parameter.

Subtype 29

LNKLST set activation

Offsets	Name	Length	Format	Description
0	0 SMF90T29LNKLSTSEQ#	4	binary	Sequence number for the LNKLST set. The sequence number is increased whenever a LNKLST set is activated.
4	4 SMF90T29LNKLSTNAME	16	EBCDIC	Name of the LNKLST set activated.
20	14 SMF90T29TIMESTAMP	8	binary	Time and date (STCK) of the LNKLST set activation.
28	1C SMF90T29CONSID	4	binary	Console ID of the console that issued the command for LNKLST activation.
32	20 SMF90T29UTOKEN	80	binary	User token of the issuer of the command for LNKLST activation.

Subtype 30

RESET command complete

Offsets	Name	Length	Format	Description																		
0	0 SMF90T30_JOBNAME	8	EBCDIC	Name of the job that was reset. This field will be blank in the case of an enclave reset request.																		
8	8 SMF90T30_JOBID	8	EBCDIC	JES Job ID of the reset job. This field will be blank if there is no JSAB associated with the job, or in the case of an enclave reset request.																		
16	10 SMF90T30_ENTRY_TIME	4	binary	Program entry time, in hundredths of a second since midnight. For a job, this is the program entry time, or zero if no JSAB is associated with the job. For an enclave, this is the time the enclave was created.																		
20	14 SMF90T30_ENTRY_DATE	4	EBCDIC	Program entry date, in the form 0cyydddF. For a job, this is the program entry date, or zero if no JSAB is associated with the job. For an enclave, this is the date the enclave was created.																		
24	18 SMF90T30_OPERATOR	8	EBCDIC	Operator ID that issued the RESET command.																		
32	20 SMF90T30_FLAGS	1	bitstring	Indicators, as follows: <table border="1" data-bbox="889 1627 1323 1864"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>QUIESCE operand used</td> </tr> <tr> <td>1</td> <td>RESUME operand used</td> </tr> <tr> <td>2</td> <td>SRVCLASS operand used</td> </tr> <tr> <td>3</td> <td>PGN operand used</td> </tr> <tr> <td>4</td> <td>The enclave service class was reset</td> </tr> <tr> <td>5</td> <td>The enclave was quiesced</td> </tr> <tr> <td>6</td> <td>The enclave was resumed</td> </tr> <tr> <td>7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	QUIESCE operand used	1	RESUME operand used	2	SRVCLASS operand used	3	PGN operand used	4	The enclave service class was reset	5	The enclave was quiesced	6	The enclave was resumed	7	Reserved
Bit	Meaning when set																					
0	QUIESCE operand used																					
1	RESUME operand used																					
2	SRVCLASS operand used																					
3	PGN operand used																					
4	The enclave service class was reset																					
5	The enclave was quiesced																					
6	The enclave was resumed																					
7	Reserved																					

Offsets	Name	Length	Format	Description						
33	21 SMF90T30_FLAGS2	1	bitstring	Additional characteristics, as follows: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Original independent enclave</td> </tr> <tr> <td>1-7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	Original independent enclave	1-7	Reserved
Bit	Meaning when set									
0	Original independent enclave									
1-7	Reserved									
34	22 SMF90T30_RSV	2	EBCDIC	Reserved						
36	24 SMF90T30_OLDSRV	8	EBCDIC	Service class name associated with the job or enclave before the RESET was processed. This field is blank if the system was in compatibility mode. The OLD and NEW service classes are the same when the RESET quiesced the address space or enclave.						
44	2C SMF90T30_NEWSRV	8	EBCDIC	Service class name associated with the job or enclave after the RESET was processed. This field is blank if the system was in compatibility mode. The OLD and NEW service classes are the same when the RESET quiesced the address space or enclave.						
52	34 SMF90T30_OLDPGN	2	binary	Beginning with z/OS V1R3, this field is always zero.						
54	36 SMF90T30_NEWPGN	2	binary	Beginning with z/OS V1R3, this field is always zero.						
56	38 SMF90T30_EnclaveOwner	8	EBCDIC	Name of the address space that owns the enclave. This field is blank in the case of a job reset request.						

Subtype 31

Dynamic LPA management section

Offsets	Name	Length	Format	Description
0	0 SMF90T31ADDORDELETE	1	binary	"0" this record is the result of an ADD to LPA; "1" this record is the result of a DELETE from LPA
1	1	3	EBCDIC	Reserved
4	4 SMF90T31NUMMODS	2	binary	Number of modules in this record.
6	6 SMF90T31MODOFFSET	2	binary	Offset from SMF90T31 to start of MODENTRIES. The modentries are contiguous in this area, each mapped by DSECT LPMEA within macro CSVLPRET
8	8 SMF90T31NUMMODS REMAINING	4	binary	Number of module entries to be written in subsequent records.
12	C SMF90T31REQUESTOR	16	EBCDIC	The requestor ID provided through CSVLYLPA.
28	1C SMF90T31TIMESTAMP	8	EBCDIC	Time value (from STCK) of the activation.
36	24 SMF90T31CONSID	4	binary	Console ID of issuer of the LPA request. The value is -1 if the request was through the CSVLYLPA macro.
40	28 SMF90T31UTOKEN	80	EBCDIC	Security product user token issuer of the LPA request.

Subtype 32

Subtype 32 contains all the workload management scheduling environment information following a successful policy change. It has a maximum size dependency of 32K. If the information exceeds 32K, additional subtype 32 records are written. Each subtype contains the header information. You must map the corresponding scheduling environment information as mapped in IWMSVPSE. For a mapping of IWMSVPSE, see *z/OS MVS Data Areas* in *z/OS Internet library* (<http://www.ibm.com/systems/z/os/zos/bkserv/>).

The field SMF9032N contains the number of subtype 32 records that are written to map the scheduling environment structure. The field SMF9032P contains the length of the subtype 32.

Mapping a single subtype 32 record

To map the WLM scheduling environment structure when there is one subtype 32 (SMF9032N = 1), base IWMSVPSE on ADDR(SMF90T32) + LENGTH(SMF9032P).

Mapping multiple subtype 32 records

To map the WLM scheduling environment structure when there is more than one subtype 32 written (SMF9032N > 1), use the following procedure:

1. Determine the storage required by multiplying 32K times the number of subtype 32 records.
32K * SMF9032N
2. Obtain a storage block equal to 32K * SMF9032N
3. Read all (SMF9032N) subtype 32 records that have the same unique identifier (SMF9032I).
4. Copy the first subtype 32 record (SMF9032S=1) beginning at SMF9032A for a length of SMF90DLN - LENGTH(SMF9032P) to the start of the obtained storage.
5. Copy the next subtype 32 record (SMF9032S=2) beginning at SMF9032A for a length of SMF90DLN-LENGTH(SMF9032P) to the byte in the obtained storage immediately after the previous record.
6. Repeat the previous step for each additional subtype 32 record.

When you have merged all the subtype 32 records, map the resulting data to the IWMSVPSE mapping macro.

Scheduling environment information

Offsets	Name	Length	Format	Description
	SMF9032P			Prefix area to subtype 32. Allows assembling several records together to map the entire WLM scheduling environment structure.
0	0 SMF9032S	4	binary	Sequence number. When the scheduling environment structure is larger than will fit in 1 subtype 32 record, this field describes the order in which individual records must be combined to view the entire scheduling environment structure.
4	4 SMF9032N	4	binary	Number of subtype 32 records which must be combined to map the scheduling environment structure. When 1 record is enough, both SMF9032S and SMF9032N will be 1.
8	8 SMF9032I	4	binary	Unique ID that is used to ensure all "N" records of 1 policy can be combined without mixing data from 2 rapid VARY policy commands.
12	C SMF9032A	*	EBCDIC	The active service policy. This area is mapped by IWMSVPSE.

Subtype 33

SET AUTOR command section

Offsets	Name	Length	Format	Description
0	0 SMF90T33_Timestamp	8	binary	Time of auto-reply policy change.
8	8 SMF90T33_#_Suffixes	4	binary	Count of AUTORxx suffixes used to set the policy.
12	C SMF90T33_Suffixes	76	EBCDIC	Array of 2-byte suffixes of specified AUTORxx parmlib members (38 maximum).

Subtype 34

A subtype 34 record is generated when a processor capacity change occurs, which is triggered by an ENF61 signal, qualified by WLMENF12 along with a change in processor capacity.

Processor capacity change section

This record is generated when a processor capacity change occurs.

Offsets	Name	Length	Format	Description								
0	0 SMF90T34_Capacity_Change_Time	8	binary	Time when the capacity was last changed.								
8	8 SMF90T34_RQSVSUS	4	binary	Current service unit factor (SU factor) from RQSVSUS.								
12	C SMF90T34_RCTPCPUA_Actual	4	binary	Physical CPU adjustment factor (for example, adjustment factor for converting CPU time to equivalent service in basic-mode with all processors online). Based on model capacity rating.								
16	10 SMF90T34_RCTPCPUA_Nominal	4	binary	Physical CPU adjustment factor (for example, adjustment factor for converting CPU time to equivalent service in basic-mode with all processors online). Based on nominal model capacity rating.								
20	14 SMF90T34_RCTPCPUA_scaling_factor	4	binary	Scaling factor for RCTPCPUA_actual and RCTPCPUA_nominal.								
24	18 SMF90T34_Capacity_Adjustment_Ind	1	binary	When: 0 The indication is not reported. 1-99 Some amount of reduction is indicated. 100 The machine is operating in normal capacity. Primary CPUs and all secondary-type CPUs are similarly affected.								
25	19 SMF90T34_Capacity_Change_Reason	1	binary	Indicates the reason that is associated with the present value contained in SMF90T34_Capacity_Adjustment_Ind. The bit values of this field correspond to those described in RMCTZ_Capacity_Adjustment_Indication of the IRARMCTZ mapping macro. (See <i>MVS Data Areas</i>).								
26	1A SMF90T34_Flags	1	binary	Error flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>SMF90T34_RQSVSUS_ErrMeaning: When on, indicates that an error occurred while collecting the value from RQSVSUS.</td> </tr> <tr> <td>1</td> <td>SMF90T34_Capacity_Data_errMeaning: When on, indicates that an error occurred while collecting the processor capacity data.</td> </tr> <tr> <td>2</td> <td>SMF90T34_PCD_Rsvd_ExistsMeaning: When on, indicates records generated on systems running z/OS V1R7 through z/OS V1R9. When off, indicates records generated on systems running z/OS V1R10 and later.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	SMF90T34_RQSVSUS_Err Meaning : When on, indicates that an error occurred while collecting the value from RQSVSUS.	1	SMF90T34_Capacity_Data_err Meaning : When on, indicates that an error occurred while collecting the processor capacity data.	2	SMF90T34_PCD_Rsvd_Exists Meaning : When on, indicates records generated on systems running z/OS V1R7 through z/OS V1R9. When off, indicates records generated on systems running z/OS V1R10 and later.
Bit	Meaning when set											
0	SMF90T34_RQSVSUS_Err Meaning : When on, indicates that an error occurred while collecting the value from RQSVSUS.											
1	SMF90T34_Capacity_Data_err Meaning : When on, indicates that an error occurred while collecting the processor capacity data.											
2	SMF90T34_PCD_Rsvd_Exists Meaning : When on, indicates records generated on systems running z/OS V1R7 through z/OS V1R9. When off, indicates records generated on systems running z/OS V1R10 and later.											
28	1C SMF90T34_RMCTADJN_Nominal	4	binary	Nominal CPU rate adjustment								

Subtype 35

A subtype 35 record is generated when a SETLOAD xx,IEASYM command is processed.

SETLOAD xx,IEASYM command section

This record is generated when a SETLOAD xx,IEASYM command is processed.

Offsets	Name	Length	Format	Description
0	0 SMF90T35_Timestamp	8	binary	Time of SETLOAD xx,IEASYM.
8	8 SMF90T35_ConsID	4	binary	Console ID of issuer.

Record type 90

Offsets	Name	Length	Format	Description
12	C SMF90T35_LOADxxName	8	EBCDIC	LOADxx member name.
20	14 SMF90T35_IeasymStatement	72	EBCDIC	IEASYM statement. Identifies the IEASYMxx suffixes.

Subtype 36

SET CON command section

Offsets	Name	Length	Format	Description
0	0 SMF90T36_TimeStamp	8	binary	Time stamp.
8	8 SMF90T36_MemberName	8	EBCDIC	CONSOLxx parmlib member name.

Subtype 37

Dynamic APF section

Offsets	Name	Length	Format	Description										
0	0 SMF90T37Function	1	binary	Function indicator: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>APF Add</td> </tr> <tr> <td>2</td> <td>APF Delete</td> </tr> <tr> <td>4</td> <td>APF Format (Dynamic)</td> </tr> <tr> <td>6</td> <td>APF Format (Static)</td> </tr> </tbody> </table>	Value	Meaning	1	APF Add	2	APF Delete	4	APF Format (Dynamic)	6	APF Format (Static)
Value	Meaning													
1	APF Add													
2	APF Delete													
4	APF Format (Dynamic)													
6	APF Format (Static)													
1	1 SMF90T37Flags	1	binary	Flags: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Update from SETPROG command</td> </tr> <tr> <td>1</td> <td>Update from SET PROG command</td> </tr> <tr> <td>2</td> <td>Update from CSVAPF macro</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Update from SETPROG command	1	Update from SET PROG command	2	Update from CSVAPF macro		
Bit	Meaning when set													
0	Update from SETPROG command													
1	Update from SET PROG command													
2	Update from CSVAPF macro													
2	2 SMF90T37ParmMemSuffix	2	EBCDIC	When bit 1 (SMF90T37_SET_PROG) of SMF90T37Flags is set, the xx portion of the name of the PROGxx parmlib member.										
4	4 SMF90T37DSNAME	44	EBCDIC	The data set name when the function is not APF Format (Dynamic) or APF Format (Static); otherwise, undefined.										
48	30 SMF90T37Volume	6	EBCDIC	The volume when the function is not APF Format (Dynamic) or APF Format (Static); otherwise, undefined. This field is set to zeros for an add or delete indicating SMS-managed, such as by specifying SMS on a SETPROG APF,ADD command or on an APF ADD statement in the PROGxx member of parmlib.										
54	36 -	2	binary	Reserved.										
56	38 SMF90T37TIMESTAMP	8	binary	Time (via STCK) of the update.										
64	40 SMF90T37Jobname	8	EBCDIC	The job name of the issuer of the APF request. For a SETPROG command or SET PROG processing, this is the job name of the ASID processing the command (ASID 1 - *MASTER*).										
72	48 SMF90T37ChKey	8	EBCDIC	The CHKEY field from the CSCB (for a started task, this is the step name); otherwise, zeros if there is no CSCB.										
80	50 SMF90T37ConsID	4	binary	The console ID of the issuer of the APF request. The value is -1 if the request was from the CSVAPF macro.										
84	54 -	4	binary	Reserved.										
88	58 SMF90T37UTOKEN	80	binary	The security product user token of the issuer of the APF request.										

Subtype 38

SMF record type 90 subtype 38 is generated to capture the entire data set optimization (IEFOPZ) configuration. One or more records may be written if the entire configuration does not fit within a single record. The record includes:

- The MAXARCH value (and the member name suffix of the IEFOPZ xx parmlib member that was the source of the definition).
- Every active OldNew definition, showing the old data set name (referred to as the IEFOPZ-Old data set name) and volume, and the particular new data set name (referred to as the IEFOPZ-New data set name) and volume that will be used (which depends on the MAXARCH value, the current machine, and the ARCH specification for the new data set). Also included is the member name suffix of the IEFOPZ xx parmlib member that was the source of the definition.
 - The member list is not included in the SMF record because z/OS itself does nothing for the members themselves; the exploiter would do that, and updates to the members of an IEFOPZ-New data set can be viewed via other SMF records.
- Every DD name and job name definition, along with the member name suffix of the IEFOPZ xx parmlib member that was the source of the definition.

The record is mapped by the IFASMFR macro (via the IFASMFR and IEFOPSMF macros).

IEFOPZ configuration section

Offsets	Name	Length	Format	Description
0	0 SMF90T38Flags	1	binary	Flags: Bit Meaning when set 0 (SMF90T38_SET_IEFOPZ) Update from SET IEFOPZ command. 1 (SMF90T38_MSI) Master Scheduler Init processing. 2-5 Reserved. 6 (SMF90T38_More) Not all data fits; a subsequent record will be produced. 7 (SMF90T38_Continuation) This is a continuation of the previous record.
1	1 *	1	binary	Reserved.
2	2 SMF90T38_ContinuationNumber	2	binary	The value is 0 for a record that is not a continuation, incremented by 1 for each continuation of a non-continuation record.
4	4 SMF90T38_MaxArch	2	binary	MAXARCH value.
6	6 SMF90T38_MaxArchIEFOPZxxSuffix	2	EBCDIC	The xx portion of the IEFOPZ xx parmlib member name in which the MaxArch was defined, or binary zeros if MaxArch was not specified (the default value was used).
8	8 *	4	binary	Reserved.
12	C SMF90T38_Consid	4	binary	Console ID of the issuer of the SET IEFOPZ command.
16	10 SMF90T38_Conaname	8	EBCDIC	Console name of the issuer of the SET IEFOPZ command.
24	18 SMF90T38_TimeStamp	8	binary	Time value (from STCK) of the update. Continuations of this record will have the same TimeStamp value.
32	20 SMF90T38_Jobname	8	EBCDIC	The job name of the issuer of the IEFOPZ request. For SET IEFOPZ, this will be the job name of the ASID processing the command (ASID 1 = *MASTER*).
40	28 SMF90T38_CHKEY	8	EBCDIC	The CHKEY field from the CSCB (for a started task, this is the step name), or zeros if there is no CSCB.
48	30 SMF90T38_UToken	80	binary	Security product user token for the IEFOPZ request, mapped by ICHRUTKN.
118	70 SMF90T38_UtokenUserid	8	EBCDIC	TOKUSER (user ID) field of the user token.

Record type 90

Offsets	Name	Length	Format	Description
128	80 SMF90T38_Num_OldNew	4	binary	Number of OldNew entries in this record.
132	84 SMF90T38_OldNew_Offset	4	binary	Offset from SMFRCD90 to first OldNew entry. Entry is mapped by SMF90T38_OldNew. (See "SMF90T38_OldNew section.")
136	88 SMF90T38_OldNew_Len	4	binary	Length of an OldNew entry. Use this length to navigate from one OldNew entry to the next.
140	8C SMF90T38_Num_DDJobname	4	binary	Number of DDJobname entries in this record.
144	90 SMF90T38_DDJobname_Offset	4	binary	Offset from SMFRCD90 to the first DDJobname entry. Entry is mapped by SMF90T38_DDJobname. (See "SMF90T38_DDJobname section.")
148	94 SMF90T38_DDJobname_Len	4	binary	Length of a DDJobname. Use this length to navigate from one DDJobname entry to the next.

SMF90T38_OldNew section

Offsets	Name	Length	Format	Description
0	0 SMF90T38ON_Flags	1	binary	Flags: Bit Meaning when set 0 (SMF90T38ON_OVolProvided) The IEFOPZ-Old data set was specified with volume. 1 (SMF90T38ON_NVolProvided) The IEFOPZ-New data set was specified with volume. 2-7 Reserved.
1	1 *	1	binary	Reserved.
2	2 SMF90T38ON_IEFOPZxxSuffix	2	EBCDIC	The xx portion of the IEFOPZxx parmlib member name in which the OldNew was defined.
4	4 SMF90T38ON_ODSName	44	EBCDIC	IEFOPZ-Old data set name.
48	30 SMF90T38ON_OR	44	EBCDIC	Real IEFOPZ-Old data set name, if IEFOPZ-Old is an alias; otherwise, matches SMF90T38ON_ODSName.
92	5C SMF90T38ON_OVolume	6	EBCDIC	IEFOPZ-Old volume. This is the value when the data set was last allocated by IEFOPZ processing.
98	62 SMF90T38ON_NDSName	44	EBCDIC	The IEFOPZ-New data set name that will be used.
142	8E SMF90T38ON_NRDSName	44	EBCDIC	Real IEFOPZ-New data set name, if IEFOPZ-New is an alias; otherwise, matches SMF90T38ON_NDSName.
186	BA SMF90T38ON_NVVolume	6	EBCDIC	IEFOPZ-New volume that will be used. This is the value when the data set was last allocated by IEFOPZ processing.
192	C0 SMF90T38ON_NArch	2	binary	The ARCH value of the IEFOPZ-New data set.
194	C2 *	2	binary	Reserved.

SMF90T38_DDJobname section

Offsets	Name	Length	Format	Description
0	0 SMF90T38DDJ_IEFOPZxxSuffix	2	EBCDIC	The xx portion of the IEFOPZxx parmlib member name in which the DDName/Jobname pair was defined.
2	2 *	2	binary	Reserved.
4	4 SMF90T38DDJ_DDName	8	EBCDIC	DDName.
12	C SMF90T38DDJ_Jobname	8	EBCDIC	Jobname.

Subtype 39

A subtype 39 record is generated when the SET SMFLIM command is processed.

SET SMFLIM command section

Offsets	Name	Length	Format	Description
0	0 SMF90T39_Timestamp	8	binary	Time of the SET SMFLIM policy change.
8	8 SMF90T39_Num_Suffixes	4	binary	Count of SMFLIMxx suffixes.
12	C SMF90T39_Suffixes	76	EBCDIC	Array of 2-byte suffixes of specified SMFLIMxx members.

Record Type 91 (5B) — BatchPipes/MVS Statistics

BatchPipes/MVS writes type 91 records to collect statistics about BatchPipes/MVS activities. For more information about record type 91, see *IBM BatchPipes® Users Guide and Reference* (<http://publibfp.dhe.ibm.com/cgi-bin/bookmgr/BOOKS/asf1a210/CCONTENTS>), SA22-7458.

Record type 92 (5C) — File system activity

SMF record type 92 reports activity of mounted file systems and files. For more information about SMF record type 92, see *z/OS UNIX System Services Planning*.

For a description of when open and close records are written, see “Accounting for open() and close()” on page 124.

Rules:

1. To collect information about the activity of a mounted file system, you must be collecting SMF type 92 subtype 5 (unmount) records at the time the file system is mounted and at the time the file system is unmounted.
2. To collect information on the activity of a specific file, you must be collecting SMF type 92 subtype 11 (close) records at the time the file is opened and at the time the file is closed.

The subtypes are:

Subtype

	Description
1	Contains information written when a file system is mounted.
2	Contains information written after the file system is quiesced (or suspended).
4	Contains information written after the file system is unquiesced (or resumed).
5	Contains information written when the file system is unmounted.
6	Contains information written when the file system is remounted.
7	Contains information written when the file system is moved.
10	Contains information written when a file is opened.
11	Contains information written when a file is closed.
12	Contains MMAP subtype information.
13	Contains MUNMAP subtype information.
14	Contains information written when a file or file directory is deleted or renamed.

Record type 92

- 15 Contains information written when a file's security attributes for APF authorized, program control, or shared library are changed.
- 16 Contains information written when a socket, character special file, pipe, or fifo is closed. The record format is the same as for subtype 11.
- 17 Contains information about how many times a file is accessed throughout the life of an open and is written on the SMF global recording interval.

Record Environment

The following conditions exist for the generation of each of the subtypes of this record:

Macro SMFEWTM(2), BRANCH=YES,MODE=XMEM (record exit: IEFU85)

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
Record Header Section:																
0	0 SMF92LEN	2	binary	Record Length.												
2	2 SMF92SEG	2	binary	Segment descriptor.												
4	4 SMF92FLG	1	binary	Header flag byte. <table border="0" style="margin-left: 20px;"> <tr> <td style="text-align: right;">Bit</td> <td>Meaning when set</td> </tr> <tr> <td style="text-align: right;">0</td> <td>Subsystem identification follows system identification</td> </tr> <tr> <td style="text-align: right;">1</td> <td>Subtypes used</td> </tr> <tr> <td style="text-align: right;">2</td> <td>Reserved</td> </tr> <tr> <td style="text-align: right;">3-6</td> <td>Version Indicators (see "Standard SMF record header" on page 162 for details)</td> </tr> <tr> <td style="text-align: right;">7</td> <td>Reserved</td> </tr> </table>	Bit	Meaning when set	0	Subsystem identification follows system identification	1	Subtypes used	2	Reserved	3-6	Version Indicators (see "Standard SMF record header" on page 162 for details)	7	Reserved
Bit	Meaning when set															
0	Subsystem identification follows system identification															
1	Subtypes used															
2	Reserved															
3-6	Version Indicators (see "Standard SMF record header" on page 162 for details)															
7	Reserved															
5	5 SMF92RTY	1	binary	Record type: 92 (X'5C').												
6	6 SMF92TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF92DTE	4	packed	Date when record was written.												
14	E SMF92SID	4	EBCDIC	System identification (from the SID parameter).												
18	12 SMF92WID	4	EBCDIC	Subsystem identification.												
22	16 SMF92STP	2	binary	Record subtype.												
24	18	2	binary	Reserved.												
26	1A SMF92SDL	2	binary	Length of self-defining section.												
Self-Defining Section:																
28	1C SMF92SOF	4	binary	Offset to subsystem section.												
32	20 SMF92SLN	2	binary	Length of subsystem section.												
34	22 SMF92SON	2	binary	Number of subsystem sections.												
36	24 SMF92IOF	4	binary	Offset of identification section.												
40	28 SMF92ILN	2	binary	Length of identification section.												
42	2A SMF92ION	2	binary	Number of identification sections.												
44	2C SMF92DOF	4	binary	Offset of data section.												

Offsets	Name	Length	Format	Description																										
48	30 SMF92DLN	2	binary	Length of data section.																										
50	32 SMF92DON	2	binary	Number of data sections.																										
Subsystem Section:																														
0	0 SMF92TYP	2	binary	Subtype identification <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr><td>1</td><td>File system mount</td></tr> <tr><td>2</td><td>File system quiesce</td></tr> <tr><td>4</td><td>File system unquiesce</td></tr> <tr><td>5</td><td>File system unmount</td></tr> <tr><td>6</td><td>File system remount</td></tr> <tr><td>7</td><td>File system move</td></tr> <tr><td>10</td><td>File open</td></tr> <tr><td>11</td><td>File close</td></tr> <tr><td>12</td><td>MMAP</td></tr> <tr><td>13</td><td>MUNMAP</td></tr> <tr><td>14</td><td>File or file directory delete or rename</td></tr> <tr><td>15</td><td>File security attributes for APF authorized, program control, or shared library changed</td></tr> </tbody> </table>	Value	Meaning	1	File system mount	2	File system quiesce	4	File system unquiesce	5	File system unmount	6	File system remount	7	File system move	10	File open	11	File close	12	MMAP	13	MUNMAP	14	File or file directory delete or rename	15	File security attributes for APF authorized, program control, or shared library changed
Value	Meaning																													
1	File system mount																													
2	File system quiesce																													
4	File system unquiesce																													
5	File system unmount																													
6	File system remount																													
7	File system move																													
10	File open																													
11	File close																													
12	MMAP																													
13	MUNMAP																													
14	File or file directory delete or rename																													
15	File security attributes for APF authorized, program control, or shared library changed																													
2	2 SMF92RVN	2	EBCDIC	Record version number. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr><td>1</td><td>OpenEdition MVS with MVS/ESA SP 4.3</td></tr> <tr><td>2</td><td>OpenEdition MVS with MVS/ESA SP 5.1 and later</td></tr> </tbody> </table>	Value	Meaning	1	OpenEdition MVS with MVS/ESA SP 4.3	2	OpenEdition MVS with MVS/ESA SP 5.1 and later																				
Value	Meaning																													
1	OpenEdition MVS with MVS/ESA SP 4.3																													
2	OpenEdition MVS with MVS/ESA SP 5.1 and later																													
4	4 SMF92PNM	8	EBCDIC	Product name ().																										
12	C SMF92OSL	8	EBCDIC	MVS product level.																										
Identification Section:																														
0	0 SMF92JBN	8	EBCDIC	Job name.																										
8	8 SMF92RST	4	binary	Reader start time.																										
12	C SMF92RSD	4	packed	Reader start date.																										
16	10 SMF92STM	8	EBCDIC	Step name.																										
24	18 SMF92RGD	8	EBCDIC	SAF Group ID.																										
32	20 SMF92RUD	8	EBCDIC	SAF User ID.																										
40	28 SMF92UID	4	binary	mreal user ID.																										
44	2C SMF92GID	4	binary	z/OS UNIX System Services real group ID.																										
48	30 SMF92PID	4	binary	z/OS UNIX System Services process ID.																										
52	34 SMF92PGD	4	binary	z/OS UNIX System Services process group ID.																										
56	38 SMF92SSD	4	binary	z/OS UNIX System Services session ID.																										
60	3C SMF92API	4	binary	z/OS UNIX System Services anchor process ID.																										
64	40 SMF92APG	4	binary	z/OS UNIX System Services anchor process group ID.																										
68	44 SMF92ASG	4	binary	z/OS UNIX System Services anchor session ID.																										

Subtype 1

A number of the fields that describe mountable file systems are defined in the macro BPXYMNT.

Offsets	Name	Length	Format	Description
File System Mount — Data Section:				
0	0 SMF92MTM	8	binary	Time of mount, STCK format.
8	8 SMF92MPF	4	binary	Offset of path section.
12	C SMF92MFT	4	binary	File system type from MntEntFSType field of BPXYMNT.

Record type 92

Offsets	Name	Length	Format	Description										
16	10 SMF92MFM	4	binary	File system mode from MntEntFSMode field of BPXYMNTE.										
20	14 SMF92MDN	4	binary	File system device number from MntEntFSDev field of BPXYMNTE.										
24	18 SMF92MDD	8	EBCDIC	DDNAME specified on mount from MntEntFSDDName field of BPXYMNTE.										
32	20 SMF92MTN	8	EBCDIC	File system type name from MntEntFSTName field of BPXYMNTE.										
40	28 SMF92MFN	44	EBCDIC	File system name from MntEntFSName field of BPXYMNTE.										
84	54 SMF92MBL	4	binary	File system block size.										
88	58 SMF92MST	8	binary	Total space in file system in block size units.										
96	60 SMF92MSU	8	binary	Allocated space in file system in block size units.										
104	68 SMF92MFG	1	binary	Flag byte <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>File system mounted by automounter (SMF92MAU)</td> </tr> <tr> <td>1</td> <td>File system mounted asynchronously (SMF92MAS)</td> </tr> </table>	Bit	Meaning when set	0	File system mounted by automounter (SMF92MAU)	1	File system mounted asynchronously (SMF92MAS)				
Bit	Meaning when set													
0	File system mounted by automounter (SMF92MAU)													
1	File system mounted asynchronously (SMF92MAS)													
105	69 SMF92MF2	1	binary	Second flag byte <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>File system mounted locally (SMF92MLU)</td> </tr> <tr> <td>1</td> <td>File system mounted remotely (SMF92MNU)</td> </tr> <tr> <td>2</td> <td>Sysplex client (SMF92MDO)</td> </tr> <tr> <td>3</td> <td>File system owner (SMF92MSN)</td> </tr> </table>	Bit	Meaning when set	0	File system mounted locally (SMF92MLU)	1	File system mounted remotely (SMF92MNU)	2	Sysplex client (SMF92MDO)	3	File system owner (SMF92MSN)
Bit	Meaning when set													
0	File system mounted locally (SMF92MLU)													
1	File system mounted remotely (SMF92MNU)													
2	Sysplex client (SMF92MDO)													
3	File system owner (SMF92MSN)													
Path Section:														
0	0 SMF92PPL	2	binary	Length of pathname for directory.										
2	2 SMF92PPN	variable	EBCDIC	Pathname of directory where file system is mounted.										

Subtype 2

Offsets	Name	Length	Format	Description										
File System Quiesce (Suspend) — Data Section:														
0	0 SMF92STS	8	binary	Time of suspend, STCK format.										
8	8 SMF92SFT	4	binary	File system type from MntEntFSSType field of BPXYMNTE.										
12	C SMF92SFM	4	binary	File system mode from MntEntFSMode field of BPXYMNTE.										
16	10 SMF92SDN	4	binary	File system device number from MntEntFSDev field of BPXYMNTE.										
20	14 SMF92SDD	8	EBCDIC	DDNAME specified on mount from MntEntFSDDName field of BPXYMNTE.										
28	1C SMF92STN	8	EBCDIC	File system type name from MntEntFSTName field of BPXYMNTE.										
36	24 SMF92SFN	44	EBCDIC	File system name from MntEntFSName field of BPXYMNTE.										
80	50 SMF92SFG	1	binary	Flag byte <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>File system mounted locally (SMF92SLU)</td> </tr> <tr> <td>1</td> <td>File system mounted remotely (SMF92SNU)</td> </tr> <tr> <td>2</td> <td>Sysplex client (SMF92SDO)</td> </tr> <tr> <td>3</td> <td>File system owner (SMF92SSN)</td> </tr> </table>	Bit	Meaning when set	0	File system mounted locally (SMF92SLU)	1	File system mounted remotely (SMF92SNU)	2	Sysplex client (SMF92SDO)	3	File system owner (SMF92SSN)
Bit	Meaning when set													
0	File system mounted locally (SMF92SLU)													
1	File system mounted remotely (SMF92SNU)													
2	Sysplex client (SMF92SDO)													
3	File system owner (SMF92SSN)													

Subtype 4

Offsets	Name	Length	Format	Description										
File System Unquiesce (Resume) — Data Section:														
0	0 SMF92RTS	8	binary	Time of suspend, STCK format.										
8	8 SMF92RTR	8	binary	Time of resume, STCK format.										
16	10 SMF92RFT	4	binary	File system type from MntEntFSType field of BPXYMNTE.										
20	14 SMF92RFM	4	binary	File system mode from MntEntFSMode field of BPXYMNTE.										
24	18 SMF92RDN	4	binary	File system device number from MntEntFSDev field of BPXYMNTE.										
28	1C SMF92RDD	8	EBCDIC	DDNAME specified on mount from MntEntFSDDName field of BPXYMNTE.										
36	24 SMF92RTN	8	EBCDIC	File system type name from MntEntFSTName field of BPXYMNTE.										
44	2C SMF92RFN	44	EBCDIC	File system name from MntEntFSName field of BPXYMNTE.										
88	58 SMF92RFG	1	binary	Flag byte										
				<table> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>File system mounted locally (SMF92RLU)</td> </tr> <tr> <td>1</td> <td>File system mounted remotely (SMF92RNU)</td> </tr> <tr> <td>2</td> <td>Sysplex client (SMF92RDO)</td> </tr> <tr> <td>3</td> <td>File system owner (SMF92RSN)</td> </tr> </table>	Bit	Meaning when set	0	File system mounted locally (SMF92RLU)	1	File system mounted remotely (SMF92RNU)	2	Sysplex client (SMF92RDO)	3	File system owner (SMF92RSN)
Bit	Meaning when set													
0	File system mounted locally (SMF92RLU)													
1	File system mounted remotely (SMF92RNU)													
2	Sysplex client (SMF92RDO)													
3	File system owner (SMF92RSN)													

Subtypes 5 and 6

Offsets	Name	Length	Format	Description
File System Unmount and Remount — Data Section:				
0	0 SMF92UTM	8	binary	Time of mount, STCK format.
8	8 SMF92UTU	8	binary	Time of unmount, STCK format.
16	10 SMF92UFT	4	binary	File system type from MntEntFSType field of BPXYMNTE.
20	14 SMF92UFM	4	binary	File system mode from MntEntFSMode field of BPXYMNTE.
24	18 SMF92UDN	4	binary	File system device number from MntEntFSDev field of BPXYMNTE.
28	1C SMF92UDD	8	EBCDIC	DDNAME specified on mount from MntEntFSDDName field of BPXYMNTE.
36	24 SMF92UTN	8	EBCDIC	File system type name from MntEntFSTName field of BPXYMNTE.
44	2C SMF92UFN	44	EBCDIC	File system name from MntEntFSName field of BPXYMNTE.
88	58 SMF92UBL	4	binary	File system block size.
92	5C SMF92UST	8	binary	Total space in file system in block size units.
100	64 SMF92USU	8	binary	Allocated space in file system in block size units.
108	6C SMF92USR	4	binary	Read calls issued to the mounted file system.
112	70 SMF92USW	4	binary	Write calls issued to the mounted file system.
116	74 SMF92UDI	4	binary	Directory I/O blocks.
120	78 SMF92UIR	4	binary	I/O blocks read.
124	7C SMF92UIW	4	binary	I/O blocks written
128	80 SMF92UBR	8	binary	Bytes read.
136	88 SMF92UBW	8	binary	Bytes written.

Record type 92

Offsets	Name	Length	Format	Description
144	90 SMF92UFG	1	binary	Flag byte Bit Meaning when set 0 File system unmounted by automounter (SMF92MAU)
145	91 SMF92UF2	1	binary	Second flag byte Bit Meaning when set 0 File system mounted locally (SMF92ULU) 1 File system mounted remotely (SMF92UNU) 2 Sysplex client (SMF92UDO) 3 File system owner (SMF92USN)

Subtype 7

Offsets	Name	Length	Format	Description
File System Move — Data Section:				
0	0 SMF92VTV	8	binary	Time of move, STCK format.
8	8 SMF92VTM	8	binary	Time of mount, STCK format.
16	10 SMF92VFT	4	binary	File system type from MntEntFSType field of BPXYMNT.
20	14 SMF92VFM	4	binary	File system mode from MntEntFSMode field of BPXYMNT.
24	18 SMF92VDN	4	binary	File system device number from MntEntFSDev field of BPXYMNT.
28	1C SMF92VDD	8	EBCDIC	DDNAME specified on mount from MntEntFSDDName field of BPXYMNT.
36	24 SMF92VTN	8	EBCDIC	File system type name from MntEntFSTName field of BPXYMNT.
44	2C SMF92VNM	44	EBCDIC	File system name from MntEntFSName field of BPXYMNT.
88	58 SMF92VBL	4	binary	File system block size.
92	5C SMF92VST	8	binary	Total space in file system in block size units.
100	64 SMF92VSU	8	binary	Allocated space in file system in block size units.
108	6C SMF92VSR	4	binary	Read calls issued to the mounted file system.
112	70 SMF92VSW	4	binary	Write calls issued to the mounted file system.
116	74 SMF92VDI	4	binary	Directory I/O blocks.
120	78 SMF92VIR	4	binary	I/O blocks read.
124	7C SMF92VIW	4	binary	I/O blocks written
132	84 SMF92VBR	8	binary	Bytes read.
140	8C SMF92VBW	8	binary	Bytes written.
148	94 SMF92VFG	1	binary	Flag byte (reason for move) Bit Meaning when set 0 User-initiated (SMF92VUI) 1 Recovery (SMF92VRI)
149	95 SMF92VOF	1	binary	Flag byte (old status) Bit Meaning when set 0 File system mounted locally (SMF92VOL) 1 File system mounted remotely (SMF92VON) 2 Sysplex client (SMF92VOD) 3 File system owner (SMF92VOS)

Offsets	Name	Length	Format	Description
150	96 SMF92VNF	1	binary	Flag byte (old status)
				Bit Meaning when set 0 File system mounted locally (SMF92VOL) 1 File system mounted remotely (SMF92VON) 2 Sysplex client (SMF92VOD) 3 File system owner (SMF92VOS)

Subtype 10

Offsets	Name	Length	Format	Description
File System Open — Data Section:				
0	0 SMF92OTO	8	binary	Time of open, STCK format.
8	8 SMF92OTY	1	binary	File type as defined in BPXYFTYP.
9	9 SMF92OFG	1	binary	Record flag byte.
				Bit Meaning when set 0 Generated by vnode interface service 1 Network socket (0 indicates UNIX domain socket) 2 Client socket (0 indicates server socket)
10	A	2	EBCDIC	Reserved.
12	C SMF92OTK	4	binary	Open file token (matches token in close data section)
16	10 SMF92OIN	4	binary	File serial number (inode).
20	14 SMF92ODN	4	binary	Unique device number for the file.

Subtype 11

Offsets	Name	Length	Format	Description
0	0 SMF92CTO	8	binary	Time of open, STCK format.
8	8 SMF92CTC	8	binary	Time of close, STCK format.
16	10 SMF92CTY	1	binary	File type as defined in BPXYFTYP.
17	11 SMF92CFG	1	binary	Record flag byte.
				Bit Meaning when set 0 Generated by vnode interface service 1 Network socket (0 indicates UNIX domain socket) 2 Client socket (0 indicates server socket) 3 File was cached 4 File had Deny Read set on it. 5 File had Deny Write set on it.
18	12	2	EBCDIC	Reserved.
20	14 SMF92CTK	4	binary	Open file token.
24	18 SMF92CIN	4	binary	File serial number (inode).
28	1C SMF92CDN	4	binary	Bit Meaning when set 0 Invalid StDev; ignore 1 Socket range denotation; ignore Note: Any decimal value of 1,073,741,824 or greater should be ignored.
32	20 SMF92CSR	4	binary	Read calls issued to the file.
36	24 SMF92CSW	4	binary	Write calls issued to the file.
40	28 SMF92CDI	4	binary	Directory I/O blocks.

Record type 92

Offsets	Name	Length	Format	Description
44	2C SMF92CIR	4	binary	I/O blocks read.
48	30 SMF92CIW	4	binary	I/O blocks written.
52	34 SMF92CBR	8	binary	Bytes read.
60	3C SMF92CBW	8	binary	Bytes written.
68	44 SMF92CPN	64	EBCDIC	The pathname used at open time, if known. If the name is 64 characters or longer, the last 64 characters of the name. The name is left-justified and padded with blanks. This field is not always present.

Subtype 12

Offsets	Name	Length	Format	Description
MMAP Subtype — Data Section:				
0	0 SMF92MTO	8	binary	Time of mmap, STCK format.
8	8 SMF92MSZ	4	binary	Number of bytes being memory mapped.
12	0C SMF92MTK	4	binary	mmap file token (matches token in munmap data section).
16	10 SMF92MIN	4	binary	File serial number (inode).
20	14 SMF92MMDN	4	binary	File unique device number.

Subtype 13

Offsets	Name	Length	Format	Description
MUNMAP Subtype — Data Section:				
0	0 SMF92MUTO	8	binary	Time of mmap, STCK format.
8	8 SMF92MUTC	8	binary	Time of munmap, STCK format.
16	10 SMF92MUSZ	4	binary	Number of bytes being memory mapped.
20	14 SMF92MUTK	4	binary	mmap file token (matches token in mmap data section).
24	18 SMF92MUIN	4	binary	File serial number (inode).
28	1C SMF92MUDN	4	binary	File unique device number.
32	20 SMF92MUIR	4	binary	I/O blocks read.
36	24 SMF92MUIW	4	binary	I/O blocks written.

Subtype 14

Offsets	Name	Length	Format	Description
File System Delete — Data Section:				
	SMF92DFL	204		Delete Subtype 14.
0	0 SMF92DFT	8	binary	Time of delete, STCK format.
8	8 SMF92DTY	1	binary	File type as defined in BPXYFTYP.
9	9 SMF92DFLG	1	Binary Bit	Flags: Bit (Name) Meaning when set 0 (SMF92DREN) Rename record
10	A *	2	Binary	Reserved.
12	C SMF92DIN	4	binary	File serial number (inode).
16	10 SMF92DINP	4	binary	File serial number (inode) of parent.

Offsets	Name	Length	Format	Description
20	14 SMF92DDN	4	binary	Unique device number for the file.
24	18 SMF92DFS	44	EBCDIC	File system name.
68	44 SMF92DNL	4	binary	Length of file name for delete.
72	48 SMF92DFN	64	EBCDIC	Name of file that was deleted or renamed, left-justified and, if longer than 64 characters, truncated on the right.
136	88 SMF92DNLR	4	Binary	Length of new name of file that was renamed.
140	8C SM92DFNR	64	EBCDIC	New name of file that was renamed, left-justified and, if longer than 64 characters, truncated on the right.

Subtype 15

Offsets	Name	Length	Format	Description														
0	0 SMF92ACT	8	binary	Time of change, STCK format.														
8	8 SMF92ATY	1	binary	File type as defined in BPXYFTYP.														
9	9 SMF92AFLG	1	binary	Flags.														
10	0A *	2	binary	Reserved.														
12	0C SMF92AIN	4	binary	File serial number (inode).														
16	10 SMF92ADN	4	binary	File system device number for the file.														
20	14 SMF92AFS	44	EBCDIC	File system name.														
64	40 SMF92AOLDGENVAL	4	binary	File's original generated values, which are the same as the values of st_GenValue from BPXYSTAT.														
67	43 SMF92AOLDGENVALSECBYTE	3	binary	Record flag byte. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>Shared library.</td> </tr> <tr> <td>4</td> <td>Reserved.</td> </tr> <tr> <td>5</td> <td>Program is APF authorized.</td> </tr> <tr> <td>6</td> <td>Program controlled.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-2	Reserved.	3	Shared library.	4	Reserved.	5	Program is APF authorized.	6	Program controlled.	7	Reserved.
Bit	Meaning when set																	
0-2	Reserved.																	
3	Shared library.																	
4	Reserved.																	
5	Program is APF authorized.																	
6	Program controlled.																	
7	Reserved.																	
68	44 MF92AOLDSECATTRSC	4	EBCDIC	File's original security flags in character form: A, P, S.														
68	44 SMF92AOLDATTRCHAR	1	EBCDIC	The '>' delimiter.														
69	45 SMF92AOLDSHRLIBC	1	EBCDIC	The value is S if shared library was on.														
70	46 SMF92AOLDAPFAUTHC	1	EBCDIC	The value is A if APF authorized was on.														
71	47 SMF92AOLDPGMCTLC	1	EBCDIC	The value is P if program controlled was on.														
72	48 SMF92ANEWGENVAL	4	binary	New generated values after the change, which are the same as the values of st_GenValue from BPXYSTAT.														
75	4B SMF92ANEWGENVALSECBYTE	1	binary	Record flag byte. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved.</td> </tr> <tr> <td>3</td> <td>Shared library.</td> </tr> <tr> <td>4</td> <td>Reserved.</td> </tr> <tr> <td>5</td> <td>Program is APF authorized.</td> </tr> <tr> <td>6</td> <td>Program controlled.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0-2	Reserved.	3	Shared library.	4	Reserved.	5	Program is APF authorized.	6	Program controlled.	7	Reserved.
Bit	Meaning when set																	
0-2	Reserved.																	
3	Shared library.																	
4	Reserved.																	
5	Program is APF authorized.																	
6	Program controlled.																	
7	Reserved.																	
76	4C SMF92ANEWSECATTRSC	4	EBCDIC	File's new security flags in character form: A, P, S.														
76	4C SMF92ANEWATTRCHAR	1	EBCDIC	The > delimiter.														
77	4D SMF92ANEWSHRLIBC	1	EBCDI	The value is S if shared library is on.														
78	4E SMF92ANEWAPFAUTHC	1	EBCDIC	The value is A if APF authorized is on.														
79	4F SMF92ANEWPGMCTLC	1	EBCDIC	The value is P if Program controlled is on.														
80	50 SMF92AOWNUID	4	binary	File owner user ID.														
84	54 SMF92AOWNGID	4	binary	File owner GID.														
88	58 SMF92ASECLABEL	8	EBCDIC	File security label.														

Record type 92

Offsets	Name	Length	Format	Description
96	60 SMF92AAUDITFID	16	EBCDIC	RACF's file ID, which is the same as the XXXX_FILE_ID in the various RACF SMF type 80 audit records.
112	70 *	20	EBCDIC	Reserved.
132	84 SMF92ACWDRC	4	binary	Error return code from getcwd .
136	88 SMF92ACWDRSN	4	binary	Error return code from getcwd . If the full path name of the file could not be determined, these fields contain the return and reason codes of the error. In this case, the SMF92APN field will contain the relative path name as entered by the user. SMF92APN is a full path name if SMF92ACWDRC=0.
140	8C SMF92APNL	4	binary	The length of the file path name.
144	90 SMF92APN	1024	EBCDIC	The file path name that is the absolute path name as entered by the user or the getcwd value for the current working directory that is concatenated with the relative name that was entered by the user.

Subtype 16

For SMF record type 92, subtype 16 is the same as subtype 11 but for a socket, character special file, pipe, or fifo. Subtype 16 uses the same record format as the subtype 11 record. See "Subtype 11" on page 777 for the record format.

Subtype 17

Offsets	Name	Length	Format	Description				
0	0 SMF92FAWT	64	binary	This can be the time when the internal file control block is released. If SMF92FAIT is on, denotes SMF interval time.				
8	8 SMF92FAFG	8	binary	Record flag byte. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>SMF92FAWT is SMF interval time.</td> </tr> </table>	Bit	Meaning when set	0	SMF92FAWT is SMF interval time.
Bit	Meaning when set							
0	SMF92FAWT is SMF interval time.							
9	9	3	EBCDIC	Reserved.				
12	0C SMF92FAIN	4	binary	File serial number (inode).				
16	10 SMF92ADN	4	binary	Unique device number.				
20	14 SMF92FATI	4	binary	Total accesses to file during interval.				
24	18 SMF92FAPN	64	EBCDIC	Path name, if known.				

Record Type 94 (5E) — IBM Tape Library Dataserver Statistics

The system-managed tape library accumulates statistics over the period of one hour. These statistics represent the activity of the IBM Tape Library Dataserver that results from all hosts attached to the library.

At the end of the hour, the system calculates composite statistics about the activity of all devices in the library and writes an SMF type 94 record.

The information in the SMF type 94 record represents:

- **Current Information**
Represents the value of the statistic at the point the record is written.
- **Summary of the Last Hour Information**
Represents statistics over the most recent hour for which composite statistics have been calculated.

For a VTS library, when microcode level F/C 4001 is installed and Outboard Policy Management is enabled, a new SMF94 record will be recorded. The new record is

an SMF94 subtype=2, and will be recorded in addition to the existing SMF94 subtype=1. The SMF94 subtype=2 record is used to record Volume Pool Statistics.

The existing subtype=1 is also changed. When F/C 4001 is installed and Outboard Policy Management is enabled, some existing statistics will not be reported. The unreported fields will contain binary zero. Existing field SMF94HSF in subtype=1 records will contain the value 2 when F/C 4001 is installed and Outboard Policy Management is enabled.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record. The mapping macro resides in SYS1.MACLIB.

Offsets	Name	Length	Format	Description								
0	0 SMF94LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.								
2	2 SMF94SEG	2	binary	Segment descriptor (see record length field).								
4	4 SMF94FLG	1	binary	System indicator: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF94RTY	1	binary	Record type 94 (X'5E').								
6	6 SMF94TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.								
10	A SMF94DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF94SID	4	EBCDIC	System identification (from SMFPRMxx parmlib member).								
18	12 SMF94WID	4	EBCDIC	Subsystem identification, worktype indicator.								
22	16 SMF94STP	2	binary	Record subtype '01' — 34xx library statistics. '02' — Volume pooling statistics								

Self-Defining Section (Subtype 1)

Offsets	Name	Length	Format	Description
24	18 SMF94SDL	4	binary	Self-defining section length.
28	1C SMF94POF	4	binary	Offset to product section from start of record, including record descriptor word (RDW).
32	20 SMF94PLN	2	binary	Length of product section.
34	22 SMF94PON	2	binary	Number of product sections.
36	24 SMF94HOF	4	binary	Offset to format section from start of record, including record descriptor word (RDW).

Record type 94

Offsets	Name	Length	Format	Description
40	28 SMF94HLN	2	binary	Length of format section.
42	2A SMF94HON	2	binary	Number of format sections.
44	2C SMF94SOF	4	binary	Offset to self-description information section from start of record, including record descriptor word (RDW).
48	30 SMF94SLN	2	binary	Length of self-description information section.
50	32 SMF94SON	2	binary	Number of self-description information sections.
52	34 SMF94LOF	4	binary	Offset to system-managed tape library statistics section from start of record, including record descriptor word (RDW).
56	38 SMF94LLN	2	binary	Length of system-managed tape library statistics section.
58	3A SMF94LON	2	binary	Number of system-managed tape library statistics sections.
60	3C SMF94MOF	4	binary	Offset to mount statistics section from start of record, including record descriptor word (RDW).
64	40 SMF94MLN	2	binary	Length of mount statistics section.
66	42 SMF94MON	2	binary	Number of mount statistics sections.
68	44 SMF94DOF	4	binary	Offset to demount statistics section from start of record, including record descriptor word (RDW).
72	48 SMF94DLN	2	binary	Length of demount statistics section.
74	4A SMF94DON	2	binary	Number of demount statistics sections.
76	4C SMF94EOF	4	binary	Offset to eject statistics section from start of record, including record descriptor word (RDW).
80	50 SMF94ELN	2	binary	Length of eject statistics section.
82	52 SMF94EON	2	binary	Number of eject statistics sections.
84	54 SMF94AOF	4	binary	Offset to audit statistics section from start of record, including record descriptor word (RDW).
88	58 SMF94ALN	2	binary	Length of audit statistics section.
90	5A SMF94AON	2	binary	Number of audit statistics sections.
92	5C SMF94IOF	4	binary	Offset to input statistics section from start of record, including record descriptor word (RDW).
96	60 SMF94ILN	2	binary	Length of input statistics section.
98	62 SMF94ION	2	binary	Number of input statistics sections.
100	64 SMF94VOF	4	binary	Offset to VTS statistics
104	68 SMF94VLN	2	binary	Length of VTS statistics
106	6A SMF94VON	2	binary	Number of VTS statistics
108	6C SMF94XOF	4	binary	Offset to import/export statistics
112	70 SMF94XLN	2	binary	Length of import/export statistics
114	72 SMF94XON	2	binary	Number of import/export statistics
116	74 SMF942OF	4	binary	Offset to VTS enhanced library statistics
120	78 SMF942LN	2	binary	Length of VTS enhanced library statistics
122	7A SMF942ON	2	binary	Number of VTS enhanced library statistics

Product Section

Offsets	Name	Length	Format	Description
0	0 SMF94TYP	2	binary	Subtype for type 94 record.
2	2 SMF94RVN	2	EBCDIC	Record version number C'01'.
4	4 SMF94PNM	8	EBCDIC	Product name 'JDZ1110 '.
12	C SMF94MVS	8	EBCDIC	MVS operating system name.

Format Section

Offsets	Name	Length	Format	Description
0	0 SMF94HSF	1	binary	Statistics format. Always equals zero.
1	1 SMF94HHI	2	binary	Hour index. Incremented every hour. Value ranges from 0 to 23.

Self-Description Information

Offsets	Name	Length	Format	Description
0	0 SMF94SLT	6	EBCDIC	System-managed tape library type number. For example, '003495' represents the IBM 3495 Tape Library Dataserver.
6	6 SMF94SLM	3	EBCDIC	System-managed tape library model number. For example, 'L30' represents model L30.
9	9 SMF94SMA	3	EBCDIC	System-managed tape library manufacturer. Always equals 'IBM'.
12	C SMF94SPL	2	EBCDIC	System-managed tape library plant of manufacture. For example, '13' represents San Jose, California, and '77' represents Valencia, Spain.
14	E SMF94SNO	12	EBCDIC	System-managed tape library sequence number. Uniquely identifies a system-managed tape library.
26	1A	1		Reserved.

Self-Managed Tape Library Statistics

Offsets	Name	Length	Format	Description
0	0 SMF94LID	2	binary	Number of drives currently installed in a system-managed tape library.
2	2 SMF94LMD	2	binary	Number of drives currently mounted in a system-managed tape library.
4	4 SMF94LM1	2	binary	Maximum number of drives mounted during the last hour.
6	6 SMF94LM2	2	binary	Minimum number of drives mounted during the last hour.
8	8 SMF94LM3	2	binary	Average number of drives mounted during the last hour.
10	A SMF94LT1	2	binary	Maximum amount of time, in seconds, that a tape volume was mounted on a drive during the last hour. The mount time of a volume is the time when the system completed mounting a volume on a drive until the time when the system-managed tape library receives an order from the host to demount the volume.
12	C SMF94LT2	2	binary	Minimum amount of time, in seconds, that a tape volume was mounted on a drive during the last hour. The mount time of a volume is the time when the system completed mounting a volume on a drive until the time when the system-managed tape library receives an order from the host to demount the volume.
14	E SMF94LT3	2	binary	Average amount of time, in seconds, that all tape volumes were mounted on drives during the last hour. The mount time of a volume is the time when the system completed mounting a volume on a drive until the time when the system-managed tape library receives an order from the host to demount the volume.

Mount Statistics

Offsets	Name	Length	Format	Description
0	0 SMF94MPR	2	binary	The total number of mount requests currently pending.
2	2 SMF94MP1	2	binary	Maximum number of mount requests pending during the last hour.
4	4 SMF94MP2	2	binary	Minimum number of mount requests pending during the last hour.
6	6 SMF94MP3	2	binary	Average number of mount requests pending during the last hour.
8	8 SMF94MTO	2	binary	Total number of mounts during the last hour.
10	A SMF94MIN	2	binary	Index mounts during the last hour. An index mount is a mount accomplished using the automatic cartridge loader of a 3490 tape drive.
12	C SMF94MPM	2	binary	Pre-mounts during last hour. A single pre-mount operation causes a volume to be added to the automatic cartridge loader of a 3490 tape drive.
14	E SMF94MT1	2	binary	Maximum amount of time, in seconds, required to perform any single mount operation during the last hour.
16	10 SMF94MT2	2	binary	Minimum amount of time, in seconds, required to perform any single mount operation during the last hour.
18	12 SMF94MT3	2	binary	Average amount of time, in seconds, required to perform a single mount operation during the last hour.

Demount Statistics

Offsets	Name	Length	Format	Description
0	0 SMF94DPR	2	binary	The total number of demount requests currently pending.
2	2 SMF94DP1	2	binary	Maximum number of demount requests pending during the last hour.
4	4 SMF94DP2	2	binary	Minimum number of demount requests pending during the last hour.
6	6 SMF94DP3	2	binary	Average number of demount requests pending during the last hour.
8	8 SMF94DTO	2	binary	Total number of demounts during the last hour.
10	A SMF94DIN	2	binary	Index demounts during the last hour. An index demount moves a volume from the feed station to the output stack of the automatic cartridge loader of a 3490 tape drive.
12	C SMF94DPM	2	binary	Post-demounts during the last hour. A post-demount operation moves a volume from the output stack of the automatic cartridge loader of a 3490 tape drive.
14	E SMF94DT1	2	binary	Maximum amount of time, in seconds, required to perform any single demount operation during the last hour.
16	10 SMF94DT2	2	binary	Minimum amount of time, in seconds, required to perform any single demount operation during the last hour.
18	12 SMF94DT3	2	binary	Average amount of time, in seconds, required to perform a single demount operation during the last hour.

Eject Statistics

Offsets	Name	Length	Format	Description
0	0 SMF94EPR	2	binary	The total number of eject requests currently pending. An eject operation moves one volume from the system-managed tape library to an output station for an operator to remove.
2	2 SMF94EP1	2	binary	Maximum number of eject requests pending during the last hour.
4	4 SMF94EP2	2	binary	Minimum number of eject requests pending during the last hour.
6	6 SMF94EP3	2	binary	Average number of eject requests pending during the last hour.
8	8 SMF94ETO	2	binary	Totals number of ejects during the last hour.
10	A SMF94ET1	2	binary	Maximum amount of time, in seconds, required to perform any single eject operation during the last hour.
12	C SMF94ET2	2	binary	Minimum amount of time, in seconds, required to perform any single eject operation during the last hour.
14	E SMF94ET3	2	binary	Average amount of time, in seconds, required to perform a single eject operation during the last hour.

Audit statistics

Offsets	Name	Length	Format	Description
0	0 SMF94APR	2	binary	The total number of audit requests currently pending. When the host requests an audit operation, the accessor moves to a shelf location and ensures that a volume is present.
2	2 SMF94AP1	2	binary	Maximum number of audit requests pending during the last hour.
4	4 SMF94AP2	2	binary	Minimum number of audit requests pending during the last hour.
6	6 SMF94AP3	2	binary	Average number of audit requests pending during the last hour.
8	8 SMF94ATO	2	binary	Total number of audits during the last hour.
10	A SMF94AT1	2	binary	Maximum amount of time, in seconds, required to perform any single audit operation during the last hour.
12	C SMF94AT2	2	binary	Minimum amount of time, in seconds, required to perform any single audit operation during the last hour.
14	E SMF94AT3	2	binary	Average amount of time, in seconds, required to perform a single audit operation during the last hour.

Insert Statistics

Offsets	Name	Length	Format	Description
0	0 SMF94INS	2	binary	Number of insert stores during last hour. This number is the number of volumes moved from an input station to a location inside the system-managed tape library.

VTS Statistics

Offsets	Name	Length	Format	Description
0	0 SMF94VNO	1	binary	Peer-to-Peer VTS reference number. X'01', User interface library. X'02', secondary library. X'FF', composite library. X'00', non-composite library.

Record type 94

Offsets	Name	Length	Format	Description
1	1 SMF94VLS	5	EBCDIC	Library sequence number for the library segment for which VTS statistics are being reported.
6	6 SMF94VTI	1	binary	Number of underlying physical tape devices currently installed in the VTS subsystem. See Note 1.
7	7 SMF94VTA	1	binary	Number of underlying physical tape devices currently available for use by the VTS subsystem. See Note 1.
8	8 SMF94VTX	1	binary	Maximum number of underlying physical tape devices mounted concurrently in this VTS during last hour. See Note 1.
9	9 SMF94VTN	1	binary	Minimum number of underlying physical tape devices mounted concurrently in this VTS during last hour. See Note 1.
10	A SMF94VTV	1	binary	Average number of underlying physical tape devices mounted concurrently in this VTS during last hour. Value is determined by summing number of concurrently mounted physical devices every 10 seconds, and dividing resultant sum by 360 during hourly statistics generation. See Note 1.
11	B SMF94VR2	1	binary	Reserved, set to X'00'
12	C SMF94VMX	2	binary	Maximum time in seconds used by the library to perform a mount request of a physical drive in the VTS in the last hour. Time is accrued from time mount request is accepted until it is completed. Mount time is accredited to the hour that mount is completed. See Note 1.
14	E SMF94VMN	2	binary	Minimum time in seconds used by the library to perform a mount request for a physical drive in the VTS in the last hour. Time is accrued from time mount request is accepted until it is completed. Mount time is accredited to the hour that mount is completed. See Note 1.
16	10 SMF94VMV	2	binary	Average time in seconds used by the library to perform a mount request for a physical drive in the VTS in the last hour. Time is accrued from time mount request is accepted until it is completed. Mount time is accredited to the hour that mount is completed. See Note 1.
18	12 SMF94VPS	2	binary	The number of physical mount requests completed in last hour to satisfy recall mounts. See Note 1.
20	14 SMF94VPM	2	binary	The number of physical mount requests completed in last hour to satisfy copy requests. See Note 1.
22	16 SMF94VPR	2	binary	The number of physical mount requests completed in last hour to satisfy reclamation mounts. See Note 1.
24	18 SMF94VDC	1	binary	The number of virtual devices configured in this VTS at the time request for statistics was received (current). See Note 1.
25	19 SMF94VDX	1	binary	The maximum number of virtual drives that were concurrently mounted in this VTS during the last hour. See Note 1.
26	1A SMF94VDN	1	binary	The minimum number of virtual drives that were concurrently mounted in this VTS during the last hour. See Note 1.
27	1B SMF94VDA	1	binary	The average number of virtual drives that were concurrently mounted in this VTS during the last hour. Value is determined by summing number of concurrently mounted virtual devices every 10 seconds, and dividing resultant sum by 360 during hourly statistics generation. See Note 1.

Offsets	Name	Length	Format	Description
28	1C SMF94VVX	2	binary	Maximum time in seconds that a virtual drive was mounted in this VTS during the last hour. Time is accrued from completion of mount until a demount is issued. Mount time is accredited to the hour that demount is issued. See Note 2.
30	1E SMF94VVN	2	binary	Minimum time in seconds that a virtual drive was mounted in this VTS during the last hour. Time is accrued from completion of mount until a demount is issued. Mount time is accredited to the hour that demount is issued. See Note 2.
32	20 SMF94VVA	2	binary	Average time in seconds that a virtual drive was mounted in this VTS during the last hour. Time is accrued from completion of mount until a demount is issued. Mount time is accredited to the hour that demount is issued. See Note 2.
34	22 SMF94VRX	2	binary	Maximum time in seconds used to complete a mount request on a virtual drive in the last hour. Time is accrued from time mount request is accepted until it is completed. Mount time is accredited to the hour that the mount is completed. See Note 3.
36	24 SMF94VRN	2	binary	Minimum time in seconds used to complete a mount request on a virtual drive in the last hour. Time is accrued from time it is completed. Mount time is accredited to the hour that the mount is completed. See Note 3.
38	26 SMF94VRA	2	binary	Average time in seconds used to complete a mount request on a virtual drive in the last hour. Time is accrued from time mount request is accepted until it is completed. Mount time is accredited to the hour that the mount is completed. See Note 3.
40	28 SMF94VFR	2	binary	The number of virtual mounts in last hour using VTS Fast-Ready facility. Fast-Ready is used for mount-from-category request for which the specified category has the Fast-Ready attribute set, or for specific volume requests for which the specified volume is, at the time the mount request is received, assigned to a category that has the Fast-Ready attribute set. See Note 3.
42	2A SMF94VMH	2	binary	The number of virtual mounts in the last hour that were completed for specific requested volume found resident in Tape Volume Cache (specific mount hits). See Note 3.
44	2C SMF94VMS	2	binary	The number of virtual mounts in last hour that were completed with specific requested logic volume recalled from a physical tape back into Tape Volume Cache. See Note 3.
46	2E SMF94VMP	2	binary	The number of virtual volumes for which a copy operation from the Tape Volume Cache to physical tape was completed in the last hour. See Note 3.
48	30 SMF94VBW	4	binary	The total number of bytes written successfully through host channels to virtual volumes in an integral multiple of 4096 bytes during the last hour. If number of bytes written is not an integer multiple of 4096, the number is rounded up. If the statistics are reported for a distributed library, the number reflects the effect of the VTC's compression of host data as written to the distributed library. See Note 2.
52	34 SMF94VBR	4	binary	The total number of bytes read successfully through host channels from virtual volumes in an integral multiple of 4096 bytes during the last hour. If number of bytes read is not an integer multiple of 4096, the number is rounded up. If the statistics are reported for a distributed library, the number reflects the effect of the VTC's compression of host data as written to the distributed library. See Note 2.

Record type 94

Offsets	Name	Length	Format	Description
56 38	SMF94VTW	4	binary	The total number of bytes written successfully by VTS to its attached physical drives in an integral multiple of 4096 bytes during the last hour. If number of bytes written is not an integer multiple of 4096, the number is rounded up. Bytes are accredited to the hour in which the underlying premigrates of virtual volumes complete. See Note 1 and 3.
60 3C	SMF94VTR	4	binary	The total number of bytes read successfully by VTS from its attached physical drives in an integral multiple of 4096 bytes during the last hour. If the number of bytes read is not an integer multiple of 4096, the number is rounded up. Bytes are accredited to the hour in which the underlying stage requests complete. See Note 1 and 3.
64 40	SMF94VCA	2	binary	The average, in minutes, of the age of last reference of the virtual volumes in the Tape Volume Cache, as determined at the end of the reported hour. See Note 1 and 3.
66 42	SMF94VCZ	2	binary	The average size of the virtual volumes in the Tape Volume Cache in an integral multiple of 1,048,576 bytes (1Mbytes), at the end of the reported hour. Virtual volume that contain less than 1 MB are rounded up to 1MB. See Note 1 and 3.
68 44	SMF94VNM	2	binary	The number of virtual volumes in Tape Volume Cache at the end of reported hour. See Note 1 and 3.
70 46	SMF94VR3	2	binary	Reserved, set to X'00'
72 48	SMF94VBA	4	binary	The total number of megabytes of data on the active logical volumes which are on VTS stacked volumes at the end of the reported hour. The number is the integral multiple of 1,048,576 bytes. This is the number of megabytes copied from the Tape Volume Cache to the stacked volumes and may include multiple versions of logical volumes. The obsolete versions will become inactive during the next reconciliation process. See Note 3.
76 4C	SMF94VLA	4	binary	The total number of active logical volumes which are on VTS stacked volumes at the end of the reported hour. This number may include multiple versions of logical volumes; therefore, the number may exceed the number of defined logical volumes. The obsolete versions will become inactive during the next reconciliation process. See Note 3.

Offsets	Name	Length	Format	Description
80	50 SMF94VEC	4	binary	<p>The total estimated amount of storage capacity provided by the empty cartridges managed by the Virtual Tape Server subsystem in an integral multiple of 1,048,576 bytes a (1 MByte) as of last midnight. This value is calculated by multiplying the number of scratch a cartridges for each media type present in the subsystem by the estimated storage capacity of each a media type.</p> <p>The storage capacity of a 3590 cartridge used by the Model B16 VTS with 3590 Model B1A tape drives is estimated by assuming a compression ratio of 2:1 which results in a storage capacity of 20 GBytes for the standard 3590 High Performance Cartridge.</p> <p>The Model B18 VTS uses an actual compression ratio (likely to be 1:1 with the EHPO feature since the data will already be in a compressed format in the Tape Volume Cache) resulting in an estimated storage capacity per J type cartridge of 10 GBytes for 3590 Model B1A tape drives, 20 GBytes for 3590 Model E1A tape drives and 30 GBytes for 3590 Model H1A tape drives. Storage a capacity for K type cartridges is double that for the J type. The Model B10 or B20 VTS uses the actual compression ratio and in addition to 3590 tape drives models and media, supports the 3592 Model J1A tape drives and media. The estimated storage a capacity for the JA type media is 300 GBytes and 60 GBytes for the JJ type media. See Note 3.</p>
Note:				
1. Contains zero with F/C 4001.				
2. This field is a composite of all Virtual Tape Controllers (VTC) when reported for a composite library(SMF94VNO=X'FF').				
3. Contains zero when reported for the composite library (SMF94VNO=X'FF')				

Import/Export Statistics

Offsets	Name	Length	Format	Description
0	0 SMF94IM1	2	binary	count of physical volumes processed during import operations that completed in the last hour.
2	2 SMF94EX1	2	binary	count of physical volumes that contain the successfully exported logical volumes exported during the last hour.
4	4 SMF94IM2	4	binary	count of the number of logical volumes successfully imported during import operations that completed during the last hour.
8	8 SMF94EX2	4	binary	count of the number of logical volumes successfully exported for export operations that completed during the last hour.
12	C SMF94IM3	4	binary	megabytes of data imported for import operations that completed in the last hour.
16	10 SMF94EX3	4	binary	megabytes of data exported during export operations that completed in the last hour.
20	14 SMF94IM4	4	binary	megabytes of data that was moved from one physical stacked volume to another as part of the import operations that completed in the last hour.
24	18 SMF94EX4	4	binary	megabytes moved from one physical stacked volume to another as part of the export operations completed in the last hour.
28	1C	8	binary	Reserved, set to X'00'
36	24 SMF94ACA	2	binary	Accessor A mounts. The count of the number of mount operations accessor A completed during the last hour.

Record type 94

Offsets	Name	Length	Format	Description
38	26 SMF94ACB	2	binary	Accessor B mounts. The count of the number of mount operations accessor B completed during the last hour.
40	28	4	binary	Reserved, set to X'00'

VTS enhanced library statistics

Table 15. VTS enhanced library statistics

Offsets	Name	Length	Format	Description
0	0 S94BSRAT	2	binary	Backstore compression ratio in hundredths.. See Note 1.
2	2 S94HARAT	2	binary	Host adapter compression ratio in hundredths.. See Notes 2 and 4.
4	2 S94TVCS	2	binary	Tape volume cache size. See Note 1.
6	6 S94ESCON	1	binary	Number of ESCON channels. See Note 2.
7	7 S94SCSI	1	binary	Number of SCSI channels. See Note 1.
8	8 S94NUMBS	4	binary	Channel blocks written. See Note 2.
12	C S940KB	1	binary	Percentage of 0 to 2K channel blocks written. See Note 2.
13	D S942KB	1	binary	Percentage of greater than 2K to 4K channel blocks written. See Note 2.
14	E S944KB	1	binary	Percentage of greater than 4K to 8K channel blocks written. See Note 2.
15	F S948KB	1	binary	Percentage of greater than 8K to 16K channel blocks written. See Note 2.
16	10 S9416KB	1	binary	Percentage of greater than 16K to 32K channel blocks written. See Note 2.
17	11 S9432KB	1	binary	Percentage of greater than 32K to 64K channel blocks written. See Note 2.
18	12 S9464KB	1	binary	Percentage of greater than 64K channel blocks written. See Note 2.
19	13 S94RCprt	1	binary	Recall predominate throttling percentage. See Note 1.
20	14 S94WROVT	1	binary	Write overrun predominate throttling percentage. See Note 1.
21	15	3	binary	Reserved
24	18 S94AVRCT	4	binary	Average recall throttle value. See Note 1.
28	1C S94AVWOT	4	binary	Average write overrun throttle value. See Note 1.
32	20	4	binary	Reserved
36	24 S94TOTAT	4	binary	Overall average throttle value. See Note 1.
40	28 S94MAXFR	2	binary	Maximum fast-ready mount time. See Note 2.
42	2A S94MINFR	2	binary	Minimum fast-ready mount time. See Note 2.
44	2C S94AVGFR	2	binary	Average fast-ready mount time. See Note 2.
46	2E S94MAXCH	2	binary	Maximum cache-hit mount time. See Note 2.
48	30 S94MINCH	2	binary	Minimum cache-hit mount time. See Note 2.
50	32 S94AVGCH	2	binary	Average cache-hit mount time. See Note 2.
52	34 S94MAXRM	2	binary	Maximum recall-mount mount time. See Note 2.
54	36 S94MINRM	2	binary	Minimum recall-mount mount time. See Note 2.
56	38 S94AVGRM	2	binary	Average recall-mount mount time. See Note 2.
58	3A S94ADV05	2	binary	Number of volumes containing 0 to 5 percent active data. See Note 1.
60	3C S94ADV10	2	binary	Number of volumes containing greater than 5 to 10 percent active data. See Note 1.

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
62	3E S94ADV15	2	binary	Number of volumes containing greater than 10 to 15 percent active data. See Note 1.
64	40 S94ADV20	2	binary	Number of volumes containing greater than 15 to 20 percent active data. See Note 1.
66	42 S94ADV25	2	binary	Number of volumes containing greater than 20 to 25 percent active data. See Note 1.
68	44 S94ADV30	2	binary	Number of volumes containing greater than 25 to 30 percent active data. See Note 1.
70	46 S94ADV35	2	binary	Number of volumes containing greater than 30 to 35 percent active data. See Note 1.
72	48 S94ADV40	2	binary	Number of volumes containing greater than 35 to 40 percent active data. See Note 1.
74	4A S94ADV45	2	binary	Number of volumes containing greater than 40 to 45 percent active data. See Note 1.
76	4C S94ADV50	2	binary	Number of volumes containing greater than 45 to 50 percent active data. See Note 1.
78	4E S94ADV55	2	binary	Number of volumes containing greater than 50 to 55 percent active data. See Note 1.
80	50 S94ADV60	2	binary	Number of volumes containing greater than 55 to 60 percent active data. See Note 1.
82	52 S94ADV65	2	binary	Number of volumes containing greater than 60 to 65 percent active data. See Note 1.
84	54 S94ADV70	2	binary	Number of volumes containing greater than 65 to 70 percent active data. See Note 1.
86	56 S94ADV75	2	binary	Number of volumes containing greater than 70 to 75 percent active data. See Note 1.
88	58 S94ADV80	2	binary	Number of volumes containing greater than 75 to 80 percent active data. See Note 1.
90	5A S94ADV85	2	binary	Number of volumes containing greater than 80 to 85 percent active data. See Note 1.
92	5C S94ADV90	2	binary	Number of volumes containing greater than 85 to 90 percent active data. See Note 1.
94	5E S94ADV95	2	binary	Number of volumes containing greater than 90 to 95 percent active data. See Note 1.
96	60 S94ADV00	2	binary	Number of volumes containing greater than 95 to 100 percent active data. See Note 1.
98	62 S94THRES	1	binary	Reclaim threshold percentage. See Notes 1 and 5.
99	63	1	binary	Reserved (set to zero).
100	64 S94SRTCT	2	binary	Scratch stacked volume count. See Note 1.
102	66 S94PRICT	2	binary	Private stacked volume count. See Note 1.
104	68 S94MTVCA	4	binary	Maximum tape volume cache age. See Note 1.

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description										
108	6C S94CMGTS	1	binary	<p>If the request was for a distributed library of a PTP VTS Subsystem or a non-PTP VTS subsystem, this field reports the cache management setting for copy and recalled volumes. Each sub-field reports the cache management preference level set. The defaults are preference level 0 for copies and preference level 1 for recalls. The values for the sub-fields are only valid if bit 0 is active, otherwise the sub-fields are to be ignored. See Note 1.</p> <table border="0"> <tr> <td>Bit(s)</td> <td>Description</td> </tr> <tr> <td>0</td> <td>Fields valid</td> </tr> <tr> <td>1-3</td> <td>Copy volume management preference level (0-7)</td> </tr> <tr> <td>4</td> <td>Reserved (set to B'0')</td> </tr> <tr> <td>5-7</td> <td>Recall volume management preference level (0-7)</td> </tr> </table>	Bit(s)	Description	0	Fields valid	1-3	Copy volume management preference level (0-7)	4	Reserved (set to B'0')	5-7	Recall volume management preference level (0-7)
Bit(s)	Description													
0	Fields valid													
1-3	Copy volume management preference level (0-7)													
4	Reserved (set to B'0')													
5-7	Recall volume management preference level (0-7)													
109	6D	3	binary	Reserved (set to zero).										
112	70 S94LVVCM	2	binary	VTS code Modification value. This two byte hexadecimal field contains the Modification portion for the VTS subsystem code level that generated the statistical record.										
114	72 S94LVVCF	2	binary	VTS code fix value. This two byte hexadecimal field contains the Fix portion for the VTS subsystem code level that generated the statistical record.										
116	74 S94LVLMV	2	binary	Library manager code version value. This two byte hexadecimal field contains the Version portion for the Library Manager code level that generated the statistical record.										
118	76 S94LVLMR	2	binary	Library manager code release value. This two byte hexadecimal field contains the Release portion for the Library Manager code level that generated the statistical record.										
120	78	8	binary	Reserved (set to zero).										
128	80 S94CLLVC	4	binary	Composite library logical volumes to be copied. See Note 3.										
132	84 S94CLDTC	4	binary	Composite library data yet to be copied. See Note 3.										
136	88 S94CLMT0	2	binary	Composite library mounts completed for VTS-0. See Note 3.										
138	8A S94CLMT1	2	binary	Composite library mounts completed for VTS-1. See Note 3.										
140	8C	4	binary	Reserved (set to zero).										
144	90 S94CLDC0	4	binary	Data copied by VTC number 0. See Note 3.										
148	94 S94CLVC0	4	binary	Volumes copied by VTC number 0. See Note 3.										
152	98 S94CLRD0	4	binary	Read data transferred through VTC number 0. See Note 3.										
156	9C S94CLWD0	4	binary	Write data transferred through VTC number 0. See Note 3.										
160	A0 S94CLCM0	2	binary	Category mounts for VTC number 0. See Note 3.										
162	A2 S94CLSM0	2	binary	Specific cache mounts for VTC number 0. See Note 3.										
164	A4 S94CLRM0	2	binary	Specific recall mounts for VTC number 0. See Note 3.										
166	A6 S94CLCR0	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.										

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
168	A8 S94CLPF0	1	binary	I/O VTS and master VTS preferences for the VTC. See Note 3.
				<p>Bit(s) Description</p> <p>0-3 Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS.</p> <p>Value Description</p> <p>8 VTS 0</p> <p>9 VTS 1</p> <p>F No preference</p> <p>Values not listed are reserved.</p> <p>4-7 This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved.</p> <p>Value Description</p> <p>8 VTS 0</p> <p>9 VTS 1</p> <p>F No preference</p>

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
169	A9 S94CLCS0	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <p>Bit(s) Description</p> <p>0-1 Default copy mode. Reports the copy mode set as the default for the VTC:</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>2 Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</p> <p>3 Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</p> <p>4-5 Controller Operational Mode This field reports the operational mode.</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>6 Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</p> <p>7-14 Reserved (set to 0)</p> <p>15 Fields valid</p>
171	AB S94CLRL0	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <p>Value Description</p> <p>0 No support for reporting relative link speeds</p> <p>1 ESCON < 5 km, FICON < 30 km</p> <p>2 ESCON < 10 km, FICON < 80 km</p> <p>3 Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</p> <p>4 Channel Ext > 1000 km, ESCON over DWDM < 15 km</p> <p>5 ESCON over DWDM > 15 km</p> <p> Values not listed are reserved.</p> <p>Bit(s) Description</p> <p>0-3 VTC to VTS0 link speed value</p> <p>4-7 VTC to VTS1 link speed value</p>

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																						
172	AC	4	binary	Reserved (set to zero).																						
176	B0 S94CLDC1	4	binary	Data copied by AX0 number 1. See Note 3.																						
180	B4 S94CLVC1	4	binary	Volumes copied by AX0 number 1. See Note 3.																						
184	B8 S94CLRD1	4	binary	Read data transferred through AX0 number 1. See Note 3.																						
188	BC S94CLWD1	4	binary	Write data transferred through AX0 number 1. See Note 3.																						
192	C0 S94CLCM1	2	binary	Category mounts for AX0 number 1. See Note 3.																						
194	C2 S94CLSM1	2	binary	Specific cache mounts for AX0 number 1. See Note 3.																						
196	C4 S94CLRM1	2	binary	Specific recall mounts for AX0 number 1. See Note 3.																						
198	C6 S94CLCR1	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.																						
200	C8 S94CLPF1	1	binary	I/O VTS and master VTS preferences for the VTC. See Note 3. <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved. </td> </tr> <tr> <td>4-7</td> <td>This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Bit(s)	Description	0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference	4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference
Bit(s)	Description																									
0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									
4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
201	C9 S94CLCS1	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <p>Bit(s) Description</p> <p>0-1 Default copy mode. Reports the copy mode set as the default for the VTC:</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>2 Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</p> <p>3 Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</p> <p>4-5 Controller Operational Mode This field reports the operational mode.</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>6 Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</p> <p>7-14 Reserved (set to 0)</p> <p>15 Fields valid</p>
203	CB S94CLRL1	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <p>Value Description</p> <p>0 No support for reporting relative link speeds</p> <p>1 ESCON < 5 km, FICON < 30 km</p> <p>2 ESCON < 10 km, FICON < 80 km</p> <p>3 Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</p> <p>4 Channel Ext > 1000 km, ESCON over DWDM < 15 km</p> <p>5 ESCON over DWDM > 15 km</p> <p> Values not listed are reserved.</p> <p>Bit(s) Description</p> <p>0-3 VTC to VTS0 link speed value</p> <p>4-7 VTC to VTS1 link speed value</p>

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																						
204	CC	4	binary	Reserved (set to zero).																						
208	D0 S94CLDC2	4	binary	Data copied by AX0 number 2. See Note 3.																						
212	D4 S94CLVC2	4	binary	Volumes copied by AX0 number 2. See Note 3.																						
216	D8 S94CLRD2	4	binary	Read data transferred through AX0 number 2. See Note 3.																						
220	DC S94CLWD2	4	binary	Write data transferred through AX0 number 2. See Note 3.																						
224	E0 S94CLCM2	2	binary	Category mounts for AX0 number 2. See Note 3.																						
226	E2 S94CLSM2	2	binary	Specific cache mounts for AX0 number 2. See Note 3.																						
228	E4 S94CLRM2	2	binary	Specific recall mounts for AX0 number 2. See Note 3.																						
230	E6 S94CLCR2	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.																						
232	E8 S94CLPF2	1	binary	I/O VTS and master VTS preferences for the VTC. See Note 3. <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved. </td> </tr> <tr> <td>4-7</td> <td>This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Bit(s)	Description	0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference	4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference
Bit(s)	Description																									
0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									
4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
233	E9 S94CLCS2	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <p>Bit(s) Description</p> <p>0-1 Default copy mode. Reports the copy mode set as the default for the VTC:</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>2 Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</p> <p>3 Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</p> <p>4-5 Controller Operational Mode This field reports the operational mode.</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>6 Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</p> <p>7-14 Reserved (set to 0)</p> <p>15 Fields valid</p>
235	EB S94CLRL2	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <p>Value Description</p> <p>0 No support for reporting relative link speeds</p> <p>1 ESCON < 5 km, FICON < 30 km</p> <p>2 ESCON < 10 km, FICON < 80 km</p> <p>3 Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</p> <p>4 Channel Ext > 1000 km, ESCON over DWDM < 15 km</p> <p>5 ESCON over DWDM > 15 km</p> <p> Values not listed are reserved.</p> <p>Bit(s) Description</p> <p>0-3 VTC to VTS0 link speed value</p> <p>4-7 VTC to VTS1 link speed value</p>

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																						
236	EC	4	binary	Reserved (set to zero).																						
240	F0 S94CLDC3	4	binary	Data copied by AX0 number 3. See Note 3.																						
244	F4 S94CLVC3	4	binary	Volumes copied by AX0 number 3. See Note 3.																						
248	F8 S94CLRD3	4	binary	Read data transferred through AX0 number 3. See Note 3.																						
252	FC S94CLWD3	4	binary	Write data transferred through AX0 number 3. See Note 3.																						
256	100 S94CLCM3	2	binary	Category mounts for AX0 number 3. See Note 3.																						
258	102 S94CLSM3	2	binary	Specific cache mounts for AX0 number 3. See Note 3.																						
260	104 S94CLRM3	2	binary	Specific recall mounts for AX0 number 3. See Note 3.																						
262	106 S94CLCR3	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.																						
264	108 S94CLPF3	1	binary	I/O VTS and master VTS preferences for the VTC. See Note 3. <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.</td> </tr> <tr> <td>4-7</td> <td>This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table></td> </tr> </tbody> </table>	Bit(s)	Description	0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference	4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference
Bit(s)	Description																									
0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									
4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																																
265	109 S94CLCS3	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Default copy mode. Reports the copy mode set as the default for the VTC:</td> </tr> <tr> <td></td> <td>Value Description</td> </tr> <tr> <td>0</td> <td>Deferred copy mode</td> </tr> <tr> <td>1</td> <td>Immediate copy mode</td> </tr> <tr> <td></td> <td>Values not listed are reserved.</td> </tr> <tr> <td>2</td> <td>Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</td> </tr> <tr> <td>3</td> <td>Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</td> </tr> <tr> <td>4-5</td> <td>Controller Operational Mode This field reports the operational mode.</td> </tr> <tr> <td></td> <td>Value Description</td> </tr> <tr> <td>0</td> <td>Deferred copy mode</td> </tr> <tr> <td>1</td> <td>Immediate copy mode</td> </tr> <tr> <td></td> <td>Values not listed are reserved.</td> </tr> <tr> <td>6</td> <td>Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</td> </tr> <tr> <td>7-14</td> <td>Reserved (set to 0)</td> </tr> <tr> <td>15</td> <td>Fields valid</td> </tr> </tbody> </table>	Bit(s)	Description	0-1	Default copy mode. Reports the copy mode set as the default for the VTC:		Value Description	0	Deferred copy mode	1	Immediate copy mode		Values not listed are reserved.	2	Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.	3	Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.	4-5	Controller Operational Mode This field reports the operational mode.		Value Description	0	Deferred copy mode	1	Immediate copy mode		Values not listed are reserved.	6	Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.	7-14	Reserved (set to 0)	15	Fields valid
Bit(s)	Description																																			
0-1	Default copy mode. Reports the copy mode set as the default for the VTC:																																			
	Value Description																																			
0	Deferred copy mode																																			
1	Immediate copy mode																																			
	Values not listed are reserved.																																			
2	Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.																																			
3	Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.																																			
4-5	Controller Operational Mode This field reports the operational mode.																																			
	Value Description																																			
0	Deferred copy mode																																			
1	Immediate copy mode																																			
	Values not listed are reserved.																																			
6	Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.																																			
7-14	Reserved (set to 0)																																			
15	Fields valid																																			
267	10B S94CLRL3	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No support for reporting relative link speeds</td> </tr> <tr> <td>1</td> <td>ESCON < 5 km, FICON < 30 km</td> </tr> <tr> <td>2</td> <td>ESCON < 10 km, FICON < 80 km</td> </tr> <tr> <td>3</td> <td>Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</td> </tr> <tr> <td>4</td> <td>Channel Ext > 1000 km, ESCON over DWDM < 15 km</td> </tr> <tr> <td>5</td> <td>ESCON over DWDM > 15 km</td> </tr> <tr> <td></td> <td>Values not listed are reserved.</td> </tr> <tr> <td></td> <td>Bit(s) Description</td> </tr> <tr> <td>0-3</td> <td>VTC to VTS0 link speed value</td> </tr> <tr> <td>4-7</td> <td>VTC to VTS1 link speed value</td> </tr> </tbody> </table>	Value	Description	0	No support for reporting relative link speeds	1	ESCON < 5 km, FICON < 30 km	2	ESCON < 10 km, FICON < 80 km	3	Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km	4	Channel Ext > 1000 km, ESCON over DWDM < 15 km	5	ESCON over DWDM > 15 km		Values not listed are reserved.		Bit(s) Description	0-3	VTC to VTS0 link speed value	4-7	VTC to VTS1 link speed value										
Value	Description																																			
0	No support for reporting relative link speeds																																			
1	ESCON < 5 km, FICON < 30 km																																			
2	ESCON < 10 km, FICON < 80 km																																			
3	Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km																																			
4	Channel Ext > 1000 km, ESCON over DWDM < 15 km																																			
5	ESCON over DWDM > 15 km																																			
	Values not listed are reserved.																																			
	Bit(s) Description																																			
0-3	VTC to VTS0 link speed value																																			
4-7	VTC to VTS1 link speed value																																			

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																						
268	10C	4	binary	Reserved (set to zero).																						
272	110 S94CLDC4	4	binary	Data copied by AX0 number 4. See Note 3.																						
276	114 S94CLVC4	4	binary	Volumes copied by AX0 number 4. See Note 3.																						
280	118 S94CLRD4	4	binary	Read data transferred through AX0 number 4. See Note 3.																						
284	11C S94CLWD4	4	binary	Write data transferred through AX0 number 4. See Note 3.																						
288	120 S94CLCM4	2	binary	Category mounts for AX0 number 4. See Note 3.																						
290	122 S94CLSM4	2	binary	Specific cache mounts for AX0 number 4. See Note 3.																						
292	124 S94CLRM4	2	binary	Specific recall mounts for AX0 number 4. See Note 3.																						
294	126 S94CLCR4	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.																						
296	128 S94CLPF4	1	binary	I/O VTS and master VTS preferences for the VTC. See Note 3. <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved. </td> </tr> <tr> <td>4-7</td> <td>This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Bit(s)	Description	0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference	4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference
Bit(s)	Description																									
0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									
4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																																
297 129	S94CLCS4	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-1</td> <td>Default copy mode. Reports the copy mode set as the default for the VTC:</td> </tr> <tr> <td></td> <td>Value Description</td> </tr> <tr> <td>0</td> <td>Deferred copy mode</td> </tr> <tr> <td>1</td> <td>Immediate copy mode</td> </tr> <tr> <td></td> <td>Values not listed are reserved.</td> </tr> <tr> <td>2</td> <td>Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</td> </tr> <tr> <td>3</td> <td>Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</td> </tr> <tr> <td>4-5</td> <td>Controller Operational Mode This field reports the operational mode.</td> </tr> <tr> <td></td> <td>Value Description</td> </tr> <tr> <td>0</td> <td>Deferred copy mode</td> </tr> <tr> <td>1</td> <td>Immediate copy mode</td> </tr> <tr> <td></td> <td>Values not listed are reserved.</td> </tr> <tr> <td>6</td> <td>Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</td> </tr> <tr> <td>7-14</td> <td>Reserved (set to 0)</td> </tr> <tr> <td>15</td> <td>Fields valid</td> </tr> </tbody> </table>	Bit(s)	Description	0-1	Default copy mode. Reports the copy mode set as the default for the VTC:		Value Description	0	Deferred copy mode	1	Immediate copy mode		Values not listed are reserved.	2	Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.	3	Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.	4-5	Controller Operational Mode This field reports the operational mode.		Value Description	0	Deferred copy mode	1	Immediate copy mode		Values not listed are reserved.	6	Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.	7-14	Reserved (set to 0)	15	Fields valid
Bit(s)	Description																																			
0-1	Default copy mode. Reports the copy mode set as the default for the VTC:																																			
	Value Description																																			
0	Deferred copy mode																																			
1	Immediate copy mode																																			
	Values not listed are reserved.																																			
2	Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.																																			
3	Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.																																			
4-5	Controller Operational Mode This field reports the operational mode.																																			
	Value Description																																			
0	Deferred copy mode																																			
1	Immediate copy mode																																			
	Values not listed are reserved.																																			
6	Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.																																			
7-14	Reserved (set to 0)																																			
15	Fields valid																																			
299 12B	S94CLRL4	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No support for reporting relative link speeds</td> </tr> <tr> <td>1</td> <td>ESCON < 5 km, FICON < 30 km</td> </tr> <tr> <td>2</td> <td>ESCON < 10 km, FICON < 80 km</td> </tr> <tr> <td>3</td> <td>Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</td> </tr> <tr> <td>4</td> <td>Channel Ext > 1000 km, ESCON over DWDM < 15 km</td> </tr> <tr> <td>5</td> <td>ESCON over DWDM > 15 km</td> </tr> <tr> <td></td> <td>Values not listed are reserved.</td> </tr> <tr> <td></td> <td>Bit(s) Description</td> </tr> <tr> <td>0-3</td> <td>VTC to VTS0 link speed value</td> </tr> <tr> <td>4-7</td> <td>VTC to VTS1 link speed value</td> </tr> </tbody> </table>	Value	Description	0	No support for reporting relative link speeds	1	ESCON < 5 km, FICON < 30 km	2	ESCON < 10 km, FICON < 80 km	3	Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km	4	Channel Ext > 1000 km, ESCON over DWDM < 15 km	5	ESCON over DWDM > 15 km		Values not listed are reserved.		Bit(s) Description	0-3	VTC to VTS0 link speed value	4-7	VTC to VTS1 link speed value										
Value	Description																																			
0	No support for reporting relative link speeds																																			
1	ESCON < 5 km, FICON < 30 km																																			
2	ESCON < 10 km, FICON < 80 km																																			
3	Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km																																			
4	Channel Ext > 1000 km, ESCON over DWDM < 15 km																																			
5	ESCON over DWDM > 15 km																																			
	Values not listed are reserved.																																			
	Bit(s) Description																																			
0-3	VTC to VTS0 link speed value																																			
4-7	VTC to VTS1 link speed value																																			

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																										
300	12C	4	binary	Reserved (set to zero).																										
304	130 S94CLDC5	4	binary	Data copied by AX0 number 5. See Note 3.																										
308	134 S94CLVC5	4	binary	Volumes copied by AX0 number 5. See Note 3.																										
312	138 S94CLRD5	4	binary	Read data transferred through AX0 number 5. See Note 3.																										
316	13C S94CLWD5	4	binary	Write data transferred through AX0 number 5. See Note 3.																										
320	140 S94CLCM5	2	binary	Category mounts for AX0 number 5. See Note 3.																										
322	142 S94CLSM5	2	binary	Specific cache mounts for AX0 number 5. See Note 3.																										
324	144 S94CLRM5	2	binary	Specific recall mounts for AX0 number 5. See Note 3.																										
326	146 S94CLCR5	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.																										
328	148 S94CLPF5	1	binary	<p>I/O VTS and master VTS preferences for the VTC. See Note 3.</p> <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS.</td> </tr> <tr> <td></td> <td> <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved. </td> </tr> <tr> <td>4-7</td> <td>This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved.</td> </tr> <tr> <td></td> <td> <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Bit(s)	Description	0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS.		<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference	4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved.		<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference
Bit(s)	Description																													
0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS.																													
	<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference																					
Value	Description																													
8	VTS 0																													
9	VTS 1																													
F	No preference																													
4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved.																													
	<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference																					
Value	Description																													
8	VTS 0																													
9	VTS 1																													
F	No preference																													

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
329 149	S94CLCS5	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <p>Bit(s) Description</p> <p>0-1 Default copy mode. Reports the copy mode set as the default for the VTC:</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>2 Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</p> <p>3 Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</p> <p>4-5 Controller Operational Mode This field reports the operational mode.</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>6 Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</p> <p>7-14 Reserved (set to 0)</p> <p>15 Fields valid</p>
331 14B	S94CLRL5	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <p>Value Description</p> <p>0 No support for reporting relative link speeds</p> <p>1 ESCON < 5 km, FICON < 30 km</p> <p>2 ESCON < 10 km, FICON < 80 km</p> <p>3 Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</p> <p>4 Channel Ext > 1000 km, ESCON over DWDM < 15 km</p> <p>5 ESCON over DWDM > 15 km</p> <p> Values not listed are reserved.</p> <p>Bit(s) Description</p> <p>0-3 VTC to VTS0 link speed value</p> <p>4-7 VTC to VTS1 link speed value</p>

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																						
332	14C	4	binary	Reserved (set to zero).																						
336	150 S94CLDC6	4	binary	Data copied by AX0 number 6. See Note 3.																						
340	154 S94CLVC6	4	binary	Volumes copied by AX0 number 6. See Note 3.																						
344	158 S94CLRD6	4	binary	Read data transferred through AX0 number 6. See Note 3.																						
348	15C S94CLWD6	4	binary	Write data transferred through AX0 number 6. See Note 3.																						
352	160 S94CLCM6	2	binary	Category mounts for AX0 number 6. See Note 3.																						
354	162 S94CLSM6	2	binary	Specific cache mounts for AX0 number 6. See Note 3.																						
356	164 S94CLRM6	2	binary	Specific recall mounts for AX0 number 6. See Note 3.																						
358	166 S94CLCR6	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.																						
360	168 S94CLPF6	1	binary	I/O VTS and master VTS preferences for the VTC. See Note 3. <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved. </td> </tr> <tr> <td>4-7</td> <td>This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Bit(s)	Description	0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference	4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference
Bit(s)	Description																									
0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									
4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
361	169 S94CLCS6	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <p>Bit(s) Description</p> <p>0-1 Default copy mode. Reports the copy mode set as the default for the VTC:</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>2 Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</p> <p>3 Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</p> <p>4-5 Controller Operational Mode This field reports the operational mode.</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>6 Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</p> <p>7-14 Reserved (set to 0)</p> <p>15 Fields valid</p>
363	16B S94CLRL6	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <p>Value Description</p> <p>0 No support for reporting relative link speeds</p> <p>1 ESCON < 5 km, FICON < 30 km</p> <p>2 ESCON < 10 km, FICON < 80 km</p> <p>3 Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</p> <p>4 Channel Ext > 1000 km, ESCON over DWDM < 15 km</p> <p>5 ESCON over DWDM > 15 km</p> <p> Values not listed are reserved.</p> <p>Bit(s) Description</p> <p>0-3 VTC to VTS0 link speed value</p> <p>4-7 VTC to VTS1 link speed value</p>

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description																						
364	16C	4	binary	Reserved (set to zero).																						
368	170 S94CLDC7	4	binary	Data copied by AX0 number 7. See Note 3.																						
372	174 S94CLVC7	4	binary	Volumes copied by AX0 number 7. See Note 3.																						
376	178 S94CLRD7	4	binary	Read data transferred through AX0 number 7. See Note 3.																						
380	17C S94CLWD7	4	binary	Write data transferred through AX0 number 7. See Note 3.																						
384	180 S94CLCM7	2	binary	Category mounts for AX0 number 7. See Note 3.																						
386	182 S94CLSM7	2	binary	Specific cache mounts for AX0 number 7. See Note 3.																						
388	184 S94CLRM7	2	binary	Specific recall mounts for AX0 number 7. See Note 3.																						
390	186 S94CLCR7	2	binary	Compression ratio of the data that has moved through the host adapters of the VTC to the Tape Volume Cache of the I/O VTSs in the last hour. The granularity of the value reported is in hundredths. If no data has been moved through the host adapters in the last hour, a compression value of zero is reported. See Note 3.																						
392	188 S94CLPF7	1	binary	I/O VTS and master VTS preferences for the VTC. See Note 3. <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0-3</td> <td>Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved. </td> </tr> <tr> <td>4-7</td> <td>This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Bit(s)	Description	0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference	4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference
Bit(s)	Description																									
0-3	Preferred I/O. This field indicates if a preferred VTS has been specified for I/O operations. If possible all host I/O operations will be directed to the specified VTS. If bit 0 is not active, then the VTS does not support the reporting of a preferred I/O VTS. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table> Values not listed are reserved.	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									
4-7	This field indicates if a preferred master VTS has been specified. If the specified VTS is not the current master, the VTC will attempt a master switchover to the preferred VTS, if conditions within the PTP VTS would allow it. If bit 0 is not active, then the VTS does not support the reporting of a preferred master VTS. Values not listed are reserved. <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>VTS 0</td> </tr> <tr> <td>9</td> <td>VTS 1</td> </tr> <tr> <td>F</td> <td>No preference</td> </tr> </tbody> </table>	Value	Description	8	VTS 0	9	VTS 1	F	No preference																	
Value	Description																									
8	VTS 0																									
9	VTS 1																									
F	No preference																									

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
393	189 S94CLCS7	2	binary	<p>Configured settings. Operational settings configured for the VTC. The reported operational setting are valid only if bit 15 is active. See Note 3.</p> <p>Bit(s) Description</p> <p>0-1 Default copy mode. Reports the copy mode set as the default for the VTC:</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>2 Force Scratch to preferred I/O VTS. If this bit is active, all scratch mounts use the preferred VTS, if available, independent of the data validity on the preferred VTS.</p> <p>3 Primary I/O. If this bit is active, a PSF-PMC order was accepted that specified a VTS I/O Selection Criteria of Primary.</p> <p>4-5 Controller Operational Mode This field reports the operational mode.</p> <p> Value Description</p> <p> 0 Deferred copy mode</p> <p> 1 Immediate copy mode</p> <p> Values not listed are reserved.</p> <p>6 Write protect mode. If this bit is active, the Virtual Tape Controllers (VTC) is in write protected mode. All host commands that attempt to change the attributes of a volume or modify/add data to a volume will fail. This mode supersedes the controller operational mode.</p> <p>7-14 Reserved (set to 0)</p> <p>15 Fields valid</p>
395	18B S94CLRL7	1	binary	<p>Relative link speeds. Reports the CE settings for the relative link speeds between the VTC and VTS0 and VTS1. See Note 3. The following values are defined:</p> <p>Value Description</p> <p>0 No support for reporting relative link speeds</p> <p>1 ESCON < 5 km, FICON < 30 km</p> <p>2 ESCON < 10 km, FICON < 80 km</p> <p>3 Channel Ext < 1000 km, ESCON over DWDM < 10 km, FICON < 100 km</p> <p>4 Channel Ext > 1000 km, ESCON over DWDM < 15 km</p> <p>5 ESCON over DWDM > 15 km</p> <p> Values not listed are reserved.</p> <p>Bit(s) Description</p> <p>0-3 VTC to VTS0 link speed value</p> <p>4-7 VTC to VTS1 link speed value</p>

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
396	18C	4	binary	Reserved (set to zero).
400	190 S94CMV_VTC0	2	binary	VTC 0 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
402	192 S94CFV_VTC0	2	binary	VTC 0 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
404	194 S94CMV_VTC1	2	binary	VTC 1 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
406	194 S94CFV_VTC1	2	binary	VTC 1 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
408	198 S94CMV_VTC2	2	binary	VTC 2 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
410	19A S94CFV_VTC2	2	binary	VTC 2 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
412	19C S94CMV_VTC3	2	binary	VTC 3 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
414	19E S94CFV_VTC3	2	binary	VTC 3 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
416	1A0 S94CMV_VTC4	2	binary	VTC 4 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
418	1A2 S94CFV_VTC4	2	binary	VTC 4 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
420	1A4 S94CMV_VTC5	2	binary	VTC 5 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
422	1A6 S94CFV_VTC5	2	binary	VTC 5 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
424	1A8 S94CMV_VTC6	2	binary	VTC 6 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
426	1AA S94CFV_VTC6	2	binary	VTC 6 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
428	1AC S94CMV_VTC7	2	binary	VTC 7 code modification value. Contains the modification portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
430	1AE S94CFV_VTC7	2	binary	VTC 7 code fix value. Contains the Fix portion for the VTC code level that is part of the PTP VTS subsystem that generated the statistical record. See Note 3.
432	1B0	96	binary	Reserved (set to zero).
When F/C 4001 is installed and enabled, the following statistics are reported.				
528	210 S94OPM_VDC	2	binary	Virtual Drives Configured (current). This two byte field contains the number of virtual devices configured in the Virtual Tape Server subsystem at the time the request was received. See Note 2.

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description												
530	212 S94OPM_MAXVDM	2	binary	Max virtual drives mounted (last hour). This two byte field contains the maximum number of virtual drives that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. See Note 2.												
532	214 S94OPM_MINVDM	2	binary	Min virtual drives mounted (last hour). This two byte field contains the minimum number of virtual drives that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. See Note 2.												
534	216 S94OPM_AVGVDM	2	binary	Avg virtual drives mounted (last hour). This two byte field contains the average number of virtual drives that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. This value is determined by summing the number of concurrently mounted virtual devices every 10 seconds and then, during the hourly generation of the statistics, dividing the resultant value by 360. See Note 2.												
536	218	8	binary	Reserved (set to zero).												
When F/C 4001 is installed and enabled, the following array information is included.																
544	220 S94OPM_DCII	1	binary	Device Class Identifier. This one byte field contains the device class identifier for one of the set of physical tape devices installed in the VTS. See Note 1. The following are the defined values for this field: <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>X'00'</td> <td>There is no device class configured.</td> </tr> <tr> <td>X'11'</td> <td>3590 Model B1A</td> </tr> <tr> <td>X'13'</td> <td>3590 Model E1A</td> </tr> <tr> <td>X'14'</td> <td>3590 Model H1A</td> </tr> <tr> <td>X'20'</td> <td>3592 Model J1A</td> </tr> </tbody> </table>	Value	Description	X'00'	There is no device class configured.	X'11'	3590 Model B1A	X'13'	3590 Model E1A	X'14'	3590 Model H1A	X'20'	3592 Model J1A
Value	Description															
X'00'	There is no device class configured.															
X'11'	3590 Model B1A															
X'13'	3590 Model E1A															
X'14'	3590 Model H1A															
X'20'	3592 Model J1A															
545	221 S94OPM_PDI1	1	binary	Installed Virtual Tape Server physical devices. This one byte field contains the number of physical tape devices, of the device class indicated, that are installed in the Virtual Tape Server subsystem at the time the request was received. See Note 1.												
546	222 S94OPM_CAFU1	1	binary	Available Virtual Tape Server physical devices. This one byte field contains the number of physical tape devices, of the device class indicated, currently available for use by the Virtual Tape Server subsystem at the time the request was received. See Note 1.												
547	223 S94OPM_MAXCM1	1	binary	Max Virtual Tape Server physical devices mounted. This one byte field contains the maximum number of physical tape devices, of the device class indicated, that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. See Note 1.												

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
548	224 S94OPM_MINCM1	1	binary	Min Virtual Tape Server physical devices mounted. This one byte field contains the minimum number of physical tape devices, of the device class indicated, that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. See Note 1.
549	225 S94OPM_AVGCM1	1	binary	Avg Virtual Tape Server physical devices mounted (last hour). This one byte field contains the average number of physical tape devices, of the device class indicated, that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. This value is determined by summing the number of concurrently mounted physical devices every 10 seconds and then, during the hourly generation of the statistics, dividing the resultant value by 360. See Note 1.
550	226 S94OPM_MAXTTM1	2	binary	Max physical mount time (last hour). This two byte field contains the maximum time, in seconds, that the library took to complete the execution of a mount request for a physical tape device, of the device class indicated, in the Virtual Tape Server subsystem. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed. See Note 1.
552	228 S94OPM_MINTTM1	2	binary	Min physical mount time (last hour). This two byte field contains the minimum time, in seconds, that the library took to complete the execution of a mount request for a physical tape device, of the device class indicated, in the Virtual Tape Server subsystem. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed. See Note 1.
554	22A S94OPM_AVGTTM1	2	binary	Avg physical mount time (last hour). This two byte field contains the average time, in seconds, that the library took to complete the execution of a mount request for a physical tape device, of the device class indicated, in the Virtual Tape Server subsystem. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed. See Note 1.
556	22C S94OPM_STGMNTS1	2	binary	Physical mounts - stage (last hour). This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy stage mounts, of the device class indicated. See Note 1.
558	22E S94OPM_MIGMNTS1	2	binary	Physical mounts - migrate (last hour). This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy migration mounts, of the device class indicated. See Note 1.
560	230 S94OPM_RECMTS1	2	binary	Physical mounts - reclaim (last hour). This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy reclamation mounts, of the device class indicated. See Note 1.

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description												
562 232	S94OPM_SDEMNTS1	2	binary	This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy Secure Data Erase mounts, of the device class indicated.												
564 234	S94OPM_PPWRITN1	4	binary	Data Written to a Primary Pool (last hour). This four byte field contains the number of MBytes premigrated from the tape volume cache to a primary pool for the device class indicated during the last hour. Only the data for logical volumes that have completed premigration when statistics were calculated at the end of the last hour are included in this value. The value is reset and a new count begins after statistics are calculated. It is accumulated in bytes and reported in an integral multiple of 1,048,576 bytes (1 MByte). See Note 1.												
568 238	S94OPM_SPWRITN1	4	binary	Data Written to a Secondary Pool (last hour). This four byte field contains the number of MBytes premigrated from the tape volume cache to a secondary pool for the device class indicated during the last hour. Only the data for logical volumes that have completed premigration when statistics were calculated at the end of the last hour are included in this value. The value is reset and a new count begins after statistics are calculated. It is accumulated in bytes and reported in an integral multiple of 1,048,576 bytes (1 MByte). See Note 1.												
572 23C		4	binary	Reserved (set to X'00')												
576 240	S94OPM_DCI2	1	binary	Device Class Identifier. This one byte field contains the device class identifier for one of the set of physical tape devices installed in the VTS. See Note 1. The following are the defined values for this field: <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>X'00'</td> <td>There is no device class configured.</td> </tr> <tr> <td>X'11'</td> <td>3590 Model B1A</td> </tr> <tr> <td>X'13'</td> <td>3590 Model E1A</td> </tr> <tr> <td>X'14'</td> <td>3590 Model H1A</td> </tr> <tr> <td>X'20'</td> <td>3592 Model J1A</td> </tr> </tbody> </table>	Value	Description	X'00'	There is no device class configured.	X'11'	3590 Model B1A	X'13'	3590 Model E1A	X'14'	3590 Model H1A	X'20'	3592 Model J1A
Value	Description															
X'00'	There is no device class configured.															
X'11'	3590 Model B1A															
X'13'	3590 Model E1A															
X'14'	3590 Model H1A															
X'20'	3592 Model J1A															
577 241	S94OPM_PDI2	1	binary	Installed Virtual Tape Server physical devices. This one byte field contains the number of physical tape devices, of the device class indicated, that are installed in the Virtual Tape Server subsystem at the time the request was received. See Note 1.												
578 242	S94OPM_CAFU2	1	binary	Available Virtual Tape Server physical devices. This one byte field contains the number of physical tape devices, of the device class indicated, currently available for use by the Virtual Tape Server subsystem at the time the request was received. See Note 1.												
579 243	S94OPM_MAXCM2	1	binary	Max Virtual Tape Server physical devices mounted. This one byte field contains the maximum number of physical tape devices, of the device class indicated, that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. See Note 1.												

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
580	244 S94OPM_MINCM2	1	binary	Min Virtual Tape Server physical devices mounted. This one byte field contains the minimum number of physical tape devices, of the device class indicated, that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. See Note 1.
581	245 S94OPM_AVGCM2	1	binary	Avg Virtual Tape Server physical devices mounted (last hour). This one byte field contains the average number of physical tape devices, of the device class indicated, that were concurrently mounted in the Virtual Tape Server subsystem during the last hour. This value is determined by summing the number of concurrently mounted physical devices every 10 seconds and then, during the hourly generation of the statistics, dividing the resultant value by 360. See Note 1.
582	246 S94OPM_MAXTTM2	2	binary	Max physical mount time (last hour). This two byte field contains the maximum time, in seconds, that the library took to complete the execution of a mount request for a physical tape device, of the device class indicated, in the Virtual Tape Server subsystem. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed. See Note 1.
584	248 S94OPM_MINTTM2	2	binary	Min physical mount time (last hour). This two byte field contains the minimum time, in seconds, that the library took to complete the execution of a mount request for a physical tape device, of the device class indicated, in the Virtual Tape Server subsystem. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed. See Note 1.
586	24A S94OPM_AVGTTM2	2	binary	Avg physical mount time (last hour). This two byte field contains the average time, in seconds, that the library took to complete the execution of a mount request for a physical tape device, of the device class indicated, in the Virtual Tape Server subsystem. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed. See Note 1.
588	24C S94OPM_STGMNTS2	2	binary	Physical mounts - stage (last hour). This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy stage mounts, of the device class indicated. See Note 1.
590	24E S94OPM_MIGMNTS2	2	binary	Physical mounts - migrate (last hour). This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy migration mounts, of the device class indicated. See Note 1.
592	250 S94OPM_RECMTS2	2	binary	Physical mounts - reclaim (last hour). This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy reclamation mounts, of the device class indicated. See Note 1.

Record type 94

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
594	252 S94OPM_SDEMNTS2	2	binary	This two byte field contains the number of physical mount requests completed by the library in the last hour to satisfy secure data erase mounts, of the device class indicated.
596	254 S94OPM_PPWRITN2	4	binary	Data Written to a Primary Pool (last hour). This four byte field contains the number of MBytes premigrated from the tape volume cache to a primary pool for the device class indicated during the last hour. Only the data for logical volumes that have completed premigration when statistics were calculated at the end of the last hour are included in this value. The value is reset and a new count begins after statistics are calculated. It is accumulated in bytes and reported in an integral multiple of 1,048,576 bytes (1 MByte). See Note 1.
600	258 S94OPM_SPWRITN2	4	binary	Data Written to a Secondary Pool (last hour). This four byte field contains the number of MBytes premigrated from the tape volume cache to a secondary pool for the device class indicated during the last hour. Only the data for logical volumes that have completed premigration when statistics were calculated at the end of the last hour are included in this value. The value is reset and a new count begins after statistics are calculated. It is accumulated in bytes and reported in an integral multiple of 1,048,576 bytes (1 MByte). See Note 1.
604	25C	4	binary	Reserved (set to X'00')
When F/C 4001 is installed and enabled, the following VTS Cache Usage Information array is included.				
608	260 S94OPM_ARRAY	512	binary	VTS Cache Usage Information Array. Each entry in the array is 64 bytes long and is mapped by S94OPM_ARRAY_ENTRY. Up to eight entries may be present.
1120	460 S94OPM_IARTAFRT	2	binary	IART Average Fast Ready Mount Time. This two byte field contains the average time, in seconds, that the Virtual Tape Server subsystem took to complete the execution of a fast-ready mount request for a virtual device. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed.
1122	462 S94OPM_IARTFRM	2	binary	IART Fast-Ready Mounts. This two byte field contains the number of mount requests completed using the Fast-Ready facility by the Virtual Tape Server subsystem in the last hour. The Fast-Ready facility is used for PLF Library Mount orders where a category is specified and the specified category has the Fast-Ready attribute set or a VOLSER is specified and that VOLSER, at the time the mount request was received, is assigned to a category that has the Fast-Ready attribute set.
1124	464 S94OPM_IARTCHMT	2	binary	IART Average Cache Hit Mount Time. This two byte field contains the average time, in seconds, that the Virtual Tape Server subsystem took to complete the execution of a mount request for a virtual device where the requested volume was in the Tape Volume Cache. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed.

Table 15. VTS enhanced library statistics (continued)

Offsets	Name	Length	Format	Description
1126 466	S94OPM_IARTCHM	2	binary	IART Cache Hit Mounts. This two byte field contains the number of mount requests that were completed by the Virtual Tape Server subsystem in the last hour because the required volume was resident in the Tape Volume Cache.
1128 468	S94OPM_IARTCMMT	2	binary	IART Average Cache Miss Mount Time. This two byte field contains the average time, in seconds, that the Virtual Tape Server subsystem took to complete the execution of a mount request for a virtual device where the requested volume had to be recalled from a stacked volume. Mount time is accrued from the time the mount request is accepted until the volume has been recalled and the mount completed. The mount time is accredited to the hour it was completed.
1130 46A	S94OPM_IARTCMM	2	binary	IART Cache Miss Mounts. This two byte field contains the number of mount requests that were completed by the Virtual Tape Server subsystem in the last hour that required a logical volume to be recalled from a stacked volume back into the Tape Volume Cache.
Note:				
1. This field will be zero if the statistics are reported for a composite library(SMF94VNO=X'FF').				
2. This field is a composite of all AX0's when reported for a composite library(SMF94VNO=X'FF').				
3. This field is only valid when reported for a composite library(SMF94VNO=X'FF'). For other than a composite library the field will contain zero.				
4. This field will be zero if the statistics are reported for a distributed library (SMF94VNO=X'01' or X'02')				
5. This field will contain zero for F/C 4001				

Array data section

Offsets	Name	Length	Format	Description																
Start - S94OPM_ARRAY_ENTRY																				
0	0 S94OPM_PMC	4	binary	Preference Management Control. This four byte field contains information about how the preference level is managed. <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved (set to B'0')</td> </tr> <tr> <td>1-3</td> <td>Logical Volume Migration Algorithm</td> </tr> <tr> <th>Value</th> <th>Description</th> </tr> <tr> <td>0</td> <td>Least Recently Used (LRU) Managed. The logical volumes in this preference level are removed from the cache based on a least recently used algorithm.</td> </tr> <tr> <td>1</td> <td>Largest Size Managed. The logical volumes in this preference level are removed from the cache based on their size with the largest volumes being removed first.</td> </tr> <tr> <td>2-7</td> <td>Reserved</td> </tr> <tr> <td>4-31</td> <td>Reserved (set to B'0')</td> </tr> </tbody> </table>	Bit(s)	Description	0	Reserved (set to B'0')	1-3	Logical Volume Migration Algorithm	Value	Description	0	Least Recently Used (LRU) Managed. The logical volumes in this preference level are removed from the cache based on a least recently used algorithm.	1	Largest Size Managed. The logical volumes in this preference level are removed from the cache based on their size with the largest volumes being removed first.	2-7	Reserved	4-31	Reserved (set to B'0')
Bit(s)	Description																			
0	Reserved (set to B'0')																			
1-3	Logical Volume Migration Algorithm																			
Value	Description																			
0	Least Recently Used (LRU) Managed. The logical volumes in this preference level are removed from the cache based on a least recently used algorithm.																			
1	Largest Size Managed. The logical volumes in this preference level are removed from the cache based on their size with the largest volumes being removed first.																			
2-7	Reserved																			
4-31	Reserved (set to B'0')																			

Record type 94

Offsets	Name	Length	Format	Description
4	4 S94OPM_VVIC	4	binary	<p>Virtual volumes in cache.</p> <p>This four byte field contains a count, that is a snapshot taken when statistics are calculated at the end of the hour, of the number of volume assigned to the preference level that are still cache resident. For volumes that are currently mounted and do not have a preference level established (that is done when a volume is unloaded), they are credited to the count for preference level 1.</p>
8	8 S94OPM_DRIC	4	binary	<p>Data resident in cache.</p> <p>This four byte field contains a count, that is a snapshot taken when statistics are calculated at the end of the hour, of the amount of cache space used by the volumes assigned to the preference level that are still cache resident. For volumes that are currently mounted and do not have a preference level established (that is done when a volume is unloaded), their size is credited to the count for preference level 1. The cache space is accumulated in bytes and reported in an integral multiple of 1,048,576 bytes (1 MByte).</p>
12	C S94OPM_TVCA4	4	binary	<p>4 Hour Rolling average tape volume cache age.</p> <p>This four byte field contains a rolling average cache age, in minutes, of the logical volumes that were assigned to the preference level when the volume was migrated from the cache. The rolling average is calculated based on the cache age of the volumes that have been migrated from the cache over the last 4 hours. Cache age is measured from when a volume is first closed after being created or recalled into cache until it has been migrated from cache. Each volume's cache age is rounded up to the nearest minute. The value is calculated at the end of the hour.</p>
16	10 S94OPM_VM4	4	binary	<p>Volumes migrated last 4 hours. Contains the number of logical volumes assigned to the preference level that were migrated from the cache over the last 4 hours.</p>
20	14 S94OPM_TVCA48	4	binary	<p>48 Hour Rolling average tape volume cache age.</p> <p>This four byte field contains a rolling average cache age, in minutes, of the logical volumes that were assigned to the preference level when the volume was migrated from the cache. The rolling average is calculated based on the cache age of the volumes that have been migrated from the cache over the last 48 hours. Cache age is measured from when a volume is first closed after being created or recalled into cache until it has been migrated from cache. Each volume's cache age is rounded up to the nearest minute. The value is calculated at the end of the hour.</p>
24	18 S94OPM_VM48	4	binary	<p>Volumes migrated last 48 hours. Contains the number of logical volumes assigned to the preference level that were migrated from the cache over the last 48 hours.</p>
28	1C S94OPM_TVCA35	4	binary	<p>35 Day Rolling average tape volume cache age.</p> <p>This four byte field contains a rolling average cache age, in minutes, of the logical volumes that were assigned to the preference level when the volume was migrated from the cache. The rolling average is calculated based on the cache age of the volumes that have been migrated from the cache over the last 35 days. Cache age is measured from when a volume is first closed after being created or recalled into cache until it has been migrated from cache. Each volume's cache age is rounded up to the nearest minute. The value is calculated at the end of the hour.</p>

Offsets	Name	Length	Format	Description
32	20 S94OPM_VM35	4	binary	Volumes migrated last 35 days. Contains the number of logical volumes assigned to the preference level that were migrated from the cache over the last 35 days.
36	24 S94OPM_FRMT	2	binary	Average Fast Ready Mount Time. This two byte field contains the average time, in seconds, that the Virtual Tape Server subsystem took to complete the execution of a fast-ready mount request for a virtual device. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed.
38	26 S94OPM_FRMNTS	2	binary	Fast-Ready Mounts. This two byte field contains the number of mount requests completed using the Fast-Ready facility by the Virtual Tape Server subsystem in the last hour. The Fast-Ready facility is used for PLF Library Mount orders where a category is specified and the specified category has the Fast-Ready attribute set or a VOLSER is specified and that VOLSER, at the time the mount request was received, is assigned to a category that has the Fast-Ready attribute set.
40	28 S94OPM_CHTIME	2	binary	Average Cache Hit Mount Time. This two byte field contains the average time, in seconds, that the Virtual Tape Server subsystem took to complete the execution of a mount request for a virtual device where the requested volume was in the Tape Volume Cache. Mount time is accrued from the time the mount request is accepted until the mount is completed. The mount time is accredited to the hour it was completed.
42	2A S94OPM_CHMNTS	2	binary	Cache Hit Mounts. This two byte field contains the number of mount requests that were completed by the Virtual Tape Server subsystem in the last hour because the required volume was resident in the Tape Volume Cache.
44	2C S94OPM_CMTIME	2	binary	Average Cache Miss Mount Time. This two byte field contains the average time, in seconds, that the Virtual Tape Server subsystem took to complete the execution of a mount request for a virtual device where the requested volume had to be recalled from a stacked volume. Mount time is accrued from the time the mount request is accepted until the volume has been recalled and the mount completed. The mount time is accredited to the hour it was completed.
46	2E S94OPM_CMMNTS	2	binary	Cache Miss Mounts. This two byte field contains the number of mount requests that were completed by the Virtual Tape Server subsystem in the last hour that required a logical volume to be recalled from a stacked volume back into the Tape Volume Cache.
48	30	16	binary	Reserved (set to X'00')
End - S94OPM_ARRAY_ENTRY				

Record type 94

Subtype 2

Header Section

Offsets	Name	Length	Format	Description										
0	0 SMF94S2_LEN	2	binary	Record length.										
2	2 SMF94S2_SEG	2	binary	Segment descriptor.										
4	4 SMF94S2_FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0-3</td><td>Reserved.</td></tr><tr><td>4</td><td>Subsystem name follows.</td></tr><tr><td>5</td><td>Subtypes utilized.</td></tr><tr><td>6-7</td><td>Reserved.</td></tr></tbody></table>	Bit	Meaning when set	0-3	Reserved.	4	Subsystem name follows.	5	Subtypes utilized.	6-7	Reserved.
Bit	Meaning when set													
0-3	Reserved.													
4	Subsystem name follows.													
5	Subtypes utilized.													
6-7	Reserved.													
5	5 SMF94S2_RTY	1	binary	Record type 94 — Subtype 2										
6	6 SMF94S2_TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.										
10	A SMF94S2_DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyydddF</i> .										
14	E SMF94S2_SID	4	EBCDIC	System identification (from SMFPRMxx parmlib member).										
18	12 SMF94S2_WID	4	EBCDIC	Subsystem identification, worktype indicator.										
22	16 SMF94S2_STP	2	binary	Record subtype '02' — Volume pooling statistics										

Self-defining Section (Subtype 2)

Offsets	Name	Length	Format	Description
24	18 SMF94S2_SDL	4	binary	Self-defining section length
28	1C SMF94S2_POF	4	binary	Offset to product section
32	20 SMF94S2_PLN	2	binary	Length of product section
34	22 SMF94S2_PON	2	binary	Number of product sections
36	24 SMF94S2_HOF	4	binary	Offset to header section
40	28 SMF94S2_HLN	2	binary	Length of header section
42	2A SMF94S2_HON	2	binary	Number of header sections
44	2C SMF94S2_SOF	4	binary	Offset to statistics section
48	30 SMF94S2_SLN	2	binary	Length of statistics section
50	32 SMF94S2_SON	2	binary	Number of statistics sections

Product Section

Offsets	Name	Length	Format	Description
0	0 SMF94S2_TYP	2	binary	Subtype for type 94 record.
2	2 SMF94S2_RVN	2	EBCDIC	Record version number C'01'.
4	4 SMF94S2_PNM	8	EBCDIC	Product name 'fmid '.
12	C SMF94S2_MVS	8	EBCDIC	MVS operating system name.

Header Section

Offsets	Name	Length	Format	Description
0	0	32	binary	Reserved (set to zero).

Volume Pool Statistics (VPS) Section

Offsets	Name	Length	Format	Description																
0	0	9	binary	VPS Message Header data																
9	9 SMF94S2_LIBID	3	binary	Library Sequence Number																
12	C	2	binary	Reserved (set to X'00').																
14	E SMF94S2_HHI	2	binary	Hour Index. The hour index is incremented once each hour by the library manager. It is used to prevent duplicate logged statistics from the same one hour period from being counted twice. The hour index for volume pooling statistics is the same as reported for library statistical data calculated for the same hour.																
16	10 SMF94S2_LRTD	10	EBCDIC	Last Reconcile Time and Date. This 10 EBCDIC character field contains the last time and date a reconcile was automatically completed by the VTS. Some of the statistical fields are calculated at this point.																
26	1A SMF94S2_MNVP	2	binary	Maximum number of volume pools allowed in the partition. This 2 byte hexadecimal field contains the maximum number of volume pools allowed in the partition. The number begins with 1. This field is used by the host to determine if there are more than 16 volume pools which would require additional requests for statistical data.																
28	1C	1	binary	Reserved (set to X'00').																
29	1D SMF94S2_VPSET	1	binary	Volume Pool Set. This byte specifies which set of volume pools are being reported, based on the set requested in the preceding request. If the set specified is 0, the first 16 volume pools are reported, if 1, the next 16 and so on.																
30	1E	2	binary	Reserved (set to X'00').																
32	20	1	binary	Reserved (set to X'00').																
33	21 SMF94S2_BPMIO	1	binary	Common Scratch Pool Media Identifier 0. This one byte field contains the identifier for the media type associated with the following common scratch pool volume count. The following are the defined values for this field: <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>X'00'</td> <td>No media type configured.</td> </tr> <tr> <td>X'10'</td> <td>3590 'J' media</td> </tr> <tr> <td>X'11'</td> <td>3590 'K' media</td> </tr> <tr> <td>X'20'</td> <td>3592 'JA' media</td> </tr> <tr> <td>X'21'</td> <td>Reserved for 3592 JW media</td> </tr> <tr> <td>X'22'</td> <td>3592 'JJ' media</td> </tr> <tr> <td>X'23'</td> <td>Reserved for 3592 JR media</td> </tr> </tbody> </table>	Value	Description	X'00'	No media type configured.	X'10'	3590 'J' media	X'11'	3590 'K' media	X'20'	3592 'JA' media	X'21'	Reserved for 3592 JW media	X'22'	3592 'JJ' media	X'23'	Reserved for 3592 JR media
Value	Description																			
X'00'	No media type configured.																			
X'10'	3590 'J' media																			
X'11'	3590 'K' media																			
X'20'	3592 'JA' media																			
X'21'	Reserved for 3592 JW media																			
X'22'	3592 'JJ' media																			
X'23'	Reserved for 3592 JR media																			
34	22 SMF94S2_BPSVCO	2	binary	Common Scratch Pool Stacked Volume Count - Media Identifier 0 (Hourly Snapshot) This two byte field contains the number of scratch stacked volumes, of a type identified by Media Identifier 0, assigned to the common volume pool. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour. Physical volumes are assigned to the common scratch pool upon entry into the library or when returned from being borrowed by another pool.																

Record type 94

Offsets	Name	Length	Format	Description
36	24	1	binary	Reserved (set to X'00').
37	25 SMF94S2_BPMI1	1	binary	Common Scratch Pool Media Identifier 1 This one byte field contains the identifier for the media type associated with the following common scratch pool volume count. See the Common Scratch Pool Media Identifier 0 field for the values defined for this field.
38	26 SMF94S2_BPSVC1	2	binary	Common Scratch Pool Stacked Volume Count - Media Identifier 1 (Hourly Snapshot) This two byte field contains the number of scratch stacked volumes, of a type identified by Media Identifier 1, assigned to the common volume pool. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour. Physical volumes are assigned to the common scratch pool upon entry into the library or when returned from being borrowed by another pool.
40	28	1	binary	Reserved (set to X'00')
41	29 SMF94S2_BPMI2	1	binary	Common Scratch Pool Media Identifier 2 This one byte field contains the identifier for the media type associated with the following common scratch pool volume count. See the Common Scratch Pool Media Identifier 0 field for the values defined for this field.
42	2A SMF94S2_BPSVC2	2	binary	Common Scratch Pool Stacked Volume Count - Media Identifier 2 (Hourly Snapshot) This two byte field contains the number of scratch stacked volumes, of a type identified by Media Identifier 2, assigned to the common volume pool. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour. Physical volumes are assigned to the common scratch pool upon entry into the library or when returned from being borrowed by another pool.
44	2C	1	binary	Reserved (set to X'00').
45	2D SMF94S2_BPMI3	1	binary	Common Scratch Pool Media Identifier 3 This one byte field contains the identifier for the media type associated with the following common scratch pool volume count. See the Common Scratch Pool Media Identifier 0 field for the values defined for this field.
46	2E SMF94S2_SVC3	2	binary	Common Scratch Pool Stacked Volume Count - Media ID 3 (Hourly Snapshot) This two byte field contains the number of scratch stacked volumes, of a type identified by Media Identifier 3, assigned to the common volume pool. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour. Physical volumes are assigned to the common scratch pool upon entry into the library or when returned from being borrowed by another pool.

Offsets	Name	Length	Format	Description
48	30 SMF92S2_ARRAY	1792	binary	Volume Pool Statistics array. Each entry contains information about the usage and characteristics of a volume pool. Each entry in the array is 112 bytes long and is mapped by SMF94S2_ARRAY_ENTRY. Up to 16 array entries may be present. SMF94S2_MNVP contains the maximum number of pools in the library partition. When there are more than 16 pools, additional Volume Pool Statistics sections will be recorded. The number of Volume Pool Statistics sections is indicated by SMF94S2_SON in the self-defining section.

Volume Pool Statistics (VPS) Array Section

Offsets	Name	Length	Format	Description
Start - SMF94S2_ARRAY_ENTRY				
0	0	1	binary	Reserved (set to X'00')
1	1 SMF94S2_VPN	1	binary	Pool Number. This one byte field contains the volume pool number. Pools are numbered starting with 1.
2	2	2	binary	Reserved (set to X'00')
4	4 SMF94S2_ALVIP	4	binary	Active logical volumes in pool (Hourly Snapshot) This four byte field contains the number of logical volume images resident in the volume pool. The number is updated dynamically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour. To be considered resident in a pool, the logical volume must be on one of the physical volumes assigned to the pool. Cache resident only volumes, although assigned to the pool, are not included. Programming Note: This field may indicate a larger number of active logical volumes than is expected in a pool because it contain old versions of a logical volume's image after its been reused, modified, or deleted since the last reconcile was completed. Reconcile removes the database references for old versions of logical volume images so that they are no longer included in the count.

Record type 94

Offsets	Name	Length	Format	Description												
8	8 SMF94S2_ADIVP	4	binary	<p>Active data in volume pool (Hourly Snapshot).</p> <p>This four byte field contains the number of MBytes of logical volume image data managed by the virtual tape server in the volume pool. The number is updated dynamically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour. To be considered resident in a pool, the logical volume must be on one of the physical volumes assigned to the pool. Cache resident only volumes, although assigned to the pool, are not included. It is accumulated in bytes and reported in an integral multiple of 1,048,576 bytes (1 MByte).</p> <p>Note:</p> <ol style="list-style-type: none"> 1. This field may indicate a larger count of active data than is expected in a pool because it contains old versions of a logical volume's image after it has been reused, modified, or deleted since the last reconcile was completed. Reconcile removes the database references for old versions of logical volume images so that their contents are no longer included in the count. 2. This field does not include the volumes that are currently mounted. Only volumes that have been premigrated are included in the count. 												
12	C SMF94S2_DWTPLH	4	binary	<p>Data written to the pool in the last hour</p> <p>This four byte field contains the number of MBytes premigrated from the tape volume cache to the pool during the last hour. Only the data for logical volumes that have completed premigration when statistics were calculated at the end of the last hour are included in this value. The value is reset and a new count begins after statistics are calculated. The count is accumulated in bytes and reported in an integral multiple of 1,048,576 bytes (1 MByte).</p>												
16	10 SMF94S2_PDCI	1	binary	<p>Pool Device Class Identifier.</p> <p>This one byte field contains the device class identifier for the volume pool. The following are the defined values for this field:</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>X'00'</td> <td>There is no device class configured.</td> </tr> <tr> <td>X'11'</td> <td>3590 Model B1A</td> </tr> <tr> <td>X'13'</td> <td>3590 Model E1A</td> </tr> <tr> <td>X'14'</td> <td>3590 Model H1A</td> </tr> <tr> <td>X'20'</td> <td>3592 Model J1A</td> </tr> </tbody> </table>	Value	Description	X'00'	There is no device class configured.	X'11'	3590 Model B1A	X'13'	3590 Model E1A	X'14'	3590 Model H1A	X'20'	3592 Model J1A
Value	Description															
X'00'	There is no device class configured.															
X'11'	3590 Model B1A															
X'13'	3590 Model E1A															
X'14'	3590 Model H1A															
X'20'	3592 Model J1A															
17	11 SMF94S2_MI0	1	binary	<p>Media Identifier 0</p> <p>This one byte field contains the identifier for one of two media compatible with the device class for the pool. Refer to the definition of the Common Scratch Pool Media Identifier 0 field for the values defined for this field.</p>												

Offsets	Name	Length	Format	Description
18	12 SMF94S2_PSSVC0	2	binary	<p>Pool Static Scratch Stacked Volume Count - Media Identifier 0 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 0 volumes that were statically assigned to the volume pool and are in scratch status. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>
20	14 SMF94S2_PSPVC0	2	binary	<p>Pool Static Private Stacked Volume Count - Media Identifier 0 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 0 volumes that are statically assigned to the volume pool and contain active data. This includes volumes that have been marked full or those that are in the process of being filled. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>
22	16 SMF94S2_PBSSVC0	2	binary	<p>Pool Borrowed Scratch Stacked Volume Count - Media Identifier 0 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 0 volumes that were assigned to the volume pool through borrowing and are in scratch status. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>
24	18 SMF94S2_PBPSVC0	2	binary	<p>Pool Borrowed Private Stacked Volume Count - Media Identifier 0 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 0 volumes that are assigned to the volume pool through borrowing that contain active data. This includes volumes that have been marked full or those that are in the process of being filled. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>
26	1A	1	binary	Reserved (set to X'00')
27	1B SMF94S2_MI1	1	binary	<p>Media Identifier 1.</p> <p>This one byte field contains the identifier for one of two media compatible with the device class for the pool. Refer to the definition of the Common Scratch Pool Media Identifier 0 field for the values defined for this field.</p>
28	1C SMF94S2_PSSVC1	2	binary	<p>Pool Static Scratch Stacked Volume Count - Media Identifier 1 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 1 volumes that were statically assigned to the volume pool and are in scratch status. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>

Record type 94

Offsets	Name	Length	Format	Description
30	1E SMF94S2_PSPSVC1	2	binary	<p>Pool Static Private Stacked Volume Count - Media Identifier 1 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 1 volumes that are statically assigned to the volume pool and contain active data. This includes volumes that have been marked full or those that are in the process of being filled. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>
32	20 SMF94S2_PBSSVC1	2	binary	<p>Pool Borrowed Scratch Stacked Volume Count - Media Identifier 1 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 1 volumes that were assigned to the volume pool through borrowing and are in scratch status. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>
34	22 SMF94S2_PBPSVC1	2	binary	<p>Pool Borrowed Private Stacked Volume Count - Media Identifier 1 (Hourly Snapshot)</p> <p>This two byte field contains the number of media identifier 1 volumes that were assigned to the volume pool through borrowing that contain active data. This includes volumes that have been marked full or those that are in the process of being filled. The number is updated periodically within the VTS and the reported value is the snapshot of that count when statistics are calculated at the end of the last hour.</p>
36	24	4	binary	Reserved (set to X'00')
40	28 SMF94S2_AAORD	2	binary	<p>Average age of residual data (as of the last reconcile).</p> <p>This two byte field contains the average age, in days, of the residual data that resides on the stacked volumes assigned to the pool at the completion of the last reconcile. Statically assigned and borrowed volumes are included in this calculation. A physical volume has residual data on it if it is not full. This value is calculated based on the date a volume transitions to not full and the current date. When a logical volume's image on a physical volume no longer represents the most current version of the volume, after a reconcile, it has been removed from the database that manages the physical volumes and it is considered residual data.</p>
42	2A SMF94S2_MAORD	2	binary	<p>Maximum age of residual data (as of the last reconcile).</p> <p>This two byte field contains the maximum age, in days, of the residual data that resides on the stacked volumes assigned to the pool at the completion of the last reconcile. Statically assigned and borrowed volumes are included in this calculation. A physical volume has residual data on it if it is not full. This value is calculated based on the date a volume transitions to not full and the current date. When a logical volume's image on a physical volume no longer represents the most current version of the volume, after a reconcile, it has been removed from the database that manages the physical volumes and it is considered residual data.</p>

Offsets	Name	Length	Format	Description
44	2C SMF94S2_AAOFPSV	2	binary	Average age of the full private stacked volumes (as of the last reconcile). This two byte field contains the average age, in days, of the private stacked volumes in the volume pool at the completion of the last reconcile. Statically assigned and borrowed volumes are included in this calculation. The age of a volume is measured from when the volume is marked as full until it is reclaimed.
46	2E SMF94S2_MAOFPSV	2	binary	Maximum age of the full private stacked volumes (as of the last reconcile). This two byte field contains the maximum age, in days, of the private stacked volumes in the volume pool at the completion of the last reconcile. Statically assigned and borrowed volumes are included in this calculation. The age of a volume is measured from when the volume is marked as full until it is reclaimed.
48	30	1	binary	Reserved (set to X'00')
49	31 SMF94S2_VPRTP	1	binary	Volume pool reclaim threshold percentage (Current value). This one byte field contains the current reclaim threshold percentage set for the volume pool.
50	32 SMF94S2_ADD00	2	binary	0-5% Active Data Distribution The next twenty, two byte fields report the number of full private stacked volumes in the volume pool that contain active data by the percentage (5% granularity) of active data remaining on the volumes. The numbers are updated periodically within the VTS and the reported value is the snapshot taken when statistics are calculated at the end of the last hour. The percentage of active data is relative to the amount of data on a stacked volume when it was filled.
52	34 SMF94S2_ADD05	2	binary	>5-10% active data
54	36 SMF94S2_ADD10	2	binary	>10-15% active data
56	38 SMF94S2_ADD15	2	binary	>15-20% active data
58	3A SMF94S2_ADD20	2	binary	>20-25% active data
60	3C SMF94S2_ADD25	2	binary	>25-30% active data
62	3E SMF94S2_ADD30	2	binary	>30-35% active data
64	40 SMF94S2_ADD35	2	binary	>35-40% active data
66	42 SMF94S2_ADD40	2	binary	>40-45% active data
68	44 SMF94S2_ADD45	2	binary	>45-50% active data
70	46 SMF94S2_ADD50	2	binary	>50-55% active data
72	48 SMF94S2_ADD55	2	binary	>55-60% active data
74	4A SMF94S2_ADD60	2	binary	>60-65% active data
76	4C SMF94S2_ADD65	2	binary	>65-70% active data
78	4E SMF94S2_ADD70	2	binary	>70-75% active data
80	50 SMF94S2_ADD75	2	binary	>75-80% active data
82	52 SMF94S2_ADD80	2	binary	>80-85% active data
84	54 SMF94S2_ADD85	2	binary	>85-90% active data
86	56 SMF94S2_ADD90	2	binary	>90-95% active data
88	58 SMF94S2_ADD95	2	binary	>95-100% active data

Record type 94

Offsets	Name	Length	Format	Description																																				
90	5A SMF94S2_PPP	1	binary	<p>Physical Pool Properties. This field contains the current settings of the pool's management controls when statistics were calculated at the end of the last hour.</p> <table border="0"> <thead> <tr> <th>Bit(s)</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Returns Allowed. This bit is active if borrowed volumes are to be returned to the common scratch pool when scratched. If inactive, borrowed volumes remain in the pool that borrowed them when scratched. This field is ignored if bit 2:7 are set to zero.</td> </tr> <tr> <td>1</td> <td>Reserved.</td> </tr> <tr> <td>2-4</td> <td>First Media Type To Borrow . If this field is non-zero, it specifies the media type that is to be borrowed first if additional physical scratch volumes are needed by the pool.</td> </tr> <tr> <td></td> <td> <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>NoBorrowing</td> </tr> <tr> <td>1</td> <td>Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.</td> </tr> <tr> <td>2</td> <td>Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.</td> </tr> <tr> <td>3</td> <td>Either Media Identifier. Borrowing of the media identified by either Media Identifier field is allowed.</td> </tr> <tr> <td>4-7</td> <td>Reserved</td> </tr> </tbody> </table> </td> </tr> <tr> <td>5-7</td> <td>Second Media Type To Borrow. If this field is non-zero, it specifies the media type that is to be borrowed if additional physical scratch volumes are needed by the pool and none of the media type specified by the First Media Type To Borrow field are available.</td> </tr> <tr> <td></td> <td> <table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>NoBorrowing</td> </tr> <tr> <td>1</td> <td>Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.</td> </tr> <tr> <td>2</td> <td>Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table> </td> </tr> </tbody> </table>	Bit(s)	Description	0	Returns Allowed. This bit is active if borrowed volumes are to be returned to the common scratch pool when scratched. If inactive, borrowed volumes remain in the pool that borrowed them when scratched. This field is ignored if bit 2:7 are set to zero.	1	Reserved.	2-4	First Media Type To Borrow . If this field is non-zero, it specifies the media type that is to be borrowed first if additional physical scratch volumes are needed by the pool.		<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>NoBorrowing</td> </tr> <tr> <td>1</td> <td>Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.</td> </tr> <tr> <td>2</td> <td>Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.</td> </tr> <tr> <td>3</td> <td>Either Media Identifier. Borrowing of the media identified by either Media Identifier field is allowed.</td> </tr> <tr> <td>4-7</td> <td>Reserved</td> </tr> </tbody> </table>	Value	Description	0	NoBorrowing	1	Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.	2	Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.	3	Either Media Identifier. Borrowing of the media identified by either Media Identifier field is allowed.	4-7	Reserved	5-7	Second Media Type To Borrow. If this field is non-zero, it specifies the media type that is to be borrowed if additional physical scratch volumes are needed by the pool and none of the media type specified by the First Media Type To Borrow field are available.		<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>NoBorrowing</td> </tr> <tr> <td>1</td> <td>Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.</td> </tr> <tr> <td>2</td> <td>Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Value	Description	0	NoBorrowing	1	Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.	2	Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.	3-7	Reserved.
Bit(s)	Description																																							
0	Returns Allowed. This bit is active if borrowed volumes are to be returned to the common scratch pool when scratched. If inactive, borrowed volumes remain in the pool that borrowed them when scratched. This field is ignored if bit 2:7 are set to zero.																																							
1	Reserved.																																							
2-4	First Media Type To Borrow . If this field is non-zero, it specifies the media type that is to be borrowed first if additional physical scratch volumes are needed by the pool.																																							
	<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>NoBorrowing</td> </tr> <tr> <td>1</td> <td>Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.</td> </tr> <tr> <td>2</td> <td>Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.</td> </tr> <tr> <td>3</td> <td>Either Media Identifier. Borrowing of the media identified by either Media Identifier field is allowed.</td> </tr> <tr> <td>4-7</td> <td>Reserved</td> </tr> </tbody> </table>	Value	Description	0	NoBorrowing	1	Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.	2	Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.	3	Either Media Identifier. Borrowing of the media identified by either Media Identifier field is allowed.	4-7	Reserved																											
Value	Description																																							
0	NoBorrowing																																							
1	Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.																																							
2	Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.																																							
3	Either Media Identifier. Borrowing of the media identified by either Media Identifier field is allowed.																																							
4-7	Reserved																																							
5-7	Second Media Type To Borrow. If this field is non-zero, it specifies the media type that is to be borrowed if additional physical scratch volumes are needed by the pool and none of the media type specified by the First Media Type To Borrow field are available.																																							
	<table border="0"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>NoBorrowing</td> </tr> <tr> <td>1</td> <td>Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.</td> </tr> <tr> <td>2</td> <td>Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Value	Description	0	NoBorrowing	1	Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.	2	Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.	3-7	Reserved.																													
Value	Description																																							
0	NoBorrowing																																							
1	Media Identifier 0. Borrowing of the media identified by the Media Identifier 0 field is allowed.																																							
2	Media Identifier 1. Borrowing of the media identified by the Media Identifier 1 field is allowed.																																							
3-7	Reserved.																																							
91	5B	1	binary	Reserved (set to X'00')																																				
92	5C SMF94S2_RPN	1	binary	Reclamation Pool. Contains the pool number to be used for the target for data that is reclaimed. Pools are numbered starting with 1.																																				
93	5D	1	binary	Reserved (set to X'00')																																				
94	5E SMF94S2_RPDSLA	2	binary	Reclaim policy - days since last accessed. A physical volume is eligible for reclaim when the number of days contained in this field has elapsed since any data on the volume has been accessed because of a recall. Supported values are 0 to 365. If this field contains a value of 0, it is not used as a criteria a for reclaim.																																				

Offsets	Name	Length	Format	Description
96	60 SMF94S2_RPDSLW	2	binary	Reclaim policy - days since last written. A physical volume is eligible for reclaim when the number of days contained in this field has elapsed since any data was written to the volume. Supported values are 0 to 365. If this field contains a value of 0, it is not used as a criteria for reclaim.
98	62 SMF94S2_RPDSLDI	2	binary	Reclaim policy - days since last data invalidation. A physical volume is eligible for reclaim when the number of days contained in this field has elapsed since any data was invalidated on the volume and the amount of active data on the volume falls below the threshold defined in the Minimum Active Data Percentage (byte 100) field. Supported values are 0 to 365. If this field contains a value of 0, it is not used as a criteria for reclaim.
100	64 SMF94S2_RPMADP	1	binary	Reclaim policy - minimum active data percentage. This field contains the minimum active data threshold percentage a physical volume's active data must fall below before it can be reclaimed using the days since last data invalidation reclamation policy (non-zero value in bytes 98:99). Supported a values are 5 to 95.
101	65	11	binary	Reserved (set to X'00')
End - SMF94S2_ARRAY_ENTRY				

Record Type 96 (60) — Cross Memory Service Provider Charge Back

Record type 96 is written whenever certain operator commands are issued. The record is created to provide user account information so that it may be sorted with other SMF records associated with the user. For accounting purposes, this record contains the amount of CPU time used by a user.

Note: If available, this time also includes VECTOR time.

The type 96 record can be used with the subtype selectivity function. The subtypes are:

1. Detail records
2. Summary records

The Detail records are produced during consultations with the Integrated Reasoning Shell's subsystem. One of these records is produced each time the subsystem replies or queries the requestor (user).

A Summary record is produced when the requestor issues an "INIT END" command. This record contains counts of the communications that occurred between the subsystem and the requestor, and the totals for CPU and Vector times.

Note: Since Vector times are not available for all systems, the Vector time fields contain zero on those systems not able to provide Vector accounting at the task level.

Offsets	Name	Length	Format	Description
0	0 SMF96LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
02	02 SMF96SEG	2	binary	Segment descriptor (see record length field).

Record type 96

Offsets	Name	Length	Format	Description								
4	4 SMF96FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0-2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF96RTY	1	binary	Record type 96 (X'60').								
6	6 SMF96TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	0A SMF96DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	0E SMF96SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF96WID	4	EBCDIC	Subsystem identifier.								
22	16 SMF96STP	4	binary	Record subtype.								
24	18 SMF96JMR	2	binary	Displacement to the start of the requestor's JMR data. This includes the RDW. This is also the length of the standard SMF header.								
28	1C SMF96JL#	4	binary	Length of the JMR data.								
32	20 SMF96PSI	2	binary	Displacement to start of the provider's data section (includes RDW).								
36	24 SMF96PI#	2	binary	Length of provider's data.								
40	28 SMF96RCS	4	binary	Displacement to start of the subtype data areas (includes RDW).								
0	0 SMF96JBN	8	EBCDIC	Requestor's JMRJOB data including the record descriptor word (RDW).								
8	8 SMF96RST	4	binary	Requestor's JMRENTY.								
12	0C SMF96RDS	4	packed	Requestor's JMREDATE.								
16	10 SMF96UIF	8	EBCDIC	Requestor's JMUSEID.								

Provider's Information Section

This section contains user information.

Offsets	Name	Length	Format	Description
0	0 SMF96PID	8	EBCDIC	"Product" name within subsystem.
8	8 SMF96PNM	4	EBCDIC	Knowledge Application name.
16	10 SMF96TID	8	EBCDIC	User/terminal identifier.
28	1C SMF96URT	4	EBCDIC	User environment.

Detail Section

Note: Date and Time are in the same format as TIME DEC.

Offsets	Name	Length	Format	Description
0	0 SMF96DL#	4	binary	Length of detail record.
4	4 SMF96CPU	4	binary	CPU time in .01 seconds.
8	8 SMF96DVF	4	binary	Vector time in .01 seconds.
12	0C SMF96STM	4	binary	Time consultation started.
16	10 SMF96ADT	4	packed	Date consultation started.
20	14 SMF96ETM	4	binary	Time consultation ended.
24	18 SMF96EDT	2	packed	Date consultation ended.

Summary Section

Note: Date and Time are in the same format as TIME DEC.

Offsets	Name	Length	Format	Description
0	0 SMF96SL#	4	binary	Length of detail record.
4	4 SMF96TPU	4	binary	CPU time in .01 seconds.
8	8 SMF96SVF	4	binary	Vector time in .01 seconds.
12	0C SMF96TI	4	binary	Time session started.
16	10 SMF96DI	4	packed	Date session started.
20	14 SMF96TE	4	binary	Time session ended.
24	18 SMF96DE	2	packed	Date session ended.
28	1C SMF96NOC	4	binary	Number of interactions with requestor during this session.
32	20 SMF96SAC	2	binary	System abend code, if any.
34	22 SMF96UAC	2	binary	User abend code, if any.

Record Type 97 (61) — Foreign Enclave Resource Data

When an enclave is exported to one or more supporting systems, the CPU time consumed in those foreign enclaves is accumulated in SMF type 97 records. There will be one type 97 record on each supporting system that imported the enclave.

Type 97 records are written on an SMF interval basis. The CPU time is broken down by originating system — in other words, there is one section for each originating system that exported one or more enclaves that were then imported by this system during the interval. Note that this section will reflect the total CPU time consumed by all foreign enclaves imported from this one particular originating system.

To identify the specific jobs that consumed CPU time, you need to review the SMF type 30 records on the originating system. Note that for any specific SMF interval, the sum of the type 30 CPU time may not exactly match the type 97 CPU time, as the data for type 30 records is collected asynchronously.

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description								
Record Header Section:												
0	0 SMF97LEN	2	binary	Record Length.								
2	2 SMF97SEG	2	binary	Segment descriptor.								
4	4 SMF92FLG	1	binary	Header flag byte. <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem identification follows system identification</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2-7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Subsystem identification follows system identification	1	Subtypes used	2-7	Reserved
Bit	Meaning when set											
0	Subsystem identification follows system identification											
1	Subtypes used											
2-7	Reserved											
5	5 SMF97RTY	1	binary	Record type: 97 (X'61').								

Record type 97

Offsets	Name	Length	Format	Description
6	6 SMF97TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.
10	A SMF97DTE	4	packed	Date when record was written.
14	E SMF97SID	4	EBCDIC	System identification (from the SID parameter).
18	12 SMF97SSI	4	EBCDIC	Subsystem identification – STC.
22	16 SMF97STP	2	binary	Record subtype.
24	18 SMF97SDL	4	binary	Length of self-defining section.
Self-Defining Section:				
28	1C SMF97POF	4	binary	Offset to product section.
32	20 SMF97PLN	2	binary	Length of product section.
34	22 SMF97PON	2	binary	Number of product sections.
36	24 SMF97EOF	4	binary	Offset of enclave resource data section.
40	28 SMF97ELN	4	binary	Length of enclave resource data section section.
44	2C SMF97EON	4	binary	Number of enclave resource data sections in this record.
48	30 SMF97EOS	4	binary	Number of enclave resource data sections in subsequent records.

Product Section

Offsets	Name	Length	Format	Description
0	0 SMF97RVN	2	EBCDIC	Record version number – ‘01’
2	2	2	EBCDIC	Reserved
4	4 SMF97PNM	8	EBCDIC	Product name –‘SCWLM’
12	C SMF97OSL	8	EBCDIC	MVS product level
20	14 SMF97SYN	8	EBCDIC	Local system name (from SYSNAME PARMLIB option)
28	1C SMF97IST	4	binary	Reporting interval start time (local, hundredths of a second from midnight). First record will report IPL time.
32	20 SMF97ISD	4	EBCDIC	Reporting interval start date in the form 0cyydddF, where F is the sign. First record will report IPL date.
36	24 SMF97IET	4	binary	Reporting interval end time (local, hundredths of a second from midnight).
40	28 SMF97IED	4	EBCDIC	Reporting interval end date in the form 0cyydddF, where F is the sign.
44	2C SMF97CAF	4	binary	Copy of RmctAdjc when this SMF record was produced, measures the number of sixteenths of one microsecond of CPU time per CPU service unit.

Foreign Enclave Data Section

Offsets	Name	Length	Format	Description
0	0 SMF97FSN	8	EBCDIC	Name of the system that exported the enclaves which used services on the local system.
8	8 SMF97FCD	4	binary	CPU time used by foreign dependent enclaves, in hundredths of a second.
12	C SMF97FCI	4	binary	CPU time used by foreign independent enclaves, in hundredths of a second.

Record Type 99 (63) — System Resource Manager Decisions

This record type is written by the SRM component. The records contain:

- Performance data for each service class period
- Trace codes representing the SRM actions
- The data which SRM used to decide which actions to take
- The controls SRM is using to manage work.

In addition, subtypes 1 and 9 will be written by the SRM component when running in compatibility mode.

The mapping macro, IRASMF99, for this record is supplied in SYS1.AMODGEN.

Record 99 has the following subtypes:

Subtype 1

Contains system level data, the trace of SRM actions, and data about resource groups. The SRM actions are recorded in trace codes. All trace codes are described in *z/OS MVS Programming: Workload Management Services*. A subtype 1 record is written every policy interval.

Subtype 2

Contains data for service classes. A subtype 2 record is written every policy interval for each service class if any period in the service class had recent activity.

Subtype 3

Contains service class period plot data. A subtype 3 record is written every policy interval for each service class if any period in the service class had recent activity and plot data.

Subtype 4

Contains information about a device cluster. A device cluster is a set of service classes that compete to use the same non-paging DASD devices. A subtype 4 record is written every policy interval for each device cluster in the system.

Subtype 5

Contains data about monitored address spaces. A subtype 5 record is written each policy interval for each swapped in monitored address space.

Subtype 6

Contains summary information about each service class period, including the resource control settings for the next policy interval. A subtype 6 record is written each policy interval.

Subtype 7

Contains summary information for the Enterprise Storage Server[®] (ESS) with Parallel Access Volume (PAV) feature. A subtype 7 record is written every third policy interval.

Subtype 8

Contains summary information for LPAR CPU management. A subtype 8 record is written each policy interval, when in LPAR mode.

Subtype 9

Contains summary information for dynamic channel path management. A subtype 9 record is written each policy interval.

Record type 99

Subtype 10

Contains information about dynamic processor speed changes. A subtype 10 record is written for every processor speed change.

Subtype 11

Contains information about Group Capacity Limits. A subtype 11 record is written every 5 minutes.

Subtype 12

Contains HiperDispatch interval data. A set of subtype 12 records is written each policy interval.

Subtype 13

Contains information about HiperDispatch. This information is for IBM internal use only.

Subtype 14

Contains HiperDispatch topology data. Subtype 14 records are written every 5 minutes, or in the current policy interval, if a HiperDispatch topology change happened.

For information about how to use type 99, see *z/OS MVS Programming: Workload Management Services*. For information about workload management, see *z/OS MVS Planning: Workload Management*.

Starting SMF Record Type 99

You specify the type 99 record in the SMFPRMxx parmlib member under SUBSYS STC. Because SMF type 99 records are written approximately every 10 seconds, you should write them only for certain time periods. If you use NOTYPE in your SMFPRMxx parmlib member, you should include type 99 in your NOTYPE list. For example:

```
SUBSYS(STC,NOTYPE(99))
```

If you use TYPE in your SMFPRMxx parmlib member, make sure you add TYPE 99 only when you want this level of detail. For example, add:

```
SUBSYS(STC,TYPE(99))
```

You should have an SMFPRMxx parmlib member for general audit information that does not specify type 99, and another for detailed audit information that specifies type 99. This way, you can set the proper SMFPRMxx member and write SMF type 99 records only when you need them.

Record Mapping

Header/Self-defining Section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF99LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.
2	2 SMF99SEG	2	binary	Segment descriptor (see record length field).

Offsets	Name	Length	Format	Description								
4	4 SMF99FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0-2	Reserved.	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set											
0-2	Reserved.											
3-6	Version indicators*											
7	Reserved.											
5	5 SMF99RTY	1	binary	Record type 99								
6	6 SMF99TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.								
10	0A SMF99DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	0E SMF99SID	4	EBCDIC	System identification (from the SID parameter).								
18	12 SMF99SSID	4	EBCDIC	Sub system identification								
22	16 SMF99TID	2	binary	Record subtype (must be at offset X'16' x).								
24	18 SMF99 _SDEF_LEN	4	binary	Length of the self definition section.								

Self-Defining Section

Offsets	Name	Length	Format	Description
0	4 SMF99POF	4	binary	Offset to the product section from the beginning of the record (including RDW).
4	4 SMF99PLN	2	binary	Length of the product section.
6	6 SMF99PON	2	binary	Number of the product section.
8	8 SMF99DOF	4	binary	Offset to data section from beginning of the record (including RDW).
12	C SMF99DLN	2	binary	Length of the data section.
14	E SMF99DON	2	binary	Number of the data section.

SMF 99 Product Information

Offsets	Name	Length	Format	Description
0	2 SMF99VN2	2	binary	Record sub-version. Use to identify changes to the record in the service stream.
2	2 SMF99RVN	2	binary	Record version number.
4	4 SMF99PNM	8	EBCDIC	Product name - SRM
12	C SMF99SLV	8	EBCDIC	System level from which record was cut (Copied from CVTPRODND).
20	14 SMF99SNM	8	EBCDIC	System name from which record was cut (Copied from CVTSNAME)

Record type 99

Offsets	Name	Length	Format	Description								
28	1C SMP99FLG	1	binary	Record Flags: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Only a subset of the available data was written to avoid that this record gets larger than 32 KByte</td> </tr> <tr> <td>1</td> <td>Only a subset of the available data is written to this record. The rest follows in subsequent records. This record contains a reassembly area.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Only a subset of the available data was written to avoid that this record gets larger than 32 KByte	1	Only a subset of the available data is written to this record. The rest follows in subsequent records. This record contains a reassembly area.	2-7	Reserved.
Bit	Meaning when set											
0	Only a subset of the available data was written to avoid that this record gets larger than 32 KByte											
1	Only a subset of the available data is written to this record. The rest follows in subsequent records. This record contains a reassembly area.											
2-7	Reserved.											
29	1D	3	EBCDIC	Reserved.								

Subtype 1

Header/Self-defining Section

Offsets	Name	Length	Format	Description
0	SMF99TOF	4	binary	Offset to trace section from beginning of record (including RDW).
4	4 SMF99TLN	2	binary	Length of a trace table entry.
6	6 SMF99TON	2	binary	Number of trace table entries. There is one trace table entry per action or contemplated action.
8	8 SMF99SSOF	4	binary	Offset to system state section from beginning of record (including RDW).
12	C SMF99SSLN	2	binary	Length of system state section.
14	E SMF99SSON	2	binary	Number of system state sections (always 1).
16	10 SMF99PPOF	4	binary	Offset to paging plot section from beginning of the record (including RDW).
20	14 SMF99PPLN	2	binary	Length of the paging plot section.
22	16 SMF99PPON	2	binary	Number of paging plot sections (always 1).
24	18 SMF99PTOF	4	binary	Offset to priority table entries from beginning of record (including RDW).
28	1C SMF99PTLN	2	binary	Length of a priority table entry.
30	1E SMF99PTON	2	binary	Number of priority table entries. There is one priority table entry per dispatching priority.
32	20 SMF99RGOF	4	binary	Offset to resource group entries from beginning of record (including RDW). This field is zero when there are no resource groups defined in the service policy.
36	24 SMF99RGLN	2	binary	Length of a resource group entry. This field is zero when there are no resource groups defined in the service policy.
38	26 SMF99RGON	2	binary	Number of resource group entries. There is one resource group entry per resource group in the service policy. This field is zero when there are no resource groups defined in the service policy.
40	28 SMF99GROF	4	binary	Offset to the generic resource section from the beginning of the record (including RDW).
44	2C SMF99GRLN	2	binary	Length of the generic resource section.

Offsets	Name	Length	Format	Description
46	2E SMF99GRON	2	binary	Number of generic resource sections. There is one generic resource group entry per generic resource group in the service policy. This field is zero when there are no generic resource groups defined in the service policy.
48	30 SMF99SLOF	4	binary	Offset to the software licensing service table section from the beginning of the record (including RDW).
52	34 SMF99SLLN	2	binary	Length of the software licensing section.
54	36 SMF99SLON	2	binary	Number of software licensing sections.
56	38 SMF99SLTOF	4	binary	Offset to the software licensing service table section from the beginning of the record (including RDW).
60	3C SMF99SLTLN	2	binary	Length of the software licensing service table section.
62	3E SMF99SLTON	2	binary	Number of software licensing service table sections.
64	40 SMF99PIOF	4	binary	Offset to priority table entries (zAAP) from the beginning of the record (including RDW).
68	44 SMF99PILN	2	binary	Length of a priority table entry.
70	46 SMF99PION	2	binary	Number of priority table entries (zAAP). There is one priority table entry per dispatching priority.
72	48 SMF99ZEOF	4	binary	Offset of internal use section.
76	4C SMF99ZELN	2	binary	Length of internal use section.
78	4E SMF99ZEON	2	binary	Number of internal use section.
72	48 SMF99ZEOF	4	binary	Offset to the zIIP entitlement sections from the beginning of the record.
76	4C SMF99ZELN	2	binary	Length of a zIIP entitlement section.
78	4E SMF99ZEON	2	binary	Number of zIIP entitlement sections.
80	50 SMF99PSOF	4	binary	Offset to priority table entries (zIIP) from the beginning of the record (including RDW).
84	54 SMF99PSLN	2	binary	Length of a priority table entry.
86	56 SMF99PSON	2	binary	Number of priority table entries (zIIP). There is one priority table entry per dispatching priority.

Trace Table Entry Section

Offsets	Name	Length	Format	Description
0	SMF99_TPID	1	binary	Policy adjustment interval identifier
1	1 SMF99_TRID	1	binary	Resource adjustment interval identifier.
2	2 SMF99_TCOD	2	binary	Trace code.
4	4 SMF99_TJOB	8	EBCDIC	Name of the address space affected by the trace code. This field is blank when the trace code does not apply to a specific address space.
12	C SMF99_TLPI	4	binary	Projected local performance index scaled by 100.
16	10 SMF99_TSPI	4	binary	Projected sysplex performance index scaled by 100.
20	14 SMF99_TGSR	4	binary	Projected resource group service rate in unweighted CPU service units per second.
24	18 SMF99_TDT1	4	binary	Reserved for system use.
28	1C SMF99_TDT2	4	binary	Reserved for system use.

Record type 99

Offsets	Name	Length	Format	Description
32	20 SMF99_TDT3	4	binary	Reserved for system use.
36	24 SMF99_TRGN	8	EBCDIC	Resource group name. This field is blank if the service class is not assigned to a resource group.
44	2C SMF99_TCNM	8	EBCDIC	Service class name relating to action.
52	34 SMF99_TPER	2	binary	Service class period number relating to action.
54	36 SMF99_TASID	2	binary	Address space ID.
56	38 SMF99_TDT4	4	binary	Reserved for system use.
60	3C SMF99_TFLG	4	binary	Reserved for system use.

System State Information Section

Offsets	Name	Length	Format	Description														
0	SMF99_CPUA	2	binary	Processor utilization scaled by 16.														
2	2 SMF99_UMP	2	binary	Recent unmanaged paging and swap cost percentage scaled by 10.														
4	4 SMF99_UIC1	4	binary	Page frames in UIC bucket 1, see SMF99_FRV1 for bucket 1 delimiter.														
8	8 SMF99_UIC2	4	binary	Page frames in UIC bucket 2, see SMF99_FRV2 for bucket 2 delimiter.														
12	C SMF99_UIC3	4	binary	Page frames in UIC bucket 3, see SMF99_FRV3 for bucket 3 delimiter.														
16	10 SMF99_UIC4	4	binary	Page frames in UIC bucket 4.														
20	14 SMF99_EUIC1	4	binary	Expanded storage page frames in expanded UIC bucket 1; see SMF99_ESTB1 for bucket 1 delimiter.														
24	18 SMF99_EUIC2	4	binary	Expanded storage page frames in expanded UIC bucket 2. See SMF99_ESTB2 for bucket 2 delimiter.														
28	1C SMF99_EUIC3	4	binary	Page frames in expanded UIC bucket 3. See SMF99_ESTB3 for bucket 3 delimiter.														
32	20 SMF99_EUIC4	4	binary	Page frames in expanded UIC bucket 4.														
36	24 SMF99_FRV1	2	binary	UIC delimiter value 1. The delimiter is inclusive (<=).														
38	26 SMF99_FRV2	2	binary	UIC delimiter value 2. The delimiter is inclusive (<=).														
40	28 SMF99_FRV3	2	binary	UIC delimiter value 3. The delimiter is inclusive (<=).														
42	2A SMF99_ESTB1	2	binary	Expanded storage UIC delimiter value 1. The delimiter is inclusive (<=).														
44	2C SMF99_ESTB2	2	binary	Expanded storage UIC delimiter value 2, The delimiter is inclusive (<=).														
46	2E SMF99_ESTB3	2	binary	Expanded storage UIC delimiter value 3. The delimiter is inclusive (<=).														
48	30 SMF99_W2MIG	4	binary	Expanded storage writes to migrate percentage.														
52	34 SMF99_PTAVAIL	4	binary	Total processor time available, including captured time plus wait time, in unweighted CPU service units per second.														
56	38 SMF99_SHORT_FLAGS	1	binary	Shortage flags <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Central storage shortage exists.</td> </tr> <tr> <td>1</td> <td>First level auxiliary storage shortage exists.</td> </tr> <tr> <td>2</td> <td>Critical auxiliary storage shortage exists.</td> </tr> <tr> <td>3</td> <td>First level SQA storage shortage exists.</td> </tr> <tr> <td>4</td> <td>Critical SQA storage shortage exists.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Central storage shortage exists.	1	First level auxiliary storage shortage exists.	2	Critical auxiliary storage shortage exists.	3	First level SQA storage shortage exists.	4	Critical SQA storage shortage exists.	5-7	Reserved.
Bit	Meaning when set																	
0	Central storage shortage exists.																	
1	First level auxiliary storage shortage exists.																	
2	Critical auxiliary storage shortage exists.																	
3	First level SQA storage shortage exists.																	
4	Critical SQA storage shortage exists.																	
5-7	Reserved.																	

Offsets	Name	Length	Format	Description										
57	39 SMF99_STATUS_FLAGS	1	binary	Status flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Dynamic channel path management is active (in balance mode if next bit is off).</td> </tr> <tr> <td>1</td> <td>Dynamic channel path management goal algorithm is active.</td> </tr> <tr> <td>2</td> <td>COMPAT mode indication.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Dynamic channel path management is active (in balance mode if next bit is off).	1	Dynamic channel path management goal algorithm is active.	2	COMPAT mode indication.	3-7	Reserved.
Bit	Meaning when set													
0	Dynamic channel path management is active (in balance mode if next bit is off).													
1	Dynamic channel path management goal algorithm is active.													
2	COMPAT mode indication.													
3-7	Reserved.													
58	3A SMF99_TOTAL_PAG_COST	2	binary	Recent total paging and swap cost percentage, scaled by 10.										
60	3C SMF99_CPPS	4	binary	Common protective processor storage target, measured in frame counts.										
64	40 SMF99_ILSU_ARRAY	32	binary	Array of importance level service units. The first entry contains service units pertaining to importance level zero, the second entry contains service units pertaining to importance level one, and so on. The last entry contains service units pertaining to unused service.										
96	60 SMF99_SUIC1	4	binary	Shared central UIC bucket 1, measured in frame counts.										
100	64 SMF99_SUIC2	4	binary	Shared central UIC bucket 2, measured in frame counts.										
104	68 SMF99_SUIC3	4	binary	Shared central UIC bucket 3, measured in frame counts.										
108	6C SMF99_SUIC4	4	binary	Shared central UIC bucket 4, measured in frame counts.										
112	70 SMF99_SEUC1	4	binary	Shared expanded UIC, bucket 1, measured in frame counts.										
116	74 SMF99_SEUC2	4	binary	Shared expanded UIC, bucket 2, measured in frame counts.										
120	78 SMF99_SEUC3	4	binary	Shared expanded UIC, bucket 3, measured in frame counts.										
124	7C SMF99_SEUC4	4	binary	Shared expanded UIC, bucket 4, measured in frame counts.										
128	80 SMF99_STWSS	4	binary	Shared protective processor storage target, measured in frame counts.										
132	84 SMF99_NUM_EXT_SC	4	binary	Number of external service classes.										
136	88 SMF99_DEFAULT_IO_VELOCITY	4	binary	Default I/O velocity. Calculated by IOS at the beginning of each measurement interval during data gathering.										
140	8C SMF99_SU_IFACTOR	4	binary	Service unit inflation factor.										
144	90 SMF99_StgCrit_Hsk_Skip_Clock	2	binary	Storage critical housekeeping skip clock counter for each importance level.										
158	9E *	2	EBCDIC	Reserved.										
160	A0 SMF99_LS_DISC	4	binary	Frames owned by logically swapped spaces in non-short response time periods that are discretionary.										
164	A4 SMF99_CAPWS	4	binary	CAP workarea - working set size accumulator.										
168	A8 SMF99_SECWS	4	binary	Number of secondary working set pages for which swap-ins have been started.										
172	AC SMF99_PGINS	4	binary	Page-ins rate count used for calculating the system paging rate.										
176	B0 SMF99_IFA_NORMALIZATION	4	binary	Normalization factor for assist processors.										
180	B4 SMF99_CPUS_ONLINE	2	binary	Number of regular CPs online.										
182	B6 SMF99_IFAS_ONLINE	2	binary	Number of online assist processors.										
184	B8 SMF99_IFAA	2	binary	Average utilization of assist processors, scaled by 16.										
186	BA SMF99_PROA	2	binary	Average utilization of all processors, regular CPs and assist processors, scaled by 16.										

Record type 99

Offsets	Name	Length	Format	Description								
188	BC SMF99_IFA_FLAGS	1	binary	Assist processors related flags: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Assist processor work may be executed on regular CPs</td> </tr> <tr> <td>1</td> <td>Assist processor work may run on regular CPs at priority</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Assist processor work may be executed on regular CPs	1	Assist processor work may run on regular CPs at priority	2-7	Reserved.
Bit	Meaning when set											
0	Assist processor work may be executed on regular CPs											
1	Assist processor work may run on regular CPs at priority											
2-7	Reserved.											
189	BD *	3	EBCDIC	Reserved.								
192	C0 SMF99_FREE_LPAR_CAPACITY_WT_RELATED	4	binary	Free LPAR capacity based on the accumulated logical CPU wait times.								
196	C4 SMF99_FREE_LPAR_CAPACITY_GUARANTEED	4	binary	Free LPAR capacity which is always available based on the LPAR weight.								
200	C8 SMF99_FREE_LPAR_CAPACITY_CEC_RELATED	4	binary	Free LPAR capacity which is the total of what is always available to the LPAR and the portion of the unused capacity of the CEC.								
204	CC SMF99_FREE_LPAR_CAPACITY_LCP_CONFIG	4	binary	Free LPAR capacity based on the configured LCPs.								
208	D0 SMF99_ITAVAIL	4	binary	Total zAAP time.								
212	D4 SMF99_SUP_NORMALIZATION	4	binary	Normalization factor for zIIPs.								
216	D8 SMF99_SUPS_ONLINE	2	binary	Number of online zIIPs.								
218	DA SMF99_SUPA	2	binary	Average utilization of zIIPs, scaled by 16.								
220	DC SMF99_GUARANTEED_IMAGE_CAPACITY	4	binary	Guaranteed image capacity available to MVS image in service units per minute.								
224	E0 SMF99_ZAAP_ILSU_ARRAY	32	binary	Array of importance level service units of zAAPs.								
256	100 SMF99_ZIIP_ILSU_ARRAY	32	binary	Array of importance level service units of zIIPs.								
288	120 SMF99_CCTINTHD	2	binary	OPT parameter BLWLINTHD for starvation threshold.								
290	122 SMF99_CCTTRPCT	2	binary	OPT parameter BLWLTRPCT for percentage of CP trickling.								
292	124 SMF99_CCTTRATE	4	binary	Maximum number of trickles per second.								
296	128 SMF99_CCCTTSH	4	binary	Length of major time slice, which is also the length of trickle.								
300	12C SMF99_CCTRC100	4	binary	Number of times that CP utilization is 100 % in the current interval.								
304	130 SMF99_CCTRCDSP	4	binary	Number of times that dispatcher was called to do trickle in the current interval.								
308	134 SMF99_CCTRUSE	4	binary	Number of trickles used in the current interval.								
312	138 SMF99_CCTRWCWTR	4	binary	Number of address spaces or enclaves waiting longer than the threshold.								
316	13C SMF99_CCCITTSH	4	binary	Length of initial task time slice.								
320	140 SMF99_STAVAIL	4	binary	Total zIIP processor time available.								
324	144 SMF99_FREE_LPAR_CAPACITY_WT_RELATED_ZAAP	4	binary	Free zAAP LPAR capacity based on the accumulated logical zAAP wait times.								
328	148 SMF99_FREE_LPAR_CAPACITY_GUARANTEED_ZAAP	4	binary	Free zAAP LPAR capacity which is always available based on the zAAP LPAR weight.								
332	14C SMF99_FREE_LPAR_CAPACITY_CEC_RELATD_ZAAP	4	binary	Free zAAP LPAR capacity which is the total of what is always available to the LPAR and the portion of the unused zAAP capacity of the CEC.								
336	150 SMF99_FREE_LPAR_CAPACITY_LCP_CONFIG_ZAAP	4	binary	Free zAAP LPAR capacity based on the configured logical zAAPs.								
340	154 SMF99_FREE_LPAR_CAPACITY_WT_RELATED_ZIIP	4	binary	Free zIIP LPAR capacity based on the accumulated logical zIIP wait times.								
344	158 SMF99_FREE_LPAR_CAPACITY_GUARANTEED_ZIIP	4	binary	Free zIIP LPAR capacity which is always available based on the zIIP LPAR weight.								
348	15C SMF99_FREE_LPAR_CAPACITY_CEC_RELATD_ZIIP	4	binary	Free zIIP LPAR capacity which is the total of what is always available to the LPAR and the portion of the unused zIIP capacity of the CEC.								
352	160 SMF99_FREE_LPAR_CAPACITY_LCP_CONFIG_ZIIP	4	binary	Free zIIP LPAR capacity based on the configured logical zIIPs.								
356	164 SMF99_SVTWTSS	4	binary	Short wait time slice.								

System Paging Plot Information Section

Offsets	Name	Length	Format	Description
0	SMF99_PAGP_BW	4	binary	Size of each x bucket width. X is the system wide page fault rate in page faults per second.
4	4 SMF99_PAGP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
12	C SMF99_PAGP_POINTS_OF	4	binary	Offset of plot point entries from beginning of the record (including RDW).
16	10 SMF99_PAGP_POINTS_ON	2	binary	Number of plot point entries.
18	12 SMF99_PAGP_POINTS_LN	2	binary	Length of a plot point entry.

Priority Table Entry Section

Offsets	Name	Length	Format	Description
0	SMF99_PTPRTY	2	binary	Dispatching priority, after policy adjustment.
2	2 SMF99_PTNP	2	binary	New dispatching priority, after unbunching.
4	4 SMF99_PTIMDP	4	binary	Initial maximum percentage of processor demanded at priority, initial value before any priority moves.
8	8 SMF99_PTPMDP	4	binary	Projected maximum percentage of processor demanded at priority.
12	C SMF99_PTCPUU	4	binary	CPU using samples at priority found in the last 10 seconds.
16	10 SMF99_PTCPUD	4	binary	CPU delay samples at priority found in the last 10 seconds.
20	14 SMF99_PTW2UR	4	binary	Wait-to-using ratio at priority scaled by 16.
24	18 SMF99_PTAPU	4	binary	Actual measured processor used at priority in unweighted CPU service units per second.
28	1C SMF99_PTPPU	4	binary	Projected processor time to be used at priority in unweighted CPU service units per second.
32	20 SMF99_PTACMD	4	binary	Achievable cumulative maximum demand percentage scaled by 10.
	*	4	binary	Reserved.
40	28 SMF99_PTIMAXD	4	binary	Initial cumulative maximum demand percentage scaled by 10.
44	2C SMF99_PTWMAXD	4	binary	Projected cumulative maximum demand percentage scaled by 10.
48	30 SMF99_PTIAMTW	4	binary	Initial average mean time to wait in unweighted CPU service units per second scaled by 1000.
52	34 SMF99_PTWAMTW	4	binary	Projected average mean time to wait in unweighted CPU service units per second scaled by 1000.
56	38 SMF99_PTSCPUU	4	binary	Sample based CPU using samples at priority.
60	3C SMF99_PTSCPUD	4	binary	Sample based CPU delay samples at priority.

Resource Group Entry Section

Offsets	Name	Length	Format	Description
0	SMF99_RGNAME	8	EBCDIC	Resource group name
8	8 SMF99_MIN_SR	4	binary	Minimum service rate for the resource group in unweighted CPU service units per second. When there is no minimum defined, this field is 0.

Record type 99

Offsets	Name	Length	Format	Description																		
12	C SMF99_MAX_SR	4	binary	Maximum service rate for the resource group in unweighted CPU service units per second. When there is no maximum defined, this field is X'7FFFFFFF'.																		
16	10 SMF99_ACT_SR	4	binary	Service rate received in the last policy adjustment interval on the local system in unweighted CPU service units per second.																		
20	14 SMF99_SPAS	4	binary	Service per non-capped slice in unweighted CPU service units per second.																		
24	18 SMF99_SLICES	2	binary	The number of cap slices in which work in this resource group was capped.																		
26	1A SMF99_RHELPCNT0	2	binary	A count of the systems that can help special system address spaces (work at importance 0). The count can include any systems in the sysplex running in goal mode other than the local system.																		
28	1C SMF99_RHELPCNT1	2	binary	A count of the systems that can help work at importance 1. The count can include any systems in the sysplex running in goal mode other than the local system.																		
30	1E SMF99_RHELPCNT2	2	binary	A count of the systems that can help work at importance 2. The count can include any systems in the sysplex running in goal mode other than the local system.																		
32	20 SMF99_RHELPCNT3	2	binary	A count of the systems that can help work at importance 3. The count can include any systems in the sysplex running in goal mode other than the local system.																		
34	22 SMF99_RHELPCNT4	2	binary	A count of the systems that can help work at importance 4. The count can include any systems in the sysplex running in goal mode other than the local system.																		
36	24 SMF99_RHELPCNT5	2	binary	A count of the systems that can help work at importance 5. The count can include any systems in the sysplex running in goal mode other than the local system.																		
38	26 SMF99_RHELPCNT6	2	binary	A count of the systems that can help discretionary work (work at importance 6). The count can include any systems in the sysplex running in goal mode other than the local system.																		
40	28 SMF99_LHELP_FLGS	1	binary	Flag indicating whether the local system can help work at each importance level. 1 indicates it can help, 0 indicates it cannot help. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Local system can help work at importance 0.</td> </tr> <tr> <td>2</td> <td>Local system can help work at importance 1.</td> </tr> <tr> <td>3</td> <td>Local system can help work at importance 2.</td> </tr> <tr> <td>4</td> <td>Local system can help work at importance 3.</td> </tr> <tr> <td>5</td> <td>Local system can help work at importance 4.</td> </tr> <tr> <td>6</td> <td>Local system can help work at importance 5.</td> </tr> <tr> <td>7</td> <td>Local system can help work at importance 6.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Reserved.	1	Local system can help work at importance 0.	2	Local system can help work at importance 1.	3	Local system can help work at importance 2.	4	Local system can help work at importance 3.	5	Local system can help work at importance 4.	6	Local system can help work at importance 5.	7	Local system can help work at importance 6.
Bit	Meaning when set																					
0	Reserved.																					
1	Local system can help work at importance 0.																					
2	Local system can help work at importance 1.																					
3	Local system can help work at importance 2.																					
4	Local system can help work at importance 3.																					
5	Local system can help work at importance 4.																					
6	Local system can help work at importance 5.																					
7	Local system can help work at importance 6.																					

Offsets	Name	Length	Format	Description										
41	29 SMF99_RG_FLAGS	1	binary	Resource group flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Indicates that the resource group is dynamic</td> </tr> <tr> <td>1</td> <td>Indicates that the resource group capacity is specified in percentage of the total LPAR capacity</td> </tr> <tr> <td>2</td> <td>Indicates that the resource group capacity is specified in percentage of a single processor capacity</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Indicates that the resource group is dynamic	1	Indicates that the resource group capacity is specified in percentage of the total LPAR capacity	2	Indicates that the resource group capacity is specified in percentage of a single processor capacity	3-7	Reserved.
Bit	Meaning when set													
0	Indicates that the resource group is dynamic													
1	Indicates that the resource group capacity is specified in percentage of the total LPAR capacity													
2	Indicates that the resource group capacity is specified in percentage of a single processor capacity													
3-7	Reserved.													
42	30 *	2	EBCDIC	Reserved.										
44	32 SMF_RG_PERC_MIN	4	binary	Percentage min value, if min/max was specified in percentages										
48	36 SMF_RG_PERC_MAX	4	binary	Percentage max value, if min/max was specified in percentages										

Generic Resource Entry Section

Offsets	Name	Length	Format	Description						
0	SMF99_GR_SYSNAME	8	EBCDIC	Name of the system where the sessions were routed.						
8	8 SMF99_GR_TSO_SESSIONS_ROUTED	4	binary	Number of TSO sessions that were routed in the last 10 seconds to the system named by SMF99_GR_SYSNAME.						
12	C SMF99_GR_NONTSO_SESSIONS_ROUTED	4	binary	Number of non-TSO sessions that were routed in the last 10 seconds to the system named by SMF99_GR_SYSNAME.						
16	10 SMF99_GR_TSO_AVG_COST	4	binary	Average cost of a TSO session in raw CPU service units on the system named by SMF99_GR_SYSNAME.						
20	14 SMF99_GR_TSO_PI	4	binary	Weighted average of PI of service class periods running TSO work on the system named by SMF99_GR_SYSNAME.						
24	18 SMF99_GR_FLAGS	4	binary	Generic resource flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>The system named by SMF99_GR_SYSNAME had a shortage that may have caused a session to not be routed to it.</td> </tr> <tr> <td>1-31</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	The system named by SMF99_GR_SYSNAME had a shortage that may have caused a session to not be routed to it.	1-31	Reserved.
Bit	Meaning when set									
0	The system named by SMF99_GR_SYSNAME had a shortage that may have caused a session to not be routed to it.									
1-31	Reserved.									
28	1C SMF99_GR_SERVICE_BY_IMPORTANCE	32	binary	A single entry in the array of Importance Level Service Units, containing the number of raw CPU service units consumed by work at this importance level (or unused) over the last 10 seconds. The entries are indexed with an origin of zero so that the index matches the importance level to which the entry pertains. An index of zero indicates system work and an index of 7 indicates unused capacity.						

Software licensing information

Offsets	Name	Length	Format	Description														
0	SMF99_SLConfigFlags	1	binary	Configuration flags: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Indicates that the machine supports the store system information instruction.</td> </tr> <tr> <td>1</td> <td>Indicates that MVS is running in a logical partition</td> </tr> <tr> <td>2</td> <td>Indicates that MVS is running in a virtual machine</td> </tr> <tr> <td>3</td> <td>Indicates that the logical CPUs are shared with other partitions</td> </tr> <tr> <td>4</td> <td>Indicates that the logical partition is configured to be capped (as opposed to being capped by WLM)</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Indicates that the machine supports the store system information instruction.	1	Indicates that MVS is running in a logical partition	2	Indicates that MVS is running in a virtual machine	3	Indicates that the logical CPUs are shared with other partitions	4	Indicates that the logical partition is configured to be capped (as opposed to being capped by WLM)	5-7	Reserved.
Bit	Meaning when set																	
0	Indicates that the machine supports the store system information instruction.																	
1	Indicates that MVS is running in a logical partition																	
2	Indicates that MVS is running in a virtual machine																	
3	Indicates that the logical CPUs are shared with other partitions																	
4	Indicates that the logical partition is configured to be capped (as opposed to being capped by WLM)																	
5-7	Reserved.																	
1	1 SMF99_SLStateFlags	1	binary	State flags: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Indicates that the logical partition is capped by WLM</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Indicates that the logical partition is capped by WLM	1-7	Reserved.								
Bit	Meaning when set																	
0	Indicates that the logical partition is capped by WLM																	
1-7	Reserved.																	
	*	2	binary	Reserved.														
4	4 SMF99_SLIImgCapacity	4	binary	Capacity available to MVS image in millions of service units per hour, when not running as VM guest. If running as VM guest, capacity available to VM.														
8	8 SMF99_SLCecCapacity	4	binary	Capacity of CEC in millions of service units per hour.														
12	C SMF99_SLCecCpuCount	2	binary	Number of available CPUs in the CEC. This includes online and offline CPUs. It does not include reserved CPUs (CPUs that can be added through Capacity Upgrade on Demand).														
14	E SMF99_SLLogicalCpuCount	2	binary	Number of available CPUs in the logical partition. This includes online and offline CPUs. It does not include reserved CPUs (CPUs that can be added through Capacity Upgrade on Demand).														
16	10 SMF99_SLCecServiceUnits PerSecToShare	4	binary	The CEC capacity in basic-mode service units per second that is available for sharing among partitions using shared logical processors.														
20	14 SMF99_SLIImgMsuAt CurrentWeight	4	binary	MVS image capacity in millions of service units per hour that is represented by the partition's current weight.														
24	18 *	4	EBCDIC	Reserved.														
28	1C SMF99_SLAvgMsu	4	binary	Average service rate in millions of service units per hour. This is a long-term average.														
32	20 SMF99_SLAvgMsuCapped	4	binary	Average service rate in millions of service units per hour while the partition was capped. This is a short-term average.														
36	24 SMF99_SLAvgMsuUncapped	4	binary	Average service rate in millions of service units per hour while the partition was uncapped. This is a short-term average.														
40	28 SMF99_SLIntervalService	4	binary	Service units over last policy adjustment interval. NOTE: The service units are calculated using the MP factor for the number of physical CPUs, not the number of logical CPUs. This is consistent with how capacity is measured for software licensing. These service units cannot be directly compared to other service units calculated by SRM.														
44	2C SMF99_SLIntervalTime	4	binary	Elapsed time over last policy adjustment interval in 1.024 milliseconds.														
48	30 *	4	EBCDIC	Reserved.														
52	34 SMF99_SLRollInterval	2	binary	Number of policy adjustment intervals between computation of average service rate.														

Offsets	Name	Length	Format	Description
54	36 SMF99_SLService TableIntervals	2	binary	Number of consecutive policy adjustment intervals that have passed since the last time that the service table was updated.
56	38 SMF99_SLIntervalsToCap	2	binary	Number of consecutive policy adjustment intervals to cap the partition.
58	3A SMF99_SLIntervalsToUncap	2	binary	Number of consecutive policy adjustment intervals to uncap the partition.
60	3C SMF99_SLPattern IntervalCount	2	binary	Number of consecutive policy adjustment intervals that have passed in the current cap/uncap state indicated by SMF99_SLCap - pedByWlm.
62	3E *	2	binary	Reserved.
64	40 SMF99_SL_Query _Response_Code	4	binary	Response code from the last 'query' for LPAR information.
68	44 SMF99_SL_Setcap _Response_Code	4	binary	Response code from the last attempt to set capping flags.
72	48 *	8	binary	Reserved.
80	50 SMF99_SLUnusedScaling	1	binary	Scaling factor of unused group capacity which is stored in 48 buckets in the service table.
81	51 *	3	binary	Reserved.
84	54 SMF99_HardwareGroupname	8	EBCDIC	Hardware group name.
92	5C SMF99_HardwareGroupCpuTypeCapCp	4	binary	Hardware group is capped by PR/SM to a limit which is defined in hundredths of processor units.
96	60 SMF99_HardwareGroupCpuTypeCapZaap	4	binary	Hardware Group is capped by PR/SM to a limit which is defined in hundredths of processor units.
100	64 SMF99_HardwareGroupCpuTypeCapZiip	4	binary	Hardware Group is capped by PR/SM to a limit which is defined in hundredths of processor units.

Software Licensing Table Information

Offsets	Name	Length	Format	Description
0	SMF99_SLTServiceUncapped	4	binary	Basic-mode service units accumulated while the partition was uncapped. NOTE: The service units are calculated using the MP factor for the number of physical CPUs, not the number of logical CPUs. This is consistent with how capacity is measured for software licensing. These service units cannot be directly compared to other service units calculated in SRM.
4	4 SMF99_SLTServiceCapped	4	binary	Basic-mode service units accumulated while the partition was capped. NOTE: The service units are calculated using the MP factor for the number of physical CPUs, not the number of logical CPUs. This is consistent with how capacity is measured for software licensing. These service units cannot be directly compared to other service units calculated in SRM.
8	8 SMF99_SLTService UncappedCount	2	binary	Number of seconds that the partition was uncapped
10	A SMF99_SLTService CappedCount	2	binary	Number of seconds that the partition was capped
12	C SMF99_SLTServiceLast UpdateInterval	1	binary	Policy adjustment interval ID when this entry was last updated. This field is set in goal mode only. Since the ID is only 1 byte, it will wrap multiple times over the course of the table. (That is, the time span of the table is greater than 255 intervals so the interval IDs will wrap around.)
13	D *	3	EBCDIC	Reserved.
16	10 SMF99_SLTService UnusedGroupCapacity	4	binary	Service units allowed by the group capacity limit but not consumed by the members of the group

Subtype 2

Self Defining Section

Offsets	Name	Length	Format	Description
0	SMF992COF	4	binary	Offset to class data sections from beginning of the record.
4	4 SMF992CLN	2	binary	Length of class data sections.
6	6 SMF992CON	2	binary	Number of class data sections. There is one per service class.
8	8 SMF992CPOF	4	binary	Offset to period data section from beginning of record (including RDW).
12	C SMF992CPLN	2	binary	Length of period data section.
14	E SMF992CPON	2	binary	Number of period data sections.
16	10 SMF992ECOF	4	binary	Offset to EWLM class section from beginning of record (including RDW).
20	14 SMF992ECLN	2	binary	Length of EWLM class section.
22	16 SMF992ECON	2	binary	Number of EWLM class section.

Class data section

Offsets	Name	Length	Format	Description
0	SMF99_CNAM	8	EBCDIC	Service class name.
8	8 SMF99_CGRN	8	EBCDIC	Resource group name associated with the service class. This field is blank when there is no assigned resource group.
16	10 SMF99_CNUMP	2	binary	The number of periods in this service class.
18	12 SMF99_CINDEX	2	binary	Service class index.

EWLM Class Data Section

Offsets	Name	Length	Format	Description
0	SMF99_EWLM_CNAM	64	EBCDIC	Long EWLM service class name from EWLM domain policy.
64	40 SMF99_EWLM_CKEY	2	binary	EWLM service class key.

Period Data Section

Offsets	Name	Length	Format	Description
0	SMF99_PCNM	8	EBCDIC	Service class name associated with the service class period.
8	8 SMF99_PNUM	2	binary	Period number.

Offsets	Name	Length	Format	Description												
10	A SMF99_PGOALTYP	1	binary	<p>Goal type</p> <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>System component address space, SYSSTC, or server goal</td> </tr> <tr> <td>1</td> <td>Short response time (less than or equal to 20 seconds).</td> </tr> <tr> <td>2</td> <td>Long response time (greater than 20 seconds).</td> </tr> <tr> <td>3</td> <td>Velocity</td> </tr> <tr> <td>4</td> <td>Discretionary</td> </tr> </tbody> </table> <p>If the goal type is a response time goal, you should check the response-time percentage field (SMF99_PRTP). If the field is zero, then the response time goal is an average response time type. If there is a percentage filled in, then the response time goal is a percentage response time type.</p>	Value	Meaning	0	System component address space, SYSSTC, or server goal	1	Short response time (less than or equal to 20 seconds).	2	Long response time (greater than 20 seconds).	3	Velocity	4	Discretionary
Value	Meaning															
0	System component address space, SYSSTC, or server goal															
1	Short response time (less than or equal to 20 seconds).															
2	Long response time (greater than 20 seconds).															
3	Velocity															
4	Discretionary															
	*	1	binary	Reserved.												
12	C SMF99_PGOALVAL	4	binary	Goal value: For a response time goal, this is in milliseconds. For a velocity goal, this is a number from 1 to 99. For a discretionary goal, this is zero.												
16	10 SMF99_PIMPOR	2	binary	Importance.												
18	12 SMF99_PBDP	1	binary	Base dispatching priority.												
	*	1	binary	Reserved.												
20	14 SMF99_PMPLI	2	binary	MPL in-target.												
22	16 SMF99_PMPLO	2	binary	MPL out-target.												
24	18 SMF99_PAMTA	4	binary	Average maximum MPL target achieved.												
28	1C SMF99_PRUA	4	binary	Average number of ready users.												
32	20 SMF99_PLRUA	4	binary	Long term ready user average scaled by 16.												
36	24 SMF99_PPSPT	4	binary	Length of time swapped address spaces are protected in processor storage in milliseconds.												
40	28 SMF99_PPSITAR	4	binary	Protective processor storage target for each address space in the period. This is valid only for periods with short response time goals. For all other work, it is zero.												
44	2C SMF99_PESPOL	1	binary	<p>Expanded storage policy for demand pages.</p> <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>protected</td> </tr> <tr> <td>2</td> <td>least recently used (LRU)</td> </tr> <tr> <td>3</td> <td>space available</td> </tr> </tbody> </table> <p>This is valid only for periods with short response time goals.</p>	Value	Meaning	1	protected	2	least recently used (LRU)	3	space available				
Value	Meaning															
1	protected															
2	least recently used (LRU)															
3	space available															
45	2D SMF99_PESVIO	1	binary	<p>Expanded storage policy for VIO pages.</p> <table> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>protected</td> </tr> <tr> <td>2</td> <td>least recently used (LRU)</td> </tr> <tr> <td>3</td> <td>space available</td> </tr> </tbody> </table> <p>This is valid only for periods with short response time goals.</p>	Value	Meaning	1	protected	2	least recently used (LRU)	3	space available				
Value	Meaning															
1	protected															
2	least recently used (LRU)															
3	space available															

Record type 99

Offsets	Name	Length	Format	Description								
46	2E SMF99_PESHSP	1	binary	Expanded storage policy for hiperspace pages. <table border="0"> <tr> <td>Value</td> <td>Meaning</td> </tr> <tr> <td>1</td> <td>protected</td> </tr> <tr> <td>2</td> <td>least recently used (LRU)</td> </tr> <tr> <td>3</td> <td>space available</td> </tr> </table> This is valid only for periods consisting of short response time goals.	Value	Meaning	1	protected	2	least recently used (LRU)	3	space available
Value	Meaning											
1	protected											
2	least recently used (LRU)											
3	space available											
47	2F SMF99_PESSWAP	1	binary	Expanded storage policy for swap pages. <table border="0"> <tr> <td>Value</td> <td>Meaning</td> </tr> <tr> <td>1</td> <td>protected</td> </tr> <tr> <td>2</td> <td>least recently used (LRU)</td> </tr> <tr> <td>3</td> <td>space available</td> </tr> </table>	Value	Meaning	1	protected	2	least recently used (LRU)	3	space available
Value	Meaning											
1	protected											
2	least recently used (LRU)											
3	space available											
48	30 SMF99_PPROT	2	binary	Number of address spaces with demand pages protected in processor storage. This is valid for all periods except those with short response time goals.								
50	32 SMF99_PLRU	2	binary	Number of address spaces with demand pages subject to LRU expanded storage policy. This is valid for all periods except those with short response time goals.								
52	34 SMF99_PSPAV	2	binary	Number of address spaces with demand pages subject to space available expanded storage policy. This is valid for all periods except those with short response time goals.								
54	36 SMF99_PVIOL	2	binary	Number of address spaces with VIO pages subject to LRU expanded storage policy. This is valid for all periods except those with short response time goals.								
56	38 SMF99_PVIOS	2	binary	Number of address spaces with VIO pages subject to space available expanded storage policy. This is valid for all periods except those with short response time goals.								
58	3A SMF99_PHSPL	2	binary	Number of address spaces with hiperspace pages subject to LRU expanded storage policy. This is valid for all periods except those with short response time goals.								
60	3C SMF99_PHSPS	2	binary	Number of address spaces with hiperspace pages subject to space available expanded storage policy. This is valid for all periods except those with short response time goals.								
62	3E SMF99_PESCS	2	binary	Number of explicit storage critical classified address spaces.								
64	40 SMF99_PLPI	4	binary	Local performance index achieved scaled by 100.								
68	44 SMF99_PSPI	4	binary	Sysplex performance index achieved scaled by 100.								
72	48 SMF99_PSERV	4	binary	Service accumulated during policy adjustment interval in unweighted CPU service units.								
76	4C SMF99_PMDP	4	binary	Maximum percentage of processor time demanded.								
80	50 SMF99_PLCPUU	4	binary	CPU using samples during last policy adjustment interval.								
84	54 SMF99_PLCPUD	4	binary	CPU delay samples during last policy adjustment interval.								
88	58 SMF99_PMTTWA	4	binary	Mean time to wait adjusted by the maximum mean time to wait.								

Offsets	Name	Length	Format	Description
92	5C SMF99_PADP	4	binary	Working variable for achievable demand percentage.
96	60 SMF99_PASERC	4	binary	Average service accumulated over management window in unweighted CPU service units per second.
100	64 SMF99_PPRSER	4	binary	Projected service in unweighted CPU service units per second.
104	68 SMF99_PIDLE	4	binary	Idle samples. The samples are collected over an interval long enough to collect a representative number of samples.
108	6C SMF99_POTHR	4	binary	Unknown state samples.
112	70 SMF99_PCPUU	4	binary	CPU using samples. The samples are collected over an interval long enough to collect a representative number of samples.
116	74 SMF99_PCPUD	4	binary	CPU delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
120	78 SMF99_PAUXP	4	binary	Primary private area paging from auxiliary storage delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
124	7C SMF99_PAUXC	4	binary	Common area paging from auxiliary storage delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
128	80 SMF99_PVIO	4	binary	VIO from auxiliary storage delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
132	84 SMF99_PHSS	4	binary	Scroll hiperspace from auxiliary storage delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
136	88 SMF99_PHSC	4	binary	Cache hiperspace from auxiliary storage delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
140	8C SMF99_PASWP	4	binary	Swap from auxiliary storage delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
144	90 SMF99_PMPLD	4	binary	MPL delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
148	94 SMF99_PCAPD	4	binary	CPU capping delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
152	98 SMF99_PXMO	4	binary	Other cross memory address spaces paging from auxiliary storage delay samples not included in the samples listed in subtype 2 cross memory data. The samples are collected over an interval long enough to collect a representative number of samples.
156	9C SMF99_PXMEM_OF	4	binary	Offset to cross memory delay entries from beginning of record (including RDW).
160	A0 SMF99_PXMEM_LN	2	binary	Length of each cross memory delay entry.

Record type 99

Offsets	Name	Length	Format	Description
162	A2 SMF99_PXMEM_ON	2	binary	Number of cross memory delay entries. There is one entry per address space responsible for cross memory delays.
164	A4 SMF99_PSERV_OF	4	binary	Offset to server data entries from beginning of record (including RDW).
168	A8 SMF99_PSERV_LN	2	binary	Length of each server data entry.
170	AA SMF99_PSERV_ON	2	binary	Number of server data entries. There is one server data entry for each server service class, and one for each service class being served.
172	AC SMF99_PESP_OF	4	binary	Offset to address space expanded storage policy section from beginning of record (including RDW).
176	B0 SMF99_PESP_LN	2	binary	Length of each address space expanded storage policy entry.
178	B2 SMF99_PESP_ON	2	binary	Number of address space expanded storage policy entries
180	B4 SMF99_PCDCLOCK	2	binary	Policy adjustment count down clock. No policy action is taken until the clock is zero or less.
182	B6 SMF99_PNH	1	binary	The performance period experienced processor access delay.
183	B7 SMF99_PRTP	1	binary	Service class response time percentage. This field indicates whether the response time goal in SMF99_PGOALTYP is a percentage response time type. This field is zero when the response time goal in SMF99_PGOALTYP is an average response time.
184	B8 SMF99_PAUXS	4	binary	Shared paging samples from Aux. The samples are collected over an interval long enough to collect a representative number of samples.
188	BC SMF99_PIOU	4	binary	DASD I/O using samples. The samples are collected over an interval long enough to collect a representative number of samples.
192	C0 SMF99_PIOD	4	binary	DASD I/O delay samples. The samples are collected over an interval long enough to collect a representative number of samples.
196	C4 SMF99_PIO_MDP	4	binary	Maximum percentage of time a period could demand DASD I/O. The percentage is scaled by 10.
200	C8 SMF99_PIODP	1	binary	I/O priority.

Offsets	Name	Length	Format	Description																		
201	C9 SMF99_FLAGS	1	binary	Flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Period experienced some type of delay within the sysplex during last policy adjustment interval.</td> </tr> <tr> <td>1</td> <td>Period is CPU critical.</td> </tr> <tr> <td>2</td> <td>Period belongs to a service class that was assigned storage protection (storage critical) in the active service policy. The service class was used in subsystem type CICS or IMS and the rule specified storage critical = yes. Also on for transaction server DISPs serving protected service classes.</td> </tr> <tr> <td>3</td> <td>Indicates that the period is non-z/OS (Linux).</td> </tr> <tr> <td>4</td> <td>Indicates that the period has an address space that is close to being blocked.</td> </tr> <tr> <td>5</td> <td>Period is managed by EWLM performance data.</td> </tr> <tr> <td>6</td> <td>Period belongs to a service class which was assigned to I/O priority group.</td> </tr> <tr> <td>7</td> <td>Processor consumption data for transactions with special reporting provided</td> </tr> </table>	Bit	Meaning when set	0	Period experienced some type of delay within the sysplex during last policy adjustment interval.	1	Period is CPU critical.	2	Period belongs to a service class that was assigned storage protection (storage critical) in the active service policy. The service class was used in subsystem type CICS or IMS and the rule specified storage critical = yes. Also on for transaction server DISPs serving protected service classes.	3	Indicates that the period is non-z/OS (Linux).	4	Indicates that the period has an address space that is close to being blocked.	5	Period is managed by EWLM performance data.	6	Period belongs to a service class which was assigned to I/O priority group.	7	Processor consumption data for transactions with special reporting provided
Bit	Meaning when set																					
0	Period experienced some type of delay within the sysplex during last policy adjustment interval.																					
1	Period is CPU critical.																					
2	Period belongs to a service class that was assigned storage protection (storage critical) in the active service policy. The service class was used in subsystem type CICS or IMS and the rule specified storage critical = yes. Also on for transaction server DISPs serving protected service classes.																					
3	Indicates that the period is non-z/OS (Linux).																					
4	Indicates that the period has an address space that is close to being blocked.																					
5	Period is managed by EWLM performance data.																					
6	Period belongs to a service class which was assigned to I/O priority group.																					
7	Processor consumption data for transactions with special reporting provided																					
202	CA SMF99_Per_IO_Mgmt_Support_Data	2	binary	I/O management support data.																		
204	CC SMF99_PDEVCL	4	binary	Identifier of the device cluster associated with this period. This identifier can be used to associate the period with device cluster information in the subtype 4 record. This field will be zero if the period is not associated with a device cluster.																		
208	D0 SMF99_PSERVER_TYPE	4	binary	Server type flags. All bits will be zero if the period is not a server. Flags indicate what type of server is associated with the record. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Server is a transaction server</td> </tr> <tr> <td>1</td> <td>Server is an enclave server.</td> </tr> <tr> <td>2</td> <td>Server is a queue server</td> </tr> <tr> <td>3-31</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Server is a transaction server	1	Server is an enclave server.	2	Server is a queue server	3-31	Reserved.								
Bit	Meaning when set																					
0	Server is a transaction server																					
1	Server is an enclave server.																					
2	Server is a queue server																					
3-31	Reserved.																					
212	D4 SMF99_PSDATA_OF	4	binary	Offset to server samples section from the beginning of the record (including RDW).																		
216	D8 SMF99_PSDATA_LN	2	binary	Length of each server samples entry.																		
218	DA SMF99_PSDATA_ON	2	binary	Number of server samples entries.																		
220	DC SMF99_PQDATA_OF	4	binary	Offset to the queue server section from the beginning of the record (including RDW).																		
224	E0 SMF99_PQDATA_LN	2	binary	Length of each queue server entry.																		
226	E2 SMF99_PQDATA_ON	2	binary	Number of queue server entries.																		
228	E4 SMF99_PAVG_SIZE	4	binary	Average size in processor storage (frame count) of the address spaces in the period.																		
232	E8 SMF99_PGRN	8	EBCDIC	Group name, or blank if period doesn't belong to a group.																		
240	F0 SMF99_PSYS_CPUU	4	binary	Sysplex wide CPU using samples.																		
244	F4 SMF99_PSYS_NONIDLE	4	binary	Sysplex wide non-idle samples.																		
248	F8 SMF99_PSYS_IDLE	4	binary	Sysplex wide idle samples.																		
252	FC SMF99_PSYS_OTHER	4	binary	Sysplex wide other samples.																		

Record type 99

Offsets	Name	Length	Format	Description
256	100 SMF99_IOSUBSAMOF	4	binary	Offset to I/O subsystem samples data from beginning of record (including RDW).
260	104 SMF99_IOSUBSAMLN	2	binary	Length of an I/O subsystem samples data section.
262	106 SMF99_IOSUBSAMON	2	binary	Number of I/O subsystem samples data sections.
264	108 SMF99_SPMDDP	4	binary	Saved copy of maximum percentage of processor time demanded.
268	10C SMF99_AVG_NUM_TASKS	4	binary	Average number of tasks.
272	110 SMF99_PBPDP	4	binary	Buffer pool delay samples
276	114 SMF99_SWCT	4	binary	Short wait count accumulator.
280	118 *	2	EBCDIC	Reserved.
282	11A SMF99_NUM_SAMP_HIST_ROWS_USED	2	binary	Number of sample history rows used to build sample set.
284	11C SMF99_CADP	4	binary	Current [®] achievable demand percentage.
288	120 SMF99_SBCPUU	4	binary	Sample based CPU usings.
292	124 SMF99_SBCPUD	4	binary	Sample based CPU delays.
296	128 SMF99_PSYS_IO_DLY	4	binary	Sysplex wide I/O delay
300	12C SMF99_PSYS_NON_IO_DLY	4	binary	Sysplex wide non-I/O delay
304	130 SMF99_PIFAU	4	binary	IBM zEnterprise Application Assist Processor (zAAP) using samples
308	134 SMF99_PIFAD	4	binary	zAAP delay samples
312	138 SMF99_PISERV	4	binary	zAAP service accumulated during interval
316	13C SMF99_PIMDDP	4	binary	Maximum percentage of zAAP processor time demanded
320	140 SMF99_PIMTTWA	4	binary	Mean time to wait adjusted (zAAP)
324	144 SFM99_PIADP	4	binary	Working variable for acheivable demand percentage (zAAP)
328	148 SMF99_PIASERC	4	binary	Average service consumed over window (zAAP)
332	14C SMF99_PIPRSER	4	binary	Projected service (zAAP)
336	150 SMF99_ICADP	4	binary	Current achievable demand percentage (zAAP)
340	154 SMF99_PIFAONCP	4	binary	zAAP on CP using samples
344	158 SMF99_PLIFAU	4	binary	zAAP using samples during last interval
348	15C SMF99_PLIFAD	4	binary	zAAP delay samples during last interval
352	160 SMF99_PSUPU	4	binary	SUP using samples
356	164 SMF99_PSUPD	4	binary	SUP delay samples
360	168 SMF99_PSUPONCP	4	binary	SUP_On_CP using samples
364	16C SMF99_PLSUPU	4	binary	SUP using samples during last interval
368	170 SMF99_PLSUPD	4	binary	SUP delay samples during last interval
372	174 SMF99_PSSERV	4	binary	Accumulated SUP service
376	178 SMF99_Time_at_PDP_Using	4	binary	Time at PDP using samples during last interval
380	17C SMF99_Time_at_PDP	4	binary	Time at PDP accumulator during last interval
384	180 SMF99_EWLM_LOCAL_PI	4	binary	EWLM local PI
388	184 SMF99_EWLM_GLOBAL_PI	4	binary	EWLM global PI
392	188 SMF99_PSMDP	4	binary	Maximum percentage of IBM z Integrated Information Processor (zIIP) time demanded
396	18C SMF99_PSMTTWA	4	binary	Mean time to wait adjusted (zIIP)
400	190 SFM99_PSADP	4	binary	Working variable for achievable demand percentage (zIIP)
404	194 SMF99_PSASERC	4	binary	Average service consumed over window (zIIP)

Offsets	Name	Length	Format	Description
408	198 SMF99_PSPRSER	4	binary	Projected service (zIIP)
412	19C SMF99_SCADP	4	binary	Current achievable demand percentage (zIIP)
416	1A0 SMF99_HdLockPromotion_Time_at_PDP	4	binary	HD lock time at PDP accumulator during last interval
420	1A4 SMF99_HdLock_Time_at_PDP_Using	4	binary	HD lock time at PDP using samples during last interval
424	1A8 SMF99_PNS_PSERV	4	binary	Service of enclave servers' non enclave work, which was accumulated during policy adjustment interval in unweighted CPU service units
428	1AC SMF99_PNS_IPSERV	4	binary	IBM zEnterprise Application Assist Processor (zAAP) service of enclave servers' non enclave work, which was accumulated during policy adjustment interval in unweighted CPU service units
432	1B0 SMF99_PNS_SPSERV	4	binary	SUP service of enclave servers' non enclave work, which was accumulated during policy adjustment interval in unweighted CPU service units
436	1B4 SMF99_VARTIME_AT_PDP	4	binary	Time at variable DP promoted by supervisor
440	1B8 SMF99_VARTIME_AT_PDP_USING	4	binary	Usings at variable DP promoted by supervisor
444	1BC SMF99_VARWEIGHTED_TIME_AT_PDP	4	binary	Time at variable DP promoted by supervisor weighted by DP
448	1C0 SMF99_RT_DISTRI_MID_POINT	4	binary	Response time distribution mid-point (milliseconds)
452	1C4 SMF99_RT_DISTRI_TIME_STAMP	8	EBCDIC	Response time distribution time stamp
460	1CC SMF99_RT_DISTRI_AVG_RESP_TIME	4	binary	Response time distribution average response time
464	1D0 SMF99_RT_DISTRI_NUM_ROWS	4	binary	Response time distribution number of rows used to build
468	1D4 SMF99_RT_DISTRI_SUM_TRANS	4	binary	Response time distribution total number of transactions completed
472	1D8 SMF99_RT_DISTRI_NUM_TRANS(28)	4	binary	Response time distribution, 28 buckets
584	248 SMF99_RT_DISTRI_RUNNING_COUNT	4	binary	Response time distribution total number of times the mid-point was changed
588	24C SMF99_RT_DISTRI_INT_SUM_TRANS	4	binary	Response time distribution total number of transactions completed during last interval
592	250 SMF99_GAV_AREA	6	EBCDIC	
592	250 SMF99_GAV_ARRAY(6)	1	EBCDIC	Goal achievement array
598	256 *	2	binary	Reserved. Skip 2 bytes for alignment
600	258 SMF99_VELO_USING_STATES	4	binary	Total velocity using states
604	25C SMF99_USING_IOSM_CURR	4	binary	DASDI/O using samples for the current interval
608	260 SMF99_DELAY_IOSM_CURR	4	binary	DASD I/O delay samples for the current interval
612	264 SMF99_DISC_IOSM_CURR	4	binary	DASD I/O disconnect samples for the current interval
616	268 SMF99_DISC_IOSM_ACCUM	4	binary	DASD I/O disconnect samples accumulated over SMF99_Num_Samp_Hist_Rows_Used
620	26C SMF99_CUQT_IOSM_CURR	4	binary	DASD I/O control unit queue samples for the current interval
624	270 SMF99_CUQT_IOSM_ACCUM	4	binary	DASD I/O control unit queue samples accumulated over SMF99_Num_Samp_Hist_Rows_Used

Record type 99

Offsets	Name	Length	Format	Description										
628	274 Smf99_Thro_IOSM_curr	4	binary	DASD I/O induced throttle samples for the current interval										
632	278 Smf99_Thro_IOSM_accum	4	binary	DASD I/O induced throttle samples accumulated over SMF99_Num_Samp_Hist_Rows_Used										
636	27C Smf99_CntD_IOSM_curr	4	binary	DASD I/O contention delta samples for the current interval										
640	280 Smf99_CntD_IOSM_accum	4	binary	DASD I/O contention delta samples accumulated over SMF99_Num_Samp_Hist_Rows_Used										
644	284 Smf99_Pend_IOSM_curr	4	binary	DASD I/O pending samples for the current interval										
648	288 Smf99_Pend_IOSM_accum	4	binary	DASD I/O pending samples accumulated over SMF99_Num_Samp_Hist_Rows_Used										
652	28C *	4	binary	Reserved to align to double word										
656	290 SMF99_SpecRpt(4)	24	binary	Special reporting data: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>All transactions</td> </tr> <tr> <td>2</td> <td>Mobile transactions</td> </tr> <tr> <td>3</td> <td>CategoryA transactions</td> </tr> <tr> <td>4</td> <td>CategoryB transactions</td> </tr> </tbody> </table>	Value	Meaning	1	All transactions	2	Mobile transactions	3	CategoryA transactions	4	CategoryB transactions
Value	Meaning													
1	All transactions													
2	Mobile transactions													
3	CategoryA transactions													
4	CategoryB transactions													
656	290 SMF99_ SpecCP	8	binary	Transaction service units on standard CP for all transactions										
656	290 SMF99_ SpecCP1	4	binary	Word 1 of SMF99_ SpecCP										
660	294 SMF99_ SpecCP2	4	binary	Word 2 of SMF99_ SpecCP										
664	298 SMF99_SpecOffload	8	binary	Transaction service units on offload engines for all transactions										
664	298 SMF99_SpecOffload1	4	binary	Word 1 of SMF99_SpecOffload										
668	29C SMF99_SpecOffload2	4	binary	Word 2 of SMF99_SpecOffload										
672	2A0 SMF99_SpecOffloadOnCP	8	binary	Transaction service units on standard CP that were offload eligible for all transactions										
672	2A0 SMF99_SpecOffloadOnCP1	4	binary	Word 1 of SMF99_SpecOffloadOnCP										
676	2A4 SMF99_SpecOffloadOnCP2	4	binary	Word 2 of SMF99_SpecOffloadOnCP										

Cross Memory Delay Entry Section

Offsets	Name	Length	Format	Description
0	0 SMF99_XMEM_JOBND	8	EBCDIC	Name of the address space causing the cross memory delay.
8	8 SMF99_XMEM_SAMPS	4	binary	Number of cross memory samples.

Server Data Entry Section

Offsets	Name	Length	Format	Description
0	SMF99_SERVER_CNM	8	EBCDIC	Service class name. If the service class (SMF99_PCNM) is a server, then this is the name of the service class being served. If the service class (SMF99_PCNM) is being served, then this is the name of the server service class.
8	8 SMF99_SERVER_PNUM	4	binary	Service period number.

Offsets	Name	Length	Format	Description
12	C SMF99_SERVER_OBS	4	binary	<p>If the service class (SMF99_PCNM) is a server, then this is the number of times SMF99_SERVER_CNM was being served in this period.</p> <p>If the service class (SMF99_PCNM) is being served, then this is the number of times SMF99_SERVER_CNM was seen serving in this period.</p>

Server Sample Data Entry Section

Offsets	Name	Length	Format	Description								
0	SMF99_SDATA_WQDEL	4	binary	Delay samples waiting for WLM-managed work queue. The samples are collected over an interval long enough to collect a representative number of samples.								
4	4 SMF99_SDATA_ENC_AUXP	4	binary	Aux private paging delay samples experienced by enclave work units known to be associated with an address space. The samples are collected over an interval long enough to collect a representative number of samples.								
8	8 SMF99_SDATA_ENC_VIO	4	binary	Aux VIO paging delay samples experienced by enclave work units known to be associated with an address space. The samples are collected over an interval long enough to collect a representative number of samples.								
12	C SMF99_SDATA_ENC_HSP	4	binary	Aux standard hiperspace paging delay samples experienced by enclave work units known to be associated with an address space. The samples are collected over an interval long enough to collect a representative number of samples.								
16	10 SMF99_SDATA_ENC_MPLD	4	binary	MPL delay samples experienced by enclave work units known to be associated with an address space. The samples are collected over an interval long enough to collect a representative number of samples.								
20	14 SMF99_SDATA_ENC_ASWP	4	binary	Aux swap delay samples experienced by enclave work units known to be associated with an address space. The samples are collected over an interval long enough to collect a representative number of samples.								
24	18 SMF99_SDATA_SERVER_CLASS_NAME	8	EBCDIC	Service class name of the server serving this period.								
32	20 SMF99_SDATA_SERVER_TYPE	1	binary	<p>Server type:</p> <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Server is an enclave or queue server.</td> </tr> <tr> <td>1</td> <td>Server is a batch work server.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Server is an enclave or queue server.	1	Server is a batch work server.	2-7	Reserved.
Bit	Meaning when set											
0	Server is an enclave or queue server.											
1	Server is a batch work server.											
2-7	Reserved.											
33	21 *	3	EBCDIC	Reserved.								
36	24 SMF99_SDATA_SUBSYS_TYPE	4	EBCDIC	Subsystem type of the owner of the queue. (Applies only to batch queue servers.)								
40	28 SMF99_SDATA_SUBSYS_NAME	8	EBCDIC	Subsystem name of the owner of the queue. (Applies only to batch queue servers.)								

Queue Server Data Entry Section

Offsets	Name	Length	Format	Description
0	SMF99_QDATA_ENV_NAME	32	EBCDIC	Application environment name associated with the work queue.
32	20 SMF99_QDATA_SERVER_CLASS_NAME	8	EBCDIC	Service class name of the server serving the period represented by this subtype 2 record. (Applies only to queue manager type servers.)

Record type 99

Offsets	Name	Length	Format	Description												
40	28 SMF99_QDATA _SERVER_WANT	4	binary	Number of server instances needed to address queue delay according to policy adjustment. This is a queue-wide count.												
44	2C SMF99_QDATA _SERVER_HAVE	4	binary	Number of server instances bound to the queue. This is a queue-wide count.												
48	30 SMF99_QDATA _SERVER_ACTIVE	4	binary	Number of server instances bound to the queue and between IWMSTBGN and IWMSTEND. This is a subset of the HAVE count. (HAVE minus ACTIVE equals IDLE.)												
52	34 SMF99_QDATA _AS_CAPACITY	4	binary	Address space server instance capacity.												
56	38 SMF99_QDATA _ACHIEVED_QMPL	4	binary	Average number (over policy interval) of server instances that are swapped in spaces in the server service class. Only server instances serving the external service class associated with the queue are counted. The count is scaled by 16. (Not used for batch queue servers.)												
60	3C SMF99_QDATA _ACTIVE_QMPL	4	binary	Average of number of server instances between IWMSTBGN and IWMSTEND during the policy interval. The count is scaled by 16. (For batch queue servers, this is the number of initiators with active jobs sysplex-wide.)												
64	40 SMF99_QDATA _QMPL_IN_TAR	4	binary	Number of server address spaces suggested to be started in the server service class on behalf of the period represented by this subtype 2 record. (Does not apply to batch queue servers.)												
68	44 SMF99_QDATA_AVG _QUEUED_REQUESTS	4	binary	Average number of queued requests over a policy interval. The count is scaled by 16.												
72	48 SMF99_QDATA_LT _TOTAL_REQUESTS	4	binary	Long term average total work requests for the work queue.												
76	4C SMF99_QDATA _SERVER_IDLE	4	binary	Average idle server instances over the policy period.												
80	50 SMF99_QDATA_Q_TYPE	1	binary	Work queue type: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Queue manager type work queue.</td> </tr> <tr> <td>1</td> <td>Batch type work queue.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Queue manager type work queue.	1	Batch type work queue.	2-7	Reserved.				
Bit	Meaning when set															
0	Queue manager type work queue.															
1	Batch type work queue.															
2-7	Reserved.															
81	51 SMF99_QDATA _Q_QUALIFIER	1	binary	Work queue qualifier <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Server instances are managed by WLM</td> </tr> <tr> <td>1</td> <td>Address spaces have been moved from this work queue to enforce the minimum number of servers of another work queue of the same application environment</td> </tr> <tr> <td>2</td> <td>Address spaces have been moved during policy adjustment because the maximum number of servers has been already started for the application environment</td> </tr> <tr> <td>3</td> <td>Minimum number of address spaces must be distributed across all work queues of the application environment</td> </tr> <tr> <td>4-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Server instances are managed by WLM	1	Address spaces have been moved from this work queue to enforce the minimum number of servers of another work queue of the same application environment	2	Address spaces have been moved during policy adjustment because the maximum number of servers has been already started for the application environment	3	Minimum number of address spaces must be distributed across all work queues of the application environment	4-7	Reserved.
Bit	Meaning when set															
0	Server instances are managed by WLM															
1	Address spaces have been moved from this work queue to enforce the minimum number of servers of another work queue of the same application environment															
2	Address spaces have been moved during policy adjustment because the maximum number of servers has been already started for the application environment															
3	Minimum number of address spaces must be distributed across all work queues of the application environment															
4-7	Reserved.															
82	52 SMF99_QDATA _ACTIVE_RGNWORK	2	binary	Active number of server processing work requests that have been routed directly to the server region. This number is not included in either the QDATA_SERVER_IDLE count or the QDATA_SERVER_ACTIVE count.												
84	54 SMF99_QDATA _RQDATA_OF	4	binary	Offset to remote queue data section from beginning of record, including RDW. (Applies only to batch queue servers.)												

Offsets	Name	Length	Format	Description
88	58 SMF99_QDATA_RQDATA_LN	2	binary	Length of remote queue data entries.
90	5A SMF99_QDATA_RQDATA_ON	2	binary	Number of remote queue data entries.
92	5C SMF99_QDATA_SUBSYS_TYPE	4	EBCDIC	Subsystem type of the owner of the queue. (Applies only to batch queue servers.)
96	60 SMF99_QDATA_SUBSYS_NAME	8	EBCDIC	Subsystem name of the owner of the queue. (Applies only to batch queue servers.)
104	68 SMF99_QDATA_INST_PER_SERVER	2	binary	Number of server instances per server. Only applies if SMF99_QDATA_TASKS_MANAGED is set.
106	6A SMF99_QDATA_SPACES_MOVED	2	binary	Number of server address spaces moved away from this queue.
108	6C SMF99_QDATA_AE_MAXLIMIT	2	binary	Maximum number of servers for the application environment.
110	6E SMF99_QDATA_AE_MINLIMIT	2	binary	Minimum number of servers for the application environment.
112	70 SMF99_QDATA_AVG_INELIGIBLE_REQUESTS	4	binary	Average number of ineligible queued requests over a policy interval scaled by * 16. Currently applies to batch queues only.

Remote Queue Server Data Entry Section

Offsets	Name	Length	Format	Description														
0	SMF99_RQDATA_SYS_NAME	8	EBCDIC	Name of the system this RQDATA section represents.														
8	8 SMF99_RQDATA_FLAGS	4	binary	System flags: <table border="0" style="margin-left: 20px;"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>System started at least one server for this work queue in the policy interval that this data represents.</td> </tr> <tr> <td>1</td> <td>System cannot start any servers for this work due to some constraint.</td> </tr> <tr> <td>2</td> <td>System intended to add servers for this work queue on the just-completed policy interval, but deferred because another system appears to be a better candidate.</td> </tr> <tr> <td>3</td> <td>Work queue is managed on this system.</td> </tr> <tr> <td>4</td> <td>Originator sent valid assess data.</td> </tr> <tr> <td>5-31</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	System started at least one server for this work queue in the policy interval that this data represents.	1	System cannot start any servers for this work due to some constraint.	2	System intended to add servers for this work queue on the just-completed policy interval, but deferred because another system appears to be a better candidate.	3	Work queue is managed on this system.	4	Originator sent valid assess data.	5-31	Reserved.
Bit	Meaning when set																	
0	System started at least one server for this work queue in the policy interval that this data represents.																	
1	System cannot start any servers for this work due to some constraint.																	
2	System intended to add servers for this work queue on the just-completed policy interval, but deferred because another system appears to be a better candidate.																	
3	Work queue is managed on this system.																	
4	Originator sent valid assess data.																	
5-31	Reserved.																	
12	C SMF99_RQDATA_ACTIVE_SERVERS	4	binary	Ten-second average number of active servers, scaled by 16.														
16	10 SMF99_RQDATA_TOTAL_SERVERS	4	binary	Ten-second average total servers, including active and idle.														
20	14 SMF99_RQDATA_AVG_TOTAL_REQ	4	binary	Average total requests for the queue eligible to run on the system represented by this RQDATA entry. This corresponds to the last point plotted on the queue delay plot. Scaled by 16.														
24	18 SMF99_RQDATA_#_SERVERS	4	binary	Number of servers required for receiver value. (Valid only if remote system deferred starting servers.)														
28	1C SMF99_RQDATA_PI_DELTA	4	binary	PI delta for donor period of highest importance if servers are started. (Valid only if remote system deferred starting servers.)														
32	20 SMF99_RQDATA_HIGHEST_IMP	2	binary	Highest importance of donor periods negatively affected if servers are started. (Valid only if remote system deferred starting servers.)														
34	22 *	2	EBCDIC	Reserved.														
36	24 SMF99_RQDATA_WAITING_FOR_SYSNAME	8	EBCDIC	System name sender is deferring to. Blank if deferring only to collect data from other systems. (Valid only if remote system deferred starting servers.)														
44	2C SMF99_RQDATA_DONOR_CLASS	8	EBCDIC	Service class name for donor period most impacted by starting servers. (Valid only if remote system deferred starting servers.)														
52	34 SMF99_RQDATA_PER#	4	binary	Donor's service class period number. (Valid only if remote system deferred starting servers.)														

Record type 99

Offsets	Name	Length	Format	Description
56	38 SMF99_RQDATA_DONOR_RGROU	8	EBCDIC	Resource group name for donor period most impacted by starting servers.
64	40 SMF99_RQDATA_PA_SKIP	2	binary	Policy adjustment skip clock.
66	42 SMF99_RQDATA_Q_SKIP	1	binary	Defer processing skip clock.
67	43 SMF99_Q_SKIP_REASON	1	binary	Reason defer processing skip clock was set.
68	44 SMF99_RQDATA_AVG_QUEUED_REQUESTS	4	binary	Average number of queued requests over a policy interval scaled by * 16.
72	48 SMF99_RQDATA_AVG_INELIGIBLE_REQUESTS	4	binary	Average number of ineligible queued requests over a policy interval scaled by * 16.
76	4C SMF99_RQDATA_AVG_CONSTRAINT_REQUESTS	4	binary	Average number of queued requests with affinity to constraint systems only scaled by * 16.

Address space expanded storage access policy section

Offsets	Name	Length	Format	Description																
0	SMF99_AS_ESP_ANAM	8	EBCDIC	Address space name.																
8	8 SMF99_AS_ESP_AP	1	binary	Expanded storage access policy for demand pages. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>protected</td> </tr> <tr> <td>2</td> <td>least recently used (LRU)</td> </tr> <tr> <td>3</td> <td>space available</td> </tr> </tbody> </table>	Value	Meaning	1	protected	2	least recently used (LRU)	3	space available								
Value	Meaning																			
1	protected																			
2	least recently used (LRU)																			
3	space available																			
9	9 SMF99_AS_ESP_VP	1	binary	Expanded storage access policy for VIO pages. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>protected</td> </tr> <tr> <td>2</td> <td>least recently used (LRU)</td> </tr> <tr> <td>3</td> <td>space available</td> </tr> </tbody> </table>	Value	Meaning	1	protected	2	least recently used (LRU)	3	space available								
Value	Meaning																			
1	protected																			
2	least recently used (LRU)																			
3	space available																			
10	A SMF99_AS_ESP_HP	1	binary	Expanded storage access policy for hiperspace pages. <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>protected</td> </tr> <tr> <td>2</td> <td>least recently used (LRU)</td> </tr> <tr> <td>3</td> <td>space available</td> </tr> </tbody> </table>	Value	Meaning	1	protected	2	least recently used (LRU)	3	space available								
Value	Meaning																			
1	protected																			
2	least recently used (LRU)																			
3	space available																			
11	B SMF99_AS_ESP_ASID	2	binary	Address space ID.																
13	D SMF99_AS_ESP_FLAGS	1	binary	Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Storage is protected at this instant.</td> </tr> <tr> <td>1</td> <td>Storage protection assigned to space by classification rule.</td> </tr> <tr> <td>2</td> <td>Address space is currently managed to region's goal rather than transaction server's goal.</td> </tr> <tr> <td>3</td> <td>Address space is non swappable.</td> </tr> <tr> <td>4</td> <td>Address space is currently managed to both region's and transaction server's goal.</td> </tr> <tr> <td>5</td> <td>Special reporting data available</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Storage is protected at this instant.	1	Storage protection assigned to space by classification rule.	2	Address space is currently managed to region's goal rather than transaction server's goal.	3	Address space is non swappable.	4	Address space is currently managed to both region's and transaction server's goal.	5	Special reporting data available	6-7	Reserved.
Bit	Meaning when set																			
0	Storage is protected at this instant.																			
1	Storage protection assigned to space by classification rule.																			
2	Address space is currently managed to region's goal rather than transaction server's goal.																			
3	Address space is non swappable.																			
4	Address space is currently managed to both region's and transaction server's goal.																			
5	Special reporting data available																			
6-7	Reserved.																			

Offsets	Name	Length	Format	Description
14	E *	2	binary	Reserved.
16	10 SMF99_AS_ESP_CS_FMCT	4	binary	Number of central storage frames the address spaces owns.
20	14 SMF99_AS_ESP_ES_FMCT	4	binary	Number of expanded storage frames the address spaces own.
24	18 SMF99_AS_ESP_PPS_TAR	4	binary	Address space protective process storage target. See subtype 5 for other targets. This is the only target non-monitor address spaces can have.
28	1C SMF99_AS_FULL_PREEMPTION	6	EBCDIC	Full Preemption Counts.
28	1C SMF99_AS_CPSRP_SAMP	2	binary	One sample per IRACPSRP invocation.
30	1E SMP99_AS_CPSRP_CUR_FP_SAMP	2	binary	Amount of IRACPSRP samples running with full preemption.
32	20 SMP99_AS_CPSRP_PREV_FP_SAMP	2	binary	Previous value of FULL_PRE1
34	22 SMF99_AS_HealthInd	1	binary	Health indicator
35	23 *	1	binary	Reserved to align to WORD boundary
36	24 SMF99_AS_TOTAL_SERVICE	4	binary	Total service units for the address space - OUCBWMS
40	28 SMF99_AS_CPU_SERVICE	4	binary	Total CPU service units for the address space - OUCBCPU
44	2C SMF99_AS_SRB_SERVICE	4	binary	Total SRB service units for the address space - OUCBSRB
48	30 SMF99_AS_MSO_SERVICE	4	binary	Total MSO service units for the address space - OUCBMSO
52	34 SMF99_AS_TRN_SERVICE	4	binary	Accumulated transaction service for the address space - OUCBTRS
56	38 SMF99_AS_IO_SERVICE	4	binary	Total IO service units for the address space - OUCBIOC
60	3C SMF99_AS_DISP_COUNT	2	binary	Dispatchable count: the number of times that this address space has been found in subroutine CPUTLCK to be dispatchable yet no CPU time has accumulated for it - OUXBDSCN
62	3E *	2	binary	Reserved to align to DWORD boundary
64	40 SMF99_AS_IFA_SERVICE	8	binary	Total IFA service units for the address space - Oucbx_Time_On_Pro(pro_ifa) descaled
72	48 SMF99_AS_IFACP_SERVICE	8	binary	Total IFA service units spent on CP for the address space - Oucbx_Time_Pro_On_CP(pro_ifa) descaled
80	50 SMF99_AS_SUP_SERVICE	8	binary	Total SUP service units for the address space - Oucbx_Time_On_Pro(pro_sup) descaled
88	58 SMF99_AS_SUPCP_SERVICE	8	binary	Total SUP service units spent on CP for the address space - Oucbx_Time_Pro_On_CP(pro_sup) descaled
96	60 SMF99_AS_PB_SERVICE	8	binary	Transaction service units on standard CP reported for PBs running in this address space - OucbxPBCP
104	68 SMF99_AS_PB_OFFLOAD_SERVICE	8	binary	Transaction service units on offload engines reported for PBs running in this address space - OucbxPBOffload
112	70 SMF99_AS_PB_OFFLOADONCP_SERVICE	8	binary	Transaction service units on standard CP that were offload eligible reported for PBs running in this address space - OucbxPBOffloadOnCP
120	78 SMF99_AS_ENCLAVE_TIME	4	binary	Accumulate tx active time of completed enclaves owned by this space - OUCBETIM

Record type 99

Offsets	Name	Length	Format	Description
124	7C SMF99_AS_ENCLAVE_CPU_SERVICE	4	binary	Accumulated CPU service of completed enclaves owned by this space – OUCBECPU
128	80 SMF99_AS_ENCLAVE_IFA_TIME	8	binary	Total IFA time for the enclaves owned by the address space – OucbxEncTimeOnPro(pro_ifa)
136	88 SMF99_AS_ENCLAVE_IFACP_TIME	8	binary	Total IFA time spent on CP for the enclaves owned by the address space - OucbxEncTimeProOnCP(pro_ifa)
144	90 SMF99_AS_ENCLAVE_SUP_TIME	8	binary	Total SUP time for the enclaves owned by the address space – OucbxEncTimeOnPro(pro_sup)
152	98 SMF99_AS_ENCLAVE_SUPPCP_TIME	8	binary	Total SUP time spent on CP for the enclaves owned by the address space - OucbxEncTimeProOnCP(pro_sup)

Subtype 3

Self-Defining Section

Offsets	Name	Length	Format	Description
0	SMF993COF	4	binary	Offset to class information from the beginning of record (including RDW).
4	4 SMF993CLN	2	binary	Length of the class information.
6	6 SMF993CON	2	binary	Number of class information.
8	8 SMF993CPOF	4	binary	Offset to class period section from beginning of record (including RDW).
12	C SMF993CPLN	2	binary	Length of the class period section.
14	E SMF993CPON	2	binary	Number of period sections.

Class data section

Offsets	Name	Length	Format	Description
0	SMF99_PNAM	8	EBCDIC	Service class name

Period Self Defining Section

Offsets	Name	Length	Format	Description
0	SMF993_PRPOF	4	binary	Offset to paging rate plot for this period from the beginning of the record (including RDW).
4	4 SMF993_PRPLN	2	binary	Length of paging rate plot.
6	6 SMF993_PRPON	2	binary	Number of paging rate plots.
8	8 SMF993_MPLOF	4	binary	Offset to MPL delay plots for this period from the beginning of the record (including RDW).
12	C SMF993_MPLLN	2	binary	Length of MPL delay plots.
14	E SMF993_MPLON	2	binary	Number of MPL delay plots.
16	10 SMF993_RUAOF	4	binary	Offset to ready user average plots for this period from the beginning of the record (including RDW).
20	14 SMF993_RUALN	2	binary	Length of ready user average plot.
22	16 SMF993_RUAON	2	binary	Number of ready user average plots.
24	18 SMF993_SWPOF	4	binary	Offset to swap delay plots for this period from the beginning of the record (including RDW).
28	1C SMF993_SWPLN	2	binary	Length of swap delay plot.
30	1E SMF993_SWPON	2	binary	Number of swap delay plots.

Offsets	Name	Length	Format	Description
32	20 SMF993_PASOF	4	binary	Offset to proportional aggregate speed plots for this period from the beginning of the record (including RDW).
36	24 SMF993_PASLN	2	binary	Length of proportional aggregate speed plots.
38	26 SMF993_PASON	2	binary	Number of proportional aggregate speed plots.
40	28 SMF993_QMPLOF	4	binary	Offset to the queue delay plots for this period from the beginning of the record (including RDW)
44	2C SMF993_QMPLLN	2	binary	Length of the queue delay plot.
46	2E SMF993_QMPLON	2	binary	Number of queue delay plots.
48	30 SMF993_QRUAOF	4	binary	Offset to the queue ready user average for this period from the beginning of the record (including RDW).
52	34 SMF993_QRUALN	2	binary	Length of the queue ready user average plot.
54	36 SMF993_QRUAON	2	binary	Number of queue ready user average plot.
56	38 SMF993_INTERNAL _CLASS_NAME	8	EBCDIC	Internal class name of the period. For non-discretionary periods, this will be the same as the external class name. For discretionary periods, this will be of the form \$SRMDlxx. For dynamic periods, this will be of the form \$SRMSxxx.
64	40 SMF993_QSTPOF	4	binary	Offset to queue service time for this period from beginning of record (including RDW).
68	44 SMF993_QSTPLN	2	binary	Length of queue service time plot.
70	46 SMF993_QSTPON	2	binary	Number of queue service time plots.
72	48 SMF993_AINSOF	4	binary	Offset to active server instance plot for this period from beginning of record (including RDW)
76	4C SMF993_AINSLN	2	binary	Length of active server instance plot
78	4E SMF993_AINSON	2	binary	Number of active server instance plot
80	50 SMF993_ASTROF	4	binary	Offset to virtual storage plot for active server instances for this period from beginning of record (including RDW)
84	54 SMF993_ASTRLN	2	binary	Length of virtual storage plot
86	56 SMF993_ASTRON	2	binary	Number of virtual storage plot
88	58 SMF993_TSTROF	4	binary	Offset to virtual storage plot for total server instances for this period from beginning of record (including RDW)
92	5C SMF993_TSTRLN	2	binary	Length of virtual storage plot
94	5E SMF993_TSTRON	2	binary	Number of virtual storage plot

Period Paging Rate Plot Section

Offsets	Name	Length	Format	Description
0	SMF99_PPRP_PNUM	4	binary	Period number.
4	4 SMF99_PPRP_BW	4	binary	Size of each x bucket width. X is the average address space size in frames.
8	8 SMF99_PPRP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
16	10 SMF99_PPRP_POINTS _OF	4	binary	Offset of point entries.
20	14 SMF99_PPRP_POINTS _ON	2	binary	Number of point entries.
22	16 SMF99_PPRP_POINTS _LN	2	binary	Length of a point entry.

Record type 99

MPL Delay Plot Section

Offsets	Name	Length	Format	Description
0	SMF99_MPLP_PNUM	4	binary	Period number
4	4 SMF99_MPLP_BW	4	binary	Size of each x bucket width. X is the percentage of ready users who have an MPL slot available to them.
8	8 SMF99_MPLP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
16	10 SMF99_MPLP_POINTS_OF	4	binary	Offset of point entries.
20	14 SMF99_MPLP_POINTS_ON	2	binary	Number of point entries.
22	16 SMF99_MPLP_POINTS_LN	2	binary	Length of a point entry.

Ready User Average Plot Section

Offsets	Name	Length	Format	Description
0	SMF99_RUAP_PNUM	4	binary	Period number.
4	4 SMF99_RUAP_BW	4	binary	Size of each x bucket width. X is the number of MPL slots available to the service class period scaled by 16.
8	8 SMF99_RUAP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
16	10 SMF99_RUAP_POINTS_OF	4	binary	Offset of point entries.
20	14 SMF99_RUAP_POINTS_ON	2	binary	Number of point entries.
22	16 SMF99_RUAP_POINTS_LN	2	binary	Length of a point entry.

Swap Delay Plot Section

Offsets	Name	Length	Format	Description
0	SMF99_SWPP_PNUM	4	binary	Period number.
4	4 SMF99_SWPP_BW	4	binary	Size of each x bucket width. X is the average time an address space in the service class period is logically swapped or swapped on expanded storage in milliseconds.
8	8 SMF99_SWPP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
16	10 SMF99_SWPP_POINTS_OF	4	binary	Offset of point entries.
20	14 SMF99_SWPP_POINTS_ON	2	binary	Number of point entries.
22	16 SMF99_SWPP_POINTS_LN	2	binary	Length of a point entry.

Proportional Aggregate Speed Plot Section

Offsets	Name	Length	Format	Description
0	SMF99_PASP_PNUM	4	binary	Period number.
4	4 SMF99_PASP_BW	4	binary	Size of each x bucket width. X is the proportional aggregate speed of a service class. Units are the same as for velocity.

Offsets	Name	Length	Format	Description
8	8 SMF99_PASP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
16	10 SMF99_PASP_POINTS_OF	4	binary	Offset of point entries.
20	14 SMF99_PASP_POINTS_ON	2	binary	Number of point entries.
22	16 SMF99_PASP_POINTS_LN	2	binary	Length of a point entry.

Queue Delay Plot Section

Offsets	Name	Length	Format	Description								
0	SMF99_QMPLP_PNUM	4	binary	Period number.								
4	4 SMF99_QMPLP_DISP_CLASS_NAME	8	EBCDIC	Service class name of the server where the server address spaces are running.								
12	C SMF99_QMPLP_BW	4	binary	Size of each x bucket width. X is the address space size in frames.								
16	10 SMF99_QMPLP_LSTX	4	binary	Last plotted x bucket index.								
	*	4	binary	Reserved.								
24	18 SMF99_QMPLP_POINTS_OF	4	binary	Offset of point entries.								
28	1C SMF99_QMPLP_POINTS_ON	2	binary	Number of point entries.								
30	1E SMF99_QMPLP_POINTS_LN	2	binary	Length of a point entry.								
32	20 SMF99_QMPLP_Q_TYPE	1	binary	Work queue type: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Queue manager type work queue.</td> </tr> <tr> <td>1</td> <td>Batch type work queue.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Queue manager type work queue.	1	Batch type work queue.	2-7	Reserved.
Bit	Meaning when set											
0	Queue manager type work queue.											
1	Batch type work queue.											
2-7	Reserved.											
33	21 *	3	EBCDIC	Reserved.								
36	24 SMF99_QMPLP_SUBSYS_TYPE	4	EBCDIC	Subsystem type of the owner of the queue. (Applies only to batch queue servers.)								
40	28 SMF99_QMPLP_SUBSYS_NAME	8	EBCDIC	Subsystem name of the owner of the queue. (Applies only to batch queue servers.)								

Queue Ready User Average Plot Section

Offsets	Name	Length	Format	Description
0	SMF99_QRUAP_PNUM	4	binary	Period number.
4	4 SMF99_QRUAP_DISP_CLASS_NAME	8	EBCDIC	Class name of server service class where the server address spaces are running.
12	C SMF99_QRUAP_BW	4	binary	Size of each x bucket width. X is the address space size in frames.
16	10 SMF99_QRUAP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
24	18 SMF99_QRUAP_POINTS_OF	4	binary	Offset of point entries.
28	1C SMF99_QRUAP_POINTS_ON	2	binary	Number of point entries.
30	1E SMF99_QRUAP_POINTS_LN	2	binary	Length of a point entry.

Active server instances plot section

Offsets	Name	Length	Format	Description
0	SMF99_AINS_PNUM	4	binary	Period number
4	4 SMF99_AINS_BW	4	binary	Bucket width
8	8 SMF99_AINS_LSTX	4	binary	Last plotted X bucket
	*	4	binary	Reserved.

Record type 99

Offsets	Name	Length	Format	Description
16	10 SMF99_AINS_POINTS_OF	4	binary	Offset of point entries
20	14 SMF99_AINS_POINTS_ON	2	binary	Number of point entries
22	16 SMF99_AINS_POINTS_LN	2	binary	Length of a point entry

VS Plot for Active Server Instances Section

Offsets	Name	Length	Format	Description								
0	SMF99_ASTR_PNUM	4	binary	Period number								
4	4 SMF99_ASTR_BW	4	binary	Bucket width								
8	8 SMF99_ASTR_LSTX	4	binary	Last plotted X bucket								
	*	4	binary	Reserved.								
16	10 SMF99_ASTR_POINTS_OF	4	binary	Offset of point entries								
18	12 SMF99_ASTR_POINTS_ON	2	binary	Number of point entries								
20	14 SMF99_ASTR_POINTS_LN	2	binary	Length of a point entry								
22	16 SMF99_ASTR_C_USED	1	binary	Plot curve used								
				<table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>VS curve below 16MB was used last time server instances adjusted</td> </tr> <tr> <td>1</td> <td>VS curve above 16MB was used last time server instances adjusted</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	VS curve below 16MB was used last time server instances adjusted	1	VS curve above 16MB was used last time server instances adjusted	2-7	Reserved.
Bit	Meaning when set											
0	VS curve below 16MB was used last time server instances adjusted											
1	VS curve above 16MB was used last time server instances adjusted											
2-7	Reserved.											
	*	3	EBCDIC	Reserved.								

VS Plot for Total Server Instances Section

Offsets	Name	Length	Format	Description								
0	SMF99_TSTR_PNUM	4	binary	Period number								
4	4 SMF99_TSTR_BW	4	binary	Bucket width								
8	8 SMF99_TSTR_LSTX	4	binary	Last plotted X bucket								
	*	4	binary	Reserved.								
16	10 SMF99_TSTR_POINTS_OF	4	binary	Offset of point entries								
18	12 SMF99_TSTR_POINTS_ON	2	binary	Number of point entries								
20	14 SMF99_TSTR_POINTS_LN	2	binary	Length of a point entry								
22	16 SMF99_TSTR_C_USED	1	binary	Plot curve used								
				<table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>VS curve below 16MB was used last time server instances adjusted</td> </tr> <tr> <td>1</td> <td>VS curve above 16MB was used last time server instances adjusted</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	VS curve below 16MB was used last time server instances adjusted	1	VS curve above 16MB was used last time server instances adjusted	2-7	Reserved.
Bit	Meaning when set											
0	VS curve below 16MB was used last time server instances adjusted											
1	VS curve above 16MB was used last time server instances adjusted											
2-7	Reserved.											
	*	3	EBCDIC	Reserved.								

Queue Service Time Plot Section

Offsets	Name	Length	Format	Description
0	SMF99_QSTP_PNUM	4	binary	Period number.
4	4 SMF99_QSTP_DISP_CLASS_NAME	8	EBCDIC	Class name where the server address spaces are running.
12	C SMF99_QSTP_BW	4	binary	Bucket width.
16	10 SMF99_QSTP_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
24	18 SMF99_QSTP_POINTS_OF	4	binary	Offset of point entries.

Offsets	Name	Length	Format	Description
28	1C SMF99_QSTP_POINTS_ON	2	binary	Number of point entries.
30	1E SMF99_QSTP_POINTS_LN	2	binary	Length of a point entry.

Plot With Two Curves - Point Entry Section

Offsets	Name	Length	Format	Description
	SMF99_2PLOT_XVAL	4	binary	X value of point plotted in a bucket
	SMF99_2PLOT_Y1VAL	4	binary	Y value of point plotted on first curve
	SMF99_2PLOT_Y2VAL	4	binary	Y value of point plotted on second curve

Subtype 4

Self-Defining Section

Offsets	Name	Length	Format	Description
0	SMF994DEVCLID	4	binary	Identifier of the device cluster. Used to associate a device cluster with the periods in a device cluster through the device cluster identifier field in the subtype 2 record (SMF99_PDEVCL).
4	4 SMF994IOPTOF	4	binary	Offset to the I/O priority table information from the beginning of the record (including RDW).
8	8 SMF994IOPTLN	2	binary	Length of the I/O priority information.
10	A SMF994IOPTON	2	binary	Number of priority table sections.
12	C SMF994IOPLTOF	4	binary	Offset to the I/O plot section from the beginning of the record (including RDW).
16	10 SMF994IOPLTLN	2	binary	Length of the I/O plot section.
18	12 SMF994IOPLTON	2	binary	Number of I/O plot sections.

Device Cluster Priority Table Section

Offsets	Name	Length	Format	Description
0	SMF99_IPTPRTY	2	binary	I/O priority.
2	2 SMF99_IPTNP	2	binary	New I/O priority (zero if not changed)
4	4 SMF99_IPTIMDP	4	binary	Initial maximum percentage of time that work at priority could demand I/O, initial value before any priority moves. Percentage scaled by 10.
8	8 SMF99_IPTPMDP	4	binary	The projected maximum percentage of I/O time demanded at priority.
12	C SMF99_IPTW2UR	4	binary	The ratio of I/O wait to I/O using time scaled by 16.
16	10 SMF99_IPTIMAXD	4	binary	The initial cumulative maximum demand percentage scaled by 10.
20	14 SMF99_IPTWMAXD	4	binary	The projected cumulative maximum demand percentage scaled by 10.

I/O Plot Information Section

Offsets	Name	Length	Format	Description
0	SMF99_IO_PLOT_BW	4	binary	Bucket width.
4	4 SMF99_IO_PLOT_LSTX	4	binary	Last plotted x bucket.

Record type 99

Offsets	Name	Length	Format	Description
8	8 Reserved.	4	binary	Reserved.
12	C SMF99_IO_PLOT_POINTS_OF	4	binary	Offset of the point entries.
16	10 SMF99_IO_PLOT_POINTS_ON	2	binary	Number of point entries.
18	12 SMF99_IO_PLOT_POINTS_LN	2	binary	Length of a point entry.

Subtype 5

Self-Defining Section

Offsets	Name	Length	Format	Description																
0	SMF99ANAM	8	EBCDIC	Address space name																
8	8 SMF99ACNM	8	EBCDIC	Service class to which the address space belongs.																
16	10 SMF99APNUM	4	binary	Period number that the address space is in.																
20	14 SMF99APCS	4	binary	Protective central storage target, in frames.																
24	18 SMF99ARCS	4	binary	Restrictive central storage target, in frames. This field is no longer supported with z/OS release V1R8 or higher.																
28	1C SMF99APPS	4	binary	Protective processor storage target, in frames.																
32	20 SMF99ARPS	4	binary	Restrictive processor storage target, in frames. This field is no longer supported with z/OS release V1R8 or higher.																
36	24 SMF99CPLT	20	EBCDIC	Central storage plot. Mapped by SMF99_S5_CPLT_MAP.																
56	38 SMF99PPLT	20	EBCDIC	Processor storage plot. Mapped by SMF99_S5_PPLT_MAP.																
76	4C SMF99ASID	2	binary	Address space ID.																
78	4E SMF99A_EXTERNAL_CLASS_NAME	8	EBCDIC	The name of the external class with which the address space is associated.																
86	56 SMF99_S5_FLAGS	1	binary	Flags. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Storage is protected at this instant.</td> </tr> <tr> <td>1</td> <td>Storage protection assigned to space by classification rule.</td> </tr> <tr> <td>2</td> <td>Indicates that storage critical housekeeping was the last to set the storage target for central storage.</td> </tr> <tr> <td>3</td> <td>Indicates that storage critical housekeeping was the last to set the storage target for processor storage.</td> </tr> <tr> <td>4</td> <td>Indicates that policy adjustment was the last to set the storage target for central storage.</td> </tr> <tr> <td>5</td> <td>Indicates that policy adjustment was the last to set the storage target for processor storage.</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Storage is protected at this instant.	1	Storage protection assigned to space by classification rule.	2	Indicates that storage critical housekeeping was the last to set the storage target for central storage.	3	Indicates that storage critical housekeeping was the last to set the storage target for processor storage.	4	Indicates that policy adjustment was the last to set the storage target for central storage.	5	Indicates that policy adjustment was the last to set the storage target for processor storage.	6-7	Reserved.
Bit	Meaning when set																			
0	Storage is protected at this instant.																			
1	Storage protection assigned to space by classification rule.																			
2	Indicates that storage critical housekeeping was the last to set the storage target for central storage.																			
3	Indicates that storage critical housekeeping was the last to set the storage target for processor storage.																			
4	Indicates that policy adjustment was the last to set the storage target for central storage.																			
5	Indicates that policy adjustment was the last to set the storage target for processor storage.																			
6-7	Reserved.																			
87	57 SMF99_AS_IO_Mgmt_Support_Data	2	binary	I/O management support data.																
89	59 *	1	EBCDIC	Reserved.																

Processor Storage Plot Section

Offsets	Name	Length	Format	Description
	SMF99_S5_PPLT_MAP	*	*	
0	SMF99_PPLT_BW	4	binary	Size of each x bucket width. X is the address space size in frames.

Offsets	Name	Length	Format	Description
4	4 SMF99_PPLT_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
12	C SMF99_PPLT_POINTS_OF	4	binary	Offset of point entries.
16	10 SMF99_PPLT_POINTS_ON	2	binary	Number of point entries.
18	12 SMF99_PPLT_POINTS_LN	2	binary	Length of a point entry.

Central storage plot section

Offsets	Name	Length	Format	Description
	SMF99_S5_CPLT_MAP	*	*	
0	SMF99_CPLT_BW	4	binary	Size of each x bucket width. X is the address space size in frames.
4	4 SMF99_CPLT_LSTX	4	binary	Last plotted x bucket index.
	*	4	binary	Reserved.
12	C SMF99_CPLT_POINTS_OF	4	binary	Offset of point entries.
16	10 SMF99_CPLT_POINTS_ON	2	binary	Number of point entries.
18	12 SMF99_CPLT_POINTS_LN	2	binary	Length of a point entry.

Subtypes 1, 3, and 5

Plot with One Curve - Point Entry Section

Offsets	Name	Length	Format	Description
0	SMF99_PLOT_XVAL	4	binary	X value of point plotted in a bucket.
4	4 SMF99_PLOT_YVAL	4	binary	Y value of point plotted in a bucket.

Subtype 5

Plot With Three Curves - Point Entry Section

Offsets	Name	Length	Format	Description
0	SMF99_3PLOT_XVAL	4	binary	X value of point plotted in a bucket.
4	4 SMF99_3PLOT_Y1VAL	4	binary	Y value of point plotted on first curve. For the processor storage plot, the first curve is the page-in rate per captured (TCB+SRB) second from auxiliary storage. For the central storage plot, the first curve is the page-in rate per captured (TCB+SRB) second from auxiliary and expanded storage.
8	8 SMF99_3PLOT_Y2VAL	4	binary	Y value of point plotted on second curve. For the processor storage plot, the second curve is the paging cost in milliseconds per elapsed second for paging from auxiliary storage. For the central storage plot, the second curve is the paging cost in milliseconds per elapsed second for paging from auxiliary and expanded storage.

Record type 99

Offsets	Name	Length	Format	Description
12	C SMF99_3PLOT_Y3VAL	4	binary	Y value of point plotted on third curve. For the processor storage plot, the third curve is the captured time in milliseconds per elapsed second. For the central storage plot, the third curve is the captured time in milliseconds per elapsed second.

Subtype 6

Self-Defining Section

Offsets	Name	Length	Format	Description
0	SMF996CPOF	4	binary	Offset to service class period section.
4	4 SMF996CPLN	2	binary	Length of a service class period section.
6	6 SMF996CPON	2	binary	Number of service class period sections.

Period Data Section

Offsets	Name	Length	Format	Description												
0	SMF996_ECLASS_NAME	8	EBCDIC	External class name. For an externally-defined service class, this is a name defined in the service definition. For a server period, this name will be of the form \$SRMSxxx. For system service classes, this name will be \$SRMBEST, \$SRMDUMP, \$SRMGOOD, \$SRMDISC, or \$SRMQSC.												
8	8 SMF996_PER_NUM	2	binary	Period number within class.												
10	A SMF996_GOALTYPE	1	binary	Goal type: <table border="0"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>System, SYSSTC, or server goal</td> </tr> <tr> <td>1</td> <td>Short response time</td> </tr> <tr> <td>2</td> <td>Long response time</td> </tr> <tr> <td>3</td> <td>Velocity</td> </tr> <tr> <td>4</td> <td>Discretionary</td> </tr> </tbody> </table>	Value	Meaning	0	System, SYSSTC, or server goal	1	Short response time	2	Long response time	3	Velocity	4	Discretionary
Value	Meaning															
0	System, SYSSTC, or server goal															
1	Short response time															
2	Long response time															
3	Velocity															
4	Discretionary															
11	B SMF996_PERCENTILE	1	binary	Response time goal percentile. (Zero if period does not have a percentile response time goal.)												
12	C SMF996_ICLASS_NAME	8	EBCDIC	Internal service class name. Same as SMF996_ECLASS_NAME, except for discretionary periods, in which case the name will be of the form \$SRMDixx.												
20	14 SMF996_GOALVAL	4	binary	Goal value. If a response time goal, this value will be the goal in milliseconds. If a velocity goal, this value will be the velocity percentage. If a discretionary goal, system goal, or if this is a server period, this value will be zero.												
24	18 SMF996_IMPOR	2	binary	Importance of service class period.												
26	1A SMF996_DP	1	binary	Dispatching priority of period for next policy interval.												
27	1B SMF996_IODP	1	binary	I/O priority of period for next policy interval.												
28	1C SMF996_MPLI	2	binary	MPL in-target for next policy interval.												
30	1E SMF996_MPLO	2	binary	MPL out-target for next policy interval.												
32	20 SMF996_RUA	4	binary	Average number of ready address spaces over last policy interval, scaled by a factor of 16.												
36	24 SMF996_PSPT	4	binary	Time swapped out address spaces in period are protected from being swapped to aux for next policy interval. This value is expressed in units of 1.024 milliseconds.												
40	28 SMF996_PSITAR	4	binary	Storage isolation target for next policy interval for each address space in period. (Valid only for work with short response time goals, in which case the value is the number of frames protected. Otherwise, this value is zero.)												
44	2C SMF996_LOCAL_PI	4	binary	Local performance index, times 100.												
48	30 SMF996_SYSPLEX_PI	4	binary	Sysplex performance index, times 100.												

Offsets	Name	Length	Format	Description								
52	34 SMF996_SERVER_DATA_OF	4	binary	Offset to server section from beginning of record (including RDW). Only valid if period is a server period. There will be one server section entry for each different external service class to which server address spaces in this server period were originally classified.								
56	38 SMF996_SERVER_DATA_LN	2	binary	Length of each server section entry.								
58	3A SMF996_SERVER_DATA_ON	2	binary	Number of server section entries.								
60	3C SMF996_PSERV	4	binary	Service accumulated during interval.								
64	40 SMF996_PISERV	4	binary	zAAP service accumulated during interval.								
68	44 SMF996_PSSERV	4	binary	Accumulated SUP service.								
72	48 SMF996_Time_at_PDP_Using	4	binary	Time at PDP using samples during last interval.								
76	4C SMF996_Time_at_PDP	4	binary	Time at PDP accumulator during last interval.								
80	50 SMF996_FLAGS	1	binary	Flags. <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Period is managed by EWLM performance data.</td> </tr> <tr> <td>1</td> <td>Period belongs to a service class which was assigned to I/O priority group.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Period is managed by EWLM performance data.	1	Period belongs to a service class which was assigned to I/O priority group.	2-7	Reserved.
Bit	Meaning when set											
0	Period is managed by EWLM performance data.											
1	Period belongs to a service class which was assigned to I/O priority group.											
2-7	Reserved.											
81	51 *	3	EDCDIC	Reserved.								
84	54 SMF996_EWLM_LOCAL_PI	4	binary	EWLM local PI.								
88	58 SMF996_EWLM_GLOBAL_PI	4	binary	EWLM global PI.								

Server Section

Offsets	Name	Length	Format	Description
0	SMF99_S6_SERVER_CLASS_NAME	8	EBCDIC	Name of the service class to which at least one of the server address spaces in the server period represented by the subtype 6 entry was originally classified.
8	8 SMF99_S6_SERVER_PER_NUM	4	binary	Period number within class.

Subtype 7

Self-Defining Section

Offsets	Name	Length	Format	Description
0	SMF997_PAV_SUBSYS_ID	32	EBCDIC	PAV subsystem ID, (NED TOKEN)
32	20 SMF997_NUM_EXT_SC	4	binary	Number of external service classes. This is needed to determine the index to the SYSTEM service class in the device service class bitmap. The device service class bitmap is in the device data section. The number of external service classes is put in the self-defining section to avoid repeating it for each device.
36	24 SMF997_PAV_DATA_DEV_OF	4	binary	Offset to the first device section, from beginning of record (including RDW).
40	28 SMF997_PAV_DATA_DEV_LEN	2	binary	Length of each device section.
38	26 SMF997_PAV_DATA_DEV_NO	2	binary	Number of device sections.

PAV Device Section

Offsets	Name	Length	Format	Description
0	SMF997_PAV_DEV_ID	2	binary	Device ID.

Record type 99

Offsets	Name	Length	Format	Description
2	2 SMF997_PAV_DEV_FLAGS	1	binary	Goal type: Bit Meaning when set 0 PAV device is an unbound alias 1 PAV device managed by WLM 2 PAV device temporarily unavailable 3-7 Reserved.
3	3 SMF997_PAV_DEV_NUM_OF_ALIASES	1	binary	Number of aliases assigned. Valid for PAV base device.
4	4 SMF997_PAV_DEV_AVG_IOS_QUEUE_LEN	4	binary	Average IOS queue length. Valid for PAV base device.
8	8 SMF997_PAV_DEV_AVG_SERVICE_TIME	4	binary	Average service time. Valid for PAV base device in 128 micro seconds.
12	C SMF997_PAV_DEV_IODELAY_TIME	4	binary	I/O Delay Time. Currently CU queue time.
16	10 SMF997_PAV_DEV_IODELAY_SAMPS	2	binary	I/O Delay samples
18	12 SMF997_PAV_DEV_IOSQSAMPLES	2	binary	IOS Queue samples
20	14 SMF997_PAV_DEV_SUBCHSET	1	binary	Sub Channel set
21	15 *	3	binary	Reserved
24	18 SMF997_PAV_DEV_DEVSC_MAP_OLD	14	binary	Device service class ID bit string for 108 service classes prior to z/OS V1R10
38	26 *	2	binary	Reserved.
40	28 SMF997_PAV_DEV_UTILIZATION	4	binary	Utilization
44	2C SMF997_PAV_DEV_PENDTIME	4	binary	Pend time
48	30 SMF997_PAV_DEV_DISCTIME	4	binary	Disconnect time
52	34 SMF997_PAV_DEV_SSC	4	binary	Start subchannel count
56	38 SMF997_PAV_DEV_MINACNT	1	binary	Local min alias count
57	39 SMF997_PAV_DEV_GMINACNT	1	binary	Global min alias count
58	3A *	2	binary	Unused
60	3C SMF997_PAV_DEV_RSRVD2	8	binary	Reserved
68	44 *	4	binary	Reserved
72	48 SMF997_PAV_DEV_DEVSC_MAP	46	binary	Device service class ID bit string

Subtype 8

Self Defining Section

Offsets	Name	Length	Format	Description
0	SMF998_LD_DATA_OFFSET	4	binary	Offset to LPAR data section from beginning of record (including RDW)
4	4 SMF998_LD_DATA_LENGTH	2	binary	Length of an LPAR data section
6	6 SMF998_LD_DATA_NUMBER	2	binary	Number of LPAR data sections
8	8 SMF998_PT_DATA_OFFSET	4	binary	Offset to priority table section from beginning of record (including RDW)
12	C SMF998_PT_DATA_LENGTH	2	binary	Length of a priority table section
14	E SMF998_PT_DATA_NUMBER	2	binary	Number of priority table sections

Offsets	Name	Length	Format	Description
16	10 SMF998_PC_DATA _OFFSET	4	binary	Offset to period CPU section from beginning of record (including RDW)
20	14 SMF998_PC_DATA _LENGTH	2	binary	Length of a period CPU section
22	16 SMF998_PC_DATA _NUMBER	2	binary	Number of period CPU sections
24	18 SMF998_IMAGE_CPU _DATA _OFFSET	4	binary	Offset to image CPU section, from beginning of record (including RDW)
28	1C SMF998_IMAGE_CPU _DATA _LENGTH	2	binary	Length of an image CPU section
30	1E SMF998_IMAGE_CPU _DATA _NUMBER	2	binary	Number of image CPU sections
32	20 SMF998_SYSH_CPU _PLOT_OF	4	binary	Offset to the SYSH CPU plot section, from beginning of record (including RDW)
36	22 SMF998_SYSH_CPU _PLOT_LN	2	binary	Length of SYSH CPU plot section
38	24 SMF998_SYSH_CPU _PLOT_ON	2	binary	Number of SYSH CPU plot sections

LPAR Data Entry Section

Offsets	Name	Length	Format	Description																
0	SMF998_ImageSystemName	8	EBCDIC	Image system name																
8	8 SMF998_ControlFlag1	1	binary	Control flag that indicates why the rest of the data in the LD entry has not been filled in. <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Indicates that this is an overflow SMF 99 subtype 8 record for specified system. The appropriate LD data for this system appears in the first SMF 99 subtype 8 record for this system.</td> </tr> <tr> <td>1</td> <td>Indicates that this system does not have DIAG support.</td> </tr> <tr> <td>2</td> <td>Indicates that LPAR CPU Management is not enabled.</td> </tr> <tr> <td>3</td> <td>Indicates that this system issued DIAG and it failed.</td> </tr> <tr> <td>4</td> <td>Indicates that an image entry was not returned through the DIAG interface for this system.</td> </tr> <tr> <td>5</td> <td>Indicates that the image is non-z/OS. (LINUX).</td> </tr> <tr> <td>6-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Indicates that this is an overflow SMF 99 subtype 8 record for specified system. The appropriate LD data for this system appears in the first SMF 99 subtype 8 record for this system.	1	Indicates that this system does not have DIAG support.	2	Indicates that LPAR CPU Management is not enabled.	3	Indicates that this system issued DIAG and it failed.	4	Indicates that an image entry was not returned through the DIAG interface for this system.	5	Indicates that the image is non-z/OS. (LINUX).	6-7	Reserved.
Bit	Meaning when set																			
0	Indicates that this is an overflow SMF 99 subtype 8 record for specified system. The appropriate LD data for this system appears in the first SMF 99 subtype 8 record for this system.																			
1	Indicates that this system does not have DIAG support.																			
2	Indicates that LPAR CPU Management is not enabled.																			
3	Indicates that this system issued DIAG and it failed.																			
4	Indicates that an image entry was not returned through the DIAG interface for this system.																			
5	Indicates that the image is non-z/OS. (LINUX).																			
6-7	Reserved.																			
9	9 SMF998_SystemNumber	1	binary	System slot number. The source for this value is QUASNUM in IXCYQUAA.																
10	A *	2	EBCDIC	Reserved																
12	C SMF998_LastSetTime	8	binary	Timestamp in STCK format																
20	14 SMF998_TotalWeight	4	binary	Total weight of the CEC																
24	18 SMF998_ NumberOfSharedPhysicalCPUs	1	binary	Total number of shared (non-dedicated) physical CPU configured for the CEC use																
25	19 *	3	EBCDIC	Reserved																
28	1C SMF998_ImageID	1	binary	Image ID of the partition																

Record type 99

Offsets	Name	Length	Format	Description														
29	1D SMF998_ImageFlags	1	binary	Image Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Image is capped by software.</td> </tr> <tr> <td>1</td> <td>Identifies whether WLM should be involved in dynamic LPAR weight management.</td> </tr> <tr> <td>2</td> <td>Identifies whether partition is using shared CPs.</td> </tr> <tr> <td>3</td> <td>Identifies whether partition is using dedicated CPs.</td> </tr> <tr> <td>4</td> <td>Identifies whether partition is capped by installation from console.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Image is capped by software.	1	Identifies whether WLM should be involved in dynamic LPAR weight management.	2	Identifies whether partition is using shared CPs.	3	Identifies whether partition is using dedicated CPs.	4	Identifies whether partition is capped by installation from console.	5-7	Reserved.
Bit	Meaning when set																	
0	Image is capped by software.																	
1	Identifies whether WLM should be involved in dynamic LPAR weight management.																	
2	Identifies whether partition is using shared CPs.																	
3	Identifies whether partition is using dedicated CPs.																	
4	Identifies whether partition is capped by installation from console.																	
5-7	Reserved.																	
30	1E *	2	EBCDIC	Reserved														
32	20 SMF998_NumberCpusActive	2	binary	Number of CPUs that are currently active														
34	22 SMF998_AverageCpuUtilization	2	binary	Average CPU utilization														
36	24 SMF998_ImageInitialWeight	2	binary	Image initial weight														
38	26 SMF998_ImageCurrentWeight	2	binary	Image current weight														
40	28 SMF998_ImageMinimumWeight	2	binary	Image minimum weight														
42	2A SMF998_ImageMaximumWeight	2	binary	Image maximum weight														
44	2C SMF998_Pro_Time_Avail	4	binary	Total processor time available, includes captured time plus wait time														
48	30 SMF998_Service_Units_Per_Second	4	binary	Unweighted CPU service units per second per online CPU that the hardware is capable of.														
52	34 *	16	EBCDIC	Reserved														
68	44 SMF998_SoftCapMsu	4	binary	Capacity in millions of service units per hour for which the logical partition is licensed.														
72	48 *	4	EBCDIC	Reserved														
76	4C SMF998_PricingManagementWeight	4	binary	Current pricing management weight														

Priority Table Entry Section

Offsets	Name	Length	Format	Description
0	SMF998_PTPTY	2	binary	Dispatch priority
2	2 SMF998_PTNP	2	binary	New dispatch priority (zero if not changed)
4	4 SMF998_PTIMDP	4	binary	Initial maximum percentage of processor demanded at priority, initial value before any priority moves or slice changes
8	8 SMF998_PTPMDP	4	binary	Projected maximum percentage of processor demanded at priority
12	C SMF998_PTCPUU	4	binary	CPU using samples at priority
16	10 SMF998_PTCPUD	4	binary	CPU delay samples at priority
20	14 SMF998_PTW2UR	4	binary	Wait-to-using ratio at priority (*16)
24	18 SMF998_PTAPU	4	binary	Actual measured processor used at priority
28	1C SMF998_PTPPU	4	binary	Projected processor time to be used at priority
32	20 SMF998_PTACMD	4	binary	Achievable cumulative max demand for priorities affected by a move
36	24 *	4	binary	Reserved
40	28 SMF998_PTIMAXD	4	binary	Initial cumulative maximum demand

Offsets	Name	Length	Format	Description
44	2C SMF998_PTWMAXD	4	binary	Projected cumulative maximum demand
48	30 SMF998_PTIAMTW	4	binary	Initial average mean time to wait
52	34 SMF998_PTWAMTW	4	binary	Projected average mean time to wait

CPU Period Table Entry Section

Offsets	Name	Length	Format	Description
0	SMF998_Service _Class_Name	8	EBCDIC	Internal service class name
8	8 SMF998_Importance	2	binary	Importance
10	A SMF998_Period _Number	2	binary	Period number
12	C *	4	EBCDIC	Reserved
16	10 SMF998_Dasd_Io _Delay_Sample	4	binary	Copy of I/O delay samples
20	14 SMF998_Non _Idle_Samp	4	binary	Number of non-idle samples
24	18 SMF998_Cpu _Using_Sample	4	binary	Copy of CPU using samples
28	1C SMF998_Cpu _Delay_Sample	4	binary	Copy of CPU delay samples
32	20 SMF998_Wlm_Queue _Delay_Sample	4	binary	Copy of WLM queue delay samples
36	24 SMF998_Dasd_Io _Using_Sample	4	binary	Copy of DASD I/O using samples
40	28 SMF998_Max_Dem_Per	4	binary	Maximum percentage of processor time demanded (constant across policy adjustment)
44	2C SMF998_Pi_Achieved	4	binary	Performance index achieved, adjusted into range, used to select donors and receivers
48	30 SMF998_Sysplex _Pi_Achieved	4	binary	Sysplex performance index achieved, adjusted into range, used to select donors and receivers
52	34 SMF998_Service_Ow	4	binary	Average service over a WLM-defined moving interval
56	38 SMF998_Mtw_Adj	4	binary	Mean time to wait adjusted by cccmxmtw
60	3C SMF998_Base _Priority	2	binary	Base dispatching priority
62	3E SMF998_Cap _Num_Slices	2	binary	Current number of sleep slices, or 0
64	40 SMF998_Work _Pro_Used	4	binary	Working variable for assess for processor used
68	44 SMF998_Current _Ach_Dem_Per	4	binary	Current achievable demand percentage for the period calculated from the initial PDT fields.
72	48 SMF998_Ach_Dem_Per	4	binary	Working variable for achievable demand percentage
76	4C SMF998_Old_Work _Pro_Used	4	binary	Work field computed during phase 1 move
80	50 SMF998_Proj_Pi_Com	4	binary	Unadjusted projected PI for committed actions only, used as base for projections
84	54 SMF998_Using_Delta	4	binary	Computed during assessment
88	58 SMF998_LparMgmt _Delay_Delta	4	binary	Delay delta computed by LPAR Mgmt algorithm. This field captures the delay delta for SMF99 recording before it is cleared out.
92	5C SMF998_Cpu_Cap _Delay_Sample	4	binary	CPU capping delay sample
96	60 SMF998_Iosub _Samples_Data_Offset	4	binary	Offset to I/O subsystem samples data from beginning of record (including RDW)
100	64 SMF998_Iosub _Samples_Data_Length	2	binary	Length of a I/O subsystem samples data section

Record type 99

Offsets	Name	Length	Format	Description
102	66 SMF998_Iosub _Samples_Data_number	2	binary	Number of I/O subsystem samples data sections
104	68 SMF998_Sysplex _Proj_Pi_Com	4	binary	Unadjusted sysplex projected PI for committed actions only, used as base for projections
108	6C SMF998_PC_CSS_NUMBER	1	binary	Channel subsystem identifier
109	6D *	11	EBCDIC	Reserved

LPAR CPU Data for a Partition in an LPAR Cluster Section

Offsets	Name	Length	Format	Description
0	SMF998_LC _Service_Class_Name	8	EBCDIC	Internal service class name
8	8 SMF998_LC _Period_Number	2	binary	Period number
	*	2	binary	Reserved
12	C SMF998_LC _Machine_Percentage	4	binary	Percent of the CEC shared capacity used by the partition either based on its current weight or utilization
16	10 SMF998_LC_Max_Dem_Per	4	binary	Maximum percentage of processor time demanded by the image during current interval (scaled by 10)
20	14 SMF998_LC _LastInt_Cpu_Using	4	binary	Last interval CPU using samples count
24	18 SMF998_LC _LastInt_Cpu_Delay	4	binary	Last interval CPU delay samples count
28	1C SMF998_LC _LastInt_Non_Idle	4	binary	Last interval non idle sample count which include using, delay and other
32	20 SMF998_LC _Avg_Cpu_Using	4	binary	Average CPU using samples count
36	24 SMF998_LC _Avg_Cpu_Delay	4	binary	Average CPU delay samples count
40	28 SMF998_LC_Using_Delta	4	binary	Using delta
44	2C SMF998_LC_Delay_Delta	4	binary	Delay delta
48	30 SMF998_LC _Work_Max_Dem_Per	4	binary	New maximum percentage of processor time demanded by the image during current interval as a result of weight change (scaled by 10)
52	34 SMF998_LC _Work_Weighted_ Max_Dem_Per	4	binary	Maximum percentage of processor time demanded by the image as a result of weight change, with respect to its current machine share (based on weight or utilization)
56	38 SMF998_LC _Work_W2U_Ratio	4	binary	New W2U ratio due to change in LPAR weight
60	3C SMF998_LC_Pi_Delta	4	binary	PI delta projection
64	40 SMF998_LC _Sysplex_Pi_Delta	4	binary	Sysplex PI delta projection

SYSH CPU Plot Section

Offsets	Name	Length	Format	Description
0	SMF999_SYSH _CPU_PLOT_INUM	4	binary	Image number
4	4 SMF999_SYSH _CPU_PLOT_BW	4	binary	Bucket width

Offsets	Name	Length	Format	Description
8	8 SMF99_SYSH _CPU_PLOT_LSTX	4	binary	Last plotted X bucket
12	C SMF99_SYSH _CPU_PLOT_POINTS_OF	4	binary	Offset of point entries
16	10 SMF99_SYSH _CPU_PLOT_POINTS_ON	2	binary	Number of point entries
18	12 SMF99_SYSH _CPU_PLOT_POINTS_LN	2	binary	Length of a point entry

Subtypes 2 and 8

I/O Subsystems Samples Data Section

Offsets	Name	Length	Format	Description
0	SMF99_IOSUB_Index	2	binary	Subsystem index. This correlates with SMF999_IOSUB_INDEX.
2	2 *	2	binary	Reserved.
4	4 SMF99_IOSUB _ConnectSamples	2	binary	Connect samples.
6	6 SMF99_IOSUB _PendingSamples	2	binary	Pending samples.

Subtype 9

Self Defining Section

Offsets	Name	Length	Format	Description
0	SMF999_IO_SUBSYSTEM _DATA_OFFSET	4	binary	Offset to IO Subsystem data section from beginning of record (including RDW)
4	4 SMF999_IO_SUBSYSTEM _DATA_LENGTH	2	binary	Length of IO Subsystem Data section
6	6 SMF999_IO_SUBSYSTEM _DATA_NUMBER	2	binary	Number of IO Subsystem Data sections
8	8 SMF999_IOSUB _PLOT_OF	4	binary	Offset to IO Subsystem plots
12	C SMF999_IOSUB _PLOT_LN	2	binary	Length of IO Subsystem plots
14	E SMF999_IOSUB _PLOT_ON	2	binary	Number of IO Subsystem plots
16	10 SMF999_CHANNEL _DATA_OF	4	binary	Offset to Channel Data section
20	14 SMF999_CHANNEL _DATA_LN	2	binary	Length of Channel Data section
22	16 SMF999_CHANNEL _DATA_ON	2	binary	Number of Channel Data section

Record type 99

Channel path data entry section

Offsets	Name	Length	Format	Description																		
0	SMF999_FLAG1	1	binary	IO subsystem flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Indicates that the I/O subsystem is eligible for dynamic management.</td> </tr> <tr> <td>1</td> <td>Indicates CONFIG change has been made.</td> </tr> <tr> <td>2</td> <td>Indicates that no point was plotted this interval. If this indicator is on, SMF99_IOSUB_INTERVAL_VELOCITY is not relevant.</td> </tr> <tr> <td>3</td> <td>Indicates that no channel data was written this interval. This indicator is set when the structure for the channel data does not exist.</td> </tr> <tr> <td>4</td> <td>Indicates that while calculating the busy to connect ratio an entry ratio was converted from >1.6 to 1.3.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Indicates that the I/O subsystem is eligible for dynamic management.	1	Indicates CONFIG change has been made.	2	Indicates that no point was plotted this interval. If this indicator is on, SMF99_IOSUB_INTERVAL_VELOCITY is not relevant.	3	Indicates that no channel data was written this interval. This indicator is set when the structure for the channel data does not exist.	4	Indicates that while calculating the busy to connect ratio an entry ratio was converted from >1.6 to 1.3.	5-7	Reserved.				
Bit	Meaning when set																					
0	Indicates that the I/O subsystem is eligible for dynamic management.																					
1	Indicates CONFIG change has been made.																					
2	Indicates that no point was plotted this interval. If this indicator is on, SMF99_IOSUB_INTERVAL_VELOCITY is not relevant.																					
3	Indicates that no channel data was written this interval. This indicator is set when the structure for the channel data does not exist.																					
4	Indicates that while calculating the busy to connect ratio an entry ratio was converted from >1.6 to 1.3.																					
5-7	Reserved.																					
1	1 SMF999_CONTROL_FLAGS	1	binary	Control flags <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Indicates that this SMF 99 subtype 9 record represents a situation that caused us not to create valid SMF 99 subtype 9 data. Identify the condition by checking one of the following indicators. Data in this SMF 99 subtype 9 is invalid other than possibly the SMF999_IOSUB_INDEX (valid when empty slot or old slot entry).</td> </tr> <tr> <td>1</td> <td>Indicates that registry data does not exist.</td> </tr> <tr> <td>2</td> <td>Indicates that the WLM LPAR Cluster structure is not connected.</td> </tr> <tr> <td>3</td> <td>Indicates that the SMF 99 buffer for the subtype 9 data was not processed from the previous interval.</td> </tr> <tr> <td>4</td> <td>Indicates empty slot entry.</td> </tr> <tr> <td>5</td> <td>Indicates old slot entry.</td> </tr> <tr> <td>6</td> <td>Indicates unknown reason.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Indicates that this SMF 99 subtype 9 record represents a situation that caused us not to create valid SMF 99 subtype 9 data. Identify the condition by checking one of the following indicators. Data in this SMF 99 subtype 9 is invalid other than possibly the SMF999_IOSUB_INDEX (valid when empty slot or old slot entry).	1	Indicates that registry data does not exist.	2	Indicates that the WLM LPAR Cluster structure is not connected.	3	Indicates that the SMF 99 buffer for the subtype 9 data was not processed from the previous interval.	4	Indicates empty slot entry.	5	Indicates old slot entry.	6	Indicates unknown reason.	7	Reserved.
Bit	Meaning when set																					
0	Indicates that this SMF 99 subtype 9 record represents a situation that caused us not to create valid SMF 99 subtype 9 data. Identify the condition by checking one of the following indicators. Data in this SMF 99 subtype 9 is invalid other than possibly the SMF999_IOSUB_INDEX (valid when empty slot or old slot entry).																					
1	Indicates that registry data does not exist.																					
2	Indicates that the WLM LPAR Cluster structure is not connected.																					
3	Indicates that the SMF 99 buffer for the subtype 9 data was not processed from the previous interval.																					
4	Indicates empty slot entry.																					
5	Indicates old slot entry.																					
6	Indicates unknown reason.																					
7	Reserved.																					
2	2 SMF999_ROW_INDEX	2	binary	Channel path data row index																		
4	4 *	1	EBCDIC	Reserved																		
5	5 SMF999_DIAG_TOKEN	3	binary	Internal diagnosis data																		
8	8 SMF999_TOKEN_NED	32	EBCDIC	Token NED of I/O subsystem																		
40	28 SMF999_IOSUB_TARGET_VELOCITY	4	binary	I/O subsystem target velocity set by WLM																		
44	2C SMF999_IOSUB_VELOCITY	4	binary	The actual I/O velocity of the subsystem																		
48	30 SMF999_IOSUB_AVG_SVC_TIME	4	binary	Average service time																		
52	34 SMF999_IOSUB_CHECK_POINT_TIME	4	binary	Average service time of the subsystem when SRM set a target																		
56	38 SMF999_IOSUB_INDEX	2	binary	IO Subsystem Index																		

Offsets	Name	Length	Format	Description
58	3A SMF999_LCU_SQNUMBER	2	binary	LCU sequence number
60	3C SMF999_CONTROL_UNIT_ARRAY	16	binary	Control unit numbers, SMF999_CONTROL_UNITS(1-8), associated with LCU
76	4C SMF999_IOSUB_PROJECTED_VELOCITY	4	binary	Projected velocity to be expected if a change is to be made
80	50 SMF999_IOSUB_INTERVAL_VELOCITY	4	binary	The 10 second I/O velocity that is used to plot a point.
84	54 SMF999_AVG_BUSY_TO_CONNECT_RATIO	4	binary	The average busy to connect time ratio calculated by WLM during the 10 second copy interval.
88	58 SMF999_CLEAR_INTERVAL	2	binary	Clear interval index
90	5A SMF999_CSS_NUMBER	1	binary	Channel subsystem identifier
91	5B *	5	binary	Reserved
92	5C SMF999_IOSUB_INTERVALCHANNEL WAITTIME	4	HEX	Interval Channel-Wait-Time
96	60 SMF999_TIMESTAMP_SYSTEM	8	EBCDIC	Identifies the system that made a CONFIG change

I/O Subsystem Plot Section

Offsets	Name	Length	Format	Description
0	SMF999_IOSUB_BW	4	binary	Bucket width.
4	4 SMF999_IOSUB_LSTX	4	binary	Last plotted x bucket.
8	8 *	4	binary	Reserved.
12	C SMF999_IOSUB_POINTS_OF	4	binary	Offset of point entries.
16	10 SMF999_IOSUB_POINTS_ON	2	binary	Number of point entries.
18	12 SMF999_IOSUB_POINTS_LN	2	binary	Length of a point entry.

Channel path data entry section

Offsets	Name	Length	Format	Description						
0	SMF999_CHANNEL_ID	1	binary	I/O Subsystem channel ID.						
1	1 SMF999_CHANNEL_TYPE	1	binary	I/O Subsystem channel type.						
2	2 SMF999_CHANNEL_FLAG	1	binary	I/O Subsystem channel flags bit indicate if channel is managed: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Indicates that this channel can be managed by WLM.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Indicates that this channel can be managed by WLM.	1-7	Reserved.
Bit	Meaning when set									
0	Indicates that this channel can be managed by WLM.									
1-7	Reserved.									
3	3 *	1	EBCDIC	Reserved						
4	4 SMF999_CHANNEL_UTILIZATION	4	binary	I/O Subsystem Channel utilization for the current data collection interval.						
8	8 SMF999_CHANNEL_PROJECTED_UTILIZATION	1	binary	Projected I/O Subsystem Channel utilization for the current data collection interval (percentage).						
9	9 SMF999_CHANNEL_PROJ_CURRENT_PATH_LOAD	1	binary	Percent use for path projected for the current configuration during the calibration pass.						
10	A SMF999_CHANNEL_SYSTEMS_CONTRIBUTED	2	binary	Count of systems that have contributed to this channel data.						
12	C SMF999_CHANNEL_PORT_BUSY_COUNT	4	binary	Channel port busy count.						

Record type 99

Subtype 10

Header/Self-defining Section

Offsets	Name	Length	Format	Description
0	SMF9910_CPU_DATA_OFFSET	4	HEX	Offset to CPU data section from beginning of record
4	4 SMF9910_CPU_DATA_LENGTH	2	HEX	Length of CPU data section
6	6 SMF9910_CPU_DATA_NUMBER	2	HEX	Number of CPU data sections
8	8 SMF9910_PROC_SPEED_CHG_DATA_OLD_OFFSET	4	HEX	Offset to old processor speed change data section (including RDW)
12	C SMF9910_PROC_SPEED_CHG_DATA_OLD_LENGTH	2	HEX	Length of old processor speed change data section
14	E SMF9910_PROC_SPEED_CHG_DATA_OLD_NUMBER	2	HEX	Number of old processor speed change data sections
16	10 SMF9910_PROC_SPEED_CHG_DATA_NEW_OFFSET	4	HEX	Offset to new processor speed change data section (including RDW)
20	14 SMF9910_PROC_SPEED_CHG_DATA_NEW_LENGTH	2	HEX	Length of new processor speed change data section
22	16 SMF9910_PROC_SPEED_CHG_DATA_NEW_NUMBER	2	HEX	Number of new processor speed change data sections

CPU Data Section

Offsets	Name	Length	Format	Description
0	SMF99A_CPU_Reserved	2	HEX	Reserved
2	2 SMF99A_CPU_RmctScSq	2	HEX	Number of speed changes
4	4 SMF99A_CPU_Reserved	6C	HEX	Reserved

Processor Speed Change Section (old or new)

Offsets	Name	Length	Format	Description
0	SMF99A_PSC_Reserved	C	HEX	Reserved
12	C SMF99A_PSC_RMCTCpMp	4	HEX	CP speed
16	10 SMF99A_PSC_RMCTAdjc	4	HEX	CPU rate adjustment factor
20	14 SMF99A_PSC_Reserved	828	HEX	Reserved

Subtype 11

Subtype 11 contains information about Group Capacity Limits. A subtype 11 record is written every 5 minutes.

Header/Self-defining Section

Offsets	Name	Length	Format	Description
0	SMF99B_CAPTY_GROUP_DATA_OFFSET	4	binary	Offset to group capacity data section from beginning of record, included RDW.
4	4 SMF99B_CAPTY_GROUP_DATA_LENGTH	2	binary	Length of group capacity data section.
6	6 SMF99B_CAPTY_GROUP_DATA_NUMBER	2	binary	Number of group capacity data sections.
8	8 SMF99B_CEC_SERVICE_DATA_OFFSET	4	binary	Offset to CEC service data section from beginning of record.
12	C SMF99B_CEC_SERVICE_DATA_LENGTH	2	binary	Length of CEC service data section.
14	E SMF99B_CEC_SERVICE_DATA_NUMBER	2	binary	Number of CEC service data sections.

Capacity group data section

Offsets	Name	Length	Format	Description
0	SMF99B_ CAPACITYGROUPNAME	8	EBCDIC	Name of the capacity group. All partitions that have the same capacity group name build the capacity group.
8	8 SMF99B_ GroupProcessorDispatchTime	8	binary	The dispatch time accumulated over all processors of all LPARs belonging to the capacity group.
16	10 SMF99B_GroupWeight	4	binary	The weight accumulated over all LPARs belonging to the capacity group.
20	14 SMF99B_Group_Msu_Limit	4	binary	The group limit in million service units per hour (MSU).
24	18 SMF99B_ImgMsuLimit	4	binary	Capacity in millions of service units per hour, which is derived from defined and group capacity.
28	1C SMF99B_CecNumberOfPartitions	4	binary	Number of partitions, returned in the output area of the Diagnose 204 hardware instruction.
32	20 SMF99B_GrpNumberOfPartitions	4	binary	Number of partitions in the same group as this partition.
36	24 SMF99B_AvgUnused	4	binary	Average unused rate in millions of service units per hour. This is a long term average.
40	28	16		Reserved.
56	38 SMF99B_DonatedServiceUnits	4	binary	Indicates that service units have been donated by one or more group members during the last complete five minute intervals.
60	3C SMF99B_ReceiverWeight	4	binary	The weight accumulated over all receivers of donated service units.
64	40 SMF99B_ImgBaseMsu	4	binary	Capacity in MSU that belongs to this image. The capacity depends on the ratio between the current weight and the group weight.
68	44 SMF99B_ServiceTableIndex	4	binary	Index to the current entry for the SMF99B_ImgService field.
72	48 SMF99B_GroupJoinedTod	8	binary	Timestamp when this LPAR joined its group.
80	50	1244		Reserved.

CEC service data section

The CEC service data section consists of an array containing a variable number of entries. The number of entries is in field SMF99B_CEC_SERVICE_DATA_NUMBER. Each entry contains the following fields:

Offsets	Name	Length	Format	Description
0	SMF99B_ImgName	8	EBCDIC	Name of logical partition.
8	8 SMF99B_ImgSystemName	8	EBCDIC	Image system name as specified in hardware instruction DIAGNOSE 300 or by external means. Value is zero if no system name is declared.
16	10 SMF99B_ImgGroupName	8	EBCDIC	Name of the capacity group. All partitions which have the same CapacityGroupName build the capacity group.
24	18 SMF99B_ImgService	192	binary	Service units accumulated for an image of the CEC.
216	D8 SFM99B_ImgProcessor DispatchTime	8	binary	Sum of processor dispatch times for this logical partition in microseconds. Updated every policy adjustment interval.
224	E0 SMF99B_ImgInitialWght	2	binary	Initial weight of the logical partition.
226	E2 SMF99B_ImgCurrentWght	2	binary	Current weight of the logical partition.
226	E2	4		Reserved.

Subtype 12

Subtype 12 contains HiperDispatch interval data. A set of subtype 12 records is written each policy interval.

Note: In some of the following subtype 12 field descriptions, the term “CPU/core” indicates the applicability of the text, as follows:

- When the multithreading facility is not installed or when the facility is installed but not enabled, the field descriptions relate to logical or physical CPUs.

Record type 99

- When the multithreading facility is installed and enabled, the field descriptions relate to logical or physical cores.

Self-defining section

Offsets	Name	Length	Format	Description
0	0 SMF9912_HD_Int_Hdr_OFFSET	4	binary	Offset to header data section.
4	4 SMF9912_HD_Int_Hdr_LENGTH	2	binary	Length of header data section.
6	6 SMF9912_HD_Int_Hdr_NUMBER	2	binary	Number of header data sections.
8	8 SMF9912_HD_Cap_Hdr_OFFSET	4	binary	Offset to capacity data section.
12	C SMF9912_HD_Cap_Hdr_LENGTH	2	binary	Length of capacity data section.
14	E SMF9912_HD_Cap_Hdr_NUMBER	2	binary	Number of capacity data sections.
16	10 SMF9912_HD_Proc_Hdr_OFFSET	4	binary	Offset to processor data section.
20	14 SMF9912_HD_Proc_Hdr_LENGTH	2	binary	Length of processor data section.
22	16 SMF9912_HD_Proc_Hdr_NUMBER	2	binary	Number of processor data sections.

Header data section

Offsets	Name	Length	Format	Description																		
0	0 SMF99C_VCM_SMF_Sequ	4	binary	HiperDispatch SMF sequence number.																		
4	4 SMF99C_VCM_ErrorCode	2	binary	HiperDispatch Error Code.																		
6	6 *	1	binary	Reserved.																		
7	7 SMF99C_VCM_Diag204_Flags	1	binary	Flags: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>LPAR capped by WLM.</td> </tr> <tr> <td>1</td> <td>LPAR capped by customer.</td> </tr> <tr> <td>2</td> <td>Wait completion.</td> </tr> </table>	Bit	Meaning when set	0	LPAR capped by WLM.	1	LPAR capped by customer.	2	Wait completion.										
Bit	Meaning when set																					
0	LPAR capped by WLM.																					
1	LPAR capped by customer.																					
2	Wait completion.																					
8	8 SMF99C_VCM_Interval_Len	4	binary	Measured interval length in microseconds.																		
12	C SMF99C_VCM_LparPhysProcShr	4	binary	LPAR physical processor share for general CPUs/cores, scaled by 256.																		
16	10 SMF99C_VCM_Interval_TOD	8	binary	TOD when HiperDispatch code got control. In STCK format.																		
24	18 SMF99C_VCM_Flags	4	binary	HiperDispatch (HD) status flags.																		
24	18 SMF99C_VCM_Flag1	1	binary	1st flag byte: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Topology has changed.</td> </tr> <tr> <td>1</td> <td>Rebuild affinity nodes.</td> </tr> <tr> <td>2</td> <td>Honor priority has changed.</td> </tr> <tr> <td>3</td> <td>Dispatcher WUQ errorr.</td> </tr> <tr> <td>4</td> <td>Processor speed change.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Topology has changed.	1	Rebuild affinity nodes.	2	Honor priority has changed.	3	Dispatcher WUQ errorr.	4	Processor speed change.	5-7	Reserved.				
Bit	Meaning when set																					
0	Topology has changed.																					
1	Rebuild affinity nodes.																					
2	Honor priority has changed.																					
3	Dispatcher WUQ errorr.																					
4	Processor speed change.																					
5-7	Reserved.																					
25	19 SMF99C_VCM_Flag2	1	binary	2nd flag byte: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>CEC capacities are valid.</td> </tr> <tr> <td>1</td> <td>LPAR capacities are valid.</td> </tr> <tr> <td>2</td> <td>Old VCM state.</td> </tr> <tr> <td>3</td> <td>Reserved.</td> </tr> <tr> <td>4</td> <td>Dispatcher affinity was updated.</td> </tr> <tr> <td>5</td> <td>PTF was issued to initiate a switch into the opposite mode. However, the PTF return info tells us that we are already in the requested mode.</td> </tr> <tr> <td>6</td> <td>VCM is transitioning to/from vertical.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	CEC capacities are valid.	1	LPAR capacities are valid.	2	Old VCM state.	3	Reserved.	4	Dispatcher affinity was updated.	5	PTF was issued to initiate a switch into the opposite mode. However, the PTF return info tells us that we are already in the requested mode.	6	VCM is transitioning to/from vertical.	7	Reserved.
Bit	Meaning when set																					
0	CEC capacities are valid.																					
1	LPAR capacities are valid.																					
2	Old VCM state.																					
3	Reserved.																					
4	Dispatcher affinity was updated.																					
5	PTF was issued to initiate a switch into the opposite mode. However, the PTF return info tells us that we are already in the requested mode.																					
6	VCM is transitioning to/from vertical.																					
7	Reserved.																					
26	1A SMF99C_VCM_Flag3	1	binary	3rd flag byte: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Topology facility installed.</td> </tr> <tr> <td>1</td> <td>IFA facility installed.</td> </tr> <tr> <td>2</td> <td>LPAR has only dedicated CPUs/cores.</td> </tr> <tr> <td>3</td> <td>Cross memory set.</td> </tr> <tr> <td>4</td> <td>New container TLE.</td> </tr> <tr> <td>5</td> <td>Reserved.</td> </tr> <tr> <td>6</td> <td>Write TopoChg section.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Topology facility installed.	1	IFA facility installed.	2	LPAR has only dedicated CPUs/cores.	3	Cross memory set.	4	New container TLE.	5	Reserved.	6	Write TopoChg section.	7	Reserved.
Bit	Meaning when set																					
0	Topology facility installed.																					
1	IFA facility installed.																					
2	LPAR has only dedicated CPUs/cores.																					
3	Cross memory set.																					
4	New container TLE.																					
5	Reserved.																					
6	Write TopoChg section.																					
7	Reserved.																					
27	1B SMF99C_VCM_Flag4	1	binary	4th flag byte: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>IFA honor priority state of previous interval.</td> </tr> <tr> <td>1</td> <td>SUP honor priority state of previous interval.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	IFA honor priority state of previous interval.	1	SUP honor priority state of previous interval.	2-7	Reserved.										
Bit	Meaning when set																					
0	IFA honor priority state of previous interval.																					
1	SUP honor priority state of previous interval.																					
2-7	Reserved.																					
28	1C *	4	binary	Reserved.																		

Offsets	Name	Length	Format	Description														
32 20	SMF99C_VCM_DiagMPWQ	16	structure	1st data element of diagnostic MPWQ data array.														
48 30		16	structure	2nd data element of diagnostic MPWQ data array.														
64 40	SMF99C_VCM_DiagECPX	16	structure	1st data element of diagnostic ECPX data array.														
80 50		16	structure	2nd data element of diagnostic ECPX data array.														
96 60	SMF99C_MT_Flags	4	binary	HiperDispatch (HD) MT status flags														
96 60	SMF99C_MT_Flag1	1	binary	1st MT flag byte: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Processor resource is viewed as a CPU core.</td> </tr> <tr> <td>1</td> <td>Multiple CPUs defined within a CPU core.</td> </tr> <tr> <td>2-3</td> <td>Reserved.</td> </tr> <tr> <td>4</td> <td>HiperDispatch is now ready for MT mode switches.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Processor resource is viewed as a CPU core.	1	Multiple CPUs defined within a CPU core.	2-3	Reserved.	4	HiperDispatch is now ready for MT mode switches.	5-7	Reserved.		
Bit	Meaning when set																	
0	Processor resource is viewed as a CPU core.																	
1	Multiple CPUs defined within a CPU core.																	
2-3	Reserved.																	
4	HiperDispatch is now ready for MT mode switches.																	
5-7	Reserved.																	
97 61	SMF99C_MT_Flag2	1	binary	2nd MT flag byte: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>MT mode change is pending due to STSI.</td> </tr> <tr> <td>1</td> <td>The supervisor-requested MT reconfiguration is pending.</td> </tr> <tr> <td>2</td> <td>MT mode change is pending due to HISMT recovery.</td> </tr> <tr> <td>3</td> <td>MT mode change is pending due to wait completion status change.</td> </tr> <tr> <td>4</td> <td>MT mode change is pending due to supervisor request.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	MT mode change is pending due to STSI.	1	The supervisor-requested MT reconfiguration is pending.	2	MT mode change is pending due to HISMT recovery.	3	MT mode change is pending due to wait completion status change.	4	MT mode change is pending due to supervisor request.	5-7	Reserved.
Bit	Meaning when set																	
0	MT mode change is pending due to STSI.																	
1	The supervisor-requested MT reconfiguration is pending.																	
2	MT mode change is pending due to HISMT recovery.																	
3	MT mode change is pending due to wait completion status change.																	
4	MT mode change is pending due to supervisor request.																	
5-7	Reserved.																	
98 62 *		2	binary	Reserved.														
100 64	SMF99C_VCM_current_state	4	binary	Current HiperDispatch state.														
104 68	SMF99C_VCM_previous_state	4	binary	Previous HiperDispatch state.														
108 6C	SMF99C_VCM_Restart_Ctr	4	binary	Recovery restart counter.														

Capacity data section

Offsets	Name	Length	Format	Description										
0 0	SMF99C_HD_Int_Cap_ProcType	1	binary	Processor type.										
1 1 *		15	HEX	Reserved.										
16 10	SMF99C_VCM_LparCapsSMF	0	binary	LPAR capacities.										
16 10	SMF99C_VCM_LparFlags	1	binary	LPAR Status Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>The physical CPU/core share matches the number and polarization of the CPUs/cores passed by the topology information.</td> </tr> <tr> <td>1</td> <td>The physical CPU/core share is higher than the number of VHs and VMs passed by the topology info.</td> </tr> <tr> <td>2</td> <td>The physical CPU/core share is lower than the number of VHs and VMs passed by the topology info.</td> </tr> <tr> <td>3-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	The physical CPU/core share matches the number and polarization of the CPUs/cores passed by the topology information.	1	The physical CPU/core share is higher than the number of VHs and VMs passed by the topology info.	2	The physical CPU/core share is lower than the number of VHs and VMs passed by the topology info.	3-7	Reserved.
Bit	Meaning when set													
0	The physical CPU/core share matches the number and polarization of the CPUs/cores passed by the topology information.													
1	The physical CPU/core share is higher than the number of VHs and VMs passed by the topology info.													
2	The physical CPU/core share is lower than the number of VHs and VMs passed by the topology info.													
3-7	Reserved.													
17 11 *		3	HEX	Reserved.										
20 14	SMF99C_VCM_MvsBusyDynaThr Unpark	2	binary	Dynamic MvsBusy threshold for unparking, scaled by 16.										
22 16	SMF99C_VCM_MvsBusyDynaThrPark	2	binary	Dynamic MvsBusy threshold for parking, scaled by 16.										
24 18	SMF99C_VCM_MvsBusyThrUnpark	2	binary	MvsBusy threshold for unparking, scaled by 16.										
26 1A	SMF99C_VCM_MvsBusyThrPark	2	binary	MvsBusy threshold for parking, scaled by 16.										
28 1C	SMF99C_VCM_MvsBusy	4	binary	Average CPU usage, scaled by 16.										
32 20	SMF99C_VCM_LparCapUsedAdj	4	binary	Used LPAR capacity in microseconds, adjusted to the scheduled VCM interval length.										
36 24	SMF99C_VCM_LparCapUsed	4	binary	Used LPAR capacity in microseconds.										
40 28	SMF99C_VCM_LparCapUsedDiscr	4	binary	Used capacity of the non-guaranteed capacity (partially VM and unparked VLs) in microseconds, adjusted to the scheduled VCM interval length.										
44 2C	SMF99C_VCM_LparCapUsedVmVl	4	binary	Used capacity on VMs and VLs, adjusted to the scheduled VCM interval length.										
48 30	SMF99C_VCM_LowCECMaxUp	2	binary	Maximum number of VLs unparked if low CEC utilization.										
50 32	SMF99C_VCM_LowCECMvsBusy	2	binary	Park threshold for low CEC utilization, scaled by 16										
52 34	SMF99C_VCM_LparCapVmVlUsedLparCap UsedOfAlloc	4	binary	Percentage used of allocated VM + VL capacity, scaled by 256.										

Record type 99

Offsets	Name	Length	Format	Description																		
56	38 SMF99C_VCM_LparCapVmVlUsedOverGuaran	4	binary	Percentage of guaranteed VM capacity used by VM + VL, scaled by 256.																		
60	3C SMF99C_VCM_LparCapAllocVmVl	4	binary	Allocated LPAR capacity on VMs and VLs in microseconds.																		
64	40 SMF99C_VCM_LparCapAlloc	4	binary	Allocated LPAR capacity in microseconds. The allocated capacity is provided by the guaranteed capacity on VHS and VMs, plus extra capacity on VMs and unparked VLs.																		
68	44 SMF99C_VCM_LparCapNonGuaran	4	binary	Non guaranteed LPAR capacity in microseconds.																		
72	48 SMF99C_VCM_LparCapMedGuaran	4	binary	Guaranteed LPAR capacity on VMs in microseconds.																		
76	4C SMF99C_VCM_Lpar CapGuaran	4	binary	Guaranteed LPAR capacity in microseconds. This value is calculated from the physical processor share of this LPAR.																		
80	50 SMF99C_VCM_MvsBusyProjected	4	binary	Projected MvsBusy, scaled by 16.																		
84	54 SMF99C_VCM_LparUnusedCapShare	4	binary	Unused capacity share of this LPAR in microseconds.																		
88	58 SMF99C_VCM_LparUnusedCap	4	binary	Unused LPAR capacity in microseconds including the unused capacity share for this LPAR.																		
92	5C SMF99C_VCM_CECUtilPark	2	binary	CEC Utilization threshold for parking, scaled by 256.																		
94	5E SMF99C_VCM_PUpDispl	2	binary	Park / Unpark displacement, scaled by 16																		
96	60 SMF99C_VCM_Diag204_LogInfo	16	binary	LPAR information.																		
96	60 SMF99C_VCM_D204_TotalW	4	binary	Total LPAR weight.																		
100	64 SMF99C_VCM_D204_CurrentW	4	binary	Current LPAR weight.																		
104	68 SMF99C_VCM_D204_WrkCurrW	4	binary	Accumulated current LPAR weight.																		
108	6C SMF99C_VCM_D204_LCpus	2	binary	Number of logical CPUs/cores for this LPAR.																		
110	6E SMF99C_VCM_D204_Flags1	1	binary	LPAR Status flags <table border="0"> <tr> <td style="padding-right: 20px;">Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>LPAR capped by customer per processor type.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	LPAR capped by customer per processor type.	1-7	Reserved.												
Bit	Meaning when set																					
0	LPAR capped by customer per processor type.																					
1-7	Reserved.																					
111	6F *	1	binary	Reserved.																		
112	70 SMF99C_VCM_CPUs	0	binary	CPU/core data.																		
112	70 SMF99C_VCM_CpuHi	1	binary	Number of VHS.																		
113	71 SMF99C_VCM_CpuMed	1	binary	Number of VMs.																		
114	72 SMF99C_VCM_CpuLo	1	binary	Number of VLs.																		
115	73 SMF99C_VCM_CpuLoUnparked	1	binary	Number of unparked VLs.																		
116	74 SMF99C_VCM_CpuLoParked	1	binary	Number of parked VLs.																		
117	75 *	11	HEX	Reserved.																		
128	80 SMF99C_VCM_DiagCapAdj	16	binary	Diagnose information capacity adjustment.																		
128	80 SMF99C_VCM_DiagCapFlags	4	binary	Capacity change flags.																		
128	80 SMF99C_VCM_Diag CapIncr	2	binary	Capacity increase flags <table border="0"> <tr> <td style="padding-right: 20px;">Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Adjust capacity increase.</td> </tr> <tr> <td>1</td> <td>Adjust capacity increase by unparking a processor.</td> </tr> <tr> <td>2</td> <td>Unpark request.</td> </tr> <tr> <td>3</td> <td>Unpark all request.</td> </tr> <tr> <td>4</td> <td>Reserved.</td> </tr> <tr> <td>5</td> <td>Unpark requested because the LPAR capacity is below the guaranteed capacity + unused capacity share.</td> </tr> <tr> <td>6</td> <td>PR/SM capped LPAR: Unpark requested because of high VH utilization.</td> </tr> <tr> <td>7-15</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Adjust capacity increase.	1	Adjust capacity increase by unparking a processor.	2	Unpark request.	3	Unpark all request.	4	Reserved.	5	Unpark requested because the LPAR capacity is below the guaranteed capacity + unused capacity share.	6	PR/SM capped LPAR: Unpark requested because of high VH utilization.	7-15	Reserved.
Bit	Meaning when set																					
0	Adjust capacity increase.																					
1	Adjust capacity increase by unparking a processor.																					
2	Unpark request.																					
3	Unpark all request.																					
4	Reserved.																					
5	Unpark requested because the LPAR capacity is below the guaranteed capacity + unused capacity share.																					
6	PR/SM capped LPAR: Unpark requested because of high VH utilization.																					
7-15	Reserved.																					

Offsets	Name	Length	Format	Description																																		
130	82 SMF99C_VCM_DiagCapDecr	2	binary	Capacity decrease flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Adjust capacity decrease.</td> </tr> <tr> <td>1</td> <td>Adjust capacity decrease by parking a processor.</td> </tr> <tr> <td>2</td> <td>Park requested.</td> </tr> <tr> <td>3</td> <td>Park all request.</td> </tr> <tr> <td>4</td> <td>MvsBusy too low.</td> </tr> <tr> <td>5</td> <td>VL effect too low.</td> </tr> <tr> <td>6</td> <td>Small VM/VL effectiveness.</td> </tr> <tr> <td>7</td> <td>no VM/VL effectiveness.</td> </tr> <tr> <td>8</td> <td>If no VH exists.</td> </tr> <tr> <td>9</td> <td>No capacity decrease adjustment. Reason: Low CEC utilization.</td> </tr> <tr> <td>10</td> <td>PR/SM capped LPAR: Park all. Below zEC12 hardware.</td> </tr> <tr> <td>11</td> <td>PR/SM capped LPAR: Park all. High CEC utilization and no unused LPAR capacity.</td> </tr> <tr> <td>12</td> <td>PR/SM capped LPAR: VH utilization is low.</td> </tr> <tr> <td>13</td> <td>PR/SM capped LPAR: VL effect too low.</td> </tr> <tr> <td>14</td> <td>PR/SM capped LPAR: MVS busy too low.</td> </tr> <tr> <td>15</td> <td>PR/SM capped LPAR: Adjust capacity decrease.</td> </tr> </table>	Bit	Meaning when set	0	Adjust capacity decrease.	1	Adjust capacity decrease by parking a processor.	2	Park requested.	3	Park all request.	4	MvsBusy too low.	5	VL effect too low.	6	Small VM/VL effectiveness.	7	no VM/VL effectiveness.	8	If no VH exists.	9	No capacity decrease adjustment. Reason: Low CEC utilization.	10	PR/SM capped LPAR: Park all. Below zEC12 hardware.	11	PR/SM capped LPAR: Park all. High CEC utilization and no unused LPAR capacity.	12	PR/SM capped LPAR: VH utilization is low.	13	PR/SM capped LPAR: VL effect too low.	14	PR/SM capped LPAR: MVS busy too low.	15	PR/SM capped LPAR: Adjust capacity decrease.
Bit	Meaning when set																																					
0	Adjust capacity decrease.																																					
1	Adjust capacity decrease by parking a processor.																																					
2	Park requested.																																					
3	Park all request.																																					
4	MvsBusy too low.																																					
5	VL effect too low.																																					
6	Small VM/VL effectiveness.																																					
7	no VM/VL effectiveness.																																					
8	If no VH exists.																																					
9	No capacity decrease adjustment. Reason: Low CEC utilization.																																					
10	PR/SM capped LPAR: Park all. Below zEC12 hardware.																																					
11	PR/SM capped LPAR: Park all. High CEC utilization and no unused LPAR capacity.																																					
12	PR/SM capped LPAR: VH utilization is low.																																					
13	PR/SM capped LPAR: VL effect too low.																																					
14	PR/SM capped LPAR: MVS busy too low.																																					
15	PR/SM capped LPAR: Adjust capacity decrease.																																					
132	84 *	4	HEX	Reserved.																																		
136	88 SMF99C_VCM_DiagCapDecr_Cont	1	binary	Capacity decrease flags continuation: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Park all request. Free capacity unpark threshold above upper limit.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Park all request. Free capacity unpark threshold above upper limit.	1-7	Reserved.																												
Bit	Meaning when set																																					
0	Park all request. Free capacity unpark threshold above upper limit.																																					
1-7	Reserved.																																					
137	89 *	3	HEX	Reserved.																																		
140	8C *	4	HEX	Reserved.																																		
144	90 SMF99C_VCM_CecCapsSMF	0	binary	CEC data.																																		
144	90 SMF99C_VCM_CecCapTotal	4	binary	Total CEC capacity in microseconds.																																		
148	94 SMF99C_VCM_CecCapUsedAdj	4	binary	CEC capacity used in microseconds, adjusted to the scheduled VCM interval length.																																		
152	98 SMF99C_VCM_CecCapUsed	4	binary	CEC capacity used in microseconds.																																		
156	9C SMF99C_VCM_CecCapFree	4	binary	Free CEC capacity in microseconds, adjusted to the scheduled VCM interval length.																																		
160	A0 *	2	HEX	Reserved.																																		
162	A2 SMF99C_VCM_CecSharedCps	2	binary	Number of shared CPUs/cores.																																		
164	A4 SMF99C_VCM_CecCapFreeLimit	2	binary	CEC free limit for unparking, scaled by 256.																																		
166	A6 SMF99C_VCM_CecUtil	2	binary	Total CEC utilization, scaled by 256.																																		
168	A8 SMF99C_VCM_CecTotUnusedCap	4	binary	Total unused capacity of all LPARs in CEC in microseconds. The unused capacity of the requesting LPAR is not included.																																		
172	AC SMF99C_VCM_CecTotLparWgtAbove Guaran	2	binary	Total weight of all LPARs with a processor demand above guaranteed capacity. The weight of the requesting LPAR is always included.																																		
174	AE *	2	HEX	Reserved.																																		
176	B0 SMF99C_VCM_CecPhysMgmTime	4	binary	Physical LPAR management time of all CPUs/cores in microseconds.																																		
180	B4 SMF99C_VCM_CecPhysMgmTimeAdj	4	binary	Physical LPAR management time of all CPUs/cores, adjusted to the scheduled VCM interval length.																																		
184	B8 *	4	binary	Reserved.																																		
188	BC SMF99_MT	16	binary	Multithreading data.																																		
188	BC SMF99C_MT_CF	4	binary	Capacity factor of processor class.																																		
192	C0 SMF99C_MT_mCF	4	binary	Max capacity factor of processor class.																																		
196	C4 SMF99C_MT_Opt_Orig	1	binary	Multithreading mode value.																																		
197	C5 SMF99C_MT_Opt_InUse	1	binary	Multithreading mode value as forced by environment.																																		
198	C6 SMF99C_MT_Curr	1	binary	Multithreading mode currently in use.																																		
199	C7 SMF99C_MT_tgt	1	binary	Multithreading mode target value.																																		
200	C8 *	4	binary	Reserved.																																		
204	CC SMF99C_VCM_Diag204_LogInfo_cont	16	binary	LPAR information - continuation.																																		

Record type 99

Offsets	Name	Length	Format	Description						
204	CC SMF99C_VCM_D204_CpuTypeCap	4	binary	PR/SM capping limit: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1-31</td> <td>PR/SM capping limit: Count of hundredths of CPUs/cores units.</td> </tr> </table>	Bit	Meaning when set	0	Reserved.	1-31	PR/SM capping limit: Count of hundredths of CPUs/cores units.
Bit	Meaning when set									
0	Reserved.									
1-31	PR/SM capping limit: Count of hundredths of CPUs/cores units.									
208	D0 *	12	HEX	Reserved.						
220	DC SMF99C_VCM_LparCapsSMF_cont	32	HEX	LPAR capacities - continuation.						
220	DC SMF99C_VCM_PRSMCapCecUtilParkAllThr	2	binary	PR/SM capping: CEC utilization park all threshold scaled by 256.						
222	DE SMF99C_VCM_PRSMCapVhUtilThr_max	2	binary	PR/SM capping: VH/VM utilization unpark threshold scaled by 256.						
224	E0 SMF99C_VCM_PRSMCapVhUtilThr_min	2	binary	PR/SM capping: VH/VM utilization park threshold scaled by 256.						
226	E2 *	2	HEX	Reserved.						
228	E4 SMF99C_VCM_LparCapUsedVHAdj	4	binary	Used VH capacity of previous interval in microseconds.						
232	E8 SMF99C_VCM_LparCapUsedVMAdj	4	binary	Used VM capacity of previous interval in microseconds.						
236	EC SMF99C_VCM_VHUtil	2	binary	VH utilization of previous interval scaled by 256.						
238	EE SMF99C_VCM_VMUtil	2	binary	VM utilization of previous interval scaled by 256.						
240	F0 SMF99C_VCM_ProjVHUtil	2	binary	Projected VH utilization (or projected VM utilization if there is no VH in the topology) if one VL would have been parked.						
242	F2 *	2	binary	Reserved.						
244	F4 *	8	HEX	Reserved.						

Processor data section

Offsets	Name	Length	Format	Description								
0	0 SMF99C_HD_Int_Proc_Idx	2	binary	HiperDispatch interval processor index.								
2	2 SMF99C_LCCADSF2	1	binary	Processor flag 1 <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved.</td> </tr> <tr> <td>1</td> <td>Processor parked.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved.	1	Processor parked.	2-7	Reserved.
Bit	Meaning when set											
0	Reserved.											
1	Processor parked.											
2-7	Reserved.											
3	3 SMF99C_LCCASCFL	1	binary	Processor flag 2 <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-6</td> <td>Reserved.</td> </tr> <tr> <td>7</td> <td>Processor park request pending.</td> </tr> </table>	Bit	Meaning when set	0-6	Reserved.	7	Processor park request pending.		
Bit	Meaning when set											
0-6	Reserved.											
7	Processor park request pending.											
4	4 *	12	HEX	Reserved.								

Subtype 13

The information contained in subtype 13 is for IBM internal use only.

Subtype 14

Subtype 14 contains HiperDispatch topology data. Subtype 14 records are written:

- Every five minutes, or
- In the current policy interval, if a HiperDispatch topology change occurred.

Note: In some of the following subtype 14 field descriptions, the term “CPU/core” indicates the applicability of the text, as follows:

- When the multithreading facility is not installed or when the facility is installed but not enabled, the field descriptions relate to logical or physical CPUs.
- When the multithreading facility is installed and enabled, the field descriptions relate to logical or physical cores.

Self-defining section

Offsets	Name	Length	Format	Description
0	0 SMF9914_HD_TopoChg_Hdr_OFFSET	4	binary	Offset to header data section.
4	4 SMF9914_HD_TopoChg_Hdr_LENGTH	2	binary	Length of header data section.
6	6 SMF9914_HD_TopoChg_Hdr_NUMBER 2	2	binary	Number of header data sections.
8	8 *	4	binary	Reserved.
12	C *	2	binary	Reserved.
14	E *	2	binary	Reserved.
16	10 SMF9914_HD_TopoChg_CPU_OFFSET	4	binary	Offset to processor data section.
20	14 SMF9914_HD_TopoChg_CPU_LENGTH	2	binary	Length of processor data section.
22	16 SMF9914_HD_TopoChg_CPU_NUMBER	2	binary	Number of processor data sections.
24	18 SMF9914_HD_TopoChg_Node_OFFSET	4	binary	Offset to node data section.
28	1C SMF9914_HD_TopoChg_Node_LENGTH	2	binary	Length of node data section.
30	1E SMF9914_HD_TopoChg_Node_NUMBER	2	binary	Number of node data sections.
32	29 SMF9914_HD_TopoChg_MPWQ_OFFSET	4	binary	Offset to MPWQ data section.
36	24 SMF9914_HD_TopoChg_MPWQ_LENGTH	2	binary	Length of MPWQ data section.
38	26 SMF9914_HD_TopoChg_MPWQ_NUMBER	2	binary	Number of MPWQ data sections.
40	28 SMF9914_HD_TopoChg_MPWQ_HNODE_OFFSET	4	binary	Offset to MPWQ HNODE data section.
44	2C SMF9914_HD_TopoChg_MPWQ_HNODE_LENGTH	2	binary	Length of MPWQ HNODE data section.
46	2E SMF9914_HD_TopoChg_MPWQ_HNODE_NUMBER	2	binary	Number of MPWQ HNODE data sections.

Header data section

Offsets	Name	Length	Format	Description																		
0	0 SMF99E_VCM_SMF_Sequ	4	binary	Balancer interval sequence number.																		
4	4 SMF99E_VCM_Flag1	1	binary	Balancer interval flag1 <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Topology has changed.</td> </tr> <tr> <td>1</td> <td>Rebuild affinity nodes</td> </tr> <tr> <td>2</td> <td>Honour priority has changed.</td> </tr> <tr> <td>3</td> <td>Dispatcher WUQ error.</td> </tr> <tr> <td>4</td> <td>Processor speed change.</td> </tr> <tr> <td>5-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Topology has changed.	1	Rebuild affinity nodes	2	Honour priority has changed.	3	Dispatcher WUQ error.	4	Processor speed change.	5-7	Reserved.				
Bit	Meaning when set																					
0	Topology has changed.																					
1	Rebuild affinity nodes																					
2	Honour priority has changed.																					
3	Dispatcher WUQ error.																					
4	Processor speed change.																					
5-7	Reserved.																					
5	5 SMF99E_VCM_Flag2	1	binary	Balancer interval flag2 <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>CEC capacities are valid.</td> </tr> <tr> <td>1</td> <td>LPAR capacities are valid.</td> </tr> <tr> <td>2</td> <td>Old VCM state.</td> </tr> <tr> <td>3</td> <td>Reserved.</td> </tr> <tr> <td>4</td> <td>Dispatcher affinity was updated.</td> </tr> <tr> <td>5</td> <td>PTF was issued to initiate a switch opposite mode. However, the PTF return info tells us that we are already in the requested mode.</td> </tr> <tr> <td>6</td> <td>VCM in transition to/from vertical.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	CEC capacities are valid.	1	LPAR capacities are valid.	2	Old VCM state.	3	Reserved.	4	Dispatcher affinity was updated.	5	PTF was issued to initiate a switch opposite mode. However, the PTF return info tells us that we are already in the requested mode.	6	VCM in transition to/from vertical.	7	Reserved.
Bit	Meaning when set																					
0	CEC capacities are valid.																					
1	LPAR capacities are valid.																					
2	Old VCM state.																					
3	Reserved.																					
4	Dispatcher affinity was updated.																					
5	PTF was issued to initiate a switch opposite mode. However, the PTF return info tells us that we are already in the requested mode.																					
6	VCM in transition to/from vertical.																					
7	Reserved.																					
6	6 SMF99E_VCM_ErrorCode	2	binary	VCM error code.																		

Record type 99

Offsets	Name	Length	Format	Description
8	8 *	3	hexadecimal	Reserved.
11	B SMF99E_VCM_CpsPerAN	1	binary	CPUs/cores per affinity node.
12	C SMF99E_VCM_LparPhysProcShr	4	binary	LPAR physical processor share for general CPUs/cores, scaled by 256.
16	10 SMF99E_VCM_MaxAffinityIndex	2	binary	Maximum affinity index the system supports for the life of the IPL.
18	12 SMF99E_VCM_MaxCpuIdForIPL	2	binary	Maximum CPU ID/core ID the system supports activating for the life of the IPL.
20	14 *	4	hexadecimal	Reserved.

Processor data section

Offsets	Name	Length	Format	Description						
0	0 SMF99E_HD_TopoChg_CPU_Index	2	binary	Logical CPU/core number.						
2	2 *	6	HEX	Reserved.						
8	8 SMF99E_CP_CPU_Array	8	binary	CPU/core data.						
8	8 SMF99E_CP_Cpu_Type	1	binary	CPU/core type.						
9	9 SMF99E_CP_Misc	1	binary	CPU/core miscellaneous info <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0-5</td> <td>Reserved.</td> </tr> <tr> <td>6-7</td> <td>CPU/core polarization.</td> </tr> </table>	Bit	Meaning when set	0-5	Reserved.	6-7	CPU/core polarization.
Bit	Meaning when set									
0-5	Reserved.									
6-7	CPU/core polarization.									
10	A SMF99E_CP_Topo	2	binary	CPU/core topology information.						
10	A SMF99E_CP_ChipID	1	binary	Chip ID.						
11	B SMF99E_CP_BookID	1	binary	Book ID.						
12	C SMF99E_CP_Cap	4	binary	CPU/core capacity in microseconds.						
16	10 SMF99E_CP_CI	8	binary	CPU/core container information of configuration topology.						
16	10 SMF99E_CP_CI_NlInUse	1	binary	Number of highest nesting level in use in array SMF99E_CP_CI_NL. 0 = there is no container information available in SMF99E_CP_CI_NL.						
17	11 SMF99E_CP_CI_Flags	1	binary	Flags: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>No CPU topology information available in SMF99E_CP_Topo</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	No CPU topology information available in SMF99E_CP_Topo	1-7	Reserved.
Bit	Meaning when set									
0	No CPU topology information available in SMF99E_CP_Topo									
1-7	Reserved.									
18	12 SMF99E_CP_CI_NL	6	binary	CPU container information of the configuration topology per nesting level						
18	12 SMF99E_CP_CI_NL1	1	binary	Container ID of nesting level 1						
19	13 SMF99E_CP_CI_NL2	1	binary	Container ID of nesting level 2						
20	14 SMF99E_CP_CI_NL3	1	binary	Container ID of nesting level 3						
21	15 SMF99E_CP_CI_NL4	1	binary	Container ID of nesting level 4						
22	16 SMF99E_CP_CI_NL5	1	binary	Container ID of nesting level 5						
23	17 *	1	HEX	Reserved.						

Node data section

Offsets	Name	Length	Format	Description
0	0 SMF99E_HD_TopoChg_Node_Index	2	binary	Node number.
2	2 *	6	HEX	Reserved.
8	8 SMF99E_AN_Array	0	binary	Affinity node data .
8	8 SMF99E_AN_Node	8	binary	Affinity node.
8	8 SMF99E_AN_CpuType	1	binary	CPU/core type.
9	9 *	1	binary	Reserved.
10	A SMF99E_AN_CpuCounts	6	binary	CPU/core counts.
10	A SMF99E_AN_PolarHi	2	binary	Number of VHs in this affinity node.
12	C SMF99E_AN_PolarMed	2	binary	Number of VMs in this affinity node.

Offsets	Name	Length	Format	Description								
14	E SMF99E_AN_PolarLow	2	binary	Number of VLs in this affinity node.								
16	10 SMF99E_AN_Info	4	binary	Affinity node info.								
16	10 SMF99E_AN_Topo	2	binary	CPU/core topology information.								
16	10 SMF99E_AN_ChipID	1	binary	Chip ID.								
17	11 SMF99E_AN_BookID	1	binary	Book ID.								
18	12 *	1	binary	Reserved.								
19	13 SMF99E_AN_Flags	1	binary	Flags <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>CPUs/cores on this node are boundary crossing.</td> </tr> <tr> <td>1</td> <td>Helper nodes are boundary crossing.</td> </tr> <tr> <td>2-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	CPUs/cores on this node are boundary crossing.	1	Helper nodes are boundary crossing.	2-7	Reserved.
Bit	Meaning when set											
0	CPUs/cores on this node are boundary crossing.											
1	Helper nodes are boundary crossing.											
2-7	Reserved.											
20	14 SMF99E_AN_Cap	4	binary	Capacity of affinity node in microseconds.								
24	18 SMF99E_AN_CI	8	binary	CPU/core container information of configuration topology.								
24	18 SMF99E_AN_CI_NLIInUse	1	binary	Number of highest nesting level in use in array SMF99E_AN_CI_NL. 0 = there is no container information available in SMF99E_AN_CI_NL.								
25	19 SMF99E_AN_CI_Flags	1	binary	Flags: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>No CPU topology information available in SMF99E_AN_Topo.</td> </tr> <tr> <td>1-7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	No CPU topology information available in SMF99E_AN_Topo.	1-7	Reserved.		
Bit	Meaning when set											
0	No CPU topology information available in SMF99E_AN_Topo.											
1-7	Reserved.											
26	1A SMF99E_AN_CI_NL	6	binary	CPU/core container information of the configuration topology per nesting level.								
26	1A SMF99E_AN_CI_NL1	1	binary	Container ID of nesting level 1								
27	1B SMF99E_AN_CI_NL2	1	binary	Container ID of nesting level 2								
28	1C SMF99E_AN_CI_NL3	1	binary	Container ID of nesting level 3								
29	1D SMF99E_AN_CI_NL4	1	binary	Container ID of nesting level 4								
30	1E SMF99E_AN_CI_NL5	1	binary	Container ID of nesting level 5								
31	1F *	1	HEX	Reserved.								

MPWQ CPU/core data section

Offsets	Name	Length	Format	Description
0	0 SMF99E_HD_TopoChg _MPWQ_CPU_ Index	2	binary	MPWQ CPU/core Number.
2	2 SMF99E_MPWQ_Affinity _Node	1	binary	Affinity node this CPU/core belongs to.
3	3 SMF99E_MPWQ_Share	1	binary	CPU/core share.

MPWQ HNode data section

Offsets	Name	Length	Format	Description
0	0 SMF99E_HD_TopoChg _MPWQ_Node_Index	2	binary	MPWQ Node Number.
2	2 SMF99E_MPWQ_Affinity _Node_Help_ Sum	2	binary	Affinity node crossing index block.
2	2 SMF99E_MPWQ_Drawer _Crossing_Index	1	binary	Drawer crossing index.
3	3 *	1	binary	Reserved.
4	4 SMF99E_MPWQ_Help_Nodes	44	binary	Helper nodes array of this affinity node. Consists of 44 one-byte data elements. Only the first 44 helper nodes are supported.
48	30 SMF99E_MPWQ_Affinity _Node_Help_Sum_Cont	7	binary	Continuation of affinity node crossing index block.
48	30 SMF99E_MPWQ_ContCrossIndex	5	binary	Container crossing index array.
48	30 SMF99E_MPWQ_ContCrossIndex_NL1	1	binary	Container crossing index of nesting level 1.

Record type 99

Offsets	Name	Length	Format	Description
49 31	SMF99E_MPWQ_ContCrossIndex_NL2	1	binary	Container crossing index of nesting level 2.
50 32	SMF99E_MPWQ_ContCrossIndex_NL3	1	binary	Container crossing index of nesting level 3.
51 33	SMF99E_MPWQ_ContCrossIndex_NL4	1	binary	Container crossing index of nesting level 4.
52 34	SMF99E_MPWQ_ContCrossIndex_NL5	1	binary	Container crossing index of nesting level 5.
53 35	SMF99E_MPWQ_HighestContCross	1	binary	Highest container crossing for cores assigned to this affinity node.
54 36 *		1	binary	Reserved.

Record Type 100 (64) — DB2 Statistics

IBM DB2 writes record type 100 to record transaction data collected at event monitoring points. For more information about record type 100, see *IBM DB2 for z/OS Managing Performance*.

Record Type 101 (65) — DB2 Accounting

IBM DB2 writes record type 101 to account for resources during a transaction. For more information about record type 101, see *IBM DB2 for z/OS Managing Performance*.

Record Type 102 (66) — DB2 Performance

IBM DB2 writes record type 102 to record performance information. For more information about record type 102, see *IBM DB2 for z/OS Managing Performance*.

Record Type 103 (67) — IBM HTTP Server

IBM HTTP Server - Powered by Apache writes record type 103 subtypes 13 and 14 to record configuration and performance information. For more information about these records, see the IBM HTTP Server 8.5.5 in IBM Knowledge Center (http://www.ibm.com/support/knowledgecenter/SSEQTJ_8.5.5/as_ditamaps/was855_welcome_ihs.html?lang=en) or later.

Record Type 104 (68) — RMF Distributed Platform Performance Data

This record type serves as a container for performance measurement data collected by RMF XP from non z/OS platforms. The following subtype ranges are defined to contain data for the supported platforms:

Subtype 1-12

performance data from AIX® on System p

Subtype 20-31

performance data from Linux on System x

Subtype 40-53

performance data from Linux on IBM z Systems

Subtype 60-64

performance data from Windows on System x

Subtype descriptions

One specific subtype is used to collect one individual CIM metric category according to the CIM data model on the affected platform. The CIM metric

category, in return, is mapped to the resource models used by RMF XP on the supported platforms. For example, metrics from the CIM metric category AIX_ActiveMemoryExpansion are related to metrics from the ACTIVE_MEMORY_EXPANSION resource used by RMF XP for AIX on System p.

Table 16. Mapping of CIM Metric Categories to RMF XP Resource Types

CIM Metric Categories	RMF XP Resource Types
AIX on System p	
AIX_ActiveMemoryExpansion	ACTIVE_MEMORY_EXPANSION
AIX_Processor	LOGICAL_PROCESSOR
AIX_ComputerSystem	PARTITION
AIX_Disk	DISK
AIX_NetworkPort	NETWORK_PORT
AIX_FileSystem	LOCAL_FILE_SYSTEM
AIX_Memory	MEMORY
AIX_OperatingSystem	AIX_IMAGE
AIX_Process	PROCESS
AIX_SharedEthernetAdapter	SHARED_ETHERNET_ADAPTER
AIX_ActiveMemorySharing	ACTIVE_MEMORY_SHARING
AIX_VirtualTargetDevice	VIRTUAL_TARGET_DEVICE
Linux on System x	
Linux_IPProtocolEndpoint	IP_PROTOCOL_ENDPOINT
Linux_LocalFileSystem	LOCAL_FILE_SYSTEM
Linux_NetworkPort	NETWORK_PORT
Linux_OperatingSystem	XLINUX_IMAGE
Linux_Processor	LOGICAL_PROCESSOR
Linux_UnixProcess	PROCESS
Linux_Storage	DISK
Linux_KVM	KVM_GUEST
Linux_Xen	XEN_GUEST
Linux on IBM z Systems	
Linux_IPProtocolEndpoint	IP_PROTOCOL_ENDPOINT
Linux_LocalFileSystem	LOCAL_FILE_SYSTEM
Linux_NetworkPort	NETWORK_PORT
Linux_OperatingSystem	ZLINUX_IMAGE
Linux_Processor	LOGICAL_PROCESSOR
Linux_UnixProcess	PROCESS
Linux_Storage	DISK
Linux_zCEC	CEC
Linux_zLPAR	LPAR
Linux_zChannel	CHANNEL
Linux_zECKD	VOLUME
Windows	

Table 16. Mapping of CIM Metric Categories to RMF XP Resource Types (continued)

CIM Metric Categories	RMF XP Resource Types
Windows_LocalFileSystem	LOCAL_FILE_SYSTEM
Windows_NetworkPort	NETWORK_PORT
Windows_OperatingSystem	WINDOWS_IMAGE
Windows_Processor	LOGICAL_PROCESSOR
Windows_Storage	DISK

View the *z/OS RMF Programmer's Guide* for the documentation of the RMF XP resource models.

AIX on System p

Performance data for AIX on System p is collected in the following subtypes:

Subtype 1

AIX_ActiveMemoryExpansionMetrics

Subtype 2

AIX_ProcessorMetrics

Subtype 3

AIX_ComputerSystemMetrics

Subtype 4

AIX_DiskMetrics

Subtype 5

AIX_NetworkPortMetrics

Subtype 6

AIX_FileSystemMetrics

Subtype 7

AIX_MemoryMetrics

Subtype 8

AIX_OperatingSystemMetrics

Subtype 9

AIX_ProcessMetrics

Subtype 10

AIX_SharedEthernetAdapterMetrics

Subtype 11

AIX_ActiveMemorySharingMetrics

Subtype 12

AIX_VirtualTargetDeviceMetrics

Linux on System x

Performance data for Linux on System x is collected in the following subtypes:

Subtype 20

Linux_IPProtocolEndpointMetrics

Subtype 21

Linux_LocalFileSystemMetrics

Subtype 22

Linux_NetworkPortMetrics

Subtype 23
Linux_OperatingSystemMetrics

Subtype 24
Linux_ProcessorMetrics

Subtype 25
Linux_UnixProcessMetrics

Subtype 26
Linux_StorageMetrics

Subtype 30
Linux_KVMMetrics

Subtype 31
Linux_XenMetrics

Linux on z Systems

Performance data for Linux on IBM z Systems is collected in the following subtypes:

Subtype 40
Linux_IPProtocolEndpointMetrics

Subtype 41
Linux_LocalFileSystemMetrics

Subtype 42
Linux_NetworkPortMetrics

Subtype 43
Linux_OperatingSystemMetrics

Subtype 44
Linux_ProcessorMetrics

Subtype 45
Linux_UnixProcessMetrics

Subtype 46
Linux_StorageMetrics

Subtype 50
Linux_zCECMetrics

Subtype 51
Linux_zLPARMetrics

Subtype 52
Linux_zChannelMetrics

Subtype 53
Linux_zECKDMetrics

Windows on System x

Performance data for Windows is collected in the following subtypes:

Subtype 60
Windows_LocalFileSystemMetrics

Subtype 61
Windows_NetworkPortMetrics

Subtype 62
Windows_OperatingSystemMetrics

Record type 104

Subtype 63

Windows_ProcessorMetrics

Subtype 64

Windows_StorageMetrics

Record Environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage Residency

31-bit

Security Notice

To write SMF record type 104, the GPM4CIM started task needs at least READ access to the BPX.SMF profile of the FACILITY class, specified with your system authorization facility (SAF) product. The following is an example for RACE, where GPMSERVE is the user ID which is assigned to the GPM4CIM started task:

```
RDEFINE FACILITY BPX.SMF UACC(NONE)
PERMIT BPX.SMF CLASS(FACILITY) ID(GPMSERVE) ACCESS(READ)
SETROPTS RACLIST(FACILITY) REFRESH
```

Record Mappings

Header/Self-defining Section

The following content is common to all records of type 104, independent of the subtype.

Offsets	Name	Length	Format	Description												
Common header for SMF record type 104																
0	0 SMF104LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF104SEG	2	binary	Segment descriptor (see record length field).												
4	4 SMF104FLG	1	binary	System indicator: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0</td><td>New record format</td></tr><tr><td>1</td><td>Subtypes used</td></tr><tr><td>2</td><td>Reserved</td></tr><tr><td>3-6</td><td>Version indicators*</td></tr><tr><td>7</td><td>System is running in PR/SM mode</td></tr></tbody></table> *See "Standard SMF record header" on page 162 for a detailed description.	Bit	Meaning when set	0	New record format	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	System is running in PR/SM mode
Bit	Meaning when set															
0	New record format															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	System is running in PR/SM mode															
5	5 SMF104RTY	1	binary	Record type 104 (X'68').												
6	6 SMF104TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF104DTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyyddF. See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF104SID	4	EBCDIC	System identification (from the SMFPRMxx SID parameter).												
18	12 SMF104SSI	4	EBCDIC	Subsystem identification (GPM).												
22	16 SMF104STY	2	binary	Record subtype.												

Offsets	Name	Length	Format	Description
24	18 SMF104TRN	2	binary	Number of triplets in this record. A triplet is a set of three SMF fields (offset/length/number values) that defines a section of the record. The offset is the offset from the RDW.
26	1A	2		Reserved.
28	1C SMF104PRS	4	binary	Offset to RMF XP product section from the RDW.
32	20 SMF104PRL	2	binary	Length of RMF XP product section.
34	22 SMF104PRN	2	binary	Number of RMF XP product sections.
Header extension for all subtypes				
36	24 SMF104ICS	4	binary	Offset to image control section from the RDW.
40	28 SMF104ICL	2	binary	Length of image control section.
42	2A SMF104ICN	2	binary	Number of image control sections.
44	2C SMF104MES	4	binary	Offset to metric section from the RDW.
48	30 SMF104MEL	2	binary	Length of metric section.
50	32 SMF104MEN	2	binary	Total number of metric sections.

RMF XP product section

Offsets	Name	Length	Format	Description
0	0 SMF104MFV	2	packed	RMF version number.
2	2 SMF104PRD	8	EBCDIC	Product name (<i>RMF XP</i>).
10	A SMF104IST	4	packed	Time that the RMF XP measurement interval started, in the form <i>0hhmmssF</i> , where <i>hh</i> is the hours, <i>mm</i> is the minutes, <i>ss</i> is the seconds, and <i>F</i> is the sign.
14	E SMF104DAT	4	packed	Date when the RMF measurement interval started, in the form <i>0cyydddF</i> . See "Standard SMF record header" on page 162 for a detailed description.
18	12 SMF104INT	4	packed	Duration of RMF measurement interval, in the form <i>mmsstttF</i> , where <i>mm</i> is the minutes, <i>ss</i> is the seconds, <i>ttt</i> is the milliseconds, and <i>F</i> is the sign. The end of the measurement interval is the sum of the recorded start time and this field.
22	16 SMF104LGO	8	binary	Offset GMT to local time (STCK format).
30	1E	2		Reserved.
32	20 SMF104XPL	2	binary	RMF XP functionality level.
34	22 SMF104CPX	24	EBCDIC	System complex name, specified with the COMPLEX parameter in the <i>cfg4A X Z W</i> configuration file.
58	3A SMF104OSL	8	EBCDIC	Operating system label served by RMF XP (AIX, LINUX or WINDOWS).
66	42 SMF104PLT	2	binary	Platform type served by RMF XP: 0 AIX on IBM Power Systems™ 1 Linux on System x 2 Linux on z Systems™ 3 Windows on System x
68	44 SMF104MVS	8	EBCDIC	z/OS software level for the current system (consists of an acronym and the version, release, and modification level - <i>ZVvrrmm</i>).
76	4C SMF104XNM	8	EBCDIC	Sysplex name of the current sysplex as defined in parmlib member COUPLExx.
84	54 SMF104SNM	8	EBCDIC	System name for the current system as defined in parmlib member IEASYSxx SYSNAME parameter.

Record type 104

Image Control Section

One Image Control Section is produced for each system returning any metric value.

Offsets	Name	Length	Format	Description
0	0 SMF104MIM	64	EBCDIC	Name of this monitored image, extracted from the CIM metrics collection.
64	40 SMF104TIM	14	EBCDIC	Timestamp in the format <i>yyyymmddhhmmss</i> , extracted from the CIM metrics collection.
78	4E SMF104DUR	14	EBCDIC	Interval duration in the format <i>yyyymmddhhmmss</i> , extracted from the CIM metrics collection.
92	5C SMF104CIM	64	EBCDIC	Name of the image where the CIM server is running, specified with the IMAGE parameter in the <i>cfg4A X Z W</i> configuration file.
156	9C SMF104OST	4	EBCDIC	Operating system type where the CIM server is running, extracted from the OSType attribute of the CIM_Operating_System instance: 9 AIX 18 Windows 36 Linux
160	A0 SMF104OSV	64	EBCDIC	Operating system version where the CIM server is running, extracted from the version attribute of the CIM_Operating_System instance.
224	E0 SMF104CTZ	4	EBCDIC	Current time zone, extracted from the CurrentTimeZone attribute of the CIM_Operating_System instance. This value represents the GMT offset in minutes.
228	E4 SMF104MIND	2	binary	Index of first metric section associated with this monitored image.
230	E6 SMF104MNUM	2	binary	Number of metric sections associated with this monitored image.

Subtypes 1 - 12 for AIX on System p

Subtypes 1 - 12 of record type 104 contain metrics from systems running with AIX on System p. The description column of the record fields shows (in parenthesis) the name of the corresponding metric in the AIX resource model used by RMF XP.

Subtype 1 — AIX_ActiveMemoryExpansionMetrics

Offsets	Name	Length	Format	Description
0	0 R10401MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10401CMCP	8	floating	Percentage of CPU consumed by memory compression. (CompressMemCPUPercentage)
72	48 R10401CMPPG	8	floating	Number of physical pages in the compressed pool. (CompressedMemPoolPages)
80	50 R10401CMPP	8	floating	Percentage of true memory used for the compressed pool. (CompressedMemPoolPercentage)
88	58 R10401CMPS	8	floating	Size of the compressed memory pool in megabytes. (CompressedMemPoolSize)

Offsets	Name	Length	Format	Description
96	60 R10401CMEF	8	floating	Current percentage of expanded memory in use for this LPAR. (CurrentMemExpFactor)
104	68 R10401DS	8	floating	Deficit memory size between target size and actual size. (DeficitSize)
112	70 R10401EMS	8	floating	Size of expanded memory for this LPAR in megabytes. (ExpMemSize)
120	78 R10401MM	8	floating	Current memory mode. The value can be: 0 Shared 1 Dedicated 2 Expanded (MemoryMode)
128	80 R10401PIR	8	floating	Rate of page-in operations per second from the compressed pool to the uncompressed pool. (PageInRate)
136	88 R10401POR	8	floating	Rate of page-out operations per second from the uncompressed pool to the compressed pool. (PageOutRate)
144	90 R10401TMEF	8	floating	Target percentage of expanded memory in use for this LPAR. (TargetMemExpFactor)
152	98 R10401TMS	8	floating	Size of true memory for this LPAR in megabytes. (TrueMemSize)

Subtype 2 — AIX_ProcessorMetrics

Offsets	Name	Length	Format	Description
0	0 R10402MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10402TCTP	8	floating	Percentage of time where the processor was active during the interval. (TotalCPUTimePercentage)
72	48 R10402TICTP	8	floating	Percentage of time where the processor was idle during the interval. (TotalIdleCPUTimePercentage)
80	50 R10402TKCTP	8	floating	Percentage of time where the processor was active in kernel mode during the interval. (TotalKernCPUTimePercentage)
88	58 R10402TUCTP	8	floating	Percentage of time where the processor was active in user mode during the interval. (TotalUserCPUTimePercentage)
96	60 R10402TWCTP	8	floating	Percentage of time where the processor was in a wait condition during the interval. (TotalWaitCPUTimePercentage)

Record type 104

Subtype 3 — AIX_ComputerSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10403MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10403AVP	8	floating	Number of active virtual processors. (ActiveVirtualProcessors)
72	48 R10403EVIP	8	floating	Percentage of the entitled processing capacity idle. (ExternalViewIdlePercentage)
80	50 R10403EVKMP	8	floating	Percentage of the entitled processing capacity used while running in kernel mode. (ExternalViewKernelModePercentage)
88	58 R10403EVTCP	8	floating	Percentage of the entitled processing capacity used. The value is the sum of ExternalViewUserModePercentage and ExternalViewKernelModePercentage. (ExternalViewTotalCPUPercentage)
96	60 R10403EVUMP	8	floating	Percentage of the entitled processing capacity used while running in user mode. (ExternalViewUserModePercentage)
104	68 R10403NOPCU	8	floating	Number of online physical CPUs used by this LPAR. (NumberOfPhysicalCPUsUtilized)
112	70 R10403PDCUP	8	floating	Percentage of the entitled capacity consumed. Percentage of the CPU capacity defined to this operating system container that is actually used, not counting any idle time. (PartitionDefinedCapacityUsedPercentage)
120	78 R10403PCUP	8	floating	Percentage of the physical computation unit available to this LPAR. (PhysicalComputationUnitPercentage)
128	80 R10403TOLSC	8	floating	Time since last boot operation in milliseconds. (TimeOfLastStateChange)
136	88 R10403UGCC	8	floating	CPU time not used on the lowest level of virtualization layer (nearest to the hardware) this operating system is running in and shareable between two or more OS containers. (UnusedGlobalCPUCapacity)
144	90 R10403UPCC	8	floating	CPU Time in milliseconds reserved exclusively for this OS container but not used. (UnusedPartitionCPUCapacity)

Subtype 4 — AIX_DiskMetrics

Offsets	Name	Length	Format	Description
0	0 R10404MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10404ATP	8	floating	Percentage of time the disk was processing requests. (ActiveTimePercentage)

Offsets	Name	Length	Format	Description
72	48 R10404AS	8	floating	Free portion of the disk in megabytes. (AvailableSpace)
80	50 R10404ADU	8	floating	Percentage of time the disk spent servicing transfers in relation to the time the disk was active. (AverageDeviceUtilization)
88	58 R10404CAP	8	floating	Total size of the disk in megabytes. (Capacity)
96	60 R10404IOI	8	floating	Indicator for the disk utilization. The value represents the product of the ResponseTime multiplied with the RequestRate. (IOIntensity)
104	68 R10404QD	8	floating	Average number of requests on the instantaneous wait queue. (QueueDepth)
112	70 R10404RO	8	floating	Number of transfers from the disk. (ReadOperations)
120	78 R10404RT	8	floating	Average number of bytes read per second from the disk. (ReadThroughput)
128	80 R10404RR	8	floating	Number of I/O requests per second. (RequestRate)
136	88 R10404RTM	8	floating	Average response time per I/O request including service time and wait time. (ResponseTime)
144	90 R10404TO	8	floating	Number of transfers. The value is the sum of ReadOperations and WriteOperations. (TransferredOperations)
152	98 R10404TT	8	floating	Average number of bytes transferred per second. The value is the sum of ReadThroughput and WriteThroughput. (TransferredThroughput)
160	A0 R10404WT	8	floating	Average wait time per I/O request. (WaitTime)
168	A8 R10404WO	8	floating	Number of transfers to the disk. (WriteOperations)
176	B0 R10404WTP	8	floating	Average number of bytes written to disk per second. (WriteThroughput)

Subtype 5 — AIX_NetworkPortMetrics

Offsets	Name	Length	Format	Description
0	0 R10405MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.

Record type 104

Offsets	Name	Length	Format	Description
64	40 R10405BR	8	floating	Bytes received for this interface. (BytesReceived)
72	48 R10405BT	8	floating	Bytes transmitted for this interface. (BytesTransmitted)
80	50 R10405ER	8	floating	Average number of errors per second for this interface. (ErrorRate)
88	58 R10405KRR	8	floating	Kilobytes received per second for this interface. (KbsReceivedRate)
96	60 R10405KTHR	8	floating	Kilobytes transmitted and received per second for this interface. (KbsThroughoutRate)
104	68 R10405KTR	8	floating	Kilobytes transmitted per second for this interface. (KbsTransmittedRate)
112	70 R10405NPUP	8	floating	The number of packets transmitted and received for this interface divided by the total number of packets transmitted and received by the system. (NetworkPortUtilizationPercentage)
120	78 R10405PR	8	floating	Number of packets received for this interface. (PacketsReceived)
128	80 R10405PRR	8	floating	Number of packets received per second for this interface. (PacketsReceivedRate)
136	88 R10405PT	8	floating	Number of packets transmitted for this interface. (PacketsTransmitted)
144	90 R10405PTR	8	floating	Number of packets transmitted per second for this interface. (PacketsTransmittedRate)

Subtype 6 — AIX_FileSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10406MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10406AS	8	floating	Available space for this filesystem in megabytes. (AvailableSpace)
72	48 R10406TS	8	floating	Total space for this filesystem in megabytes. (TotalSpace)
80	50 R10406US	8	floating	Used space for this filesystem in megabytes. (UsedSpace)

Subtype 7 — AIX_MemoryMetrics

Offsets	Name	Length	Format	Description
0	0 R10407MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10407AVM	8	floating	Current number of active pages in virtual memory. (ActiveVirtualMemory)
72	48 R10407FSPI	8	floating	Number of page-in operations per second from the filesystem. (FileSystemPageIn)
80	50 R10407FSPO	8	floating	Number of page-out operations per second to the filesystem. (FileSystemPageOut)
88	58 R10407MUP	8	floating	Average percentage of memory utilized during the interval. (MemoryUtilizationPercentage)
96	60 R10407PFM	8	floating	Number of page-faults per second. (PageFaultMemory)
104	68 R10407PSI	8	floating	Number of page-in operations per second from the pagingspace. (PageSpaceIn)
112	70 R10407PSO	8	floating	Number of page-out operations per second from the pagingspace. (PageSpaceOut)
120	78 R10407PSM	8	floating	Number of page-stealing operations per second. (PageStealMemory)

Subtype 8 — AIX_OperatingSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10408MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10408CCI	8	floating	CPU time consumed by this operating system divided by CPU time which could have been used by the operating system within the interval. The value of this metric is between 0 (no CPU time consumed) and 1 (all entitled CPU capacity used). (CPUConsumptionIndex)
72	48 R10408CSR	8	floating	Number of context switches per second. (ContextSwitchRate)
80	50 R10408EVKMP	8	floating	Percentage of CPU resources used by this operating system in kernel mode in relation to the CPU capacity for the LPAR without taking capping effects or competition with other workloads into account. (ExternalViewKernelModePercentage)

Record type 104

Offsets	Name	Length	Format	Description
88	58 R10408EVTCP	8	floating	Percentage of CPU resources used by this operating system. The value is the sum of ExternalViewUserModePercentage and ExternalViewKernelModePercentage. (ExternalViewTotalCPUPercentage)
96	60 R10408EVUMP	8	floating	Percentage of CPU resources used by this operating system in user mode in relation to the CPU capacity for the LPAR without taking capping effects or competition with other workloads into account. (ExternalViewUserModePercentage)
104	68 R10408FPM	8	floating	Amount of currently unused physical memory. (FreePhysicalMemory)
112	70 R10408FSIPF	8	floating	Amount of virtual memory that can be swapped out into paging files or block devices. (FreeSpaceInPagingFiles)
120	78 R10408FVM	8	floating	Amount of currently unused virtual memory. (FreeVirtualMemory)
128	80 R10408HIR	8	floating	Number of hardware interrupts per second. (HardwareInterruptRate)
136	88 R10408IVIP	8	floating	Percentage of time the operating system was idle. (InternalViewIdlePercentage)
144	90 R10408IVKMP	8	floating	Percentage of CPU time spent in kernel mode by the operating system. (InternalViewKernelModePercentage)
152	98 R10408IVTCP	8	floating	Percentage of CPU time spent by the operating system. (InternalViewTotalCPUPercentage)
160	A0 R10408IVUMP	8	floating	Percentage of CPU time spent in user mode by the operating system. (InternalViewUserModePercentage)
168	A8 R10408KMT	8	floating	Total CPU time the operating system spent in kernel mode. (KernelModeTime)
176	B0 R10408LA	8	floating	Average number of dispatchable units in the ready queue, not counting any idle tasks. A currently running unit is counted as dispatchable unit as well. (LoadAverage)
184	B8 R10408NOP	8	floating	Number of processes currently loaded or running in the operating system. Kernel threads are not taken into account. (NumberOfProcesses)
192	C0 R10408NOU	8	floating	Number of user sessions for which the operating system is currently storing state information. If the same user is logged in several times, each session is counted. (NumberOfUsers)
200	C8 R10408PIR	8	floating	Average number of pages paged in per second. (PageInRate)

Offsets	Name	Length	Format	Description
208	D0 R10408POR	8	floating	Average number of pages paged out per second. (PageOutRate)
216	D8 R10408SIR	8	floating	Number of software interrupts per second. (SoftwareInterruptRate)
224	E0 R10408TCT	8	floating	Sum of KernelModeTime and UserModeTime, that is, the total CPU time spent in user mode or kernel mode. (TotalCPUTime)
232	E8 R10408UMT	8	floating	Total CPU time the operating system spent in user mode. (UserModeTime)

Subtype 9 — AIX_ProcessMetrics

Offsets	Name	Length	Format	Description
0	0 R10409MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10409AKMT	8	floating	CPU time used by this process in kernel mode since process creation. (AccumulatedKernelModeTime)
72	48 R10409ATCT	8	floating	Sum of AccumulatedUserModeTime and AccumulatedKernelModeTime for this process. (AccumulatedTotalCPUTime)
80	50 R10409AUMT	8	floating	CPU time used by this process in user mode since process creation. (AccumulatedUserModeTime)
88	58 R10409EVKMP	8	floating	CPU resources used by this process in kernel mode in relation to the CPU capacity available on a higher level of virtualization. (ExternalViewKernelModePercentage)
96	60 R10409EVTCP	8	floating	CPU resources used by this process in relation to the CPU capacity available on a higher level of virtualization. The value is the sum of ExternalViewUserModePercentage and ExternalViewKernelModePercentage for this process. (ExternalViewTotalCPUPercentage)
104	68 R10409EVUMP	8	floating	CPU resources used by this process in user mode in relation to the CPU capacity available on a higher level of virtualization. (ExternalViewUserModePercentage)
112	70 R10409IVKMP	8	floating	CPU time spent for this process in kernel mode in relation to the total CPU time spent for the system in kernel mode. (InternalViewKernelModePercentage)
120	78 R10409IVTCP	8	floating	Total CPU time spent for this process in relation to the total CPU time spent for the system. The value is the sum of InternalViewUserModePercentage and InternalViewKernelModePercentage for this process. (InternalViewTotalCPUPercentage)

Record type 104

Offsets	Name	Length	Format	Description
128	80 R10409IVUMP	8	floating	CPU time spent for this process in user mode in relation to the total CPU time spent for the system in user mode. (InternalViewUserModePercentage)
136	88 R10409KMT	8	floating	CPU time spent in kernel mode by this process. (KernelModeTime)
144	90 R10409MNOOF	8	floating	Maximum number of open files for this process. (MaxNumberOfOpenFiles)
152	98 R10409PIR	8	floating	Average number of pages paged in per second on behalf of this process. (PageInRate)
160	A0 R10409RSS	8	floating	Physical memory size for this process. (ResidentSetSize)
168	A8 R10409SS	8	floating	Integral shared memory size for this process. (SharedSize)
176	B0 R10409TCT	8	floating	Sum of UserModeTime and KernelModeTime for this process. (TotalCPUTime)
184	B8 R10409UMT	8	floating	CPU time spent in user mode by this process. (UserModeTime)
192	C0 R10409VS	8	floating	Virtual memory size for this process. (VirtualSize)

Subtype 10 — AIX_SharedEthernetAdapterMetrics

Offsets	Name	Length	Format	Description
0	0 R10410MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10410BIR	8	floating	Bytes received rate for this shared ethernet adapter. (ByteInRate)
72	48 R10410BOR	8	floating	Bytes sent rate for this shared ethernet adapter. (ByteOutRate)
80	50 R10410PIR	8	floating	Packets received rate for this shared ethernet adapter. (PacketInRate)
88	58 R10410POR	8	floating	Packets sent rate for this shared ethernet adapter. (PacketOutRate)
96	60 R10410TR	8	floating	Transfer rate for this shared ethernet adapter. (TransferredRate)

Subtype 11 — AIX_ActiveMemorySharingMetrics

Offsets	Name	Length	Format	Description
0	0 R10411MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10411AMSE	8	floating	Indicator if active memory sharing is enabled (1) or not (0). (ActiveMemorySharingEnabled)
72	48 R10411HPI	8	floating	Number of hypervisor page-in operations. (HypervsrPageIn)
80	50 R10411HPIT	8	floating	Time waiting for hypervisor page-in operations in milliseconds. (HypervsrPageInTime)
88	58 R10411LP	8	floating	Policy of loan memory in response to hypervisor requests. The value can be off (0), default (1) or aggressive (2). (LoanPolicy)
96	60 R10411LMS	8	floating	Amount of logical memory currently loaned to the hypervisor in megabytes. (LoanedMemSize)
104	68 R10411MPS	8	floating	Amount of memory in the shared memory pool in megabytes. (MemPoolSize)
112	70 R10411MIOME	8	floating	Minimum I/O memory entitlement for this LPAR in megabytes. (MinIOMemEntitlement)
120	78 R10411TIOME	8	floating	Total I/O memory entitlement for this LPAR in megabytes. (TotalIOMemEntitlement)
128	80 R10411UIOME	8	floating	Used I/O memory entitlement for this LPAR in megabytes. (UsedIOMemEntitlement)

Subtype 12 — AIX_VirtualTargetDeviceMetrics

Offsets	Name	Length	Format	Description
0	0 R10412MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10412KRR	8	floating	Read rate per second for this virtual target device. (KbsReadRate)
72	48 R10412KWR	8	floating	Write rate per second for this virtual target device. (KbsWriteRate)
80	50 R10412TR	8	floating	Average number of transmissions per second for this virtual target device. (TransferRate)

Subtypes 20 - 31 for Linux on System x

Subtypes 20 - 31 of record type 104 contain metrics from systems running with Linux on System x. The description column of the record fields shows (in parenthesis) the name of the corresponding metric in the Linux on System x resource model used by RMF XP.

Subtype 20 — Linux_IPProtocolEndpointMetrics

Offsets	Name	Length	Format	Description
0	0 R10420MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10420BR	8	floating	Number of bytes received on this IP protocol endpoint during the interval. (BytesReceived)
72	48 R10420BT	8	floating	Number of bytes transmitted on this IP protocol endpoint during the interval. (BytesTransmitted)
80	50 R10420ER	8	floating	Average number of errors per second during the interval. This includes errors that occurred during transmitting and receiving and recovered errors as well as unrecovered errors. (ErrorRate)
88	58 R10420PR	8	floating	Total number of packets received on this IP protocol endpoint during the interval. (PacketsReceived)
96	60 R10420PT	8	floating	Total number of packets transmitted on this IP protocol endpoint during the interval. (PacketsTransmitted)
104	68 R10420PRR	8	floating	Average number of packets received per second on this IP protocol endpoint during the interval. (PacketReceiveRate)
112	70 R10420PTR	8	floating	Average number of packets transmitted per second on this IP protocol endpoint during the interval. (PacketTransmitRate)
120	78 R10420BRR	8	floating	Average number of bytes received per second on this IP protocol endpoint during the interval. (ByteReceiveRate)
128	80 R10420BTR	8	floating	Average number of bytes transmitted per second on this IP protocol endpoint during the interval. (ByteTransmitRate)
136	88 R10420RDR	8	floating	Average number of received packets dropped per second on this IP protocol endpoint during the interval. (ReceiveDropRate)
144	90 R10420RPD	8	floating	Number of received packets dropped on this IP protocol endpoint during the interval. (ReceivePacketsDropped)

Offsets	Name	Length	Format	Description
152	98 R10420TDR	8	floating	Average number of transmitted packets dropped per second on this IP protocol endpoint during the interval. (TransmitDropRate)
160	A0 R10420TPD	8	floating	Number of transmitted packets dropped on this IP protocol endpoint during the interval. (TransmitPacketsDropped)

Subtype 21 — Linux_LocalFileSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10421MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10421AS	8	floating	Amount of free space for the file system. (AvailableSpace)
72	48 R10421ASP	8	floating	Percentage of free space for the file system. (AvailableSpacePercentage)

Subtype 22 — Linux_NetworkPortMetrics

Offsets	Name	Length	Format	Description
0	0 R10422MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10422BR	8	floating	Number of bytes received on this network port during the interval including any protocol overhead such as framing characters, headers and trailers. (BytesReceived)
72	48 R10422BT	8	floating	Number of bytes transmitted on this network port during the interval including any protocol overhead such as framing characters, headers and trailers. (BytesTransmitted)
80	50 R10422ER	8	floating	Average number of network errors per second during the interval. This includes errors that occurred during transmitting and receiving, and recovered errors as well as unrecovered errors. (ErrorRate)

Subtype 23 — Linux_OperatingSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10423MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10423CCI	8	floating	CPU time consumed by this operating system, divided by CPU time which could have been used by the operating system within the interval. The value of this metric is between 0 (no CPU time consumed) and 1 (all entitled CPU capacity used). (CPUConsumptionIndex)

Record type 104

Offsets	Name	Length	Format	Description
72	48 R10423CSR	8	floating	Number of context switches per second. Scheduler efficiency is one major bottleneck for highly scalable server images. This metric shows how demanding a workload is with regard to the operating system scheduler. (ContextSwitchRate)
80	50 R10423EVKMP	8	floating	Percentage of CPU resources used by this operating system in kernel mode in relation to the CPU capacity of the virtual server without taking capping effects or competition with other workloads into account. (ExternalViewKernelModePercentage)
88	58 R10423EVTCP	8	floating	Percentage of CPU resources used by this operating system in relation to the CPU capacity of the virtual server without taking capping effects or competition with other partitions into account. (ExternalViewTotalCPUPercentage)
96	60 R10423EVUMP	8	floating	Percentage of CPU resources used by this operating system in user mode in relation to the CPU capacity of the virtual server without taking capping effects or competition with other workloads into account. (ExternalViewUserModePercentage)
104	68 R10423FPM	8	floating	Amount of physical memory currently unused and available. In a virtualized environment this is the free memory available to the operating system. (FreePhysicalMemory)
112	70 R10423FSIPF	8	floating	Amount of virtual memory that can be mapped into the operating system's paging files without causing any used pages to be purged from the paging files. If an operating system does not support paging, a value of zero is returned. (FreeSpaceInPagingFiles)
120	78 R10423FVM	8	floating	Amount of virtual memory currently unused and available. (FreeVirtualMemory)
128	80 R10423HIR	8	floating	Number of hardware interrupts per second. (HardwareInterruptRate)
136	88 R10423IVIP	8	floating	Percentage of time this operating system was idle (OS view). Idle is the CPU time spent looking for work. In a virtual environment, idle time can be used by other operating systems running on the same physical server. (InternalViewIdlePercentage)
144	90 R10423IVKMP	8	floating	Percentage of CPU resources used in kernel mode by this operating system. (InternalViewKernelModePercentage)
152	98 R10423IVTCP	8	floating	Percentage of CPU resources used by this operating system. (InternalViewTotalCPUPercentage)
160	A0 R10423IVUMP	8	floating	Percentage of CPU resources used in user mode by this operating system. (InternalViewUserModePercentage)

Offsets	Name	Length	Format	Description
168	A8 R10423KMT	8	floating	CPU time the operating system spent in kernel mode during the interval. (KernelModeTime)
176	B0 R10423LA	8	floating	Average number of dispatchable units in the ready queue, not counting any idle tasks. A currently running unit is counted as dispatchable unit as well. (LoadAverage)
184	B8 R10423NOP	8	floating	Number of process contexts currently loaded or running on the operating system. (NumberOfProcesses)
192	C0 R10423NOU	8	floating	Number of user sessions for which the operating system is currently storing state information. If the same user is logged on several times, each session is counted separately. (NumberOfUsers)
200	C8 R10423PIR	8	floating	Average number of pages paged in per second. (PageInRate)
208	D0 R10423POR	8	floating	Average number of pages paged out per second. (PageOutRate)
216	D8 R10423SSIPF	8	floating	Number of kilobytes that can be stored in the operating system's paging files. This number does not represent the actual physical size of the paging file on disk. A value of zero indicates that there are no paging files. (SizeStoredInPagingFiles)
224	E0 R10423TCT	8	floating	CPU time the operating system spent during the interval. The value is the sum of KernelModeTime and UserModeTime and does not include any idle time. (TotalCPUTime)
232	E8 R10423TVIRMS	8	floating	Number of kilobytes of virtual memory. This value is the sum of total physical memory and the amount of paging space. (TotalVirtualMemorySize)
240	F0 R10423TVISMS	8	floating	Total amount of physical memory available to the operating system. This value does not necessarily indicate the true amount of physical memory, but indicates the amount that is reported as being available to the operating system. (TotalVisibleMemorySize)
248	F8 R10423UMT	8	floating	CPU time the operating system spent in user mode during the interval. (UserModeTime)
256	100 R10423UPM	8	floating	Amount of physical memory currently in use. (UsedPhysicalMemory)
264	108 R10423UVM	8	floating	Amount of virtual memory currently in use. (UsedVirtualMemory)

Record type 104

Offsets	Name	Length	Format	Description
272	110 R10423IOWT	8	floating	CPU time the operating system spent waiting for I/O during the interval. (IOWaitTime)
280	118 R10423CSC	8	floating	Accumulated number of context switches. Scheduler efficiency is one major bottleneck for highly scalable server images. This metric shows how demanding a workload is with regard to the operating system scheduler. (ContextSwitchCounter)
288	120 R10423HIC	8	floating	Accumulated number of hardware interrupts. (HardwareInterruptCounter)
296	128 R10423LC	8	floating	Accumulated number of dispatchable units in the ready queue, not counting any idle tasks. A currently running unit is counted as dispatchable unit as well. (LoadCounter)
304	130 R10423PIC	8	floating	Accumulated number of pages paged in. (PageInCounter)
312	138 R10423POC	8	floating	Accumulated number of pages paged out. (PageOutCounter)

Subtype 24 — Linux_ProcessorMetrics

Offsets	Name	Length	Format	Description
0	0 R10424MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10424TCTP	8	floating	Percentage of time where the CPU was not idle. (TotalCPUTimePercentage)

Subtype 25 — Linux_UnixProcessMetrics

Offsets	Name	Length	Format	Description
0	0 R10425MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10425AKMT	8	floating	CPU time in kernel mode spent for this process since process creation. (AccumulatedKernelModeTime)
72	48 R10425ATCT	8	floating	CPU time spent for this process since process creation. (AccumulatedTotalCPUTime)
80	50 R10425AUMT	8	floating	CPU time in user mode spent for this process since process creation. (AccumulatedUserModeTime)
88	58 R10425EVKMP	8	floating	Percentage of CPU resources used in kernel mode by this process in relation to the CPU capacity available on a higher level of virtualization. (ExternalViewKernelModePercentage)

Offsets	Name	Length	Format	Description
96	60 R10425EVTCP	8	floating	Percentage of CPU resources used by this process in relation to the CPU capacity available on a higher level of virtualization. The value is the sum of ExternalViewUserModePercentage and ExternalViewKernelModePercentage for this process. (ExternalViewTotalCPUPercentage)
104	68 R10425EVUMP	8	floating	Percentage of CPU resources used by this process in user mode in relation to the CPU capacity available on a higher level of virtualization. (ExternalViewUserModePercentage)
112	70 R10425IVKMP	8	floating	CPU time spent for this process in kernel mode in relation to the total CPU time spent for the system in kernel mode. (InternalViewKernelModePercentage)
120	78 R10425IVTCP	8	floating	Total CPU time spent for this process in relation to the total CPU time spent for the system. The value is the sum of InternalViewUserModePercentage and InternalViewKernelModePercentage for this process. (InternalViewTotalCPUPercentage)
128	80 R10425IVUMP	8	floating	CPU time spent for this process in user mode in relation to the total CPU time spent for the system in user mode. (InternalViewUserModePercentage)
136	88 R10425KMT	8	floating	CPU time the process consumed in kernel mode during the interval. (KernelModeTime)
144	90 R10425PIR	8	floating	Number of pages paged in per second on behalf of this process. (PageInRate)
152	98 R10425POR	8	floating	Number of pages paged out per second on behalf of this process. (PageOutRate)
160	A0 R10425RSS	8	floating	Amount of physical memory used by this process. Any memory currently paged out is not included in this number. (ResidentSetSize)
168	A8 R10425SS	8	floating	Number of bytes this process shares with other processes like dynamic link libraries. (SharedSize)
176	B0 R10425TCT	8	floating	CPU time the process consumed during the interval. This value is the sum of KernelModeTime and UserModeTime and does not include any idle time. (TotalCPUTime)
184	B8 R10425UMT	8	floating	CPU time the process consumed in user mode during the interval. (UserModeTime)
192	C0 R10425VS	8	floating	The size of the virtual memory used by this process. (VirtualSize)

Record type 104

Offsets	Name	Length	Format	Description
200	C8 R10425PIC	8	floating	Accumulated number of pages paged in on behalf of this process. (PageInCounter)
208	D0 R10425POC	8	floating	Accumulated number of pages paged out on behalf of this process. (PageOutCounter)

Subtype 26 — Linux_StorageMetrics

Offsets	Name	Length	Format	Description
0	0 R10426MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10426CAP	8	floating	Total Capacity of the device in bytes. (Capacity)
72	48 R10426RD	8	floating	Number of kilobytes read from the device during the interval. (Read)
80	50 R10426WR	8	floating	Number of kilobytes written to the device during the interval. (Write)

Subtype 30 — Linux_KVMMetrics

Offsets	Name	Length	Format	Description
0	0 R10430MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10430AVP	8	floating	Number of active virtual processors for this domain. (ActiveVirtualProcessors)
72	48 R10430EVTCTP	8	floating	Percentage of CPU resources used by this domain during the interval. If power management or hyper-threading are used, the content of this metric may be wrong. The metric is derived from TotalCPUTime and ActiveVirtualProcessors. (ExternalViewTotalCPUTimePercentage)
80	50 R10430HFPM	8	floating	Host physical memory currently not claimed by any domain. (HostFreePhysicalMemory)
88	58 R10430HMP	8	floating	Percentage of overall physical memory claimed by this domain. (HostMemoryPercentage)
96	60 R10430PMATVS	8	floating	Memory currently claimed by this domain. Note that a domain may ask the hypervisor for more memory if under memory pressure. (PhysicalMemoryAllocatedToVirtualSystem)

Offsets	Name	Length	Format	Description
104	68 R10430PMATVSP	8	floating	Percentage of memory currently claimed by this domain in relation to the defined maximum. (PhysicalMemoryAllocatedToVirtualSystemPercentage)
112	70 R10430TMEVTCTP	8	floating	Percentage of CPU resources used by this domain during the most recent 10 minute interval. (TenMinuteExternalViewTotalCPUTimePercentage)
120	78 R10430TMTCT	8	floating	CPU time spent for this domain during the most recent 10 minute interval. (TenMinuteTotalCPUTime)
128	80 R10430TCT	8	floating	CPU time spent for this domain during the interval. (TotalCPUTime)
136	88 R10430BC	8	floating	Total capacity of the first block device for this domain in bytes. (BlockCapacity)
144	90 R10430BR	8	floating	Number of kilobytes read from the first block device for this domain during the interval. (BlockRead)
152	98 R10430BW	8	floating	Number of kilobytes written to the first block device for this domain during the interval. (BlockWrite)
160	A0 R10430CRTC	8	floating	Accumulated CPU idle time in microseconds for this domain. (CPUReadyTimeCounter)
168	A8 R10430CUTC	8	floating	Accumulated CPU busy time in microseconds for this domain. (CPUUsedTimeCounter)
176	B0 R10430VSS	8	floating	Current state of this domain. The value can be one of the following: 0 nostate 1 running 2 blocked 3 paused 4 shutdown 5 shutoff 6 crashed 7 suspended (VirtualSystemState)

Subtype 31 — Linux_XenMetrics

Offsets	Name	Length	Format	Description
0	0 R10431MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10431AVP	8	floating	Number of active virtual processors for this domain. (ActiveVirtualProcessors)

Record type 104

Offsets	Name	Length	Format	Description
72	48 R10431EVTCTP	8	floating	Percentage of CPU resources used by this domain during the interval. If power management or hyper-threading are used, the content of this metric may be wrong. The metric is derived from TotalCPUTime and ActiveVirtualProcessors. (ExternalViewTotalCPUTimePercentage)
80	50 R10431HFPM	8	floating	Host physical memory currently not claimed by any domain. (HostFreePhysicalMemory)
88	58 R10431HMP	8	floating	Percentage of overall physical memory claimed by this domain. (HostMemoryPercentage)
96	60 R10431PMATVS	8	floating	Memory currently claimed by this domain. Note that a domain may ask the hypervisor for more memory if under memory pressure. (PhysicalMemoryAllocatedToVirtualSystem)
104	68 R10431PMATVSP	8	floating	Percentage of memory currently claimed by this domain in relation to the defined maximum. (PhysicalMemoryAllocatedToVirtualSystemPercentage)
112	70 R10431TMEVTCTP	8	floating	Percentage of CPU resources used by this domain during the most recent 10 minute interval. (TenMinuteExternalViewTotalCPUTimePercentage)
120	78 R10431TMTCT	8	floating	CPU time spent for this domain during the most recent 10 minute interval. (TenMinuteTotalCPUTime)
128	80 R10431TCT	8	floating	CPU time spent for this domain during the interval. (TotalCPUTime)

Subtypes 40 - 53 for Linux on z Systems

Subtypes 40 - 53 of record type 104 contain metrics from systems running with Linux on IBM z Systems. The description column of the record fields shows (in parenthesis) the name of the corresponding metric in the Linux on z Systems resource model used by RMF XP.

Subtype 40 — Linux_IPProtocolEndpointMetrics

Offsets	Name	Length	Format	Description
0	0 R10440MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10440BR	8	floating	Number of bytes received on this IP protocol endpoint during the interval. (BytesReceived)
72	48 R10440BT	8	floating	Number of bytes transmitted on this IP protocol endpoint during the interval. (BytesTransmitted)

Offsets	Name	Length	Format	Description
80	50 R10440ER	8	floating	Average number of errors per second during the interval. This includes errors that occurred during transmitting and receiving and recovered errors as well as unrecovered errors. (ErrorRate)
88	58 R10440PR	8	floating	Total number of packets received on this IP protocol endpoint during the interval. (PacketsReceived)
96	60 R10440PT	8	floating	Total number of packets transmitted on this IP protocol endpoint during the interval. (PacketsTransmitted)
104	68 R10440PRR	8	floating	Average number of packets received per second on this IP protocol endpoint during the interval. (PacketReceiveRate)
112	70 R10440PTR	8	floating	Average number of packets transmitted per second on this IP protocol endpoint during the interval. (PacketTransmitRate)
120	78 R10440BRR	8	floating	Average number of bytes received per second on this IP protocol endpoint during the interval. (ByteReceiveRate)
128	80 R10440BTR	8	floating	Average number of bytes transmitted per second on this IP protocol endpoint during the interval. (ByteTransmitRate)
136	88 R10440RDR	8	floating	Average number of received packets dropped per second on this IP protocol endpoint during the interval. (ReceiveDropRate)
144	90 R10440RPD	8	floating	Number of received packets dropped on this IP protocol endpoint during the interval. (ReceivePacketsDropped)
152	98 R10440TDR	8	floating	Average number of transmitted packets dropped per second on this IP protocol endpoint during the interval. (TransmitDropRate)
160	A0 R10440TPD	8	floating	Number of transmitted packets dropped on this IP protocol endpoint during the interval. (TransmitPacketsDropped)

Subtype 41 — Linux_LocalFileSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10441MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10441AS	8	floating	Amount of free space for the file system. (AvailableSpace)
72	48 R10441ASP	8	floating	Percentage of free space for the file system. (AvailableSpacePercentage)

Subtype 42 — Linux_NetworkPortMetrics

Offsets	Name	Length	Format	Description
0	0 R10442MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10442BR	8	floating	Number of bytes received on this network port during the interval including any protocol overhead such as framing characters, headers, and trailers. (BytesReceived)
72	48 R10442BT	8	floating	Number of bytes transmitted on this network port during the interval including any protocol overhead such as framing characters, headers, and trailers. (BytesTransmitted)
80	50 R10442ER	8	floating	Average number of network errors per second during the interval. This includes errors that occurred during transmitting and receiving, and recovered errors as well as unrecovered errors. (ErrorRate)

Subtype 43 — Linux_OperatingSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10443MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10443CCI	8	floating	CPU time consumed by this operating system divided by CPU time which could have been used by the operating system within the interval. The value of this metric is between 0 (no CPU time consumed) and 1 (all entitled CPU capacity used). (CPUConsumptionIndex)
72	48 R10443CSR	8	floating	Number of context switches per second. Scheduler efficiency is one major bottleneck for highly scalable server images. This metric shows how demanding a workload is with regard to the operating system scheduler. (ContextSwitchRate)
80	50 R10443EVKMP	8	floating	Percentage of CPU resources used by this operating system in kernel mode in relation to the CPU capacity of the virtual server without taking capping effects or competition with other workloads into account. (ExternalViewKernelModePercentage)
88	58 R10443EVTCP	8	floating	Percentage of CPU resources used by this operating system in relation to the CPU capacity of the virtual server without taking capping effects or competition with other partitions into account. (ExternalViewTotalCPUPercentage)
96	60 R10443EVUMP	8	floating	Percentage of CPU resources used by this operating system in user mode in relation to the CPU capacity of the virtual server without taking capping effects or competition with other workloads into account. (ExternalViewUserModePercentage)

Offsets	Name	Length	Format	Description
104	68 R10443FPM	8	floating	Amount of physical memory currently unused and available. In a virtualized environment this is the free memory available to the operating system. (FreePhysicalMemory)
112	70 R10443FSIPF	8	floating	Amount of virtual memory that can be mapped into the operating system's paging files without causing any used pages to be purged from the paging files. If an operating system does not support paging, a value of zero is returned. (FreeSpaceInPagingFiles)
120	78 R10443FVM	8	floating	Amount of virtual memory currently unused and available. (FreeVirtualMemory)
128	80 R10443HIR	8	floating	Number of hardware interrupts per second. (HardwareInterruptRate)
136	88 R10443IVIP	8	floating	Percentage of time this operating system was idle (OS view). Idle is the CPU time spent looking for work. In a virtual environment, idle time can be used by other operating systems running on the same physical server. (InternalViewIdlePercentage)
144	90 R10443IVKMP	8	floating	Percentage of CPU resources used in kernel mode by this operating system. (InternalViewKernelModePercentage)
152	98 R10443IVTCP	8	floating	Percentage of CPU resources used by this operating system. (InternalViewTotalCPUPercentage)
160	A0 R10443IVUMP	8	floating	Percentage of CPU resources used in user mode by this operating system. (InternalViewUserModePercentage)
168	A8 R10443KMT	8	floating	CPU time the operating system spent in kernel mode during the interval. (KernelModeTime)
176	B0 R10443LA	8	floating	Average number of dispatchable units in the ready queue, not counting any idle tasks. A currently running unit is counted as dispatchable unit as well. (LoadAverage)
184	B8 R10443NOP	8	floating	Number of process contexts currently loaded or running on the operating system. (NumberOfProcesses)
192	C0 R10443NOU	8	floating	Number of user sessions for which the operating system is currently storing state information. If the same user is logged on several times, each session is counted separately. (NumberOfUsers)
200	C8 R10443PIR	8	floating	Average number of pages paged in per second. (PageInRate)

Record type 104

Offsets	Name	Length	Format	Description
208	D0 R10443POR	8	floating	Average number of pages paged out per second. (PageOutRate)
216	D8 R10443SSIPF	8	floating	Number of kilobytes that can be stored in the operating system's paging files. This number does not represent the actual physical size of the paging file on disk. A value of zero indicates that there are no paging files. (SizeStoredInPagingFiles)
224	E0 R10443TCT	8	floating	CPU Time the operating system spent during the interval. The value is the sum of KernelModeTime and UserModeTime and does not include any idle time. (TotalCPUTime)
232	E8 R10443TVIRMS	8	floating	Number of kilobytes of virtual memory. This value is the sum of total physical memory and the amount of paging space. (TotalVirtualMemorySize)
240	F0 R10443TVISMS	8	floating	Total amount of physical memory available to the operating system. This value does not necessarily indicate the true amount of physical memory, but indicates the amount that is reported as being available to the operating system. (TotalVisibleMemorySize)
248	F8 R10443UMT	8	floating	CPU time the operating system spent in user mode during the interval. (UserModeTime)
256	100 R10443UPM	8	floating	Amount of physical memory currently in use (UsedPhysicalMemory)
264	108 R10443UVM	8	floating	Amount of virtual memory currently in use. (UsedVirtualMemory)
272	110 R10443IOWT	8	floating	CPU time the operating system spent waiting for I/O during the interval. (IOWaitTime)
280	118 R10443CSC	8	floating	Accumulated number of context switches. Scheduler efficiency is one major bottleneck for highly scalable server images. This metric shows how demanding a workload is with regard to the operating system scheduler. (ContextSwitchCounter)
288	120 R10443HIC	8	floating	Accumulated number of hardware interrupts.. (HardwareInterruptCounter)
296	128 R10443LC	8	floating	Accumulated number of dispatchable units in the ready queue, not counting any idle tasks. A currently running unit is counted as dispatchable unit as well. (LoadCounter)
304	130 R10443PIC	8	floating	Accumulated number of pages paged in. (PageInCounter)
312	138 R10443POC	8	floating	Accumulated number of pages paged out. (PageOutCounter)

Subtype 44 — Linux_ProcessorMetrics

Offsets	Name	Length	Format	Description
0	0 R10444MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10444TCTP	8	floating	Percentage of time where the CPU was not idle. (TotalCPUTimePercentage)

Subtype 45 — Linux_UnixProcessMetrics

Offsets	Name	Length	Format	Description
0	0 R10445MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10445AKMT	8	floating	CPU time in kernel mode spent for this process since process creation. (AccumulatedKernelModeTime)
72	48 R10445ATCT	8	floating	CPU time spent for this process since process creation. (AccumulatedTotalCPUTime)
80	50 R10445AUMT	8	floating	CPU time in user mode spent for this process since process creation. (AccumulatedUserModeTime)
88	58 R10445EVKMP	8	floating	Percentage of CPU resources used in kernel mode by this process in relation to the CPU capacity available on a higher level of virtualization. (ExternalViewKernelModePercentage)
96	60 R10445EVTCP	8	floating	Percentage of CPU resources used by this process in relation to the CPU capacity available on a higher level of virtualization. The value is the sum of ExternalViewUserModePercentage and ExternalViewKernelModePercentage for this process. (ExternalViewTotalCPUPercentage)
104	68 R10445EVUMP	8	floating	Percentage of CPU resources used by this process in user mode in relation to the CPU capacity available on a higher level of virtualization. (ExternalViewUserModePercentage)
112	70 R10445IVKMP	8	floating	CPU time spent for this process in kernel mode in relation to the total CPU time spent for the system in kernel mode. (InternalViewKernelModePercentage)
120	78 R10445IVTCP	8	floating	Total CPU time spent for this process in relation to the total CPU time spent for the system. The value is the sum of InternalViewUserModePercentage and InternalViewKernelModePercentage for this process. (InternalViewTotalCPUPercentage)
128	80 R10445IVUMP	8	floating	CPU time spent for this process in user mode in relation to the total CPU time spent for the system in user mode. (InternalViewUserModePercentage)

Record type 104

Offsets	Name	Length	Format	Description
136	88 R10445KMT	8	floating	CPU time the process consumed in kernel mode during the interval. (KernelModeTime)
144	90 R10445PIR	8	floating	Number of pages paged in per second on behalf of this process. (PageInRate)
152	98 R10445POR	8	floating	Number of pages paged out per second on behalf of this process. (PageOutRate)
160	A0 R10445RSS	8	floating	Amount of physical memory used by this process. Any memory currently paged out is not included in this number. (ResidentSetSize)
168	A8 R10445SS	8	floating	Number of bytes this process shares with other processes like dynamic link libraries. (SharedSize)
176	B0 R10445TCT	8	floating	CPU time the process consumed during the interval. This value is the sum of KernelModeTime and UserModeTime and does not include any idle time. (TotalCPUTime)
184	B8 R10445UMT	8	floating	CPU time the process consumed in user mode during the interval. (UserModeTime)
192	C0 R10445VS	8	floating	The size of the virtual memory used by this process. (VirtualSize)
200	C8 R10445PIC	8	floating	Accumulated number of pages paged in on behalf of this process. (PageInCounter)
208	D0 R10445POC	8	floating	Accumulated number of pages paged out on behalf of this process. (PageOutCounter)

Subtype 46 – Linux_StorageMetrics

Offsets	Name	Length	Format	Description
0	0 R10446MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10446CAP	8	floating	Total Capacity of the device in bytes. (Capacity)
72	48 R10446RD	8	floating	Number of kilobytes read from the device during the interval. (Read)
80	50 R10446WR	8	floating	Number of kilobytes written to the device during the interval. (Write)

Subtype 50 — Linux_zCECMetrics

Offsets	Name	Length	Format	Description
0	0 R10450MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10450EVKMP	8	floating	Capacity-based CPU percentage of CEC CPU resources used by PR/SM LPAR hypervisor to do the virtualization. (ExternalViewKernelModePercentage)
72	48 R10450EVTCP	8	floating	Capacity-based total CPU percentage on CEC level. The percentage the physical CPU resources of the CEC were not idle. (ExternalViewTotalCPUPercentage)
80	50 R10450EVUMP	8	floating	Capacity-based CPU percentage of CEC CPU resources used by the hosted virtual servers. (ExternalViewUserModePercentage)
88	58 R10450KMT	8	floating	Sum of all LPAR management times for the CEC. (KernelModeTime)
96	60 R10450TCT	8	floating	Total CPU time spent for all z Systems LPARs. (TotalCPUTime)
104	68 R10450UGCC	8	floating	Entitled CPU time not used on this CEC. (UnusedGlobalCPUCapacity)
112	70 R10450UMT	8	floating	Total CPU time spent in user mode for all z Systems LPARs. (UserModeTime)

Subtype 51 — Linux_zLPARMetrics

Offsets	Name	Length	Format	Description
0	0 R10451MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10451AVP	8	floating	Average number of virtual processors active in the interval for the LPAR. (ActiveVirtualProcessors)
72	48 R10451EVIP	8	floating	CPU idle time divided by the online time in the interval. (ExternalViewIdlePercentage)
80	50 R10451EVKMP	8	floating	LPAR management time divided by the online time in the interval. (ExternalViewKernelModePercentage)
88	58 R10451EVTCP	8	floating	Total CPU time divided by the online time in the interval. (ExternalViewTotalCPUPercentage)
96	60 R10451EVUMP	8	floating	User mode time (CPU time without LPAR management time) divided by the online time in the interval. (ExternalViewUserModePercentage)

Record type 104

Offsets	Name	Length	Format	Description
104	68 R10451KMT	8	floating	Kernel mode time (LPAR management time) for this LPAR in milliseconds. (KernelModeTime)
112	70 R10451TCT	8	floating	Total CPU time (dispatch time) for this LPAR in milliseconds. (TotalCPUTime)
120	78 R10451UPCC	8	floating	CPU time in milliseconds, exclusively reserved, but unused for this LPAR. (UnusedPartitionCPUCapacity)
128	80 R10451UMT	8	floating	User mode time (effective dispatch time) for this LPAR in milliseconds. (UserModeTime)

Subtype 52 — Linux_zChannelMetrics

Offsets	Name	Length	Format	Description
0	0 R10452MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10452BUP	8	floating	Percentage of bus cycles where the bus has been found busy for this channel in relation to the theoretical limit. (BusUtilizationPercentage)
72	48 R10452PRT	8	floating	Data transfer rates from the control unit to the channel for this partition. (PartitionReadThroughput)
80	50 R10452PUP	8	floating	The channel path utilization percentage for this partition during the interval. (PartitionUtilizationPercentage)
88	58 R10452PWT	8	floating	Data transfer rates from the channel to the control unit for this partition. (PartitionWriteThroughput)
96	60 R10452TRT	8	floating	Data transfer rates from the control unit to the channel for the CEC. (TotalReadThroughput)
104	68 R10452TUP	8	floating	The channel path utilization percentage for the CEC during the interval. (TotalUtilizationPercentage)
112	70 R10452TWT	8	floating	Data transfer rates from the channel to the control unit for the CEC. (TotalWriteThroughput)

Subtype 53 — Linux_zECKDMetrics

Offsets	Name	Length	Format	Description
0	0 R10453MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.

Offsets	Name	Length	Format	Description
64	40 R10453ADU	8	floating	Percentage of time the device spent servicing transfers in relation to the time the device was active. (AverageDeviceUtilization)
72	48 R10453CT	8	floating	Average connect time in milliseconds per I/O request for this device. (ConnectTime)
80	50 R10453CUQT	8	floating	Average control unit queue time in milliseconds per I/O request for this device. (ControlUnitQueueTime)
88	58 R10453DT	8	floating	Average disconnect time in milliseconds per I/O request for this device. (DisconnectTime)
96	60 R10453IOI	8	floating	Indicator for the device utilization. The value represents the product of the ResponseTime multiplied with the RequestRate. (IOIntensity)
104	68 R10453ICRT	8	floating	Average initial command response time in milliseconds per I/O request for this device. (InitialCommandResponseTime)
112	70 R10453PT	8	floating	Average pending time in milliseconds per I/O request for this device. (PendingTime)
120	78 R10453RR	8	floating	Number of I/O requests per second for this device. (RequestRate)
128	80 R10453RTM	8	floating	Average response time in milliseconds per I/O request for this device. (ResponseTime)

Subtypes 60 - 64 for Windows on System x

Subtypes 60-64 of record type 104 contain metrics from systems running with Windows on System x. The description column of the record fields shows (in parenthesis) the name of the corresponding metric in the Windows resource model used by RMF XP.

Subtype 60 - Windows_LocalFileSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10460MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10460AS	8	floating	Available space for this filesystem in kilobytes. (AvailableSpace)
72	48 R10460CAP	8	floating	Total size of this filesystem in kilobytes. (Capacity)

Record type 104

Subtype 61 – Windows_NetworkPortMetrics

Offsets	Name	Length	Format	Description
0	0 R10461MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10461BR	8	floating	Accumulated number of bytes received on this network port including any protocol overhead such as framing characters, headers and trailers. (BytesReceived)
72	48 R10461BT	8	floating	Accumulated number of bytes transmitted on this network port including any protocol overhead such as framing characters, headers and trailers. (BytesTransmitted)
80	50 R10461ER	8	floating	Average number of network errors per second during the interval. This includes errors that occurred during transmitting and receiving, and recovered errors as well as unrecovered errors. (ErrorRate)
88	58 R10461PR	8	floating	Accumulated number of packets received on this network port. (PacketsReceived)
96	60 R10461PT	8	floating	Accumulated number of packets transmitted on this network port. (PacketsTransmitted)

Subtype 62 – Windows_OperatingSystemMetrics

Offsets	Name	Length	Format	Description
0	0 R10462MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10462AM	8	floating	Amount of memory currently available on this system in kilobytes. (AvailableMemory)
72	48 R10462CU	8	floating	CPU Utilization in percent. For systems with multiple cores this value represents the average utilization over all cores. (CPUUsage)
80	50 R10462TM	8	floating	Amount of memory installed on this system in kilobytes. (Memory)

Subtype 63 – Windows_ProcessorMetrics

Offsets	Name	Length	Format	Description
0	0 R10463MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10463AP	8	floating	Number of processors currently available on this system. (Available Processors)

Offsets	Name	Length	Format	Description
72	48 R10463IP	8	floating	Number of processors currently installed on this system. (Processors)

Subtype 64 – Windows_StorageMetrics

Offsets	Name	Length	Format	Description
0	0 R10464MNAME	64	EBCDIC	Name of measured element, extracted from the MeasuredElementName attribute of the CIM_BaseMetricValue instance.
64	40 R10464RO	8	floating	Number of transfers from the disk storage per second. (ReadOperations)
72	48 R10464RT	8	floating	Number of bytes transferred from the disk storage per second. (ReadThroughput)
80	50 R10464WO	8	floating	Number of transfers to the disk storage per second. (WriteOperations)
88	58 R10464WTP	8	floating	Number of bytes transferred to the disk storage per second. (WriteThroughput)

Record type 105 (69) — GDPS/Global Mirror

IBM GDPS/Global Mirror (GDPS/GM) writes record type 105 to record configuration and performance information used by the GDPS GM Monitor. For more information, see the “SMF Data” appendix in the GDPS GM Monitor documentation. If you are not a current GDPS/GM user and need to understand the mapping of this record, send an email request to gdps@us.ibm.com.

Record type 106 (6A) — BCPii activity

Record type 106 is written for every successful Base Control Program internal interface (BCPii) API call that results in a hardware update or action.

BCPii provides several authorized programming interfaces that either change or modify the configuration of a CPC, image (LPAR), activation profile, or user-defined image group. The HWISET operation allows updates to an attribute value (such as a processor weight) stored on the support element (SE) for either a CPC, image, or activation profile. The HWICMD API can perform extremely disruptive operations to the CPC or image (such as activation of an image).

Whenever an HWISET or HWICMD request is successfully issued, SMF record type 106 is written to record the specifics of the completed update or operation, the target of the update or operation, and user identification to note the program, address space, and user ID associated with that update or operation.

Macro to symbolically address record type 106: The SMF record mapping macro to symbolically address record type 106 is HWISMF6A. The macro is supplied in SYS1.MACLIB.

Record type 104

For information about using BCPii, see *z/OS MVS Programming: Callable Services for High-Level Languages*.

Record environment

The following conditions exist for the generation of this record:

Macro SMFEWTM, BRANCH=Y, MODE=XMEM (record exit: IEFU85)

Mode Task

Storage residency
31-bit

Record mapping

Header/self-defining section

This section contains the common SMF record header fields and the triplet fields (offset, length, and number), if applicable, that locates the other sections of the record.

Offsets	Name	Length	Format	Description								
0	0 SMF6ALEN	2	binary	Record length								
2	2 SMF6ASEG	2	binary	Segment descriptor								
4	4 SMF6AFLG	1	binary	Header flags: <table><thead><tr><th>Bit</th><th>Meaning when set</th></tr></thead><tbody><tr><td>0</td><td>Subsystem name follows standard header</td></tr><tr><td>1</td><td>Subtypes utilized</td></tr><tr><td>2-7</td><td>Reserved</td></tr></tbody></table>	Bit	Meaning when set	0	Subsystem name follows standard header	1	Subtypes utilized	2-7	Reserved
Bit	Meaning when set											
0	Subsystem name follows standard header											
1	Subtypes utilized											
2-7	Reserved											
5	5 SMF6ARTY	1	binary	Record type 106 (X'6A').								
6	6 SMF6ATME	4	binary	Time since midnight, in hundredths of a second, when record was moved to the SMF buffer.								
10	A SMF6ADTE	4	packed	Date when the record was moved into the SMF buffer, in the form 0cyydddF. See "Standard SMF record header" on page 162 for a detailed description.								
14	E SMF6ASID	4	EBCDIC	System identification (from SMFPRMxx SID parameter).								
18	12 SMF6AWID	4	EBCDIC	Subsystem ID.								
22	16 SMF6ASTP	2	binary	Record subtype.								
24	18 SMF6ASDL	4	binary	Length of self-defining section.								
28	1C SMF6APOF	4	binary	Offset to product section.								
32	20 SMF6APLN	2	binary	Length of product section.								
34	22 SMF6APON	2	binary	Number of product sections.								
36	24 SMF6AEOF	4	binary	Offset to execution environment section.								
40	28 SMF6AELN	2	binary	Length of execution environment section.								
42	2A SMF6AEON	2	binary	Number of execution environment sections.								
44	2C SMF6ADOF	4	binary	Offset to CMSET/CMD data section.								
48	30 SMF6ADLN	2	binary	Length of CMSET/CMD data section.								
50	32 SMF6ADON	2	binary	Number of CMSET/CMD data sections.								

Product section

Triplet information: This section is located on the record using the following triplet fields, which are located in "Header/self-defining section":

Offset SMF6APOF

Length
SMF6APLN

Number
SMF6APON

Offsets	Name	Length	Format	Description
0	0 SMF6ARVN	2	EBCDIC	Record version number.
2	2 SMF6APNM	8	EBCDIC	Product name (BCPII).
10	A SMF6AOSL	8	EBCDIC	MVS product level.
18	12 SMF6ASYN	8	EBCDIC	Current system name (from SYSNAME parmlib option).

Execution environment section

Triplet information: This section is located on the record using the following triplet fields, which are located in “Header/self-defining section” on page 922:

Offset SMF6AEOF

Length
SMF6AELN

Number
SMF6AEON

Also refer to the SMF6AESD DSECT section in the HWISMF6A macro in SYS1.MACLIB.

Offsets	Name	Length	Format	Description																
0	0 SMF6ACTP	2	binary	Connect type from HWICONN: <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Connection to a target CPC</td> </tr> <tr> <td>2</td> <td>Connection to an image of a CPC</td> </tr> <tr> <td>3</td> <td>Connection to a capacity record of a CPC</td> </tr> <tr> <td>4</td> <td>Connection to a reset activation profile associated with a CPC</td> </tr> <tr> <td>5</td> <td>Connection to an image activation profile associated with a CPC</td> </tr> <tr> <td>6</td> <td>Connection to a load activation profile associated with a CPC</td> </tr> <tr> <td>7</td> <td>Connection to a user-defined image group on a CPC</td> </tr> </tbody> </table>	Value	Meaning	1	Connection to a target CPC	2	Connection to an image of a CPC	3	Connection to a capacity record of a CPC	4	Connection to a reset activation profile associated with a CPC	5	Connection to an image activation profile associated with a CPC	6	Connection to a load activation profile associated with a CPC	7	Connection to a user-defined image group on a CPC
Value	Meaning																			
1	Connection to a target CPC																			
2	Connection to an image of a CPC																			
3	Connection to a capacity record of a CPC																			
4	Connection to a reset activation profile associated with a CPC																			
5	Connection to an image activation profile associated with a CPC																			
6	Connection to a load activation profile associated with a CPC																			
7	Connection to a user-defined image group on a CPC																			
2	2 SMF6ACPC	17	EBCDIC	CPC name.																
19	13 SMF6ANLL	1	EBCDIC	Word boundary use.																
20	14 SMF6ARTN	16	EBCDIC	Request parameter.																
36	24 SMF6AASD	2	binary	Two-byte address space identifier (ASID).																
38	26 SMF6AJOB	8	EBCDIC	Job name.																
46	2E SMF6AUSR	8	EBCDIC	User name.																

Subtype 1

This section provides additional details for all BCPii HWISET API calls that complete with a return code of zero and identifies the exact attribute and value that was modified. Also refer to the SMF6ASET DSECT section in the HWISMF6A macro in SYS1.MACLIB.

Record type 106

Triplet information: This section is located on the record using the following triplet fields, which are located in "Header/self-defining section" on page 922 when SMF6ASTP = SMF6A_SMF_HWISET_SUBTYPE:

Offset SMF6ADOF

Length
SMF6ADLN

Number
SMF6ADON

Offsets	Name	Length	Format	Description
0	0 SMF6ATYP	4	binary	SET type.
4	4 SMF6ATVL	4	binary	SET type value length.
8	8 SMFSETDA	257	EBCDIC	SET parameter data.

Subtype 2

This section provides additional details for all BCPii HWICMD API calls that complete with a return code of zero and identifies the exact command attributes that were specified. Also refer to the SMF6ACMD DSECT section in the HWISMF6A macro in SYS1.MACLIB.

Triplet information: This section is located on the record using the following triplet fields, which are located in "Header/self-defining section" on page 922 when SMF6ASTP = SMF6A_SMF_HWICMD_SUBTYPE:

Offset SMF6ADOF

Length
SMF6ADLN

Number
SMF6ADON

Offsets	Name	Length	Format	Description
0	0 SMF6ACTY	4	binary	Command type.
4	4 SMF6AAOS	4	binary	CMD parameter data offset.
8	8 SMFCMDPM	328	EBCDIC	CMD passed in parameter.
336	150 SMFCMDDL	4	binary	XML or IPL token data length.
340	154 SMFCMDDA	3483	EBCDIC	XML or IPL token data.

Record Type 108 (6C) — Domino Server Statistics

This record type presents data for a Domino[®] for S/390[®] server running on an z/OS system. The specific type of data that is being reported is defined by the subtype field on the record (SMF108STP) in the standard record header.

Subtype Descriptions

Subtype 1 - Server Load

This subtype contains counts of activity done by the server running on the z/OS system.

Subtype 2 - User activity

This subtype will report Domino User activity for the different protocols Domino supports.

Subtype 3 - Monitoring and Tuning

This subtype will monitor some statistics and certain configuration parameters used by the server.

Subtype 6 - Data base activity

This subtype will report Domino specific data for Domino data bases.

Record Environment

SMF Type 108 records are generated using the C language function 'smf_record' which is a part of the z/OS extensions to the language. Records are generated at the expiration of the SMF Global Interval (combination of INTVAL and SYNCVAL parameters in the SMFPRMxx parmlib member). The generated invocation results in an environment which equates to

Macro SMFTWM (SVC level interface) — record exit = IEFU83

Mode Task

Storage Residency
31-bit

SUBSYS
'STC'

Security Notice

Because the processing which generates these records is using the 'C' language interface there is some security setup that must be done in order to enable these records to be generated. The RACF commands (or their equivalent) must be issued before these records can be generated:

- RDEFINE FACILITY BPX.SMF UACC(NONE) — may have already been done
- PERMIT BPX.SMF CLASS(FACILITY) ID(<server>) ACCESS(READ) — allow access
- SETROPTS RACLIST(FACILITY) REFRESH — refresh in-core tables

Record Mappings

The record mappings are shown as two sections, a Common Section which appears on all subtypes and a Unique Section for each subtype.

Common Sections

The following sections appear on each of the Type 108 subtype records and are included in the documentation once.

Header/Self-defining Section: This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF108LEN	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word).
2	2 SMF108SEG	2	binary	Segment description (see record length field).

Record type 108

Offsets	Name	Length	Format	Description												
4	4 SMF108FLG	1	binary	System indicator: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Reserved</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators*</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table>	Bit	Meaning when set	0	Reserved	1	Subtypes used	2	Reserved	3-6	Version indicators*	7	Reserved.
Bit	Meaning when set															
0	Reserved															
1	Subtypes used															
2	Reserved															
3-6	Version indicators*															
7	Reserved.															
5	5 SMF108RTY	1	binary	Record type 108 (X'6C').												
6	6 SMF108TME	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.												
10	A SMF108DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>OcyyddF</i> .												
14	E SMF108SID	4	EBCDIC	System identification (from the SID parameter).												
18	12 SMF108SSI	4	EBCDIC	Subsystem identification.												
22	16 SMF108STP	2	binary	Record Subtype <table border="0"> <tr> <td>Subtype</td> <td>Description</td> </tr> <tr> <td>1</td> <td>Server Load</td> </tr> <tr> <td>2</td> <td>User activity</td> </tr> <tr> <td>3</td> <td>Monitoring and Tuning</td> </tr> <tr> <td>6</td> <td>Data base activity</td> </tr> </table>	Subtype	Description	1	Server Load	2	User activity	3	Monitoring and Tuning	6	Data base activity		
Subtype	Description															
1	Server Load															
2	User activity															
3	Monitoring and Tuning															
6	Data base activity															
24	18 SMF108PRO	4	binary	Offset to Product Section												
28	1C SMF108PRL	2	binary	Length of Product Section												
30	1E SMF108PRN	2	binary	Number of Product Sections (should be '1')												
32	20 SMF108SSO	4	binary	Offset to Self-Defining Section												
36	28 SMF108SSL	2	binary	Length of Self-Defining Section												
38	2A SMF108SSN	2	binary	Number of Self-Defining Section (should be '1')												

Product Section: This section contains the general information about the server and the system that it is running on.

Offsets	Name	Length	Format	Description
0	0 SMF108PRRVN	4	binary	Record version number. Set to 6 for Domino Release 6.0.0.
4	4 SMF108PRPVN	8	EBCDIC	Product version number (6.0.0 for example). This is the first eight bytes of the product version string and may contain text or other characters after the number.
12	C SMF108PRSVN	32	EBCDIC	Server Name (used to identify partitioned servers)
44	2C SMF108PRSPN	8	EBCDIC	Sysplex Name (general-use-programming-interface (gupi) field in cvt/ecvt)
52	34 SMF108PRSYN	8	EBCDIC	System Name (gupi field in cvt/ecvt)
60	3C SMF108PROSL	8	EBCDIC	OS/390 System Level (gupi field in cvt/ecvt)
68	44 SMF108PRISTARTT	8	binary STCK	Interval Start Time
76	4C SMF108PRIENDT	8	binary STCK	Interval End Time
84	54 SMF108CVTTV	4	binary	CVTTV GMT offset time.
88	58 SMF108PRPID	4	binary	Process ID of the Domino server

Subtype 1 — Server Load

Self-Defining Section: This section contains the triplet fields (offset/length/number) that locate the specific sections for this subtype on the record.

Offsets	Name	Length	Format	Description
0	0 SMF108SLO	4	binary	Offset to Server Load Section

Offsets	Name	Length	Format	Description
4	4 SMF108SLL	2	binary	Length of Server Load Section
6	6 SMF108SLN	2	binary	Number of Server Load Section (should be '1')
8	8 SMF108TRO	4	binary	Offset to Transaction Section
12	C SMF108TRL	2	binary	Length of Transaction Section
14	E SMF108TRN	2	binary	Number of Transaction Section (1 per transaction type processed)
16	10 SMF108PTO	4	binary	Offset to Port Activity Section
20	14 SMF108PTL	2	binary	Length of Port Activity Section
22	16 SMF108PTN	2	binary	Number of Port Activity Sections (1 per TCP/IP port)

Server Load Section: This section contains the counters showing activity at the server level (globally).

Offsets	Name	Length	Format	Description
0	0 SMF108SLCU	4	binary	Current number of users
4	4 SMF108SLUA	4	binary	Number of currently connected users that are currently active
8	8 SMF108SLUA1M	4	binary	Number of currently connected users that have been active within the last 1 minute
12	12 SMF108SLUA3M	4	binary	Number of currently connected users that have been active within the last 3 minutes
16	10 SMF108SLUA5M	4	binary	Number of currently connected users that have been active within the last 5 minutes
20	14 SMF108SLUA15M	4	binary	Number of currently connected users that have been active within the last 15 minutes
24	18 SMF108SLUA30M	4	binary	Number of currently connected users that have been active within the last 30 minutes
28	1C SMF108SLDMSENTL	4	binary	Number of Domino mail messages delivered to local users
32	20 SMF108SLDMSENTLAS	4	binary	Average size of Domino mail and SMTP messages delivered to local users
36	24 SMF108SLDMSENTR	4	binary	Number of Domino mail and SMTP messages sent to other servers
40	28 SMF108SLDMSENTRAS	4	binary	Average size of Domino mail messages sent to other servers
44	2C SMF108SLSMREC	4	binary	Number of SMTP messages received from other servers during interval
48	30 SMF108SLSMRECA	4	binary	Average size of SMTP messages received from other servers during interval
52	34 SMF108SLSMSENT	4	binary	Number of SMTP messages sent to other servers during interval
56	38 SMF108SLSMSENTAS	4	binary	Average size of SMTP messages sent to other servers during interval
60	3C SMF108SLTRANS	4	binary	Total number of transactions processed during interval
64	40 SMF108SLSVREPL	4	binary	Number of replications initiated by this server
68	44 SMF108SLNWSEIN	4	binary	Number of incoming (to the server from clients) sessions established during the interval. (Version 1 format only. For Release 5.01 or higher this field will be set to zero. This data is now recorded in the Port Activity Section).
72	48 SMF108SLNWSEOUT	4	binary	Number of outgoing sessions established during the interval. (Version 1 format only. For Release 5.01 or higher this field will be set to zero. This data is now recorded in the Port Activity Section).
76	4C SMF108SLNWBR	4	binary	Number of network Bytes/1024 received during interval. (Version 1 format only. For Release 5.01 or higher this field will be set to zero. This data is now recorded in the Port Activity Section).
80	50 SMF108SLNWBS	4	binary	Number of network Bytes/1024 sent during interval. (Version 1 format only. For Release 5.01 or higher this field will be set to zero. This data is now recorded in the Port Activity Section).
84	54 SMF108SLTT	2	binary	Total number of physical thread pool threads, server_pool_tasks
86	56 SMF108SLVTIU	2	binary	Number of virtual thread pool threads currently in use
88	58 SMF108SLAIOR	4	binary	Number of async i/o reads during interval
92	5C SMF108SLAIOW	4	binary	Number of async i/o writes during interval
96	60 SMF108SLPOP3R	4	binary	Number of POP3 reads during interval

Record type 108

Offsets	Name	Length	Format	Description
100	64 SMF108SLIMAPR	4	binary	Number of IMAP reads during interval
104	68 SMF108SLHHTTPR	4	binary	Number of HTTP reads during interval
108	6C SMF108SLHHTTPW	4	binary	Number of HTTP writes during interval
112	70 SMF108SLVTIUMAX	2	binary	Maximum number of virtual thread pool threads in use during interval
114	72 SMF108SLTASKS	2	binary	Number of tasks currently in use
116	74 SMF108SLTASKSMAX	2	binary	Maximum number of tasks in use during interval
118	76 SMF108SLPTIU	2	binary	Number of physical thread pool threads currently in use
120	78 SMF108SLPTIUMAX	2	binary	Maximum number of physical thread pool threads in use during interval
122	7A SMF108SLPPAD	2	binary	The pad bytes to get to the next 32 byte boundary.
124	7C SMF108SLDomino CacheCommandCount	4	binary	The change for this interval in the Domino statistic, Domino.Cache.Command.Count.
128	80 SMF108SLDomino CacheDesignCount	4	binary	The change for this interval in the Domino statistic, Domino.Cache.Design.Count.
132	84 SMF108SLDomino CacheSessionCount	4	binary	The change for this interval in the Domino statistic, Domino.Cache.Session.Count.
136	88 SMF108SLDomino CacheUserCount	4	binary	The change for this interval in the Domino statistic, Domino.Cache.User.Count.
140	8C SMF108SLDomino RequestTotal	4	binary	The change for this interval in the Domino statistic, Domino.Cache.Requests.Total.

Transaction Section: This section contains the data being reported for each transaction (by type) that is requested of the server. Only transactions with non-zero activity counts are included.

Offsets	Name	Length	Format	Description
0	0 SMF108TRTYPE	4	binary	Transaction type. See Table 17 on page 930
4	4 SMF108TRTYPEPENP	4	binary	Number of transactions of type processed during interval
8	8 SMF108TRTYPEPETA	4	binary	Total accumulated response time, in milliseconds, for all transactions of type that completed during interval
12	C SMF108TRTYPEPENW	4	binary	Total accumulated net wait time, in milliseconds, for all transactions of type that completed during interval. This is the time the server has been waiting for clients to respond.

Port Activity Section: This section contains the data being reported for each TCP/IP port that the server has a connection to.

Offsets	Name	Length	Format	Description
0	0 SMF108PTNAME	8	EBCDIC	First eight bytes of the TCP/IP port. ("TCPIP" for example)
8	8 SMF108PTNWSEIN	4	binary	Number of incoming sessions processed during the interval (client to server connection).
12	C SMF108PTNWSEOUT	4	binary	Number of outgoing sessions processed during the interval
16	10 SMF108PTNWBR	4	binary	Total number of bytes/1024 received for this port during the interval.
20	14 SMF108PTNWBS	4	binary	Total number of bytes/1024 sent for this port during the interval.

Subtype 2 — User Activity

Self-Defining Section: This section contains the triplet fields (offset/length/number) that locate the specific sections for this subtype on the record.

Offsets	Name	Length	Format	Description
0	0 SMF108UDO	4	binary	Offset to Data Section
4	4 SMF108UDL	2	binary	Length of Data Section

Offsets	Name	Length	Format	Description
6	6 SMF108UDN	2	binary	Number of Data Sections

Server Load Section: This section contains the counters showing activity at the server level (globally).

Offsets	Name	Length	Format	Description
0	0 SMF108UIPA	16	EBCDIC	IP address presenting the request for service.
16	10 SMF108UTYPE	4	EBCDIC	Type of connection to the Domino server. User Type description: <ul style="list-style-type: none"> • NRPC Notes Data base server • HTTP Notes HTTP server • IMAP IMAP mail server • POP3 POP3 mail server • SMTP SMTP mail server
20	14 SMF108UNAME	36	EBCDIC	Notes user name for NRPC clients.
56	38 SMF108UCPU	4	binary STCK	CPU time used by this user.
64	40 SMF108UBR	4	binary	Number of bytes read by this interval.
68	44 SMF108UBW	4	binary	Number of bytes written by this interval.

Subtype 3 — Monitoring and Tuning

Self-Defining Section: This section contains the triplet fields (offset/length/number) that locate the specific sections for this subtype on the record.

Offsets	Name	Length	Format	Description
0	0 SMF108MTO	4	binary	Offset to Data Section
4	4 SMF108MTL	2	binary	Length of Data Section
6	6 SMF108MTN	2	binary	Number of Data Sections (should be '1')

Monitoring and Tuning Data Section: This section contains some statistics and certain configuration parameters for tuning the Domino server.

Offsets	Name	Length	Format	Description
0	0 SMF108MTMAXUSERS	4	binary	Maximum number of users
4	4 SMF108MTMAXCONTR	4	binary	Limit for number of concurrent transactions
8	8 SMF108MTMAXCONSES	4	binary	Maximum number of sessions to run concurrently
12	C SMF108MTSESTIMEOUT	2	binary	Number of minutes in timeout
14	E SMF108MTUPMAX	2	binary	Maximum number of concurrent update tasks
16	10 SMF108MTMAILBOXES	2	binary	Maximum number of mail.box'es
18	12 SMF108MTREPMAX	2	binary	Maximum number of replicators (concurrent)
20	14 SMF108MTNSFPPOOL	4	binary	Maximum size of nsf buffer pool (in bytes)
24	18 SMF108MTSFPOOLIU	4	binary	Number of bytes in nsf buffer pool (in use)
28	1C SMF108MTDBCENAB	1	binary	dbcache enabled = 1, 0 if disabled
29	1D RESERVECHAR	3	N/A	Reserved for alignment
32	20 SMF108MTDBCAXE	4	binary	Maximum number of dbcache entries
36	24 SMF108MTDBCCE	4	binary	Number of dbcache (current entries)
40	28 SMF108MTDBCIDBO	4	binary	Number of dbcache (initial db opens)
44	2C SMF108MTDBCOCR	4	binary	Number of dbcache (overcrowding rejections)
48	30 SMF108MTDBCHITS	4	binary	Number of dbcache (hits)
52	34 SMF108MTDBCHWM	4	binary	dbcache (high water mark)
56	38 SMF108MTSATH	2	binary	Server availability threshold

Record type 108

Offsets	Name	Length	Format	Description
58	3A SMF108MTSAX	2	binary	Server availability index
60	3C SMF108MTNIFS	4	binary	Database.NIFFPool.Size (in bytes)
64	40 SMF108MTNIFN	4	binary	Database.NIFFPool.Used
68	44 SMF108MTNSFS	4	binary	Database.NSFPool.Size (in bytes)
72	48 SMF108MTNSFN	4	binary	Database.NSFPool.Used
76	4C SMF108MTDBPR	4	binary	Number of Database.BufferPool (Reads)
80	50 SMF108MTDBPW	4	binary	Number of Database.BufferPool (Writes)
84	54 SMF108MTMMXFER	2	binary	Maximum number of mail transfer threads
86	56 SMF108MTMMXDLV	2	binary	Maximum number of mail delivery threads
88	58 SMF108MTMMXCONXFR	2	binary	Maximum number of concurrent mail transfer threads

Subtype 6 — Data Base Activity

Self-Defining Section: This section contains the triplet fields (offset/length/number) that locate the specific sections for this subtype on the record.

Offsets	Name	Length	Format	Description
0	0 SMF108DBO	4	binary	Offset to Data Section
4	4 SMF108DBL	2	binary	Length of Data Section
6	6 SMF108DBN	2	binary	Number of Data Sections

Data Base Activity Data Section: This section contains the data for Domino Data Base activity.

Offsets	Name	Length	Format	Description
0	0 SMF108DBNAME	64	EBCDIC	Last 64 characters of the data base name.
64	40 SMF108DBINDEX	4	binary	Number of indexing operations started on this data base by the server.
68	44 SMF108DBREPS	4	binary	Number of replications on this data base initiated by this server.
72	48 SMF108DBDOCADDS	4	binary	Number of documents added to this data base.
76	4C SMF108DBDOCDELS	4	binary	Number of documents deleted from this data base.

Constants: Transaction types

Table 17 contains a brief description of the transaction types recorded in "Transaction Section" on page 928.

Table 17. Transaction types

Decimal type	Description
1	OPEN_DB_RQST
2	CREATE_DB_RQST
3	CLOSE_DB_RQST
4	GET_SPECIAL_NOTE_ID_RQST
5	ITEM_DEF_TABLE_RQST
6	OPEN_NOTE_RQST
7	UPDATE_NOTE_RQST
8	UPDATE_NOTE_RQST_ALT
9	DELETE_NOTE_RQST
10	GET_NOTE_INFO_RQST
11	SET_SPECIAL_NOTE_ID_RQST
12	DB_INFO_GET_RQST

Table 17. Transaction types (continued)

Decimal type	Description
13	DB_INFO_SET_RQST
14	DB_MODIFIED_TIME_RQST
15	SEARCHSTART_RQST
16	SEARCHSTOP_RQST
17	SERVER_TIME_RQST
18	DELETE_DB_RQST
19	FILE_SUMMARY_RQST
22	DB_REPLINFO_SET_RQST
23	DB_REPLINFO_GET_RQST
24	GET_MODIFIED_NOTES_RQST
25	STAMP_NOTES_RQST
26	RENAME_DB_RQST
27	REPLICATE_RQST
28	LOOKUP_HELP_NOTE_RQST
29	DB_SPACE_USAGE_RQST
30	GET_OBJECT_SIZE_RQST
31	FREE_OBJECT_RQST
32	ALLOC_OBJECT_RQST
33	REALLOC_OBJECT_RQST
34	READ_OBJECT_RQST
35	WRITE_OBJECT_RQST
36	TEXT_SEARCH_RQST
37	ALLOC_UPDATE_OBJECT_RQST
38	FREE_UPDATE_OBJECT_RQST
39	GET_SERVER_STATS_RQST
40	FT_SEARCH_RQST
41	FT_CLOSE_SEARCH_RQST
42	COMPACT_DB_RQST
43	FT_GET_LAST_INDEXTIME_RQST
44	RELAY_EVENT_RQST
45	REMOTE_CONSOLE_RQST
46	FT_DELETE_INDEX_RQST
47	FT_INDEX_RQST
48	CLOSE_DB_RQST_ALT
49	CLOSE_COLLECTION_RQST_ALT
50	CREATE_COLLECTION_RQST
51	OPEN_COLLECTION_RQST
52	CLOSE_COLLECTION_RQST
53	UPDATE_COLLECTION_RQST
54	UPDATE_FILTERS_RQST
55	READ_ENTRIES_RQST
56	LOCATE_NOTE_RQST
57	FIND_NOTEID_RQST
58	FIND_BY_KEY_RQST
59	NIFOPENNOTE_RQST

Table 17. Transaction types (continued)

Decimal type	Description
60	NIFSTAMPNOTES_RQST
61	GET_COLLECTION_DATA_RQST
62	ASYNC_NIFOPENNOTE_RQST
63	ASYNC_READ_ENTRIES_RQST
64	UPDATE_UNID_TABLE_RQST
65	SET_COLLATION_RQST
66	NIF_UPDATE_FOLDER_RQST
67	NIF_FOLDER_COUNT_RQST
68	NIF_PURGE_FOLDER_RQST
69	PURGE_COLLECTION_RQST
70	NIF_GET_IDTABLE_RQST
75	NAME_LOOKUP_RQST
76	GET_SERVER_NAMES_RQST
77	GET_SERVER_NAMES_LITE_RQST
78	NAME_GET_AB_RQST
79	NAME_LOOKUPID_RQST
80	ASYNC_NAME_LOOKUP_RQST
81	ME_LOOKUP_RQST32
101	GET_NAMED_OBJECT_ID_RQST
102	DB_READ_HIST_RQST
103	DB_WRITE_HIST_RQST
104	GET_NOTE_INFO_BY_UNID_RQST
105	POLL_DEL_SEQNUM_RQST
106	GET_MULT_NOTE_INFO_BY_UNID_RQST
107	ASYNC_CANCEL_RQST
108	ASYNC_OPEN_NOTE_RQST
109	ASYNC_READ_OBJECT_RQST
110	ASYNC_NOTIFICATION_RSP
111	SERVER_TIME_LITE_RQST
112	GET_SERVER_STATS_LITE_RQST
114	GET_REPLICA_MATCHES_RQST
115	ASYNC_URL_GET_HEADER_RQST
116	DB_LSEC_INFO_GET_RQST
117	DB_LSEC_INFO_SET_RQST
118	GET_MULT_NOTE_INFO_RQST
119	DB_QUOTA_GET_RQST
120	DB_QUOTA_SET_RQST
121	SERVER_AVAILABLE_RQST
122	SERVER_AVAILABLE_LITE_RQST
123	SERVER_FIND_REPID_RQST
124	SERVER_FIND_REPID_LITE_RQST
125	OPEN_NOTE_BY_URL_RQST
126	ASYNC_OPEN_NOTE_BY_URL_RQST
127	AUTHENTICATE_RQST
128	UPDATE_FOLDER_RQST

Table 17. Transaction types (continued)

Decimal type	Description
129	PURGE_FOLDER_RQST
130	COPY_FOLDER_RQST
131	START_FOLDER_REPL_SOURCE_RQST
132	START_FOLDER_REPL_DEST_RQST
133	GET_FOLDER_REPL_OPS_RQST
134	APPLY_FOLDER_REPL_OPS_RQST
135	END_FOLDER_REPL_SOURCE_RQST
136	END_FOLDER_REPL_DEST_RQST
137	FOLDER_GETIDTABLE_RQST
138	DB_ADMIN_FUNC_RQST
139	DB_ADMIN_SET_RQST
140	DB_ADMIN_GET_RQST
141	DB_FTSIZE_GET_RQST
142	START_SERVER_RQST
143	RUNDOWN_TRANS_RQST
144	ASYNC_RUNDOWN_RQST
145	DB_GET_PURGE_INFO_RQST
146	DB_GETSET_DEL_SEQNUM_RQST
147	DB_DIRLINK_GET_RQST
148	DB_DIRLINK_SET_RQST
149	DB_SET_TRUNC_INFO_RQST
150	SCHED_RQST
151	ASYNC_SCHED_RQST
152	COPY_OBJECT_RQST
153	ASYNC_REMOTE_CONSOLE_RQST
154	DB_STREAMMODE_SET_RQST
155	ASYNC_READ_OBJECT_BY_URL_RQST
156	GET_UNREAD_TABLE_RQST
157	SET_UNREAD_TABLE_RQST
158	RUN_SERVER_AGENT_RQST
159	GET_TCP_HOSTNAME_RQST
160	ITEM_DEF_TABLE_EXT_RQST
161	GET_DBOPTIONS_RQST
162	SET_DBOPTIONS_RQST
163	PUT_QUEUE_MSG_RQST
164	ASYNC_TRACK_MESSAGE_RQST
165	MAIL_ROUTER_PUSH_RQST
166	FOLDER_GETMODTIME_RQST
167	COPY_FDO_RQST
168	GET_FDO_SIZE_RQST
169	SET_SUPERBLOCK_FDO_RQST
170	GET_SUPERBLOCK_FDO_RQST
171	REGISTER_MONITOR_RQST
172	DEREGISTER_MONITOR_RQST
173	MONITOR_GETEVENTS_RQST

Table 17. Transaction types (continued)

Decimal type	Description
174	SV_INFO_GET_RQST
175	GET_ARCHIVE_NOTES_RQST
176	PROFILE_ENUM_RQST
177	LOCK_NOTE_RQST
178	JS_GETSCHED_RQST
179	UNDELETE_NOTES_RQST
180	NSF_FIND_DESIGNNOTE_RQST
181	NSF_DESIGNNOTE_ENUM_RQST
182	GET_DBINFOFLAGS_RQST
183	GETSET_FOLDERINFO_RQST
184	COPY_FILE_RQST
185	DBINFO_GET_RQST
186	DBSETNOTES_RQST
187	DBGETOBJECT_RQST
188	DB_IMAP_FETCHNOTES_RQST
189	DB_IMAP_GET_FOLDERS_INFO_RQST
190	DB_IMAP_GET_ALL_FOLDERS_RQST
191	DB_IMAP_GET_SUB_LIST_RQST
192	DB_IMAP_SUBSCRIBE_FOLDER_RQST
193	DB_IMAP_CREATE_FOLDER_RQST
194	DB_IMAP_DELETE_FOLDER_RQST
195	DB_IMAP_RENAME_RQST
196	DB_IMAP_EXPUNGE_MESSAGES_RQST
197	DB_IMAP_SET_CLEAR_FLAGS_RQST
198	DB_IMAP_COPY_MESSAGES_RQST
199	DB_IMAP_APPEND_MESSAGE_RQST
200	DB_IMAP_SEARCH_RQST
201	DB_IMAP_UPDATE_INFO_RQST
202	DB_IMAP_ENABLE_FOLDERS_RQST
203	DB_IMAP_DISABLE_FOLDERS_RQST
204	DB_QUOTA_SET_HDB_RQST
205	DB_QUOTA_GET_HDB_RQST
206	LOG_SEARCHR6_MSG_RQST
207	ASYNC_OPEN_COLLECTION_RQST
208	DB_ARCHIVE_DELETE_NOTES_RQST
209	DB_ARCHIVE_PRUNE_NOTES_RQST
210	GET_SSO_TOKEN_TQST
211	DB_BEGIN_TRANSACTION_RQST
212	DB_COMMIT_TRANSACTION_RQST
213	DB_ABORT_TRANSACTION_RQST
214	GET_IOR_RQST
215	GET_MODFOLDERS_RQST
216	DB_MAJMIN_RQST
217	SERVER_ACL_RQST
218	GET_ALLFOLDERCHANGES_RQST

Table 17. Transaction types (continued)

Decimal type	Description
219	DB_CREATE_SHELL_DB_RQST
220	UPGRADE_MAIL_DESIGN_RQST
221	GET_NAMELIST_RQST
222	XACL_OBJ_ACCESS_RQST
223	XACL_ITEM_ACCESS_RQST
224	UPDATE_NOTE_HEADER_FLAGS_RQST
225	GET_UNREAD_REPL_ENTRIES
226	APPLY_UNREAD_REPL_ENTRIES

Record Type 109 (6D) — TCP/IP Statistics

The Transmission Control Protocol/Internet Protocol (TCP/IP) syslog daemon writes type 109 records to collect system messages. For more information about record type 109, see the “SMF type 109 records” topic in *z/OS Communications Server: IP Programmer’s Guide and Reference*.

Record Type 110 (6E) — CICS TS for z/OS Statistics

CICS Transaction Server for z/OS writes record type 110 to record transaction data collected at event monitoring points. For more information about record type 110, see the customization documentation available at <http://www.ibm.com/software/htp/cics/library/>.

Record Type 111 (6F) — CICS TS for z/OS Statistics

CICS Transaction Gateway for z/OS writes record type 111 to record data relating to a specific Gateway daemon address space. For more information about record type 111, see *CICS Transaction Gateway z/OS Administration (SC34-2964)*, available from IBM Publications Center (<http://www.ibm.com/e-business/linkweb/publications/servlet/pbi.wss>) or from <http://www.ibm.com/software/htp/cics/library/>.

Record type 113 (71) — Hardware capacity, reporting, and statistics

The system writes record type 113 to record hardware capacity, reporting, and statistics for IBM System z10™ or later CPCs. With the enhanced-monitor facility released with the IBM z196 and later CPCs, the SMF record can be utilized to capture software events.

For more information about hardware data event collection, see *Setting up hardware event data collection in z/OS MVS System Commands*.

Record type 113 has two subtypes:

- “Subtype 1” on page 937
- “Subtype 2” on page 939

IBM makes the following recommendations:

- Products should process SMF type 113 subtype 1 records, when available, because that is where future enhancements will be made. If subtype 1 records are not available, products may process the subtype 2 records.

Record type 113

- Customers should collect SMF type 113 subtype 1 and 2 records.

Record Mapping

Header section

This section contains the common SMF record headers fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF113LEN	2	binary	Record length.												
2	2 SMF113SEG	2	binary	Segment descriptor.												
4	4 SM113FLG	1	binary	Header flag byte: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Subsystem identification follows system identification</td> </tr> <tr> <td>1</td> <td>Subtypes used</td> </tr> <tr> <td>2</td> <td>Reserved</td> </tr> <tr> <td>3-6</td> <td>Version indicators</td> </tr> <tr> <td>7</td> <td>Reserved</td> </tr> </tbody> </table>	Bit	Meaning when set	0	Subsystem identification follows system identification	1	Subtypes used	2	Reserved	3-6	Version indicators	7	Reserved
Bit	Meaning when set															
0	Subsystem identification follows system identification															
1	Subtypes used															
2	Reserved															
3-6	Version indicators															
7	Reserved															
5	5 SMF113RTY	1	binary	Record type 113 (X'71')												
6	6 SMF113TME	4	packed	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF113DTE	4	packed	Date that the record was moved into the SMF buffer, in the form <i>0cyydddF</i> .												
14	E SMF113SID	4	EBCDIC	System identification (from the SID parameter).												
18	12 SMF113WID	4	EBCDIC	Subsystem identifier.												
22	16 SMF113STP	2	binary	Indicates the record subtype, based on the value of SMF113STP: <table border="0"> <tbody> <tr> <td>1</td> <td>Hardware event counter deltas</td> </tr> <tr> <td>2</td> <td>Hardware event counters</td> </tr> </tbody> </table>	1	Hardware event counter deltas	2	Hardware event counters								
1	Hardware event counter deltas															
2	Hardware event counters															
24	18	2		Reserved.												
26	1A SMF113SDL	2	binary	Length of self-defining section.												

Self-defining section, based on the address of SMF record type 113 + the length of the header section

Offsets	Name	Length	Format	Description
0	0 SMF113SOF	4	binary	Offset to subsystem section from beginning of record type 113
4	4 SMF113SLN	2	binary	Length of subsystem section
6	6 SMF113SON	2	binary	Number of subsystem sections
8	8 SMF113IOF	4	binary	Offset to identification section from beginning of record type 113
12	0C SMF113ILN	2	binary	Length of identification section
14	0E SMF113ION	2	binary	Number of identification sections
16	10 SMF113DOF	4	binary	Offset to data section from beginning of record type 113
20	14 SMF113DLN	2	binary	Length of data section
22	16 SMF113DON	2	binary	Number of data sections

Subsystem section, based on the address of SMF record type 113 + the offset value in SMF113SOF

This section contains information about the subsystem that generated the record.

Offsets	Name	Length	Format	Description
0	0	2		Reserved
2	2 SMF113RVN	2	EBCDIC	Record version number
4	4 SMF113PNM	8	EBCDIC	Product name

Offsets	Name	Length	Format	Description
12	C SMF113OSL	8	EBCDIC	MVS product level

Identification section, based on the address of SMF record type 113 + the offset value in SMF113IOF

Offsets	Name	Length	Format	Description
0	0 SMF113JBN	8	EBCDIC	Job name
8	8 SMF113RST	4	binary	Reader start time
12	C SMF113RSD	4	packed	Reader start date
16	10 SMF113STN	8	EBCDIC	Step name
24	18 SMF113IntervalStart	8	binary	Interval start time, STCK format
32	20 SMF113IntervalEnd	8	binary	Interval end time, STCK format

Subtype 1

Subtype 1 of record type 113 contains event counter deltas for IBM System z10 or later CPCs. You can calculate its location in the SMF record using the following formula:

(address of record type 113 + offset value in field SMF113DOF)

Subtype 1 records are CPU or core specific. For each hardware data event collection cycle:

- If one or more CPU counter sets are being collected (see the MODIFY HISPROC command), the system creates one subtype 1 record for each active CPU. If one or more core counter sets are being collected (see the MODIFY HISPROC command) in addition, each core counter set will be recorded from one CPU on each core.
- If no CPU counter sets are being collected (see the MODIFY HISPROC command) and one or more core counter sets are being collected (see the MODIFY HISPROC command), the system creates one subtype 1 record for one active CPU on each core.

Each event counter represents the number of times a specific event has occurred from the start of the current hardware data event collection cycle or since the previous SMF Type 113 subtype 1 record was written. The system captures the valid counters and places them in the appropriate counter data slot, based on the counter event. If a counter data slot is zero, either the counter event is not defined or the counter event has not occurred in the current collection cycle. For example, counter event 0 is located in the 1st counter data slot, and counter event 9 is in the 10th slot.

Header/self-defining section, based on the address of SMF record type 113 + the offset value in SMF113DOF

This section contains the common SMF subtype header fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF113_1_CTS	8	binary	Time when the hardware data collection run started in STCK format
8	8 SMF113_1_CTM	8	binary	Time when this SMF record was written in STCK format.
16	10 SMF113_1_CpuId	2	binary	Processor ID for which the hardware counters are recorded. Note that zero is a valid processor number.

Record type 113

Offsets	Name	Length	Format	Description						
18 12	SMF113_1_CpuProcClass	1	binary	The processor type for which the hardware event counters are recorded. Is one of the following: 0 Standard CP 2 zAAP 4 zIIP						
19 13		1	binary	Reserved.						
20 14	SMF113_1_CpuSpeed	4	binary	Processor speed for which the event counters are recorded. Speed is in cycles/microsecond.						
24 18	SMF113_1_MachType	4	EBCDIC	The machine type.						
28 1C	SMF113_1_MachModel	16	EBCDIC	The machine model.						
44 2C	SMF113_1_CtrVersion0	2	binary	Zero counter version number. This number is increased when there is a change to the meaning of a counter in the z/OS counter set.						
46 2E	SMF113_1_CtrVersion1	2	binary	First counter version number. This number is increased when there is a change to the meaning of a counter or the number of installed counters in the Basic or Problem-state counter sets.						
48 30	SMF113_1_CtrVersion2	2	binary	Second counter version number. This number is increased when there is a change to the meaning of a counter or the number of installed counters in the Crypto-activity or Extended or MT-diagnostic counter sets.						
50 32	SMF113_1_Flags2	2	binary	Record flags: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>The hardware indicated the hardware has lost counter data during the current interval.</td> </tr> <tr> <td>1</td> <td>The hardware indicated the hardware has lost MT counter data during the current interval.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	The hardware indicated the hardware has lost counter data during the current interval.	1	The hardware indicated the hardware has lost MT counter data during the current interval.
Bit	Meaning when set									
0	The hardware indicated the hardware has lost counter data during the current interval.									
1	The hardware indicated the hardware has lost MT counter data during the current interval.									
Self-defining section										
52 34	SMF113_1_CSOF	4	binary	Offset to counter set section, from beginning of r SMF record type 113.						
56 38	SMF113_1_CSLN	2	binary	Length of counter set section.						
58 3A	SMF113_1_CSON	2	binary	Number of counter set sections.						
60 3C	SMF113_1_SeqCode	16	EBCDIC	The machine sequence code.						
76 4C	SMF113_1_CoreId	2	binary	Core ID for which the hardware event counters are recorded. Note that zero is a valid core ID number.						

Counter set section, based on the address of SMF record type 113 + the offset value in field SMF113_1_CSOF

Offsets	Name	Length	Format	Description				
0 0	SMF113_1_CSType	2	binary	Counter set type for counters recorded: 1 Basic counter set 2 Problem-state counter set 3 Crypto counter set 4 Extended counter set 5 z/OS counter set 6 MT-diagnostic counter set				
2 2	SMF113_1_Flags	2	binary	Record flags: <table border="0"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>This counter set's counter data section is mapped by SMF113_1_LCDS. Otherwise, it is mapped by SMF113_1_SCDS.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	This counter set's counter data section is mapped by SMF113_1_LCDS. Otherwise, it is mapped by SMF113_1_SCDS.
Bit	Meaning when set							
0	This counter set's counter data section is mapped by SMF113_1_LCDS. Otherwise, it is mapped by SMF113_1_SCDS.							
4 4	SMF113_1_CDOF	4	binary	Offset to counter data section for this counter set, from the beginning of the record. This can be to a SMF113_1_SCDS section or a SMF113_1_LCDS section, depending on bit 0 of SMP113_1_Flags.				
8 8	SMF113_1_CDLN	2	binary	Length of counter data section.				
10 A	SMF113_1_CDON	2	binary	Number of counter data sections.				

Short counter data section, based on the address of SMF record type 113 + the offset value in field SMF113_1_CDOF

Offsets	Name	Length	Format	Description
0	0 SMF113_1_SCR	4	binary	Event counter value delta. This is the number of times a particular counter event has occurred since either the start of the HIS collection run, or the previous SMF 113 type 1 record was written.

Long counter data section, based on the address of SMF record type 113 + the offset value in field SMF113_1_CDOF

Offsets	Name	Length	Format	Description
0	0 SMF113_1_LCR	8	binary	Event counter value delta. This is the number of times a particular counter event has occurred since either the start of the HIS collection run, or the previous SMF 113 type 1 record was written.

Subtype 2

Subtype 2 of record type 113 contains hardware data event counters for IBM System z10 or later CPCs. You can calculate its location in the SMF record using the following formula:

(address of record type 113 + offset value in field SMF113D0F)

Subtype 2 records are CPU specific. For each hardware data event collection cycle, the system creates one subtype 2 for each active CPU.

Only a subset of the hardware data CPU event counters can be collected in subtype 2 records. (See the description of the SMF113_2_CST field for the supported counter sets.) IBM recommends using SMF type 113 subtype 1 records.

The system captures the valid counters and places them contiguously in subtype 2 of record type 113. For example, counter 0 of the first counter set, will be in the 1st slot. Counter 9 of the first counter set will be in slot 10 of the first counter set. Counter 0 of the second counter set will follow the last counter in the first counter set.

Header/self-defining section, based on the address of SMF record type 113 + the offset value in SMF113D0F

This section contains the common SMF subtype header fields and the triplet fields (offset/length/number), if applicable, that locate the other sections on the record.

Offsets	Name	Length	Format	Description
0	0 SMF113_2_CTS	8	binary	Time when the hardware data collection run started in STCK format
8	8 SMF113_2_CTM	8	binary	Time when this SMF record was written in STCK format.
16	10 SMF113_2_CPU#	1	binary	This field is deprecated, use SMF113_2_CpuId instead. Processor number for which the hardware counters in SMF113_2_CR are recorded. Note that zero is a valid processor number.
17	11 SMF113_2_CpuProcClass	1	binary	The processor type for which the hardware event counters are recorded. Is one of the following: 0 Standard CP 2 zAAP 4 zIIP

Record type 113

Offsets	Name	Length	Format	Description														
18	12 SMF113_2_CF	2	binary	Record flags: <table border="1"> <thead> <tr> <th>Bit</th> <th>Meaning when set</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>First SMF record for the hardware data collection run. The counter values are the initial values at the beginning of the run.</td> </tr> <tr> <td>1</td> <td>Intermediate SMF record, written by the system at defined intervals during the hardware data collection run. The counter values are intermediate values. The interval is based on the SMFINTVAL parameter specified at the start of the hardware data collection run.</td> </tr> <tr> <td>2</td> <td>Final SMF record written for this hardware data collection run. The counter values are the final values.</td> </tr> <tr> <td>3</td> <td>Indicates that the SMF record was written on non-standard hardware.</td> </tr> <tr> <td>4</td> <td>When ON, the hardware indicated the hardware has lost counter data during the current interval.</td> </tr> <tr> <td>5-15</td> <td>Reserved.</td> </tr> </tbody> </table>	Bit	Meaning when set	0	First SMF record for the hardware data collection run. The counter values are the initial values at the beginning of the run.	1	Intermediate SMF record, written by the system at defined intervals during the hardware data collection run. The counter values are intermediate values. The interval is based on the SMFINTVAL parameter specified at the start of the hardware data collection run.	2	Final SMF record written for this hardware data collection run. The counter values are the final values.	3	Indicates that the SMF record was written on non-standard hardware.	4	When ON, the hardware indicated the hardware has lost counter data during the current interval.	5-15	Reserved.
Bit	Meaning when set																	
0	First SMF record for the hardware data collection run. The counter values are the initial values at the beginning of the run.																	
1	Intermediate SMF record, written by the system at defined intervals during the hardware data collection run. The counter values are intermediate values. The interval is based on the SMFINTVAL parameter specified at the start of the hardware data collection run.																	
2	Final SMF record written for this hardware data collection run. The counter values are the final values.																	
3	Indicates that the SMF record was written on non-standard hardware.																	
4	When ON, the hardware indicated the hardware has lost counter data during the current interval.																	
5-15	Reserved.																	
20	14 SMF113_2_CTRVN1	2	binary	First counter version number. This number is increased when there is a change to the meaning of a counter or a change to the number of the installed counters in the basic or problem-state counter sets.														
22	16 SMF113_2_CTRVN2	2	binary	Second counter version number. This number is increased when there is a change to the meaning of a counter or a change to the number of the installed counters in the crypto-activity or extended counter sets.														
Self-defining section																		
24	18 SMF113_2_CSOF	4	binary	Offset to counter set section, from beginning of SMF record type 113														
28	1C SMF113_2_CSLN	2	binary	Length of counter set sections														
30	1E SMF113_2_CSON	2	binary	Number of counter set sections														
32	20 SMF113_2_CDOF	4	binary	Offset to counters section, from beginning of SMF record type 113														
36	24 SMF113_2_CDLN	2	binary	Length of counters sections														
38	26 SMF113_2_CDON	2	binary	Number of counter sections														
CPU information section																		
40	28 SMF113_2_CPSP	4	binary	Processor speed for which the hardware event counters are recorded. Speed is in cycles/microsecond.														
44	2C SMF113_2_MachType	4	EBCDIC	The machine type.														
48	30 SMF113_2_MachModel	16	EBCDIC	The machine model.														
64	40 SMF113_2_Cpuld	2	binary	Processor ID for which the hardware event counters are recorded. Note that zero is a valid processor number.														
66	42 *	2	binary	Reserved														
68	44 SMF113_2_SeqCode	16	EBCDIC	The machine sequence code.														

Note: For more information on machine type and machine model, see Resource Link home page (<http://www.ibm.com/servers/resourcelink>).

Counter set section, based on the address of SMF record type 113 + the offset value in field SMF113_2_CSOF

Offsets	Name	Length	Format	Description								
0	0 SMF113_2_CST	1	binary	Indicates the counter set type for counters recorded in field SMF113_2_CR: <table border="1"> <tbody> <tr> <td>1</td> <td>Basic counter set</td> </tr> <tr> <td>2</td> <td>Problem-state counter set</td> </tr> <tr> <td>3</td> <td>Crypto counter set</td> </tr> <tr> <td>4</td> <td>Extended counter set</td> </tr> </tbody> </table>	1	Basic counter set	2	Problem-state counter set	3	Crypto counter set	4	Extended counter set
1	Basic counter set											
2	Problem-state counter set											
3	Crypto counter set											
4	Extended counter set											
1	1	1		Reserved								
2	2 SMF113_2_CSN	2	binary	Number of counter sections.								
4	4	8		Reserved								

Counters section, based on the address of SMF record type 113 + the offset value in field SMF113_2_CDOF

Offsets	Name	Length	Format	Description
0	0 SMF113_2_CR	8	binary	Hardware event counter value. This is the absolute number of times a particular hardware counter event has occurred.

Record Type 115 (73) — MQSeries Statistics

MQSeries® writes record type 115 to record statistics information. For more information about record type 115, search the information center at:

<http://www-01.ibm.com/software/integration/wmq/library/libraryallversions.html#Information%20centers>

Record Type 116 (74) — MQ Accounting

MQSeries writes record type 116 to record accounting information. For more information about record type 116, search the information center at:

<http://www-01.ibm.com/software/integration/wmq/library/libraryallversions.html#Information%20centers>

Record Type 117 — Data Persistence

The SMF record type for GTZ data is 117, with one subtype of value 1. Subtype 1 records contain persisted TRACKDATA information. For a description of the fields in type 117 records, see mapping macro GTZZSMF. See also the utility programs GTZSMFU2 and GTZSMFU3, which you can use to format type 117 records in text form.

Record mapping

Header/self-defining section

Table 18. Record 117 mapping header/self-defining section

Offsets - dec	Offsets - hex	Name	Alias	Length	Format	Description
0	x00	SMF117LEN	-	2	binary	Record length. This field and the next field (total of four bytes) form the RDW (record descriptor word). See "Standard SMF record header" on page n for a detailed description.
2	x02	SMF117SEG	-	2	binary	Segment descriptor (see record length field).
4	x04	SMF117FLG	-	1	binary	System indicator. See "Standard SMF record header" on page n for details.
5	x05	SMF117RTY	-	1	binary	Record type 117 (X'75').
6	x06	SMF117TME	-	4	binary	Time since midnight, in hundredths of a second, that the record was moved into the SMF buffer.
10	x0A	SMF117DTE	-	4	packed	Date when the record was moved into the SMF buffer, in the form 0ccyddF. See "Standard SMF record header" on page n for details.
14	x0E	SMF117SID	-	4	EBCDIC	System identification (from the SID parameter).

Record type 116

Table 18. Record 117 mapping header/self-defining section (continued)

Offsets - dec	Offsets - hex	Name	Alias	Length	Format	Description
18	x12	SMF117SSI	-	4	EBCDIC	Subsystem identification.
22	x16	SMF117STY	-	2	binary	Record subtype. Value of 1 indicates TRACKDATA.
24	x18	SMF117TVR	GtzSmf117TVersion	1	binary	Version: 1 (GtzSmfVersionTRACKDATA1).
25	x19	SMF117TF1	-	1		Flags byte 1. Bit 0: If ON, use SOURCEPATH, with SMF117TSPL and SMF117TSPO, otherwise use SOURCE, with SMF117TSO. Bit 1: If ON, use PROGRAMPATH, with SMF117TPPL and SMF117TPPO, otherwise use PROGRAM, with SMF117TPR. Bit 2: If ON, the tracked EVENT ran authorized.
26	x1A	-	-	7		Reserved
33	x21	SMF117TFT	GtzSmf117TFirstTOD	8	binary	The time stamp when the first instance of this unique tracked instance was recorded.
41	x29	-	-	7		Reserved
48	x30	SMF117TOW	GtzSmf117TOwner	16	EBCDIC	OWNER value.
64	x40	SMF117TSO	GtzSmf117TSource	8	EBCDIC	SOURCE value. Only valid if SMF117TFS is OFF.
72	x48	SMF117TSPL	GtzSmf117TSourcePathLen	2	binary	Length of SOURCEPATH value. Only valid if SMF117TFS is ON.
74	x4A	SMF117TSPO	GtzSmf117TSourcePathOffset	2	binary	Offset from the start of this GtzSmf117 record to the SOURCEPATH value of the offset 72 length. Only valid if SMF117TFS is ON.
76	x4C	SMF117TEDL	GtzSmf117TEventDescLen	2	binary	Length of EVENTDESC value.
78	x4E	SMF117TEDO	GtzSmf117TEventDescOffset	2	binary	Offset from the start of this GtzSmf117 record to the EVENTDESC value of the offset 76 length.
80	x50	SMF117TED	GtzSmf117TEventData	16	binary	EVENTDATA value.
80	x50		GtzSmf117TEventData1	8	binary	First half of EVENTDATA value.
88	x58		GtzSmf117TEventData2	8	binary	Second half of EVENTDATA value.
96	x60	SMF117TEJ	GtzSmf117TEventJob	8	EBCDIC	Derived EVENTJOB-name value.
104	x68	SMF117THJ	GtzSmf117THomeJob	8	EBCDIC	Derived HOMEJOB-name value.
112	x70	SMF117TPR	GtzSmf117TProgram	8	EBCDIC	Derived PROGRAM-name value. Only valid if SMF117TFP is OFF.
120	x78	SMF117TPO	GtzSmf117TProgramOffset	8	binary	Derived PROGRAMOFFSET value.
128	x80	SMF117TPPL	GtzSmf117TProgramPathLen	2	binary	Length of PROGRAMPATH value. Only valid if SMF117TFP is ON.
130	x82	SMF117TPPO	GtzSmf117TProgramPathOffset	2	binary	Offset from the start of this GtzSmf117 record to the PROGRAMPATH value of the offset 128 length. Only valid if SMF117TFP is ON.
132	x84	SMF117TEA	GtzSmf117TEventASID	2	binary	EVENTASID value.
134	x86	SMF117THA	GtzSmf117THomeASID	2	binary	HOMEASID value.
136	x88	SMF117SYN	GtzSmf117TSystemName	8	EBCDIC	Name of system on which this tracked instance was recorded.
144	x90	SMF117SXN	GtzSmf117TSysplexName	8	EBCDIC	Name of sysplex on which this tracked instance was recorded.

Table 18. Record 117 mapping header/self-defining section (continued)

Offsets - dec	Offsets - hex	Name	Alias	Length	Format	Description
152	x98	-	-	40		Reserved
192	xC0	-	-			

Record Type 118 (76) — TCP/IP Statistics

Transmission Control Protocol/Internet Protocol (TCP/IP) writes type 118 records to collect statistics about Telnet and FTP servers, API calls, and Telnet and FTP client calls. For more information about record type 118, see the topic about Type 118 SMF records in *z/OS Communications Server: IP Programmer's Guide and Reference*.

Record Type 119 (77) — TCP/IP Statistics

Transmission Control Protocol/Internet Protocol (TCP/IP) writes type 119 records to collect statistics about Telnet servers and clients, FTP servers and clients, and API activity and stack usage information. For more information about record type 119, see the topic about see the topic about Type 119 SMF records in *z/OS Communications Server: IP Programmer's Guide and Reference*.

Record Type 120 (78) — WebSphere Application Server for z/OS Performance Statistics

WebSphere® Application Server for z/OS writes record type 120 to collect WebSphere performance statistics. For more information about record type 120, see the WebSphere Application Server for z/OS product documentation available at this URL; the information center has an embedded search feature:
<http://www-306.ibm.com/software/webservers/appserv/was/library/>

Record type 121 (79) — Java runtime performance statistics

SMF record type 121 is written by the IBM JZOS batch launcher for z/OS and is used to record z/OS Java runtime performance statistics. For more information about the JZOS batch launcher, see "JZOS Batch Launcher and Toolkit function" in *IBM SDK for z/OS Installation and User's Guide*, available at <http://www.ibm.com/systems/z/os/zos/tools/java/products/jzos/overview.html>.

Record mapping

Header/self-defining section

Offsets	Name	Length	Format	Description
0	0 SMF121LEN	2	binary	Record length of the entire SMF record.
2	2 SMF121SEG	2	binary	Segment descriptor.
4	4 SMF121FLG	1	binary	System indicator.
5	5 SMF121RTY	1	binary	Record type 121 (X'79').
6	6 SMF121TME	4	binary	Time since midnight
10	A SMF121DTE	4	packed	Date record was moved to SMF.
14	E SMF121SID	4	EBCDIC	System identification.

Record type 121

Offsets	Name	Length	Format	Description
18	12 SMF121SSI	4	EBCDIC	Subsystem identification.
22	16 SMF121STY	2	binary	Record subtype 1.
24	18 SMF121SDS_TRIPLETS	2	binary	Number of triplets (offset/length/number combinations), currently three: <ul style="list-style-type: none"> • Java runtime • Garbage collector • Thread
26	1A SMF121SDS_RSERVD	2	binary	Reserved.
28	1C SMF121SDS_OFFJRS	4	binary	Offset to Java runtime section.
32	20 SMF121SDS_LENJRS	2	binary	Length of each Java runtime section.
34	22 SMF121SDS_NUMJRS	2	binary	Number of Java runtime sections. (There is only one Java runtime section.)
36	24 SMF121SDS_OFFGCS	4	binary	Offset to garbage collector section.
40	28 SMF121SDS LENGCS	2	binary	Length of each garbage collector section.
42	2A SMF121SDS_NUMGCS	2	binary	Number of garbage collector sections. This depends on how many garbage collectors are active in the JVM.
44	2C SMF121SDS_OFFTS	4	binary	Offset to thread section.
48	30 SMF121SDS_LEN TS	2	binary	Length of each thread section.
50	32 SMF121SDS_NUM TS	2	binary	Number of thread sections. This depends on the number of active Java threads.

Java runtime section

Triplet information: This section is located on the record using the following triplet fields, which are located in "Header/self-defining section" on page 943:

Offset

SMF121SDS_OFFJRS

Length

SMF121SDS_LENJRS

Number

SMF121SDS_NUMJRS

Offsets	Name	Length	Format	Description
0	0 SMF121JRS_FDFLAGS	4	binary	Field flags: <ul style="list-style-type: none"> Byte 1 <ul style="list-style-type: none"> Bit 0 Meaning when set Contains CPU usage summary fields, including: <ul style="list-style-type: none"> SMF121JRS_APPCPU SMF121JRS_SYSCPU SMF121JRS_GCCPU SMF121JRS_JITCPU 1-7 Reserved Byte 2 Reserved Byte 3 Reserved Byte 4 Reserved
4	4 SMF121JRS_NAME	80	EBCDIC	Formatted JVM name. If longer than 80 characters, string will be truncated.
84	54 SMF121JRS_STRTTME	8	binary	Start time, in milliseconds.
92	5C SMF121JRS_UPTIME	8	binary	Up time, in milliseconds.

Offsets	Name	Length	Format	Description
100	64 SMF121JRS_GCMODE	40	EBCDIC	Garbage collection mode. If longer than 40 characters, string will be truncated.
140	8C SMF121JRS_PEAKTHRD	4	binary	Peak live thread count.
144	90 SMF121JRS_CURRTHRD	4	binary	Current number of live threads.
148	94 SMF121JRS_APPCPU	8	binary	Total CPU usage of all application threads, in microseconds. If not available, value is -1.
156	9C SMF121JRS_SYSCPU	8	binary	Total CPU usage of all system threads, in microseconds. If not available, value is -1.
164	A4 SMF121JRS_GCCPU	8	binary	Total CPU usage of all GC threads, in microseconds. If not available, value is -1.
172	AC SMF121JRS_JITCPU	8	binary	Total CPU usage of all JIT threads, in microseconds. If not available, value is -1.

Garbage collector section

Triplet information: This section is located on the record using the following triplet fields, which are located in “Header/self-defining section” on page 943:

Offset

SMF121SDS_OFFGCS

Length

SMF121SDS LENGCS

Number

SMF121SDS_NUMGCS

Offsets	Name	Length	Format	Description
0	0 SMF121GCS_FDFLAGS	4	binary	Field flags, currently all zeros.
4	4 SMF121GCS_NAME	40	EBCDIC	Garbage collector name. If longer than 40 characters, string will be truncated.
44	2C SMF121GCS_COLLCNT	8	binary	Total number of collections.
52	34 SMF121GCS_COLLTME	8	binary	Approximate accumulated collection elapsed time, in milliseconds.
60	3C SMF121GCS_TMEMFREED	8	binary	Cumulative total amount of memory freed, in bytes.
68	44 SMF121GCS_TCOMPACTS	8	binary	Cumulative total number of compacts performed.
76	4C SMF121GCS_MEMUSED	8	binary	Snapshot of the amount of heap memory used, in bytes.

Thread section

Triplet information: This section is located on the record using the following triplet fields, which are located in “Header/self-defining section” on page 943:

Offset

SMF121SDS_OFFTS

Length

SMF121SDS_LENST

Number

SMF121SDS_NUMTS

Offsets	Name	Length	Format	Description
0	0 SMF121TS_FDFLAGS	4	binary	Field flags, currently all zeros.
4	4 SMF121TS_ID	8	binary	Thread ID.
12	C SMF121TS_NAME	24	EBCDIC	Thread name.

Record type 121

Offsets	Name	Length	Format	Description
36	24 SMF121TS_CAT	8	EBCDIC	Thread category. Possible values are: APP APP-U1 APP-U2 APP-U3 APP-U4 APP-U5 SYS GC JIT OTHER RM Empty string (""), if not available
44	2C SMF121TS_CPU	8	binary	Total CPU time, in nanoseconds. If not available, value is -1.
52	34 SMF121TS_NATIVEID	8	binary	Native OS thread ID. If not available, value is -1.

Record type 124 (7C) — I/O Supervisor (IOS) information

Record type 124 has the following subtypes:

Subtype 1 — Link diagnostic information

This record is written for each FICON channel, switch entry port, switch exit port, and control unit port that is accessible to z/OS. It contains information that can be used to diagnose I/O errors and performance issues that might be caused by fiber optic infrastructure issues or incorrect I/O configurations. Subtype 1 records are created at every link diagnostic monitoring interval, which is every 24 hours and consist of a single section:

Port section

Contains link diagnostic information for a particular port. This includes operational information related to the optics, such as transmit and receive power, current and capable operating speed, and error counters. There is one port section for every port connected to an online FICON channel that is accessible to z/OS. For example, if a FICON channel is connected through a switch to three control unit ports, then eight port sections will appear in the SMF record: one for the channel port, one for the entry switch port, one for each of the three exit switch ports, and one for each of the three control unit ports.

Macro to symbolically address the record: The SMF record mapping macro for all SMF 124 records is IOSDS124. The mapping macro resides in SYS1.MACLIB.

Record environment

The following conditions exist for the generation of this record:

Macro SMFWTM (record exit: IEFU83)

Mode Task

Storage residency

31-bit

Record mapping

Header/self-defining section

This section contains the common SMF record header fields and, if applicable, the triplet fields (offset/length/number) that locate the other sections on the record.

Offsets	Name	Length	Format	Description												
0	0 SMF124RCL	2	binary	Record length. This field and the next field (total of four bytes) form the record descriptor word (RDW). See "Standard SMF record header" on page 162 for a detailed description.												
2	2 SMF124SGD	2	binary	Segment descriptor (see record length field). This is zero, if the record is not spanned.												
4	4 SMF124FLG	1	binary	System indicator flags: <table border="0"> <tr> <td>Bit</td> <td>Meaning when set</td> </tr> <tr> <td>0</td> <td>Subsystem identification follows system identification.</td> </tr> <tr> <td>1</td> <td>Subtypes are used.</td> </tr> <tr> <td>2</td> <td>Reserved.</td> </tr> <tr> <td>3-6</td> <td>Version indicators*.</td> </tr> <tr> <td>7</td> <td>Reserved.</td> </tr> </table> <p>*See "Standard SMF record header" on page 162 for a detailed description.</p>	Bit	Meaning when set	0	Subsystem identification follows system identification.	1	Subtypes are used.	2	Reserved.	3-6	Version indicators*.	7	Reserved.
Bit	Meaning when set															
0	Subsystem identification follows system identification.															
1	Subtypes are used.															
2	Reserved.															
3-6	Version indicators*.															
7	Reserved.															
5	5 SMF124RTY	1	binary	Record type 124 (X'7C').												
6	6 SMF124TME	4	binary	Time since midnight, in hundredths of a second, when the record was moved into the SMF buffer.												
10	A SMF124DTE	4	packed	Date when the record was moved into the SMF buffer, in the form <i>0cyyddF</i> . See "Standard SMF record header" on page 162 for a detailed description.												
14	E SMF124SID	4	EBCDIC	System identification (from the SID parameter).												
18	12 SMF124SSI	4	binary	Subsystem identification.												
22	16 SMF124STY	2	binary	Record subtype: <table border="0"> <tr> <td>Value</td> <td>Meaning</td> </tr> <tr> <td>1</td> <td>Link diagnostic information</td> </tr> </table>	Value	Meaning	1	Link diagnostic information								
Value	Meaning															
1	Link diagnostic information															
24	18 SMF124Hdr_Len	2	binary	Length of header.												
26	1A SMF124Hdr_TripCnt	2	binary	Number of triplets in header.												
28	1C SMF124_Hdr_Flags	2	binary	Header flags.												
30	1E *	2	binary	Reserved.												

The following fields are only included with subtype 1:

Offsets	Name	Length	Format	Description
32	20 SMF124S1_Port_Offset	4	binary	Offset to port section from start of record, including record descriptor word (RDW).
36	24 SMF124S1_Port_Len	2	binary	Length of port section.
38	26 SMF124S1_Port_Num	2	binary	Number of port sections.

Record type 124

Subtype 1

Port section

Offsets	Name	Length	Format	Description
0	0 SMF124S1_RetDate	4	packed	Date the link diagnostic information was retrieved, in the form <i>0cyyddF</i> .
4	4 SMF124S1_RetTime	4	binary	Time since midnight, in hundredths of a second, that the link diagnostic information was retrieved.
8	8 SMF124S1_WWPN	8	binary	World wide port name (WWPN) of the port.
16	10 SMF124S1_ReportSrc	1	binary	Reporting source: Value (Name) Meaning 1 (SMF124S1_ReportSrc_Monitor) Periodic monitoring
17	11 SMF124S1_PortID	3	binary	Port identifier. The format depends on the port type (SMF124S1_PortType) and the identifier size (SMF124S1_IdSize) fields. See the following entries for the different mappings based on whether the port type is a channel port, switch port, or control unit port.
17	11 SMF124S1_CHPID	1	binary	For channel ports, the channel path identifier (CHPID) assigned to the port.
18	12 SMF124S1_PCHID	2	binary	For channel ports, the physical channel identifier (PCHID) assigned to the port.
17	11 SMF124S1_ID_LA2	2	binary	For entry and exit switch ports, the domain and area portions of the two-byte link address, if the identifier size (SMF124S1_IdSize) is 2.
17	11 SMF124S1_ID_LA1	1	binary	For entry and exit switch ports, the one-byte link address, if the identifier size (SMF124S1_IdSize) is 1.
17	11 SMF124S1_INTID	2	binary	For control unit ports, the control unit interface ID assigned to the port.
20	14 SMF124S1_PortType	1	binary	Port type: Value (Name) Meaning 1 (SMF124S1_PortType_Channel) Channel port 2 (SMF124S1_PortType_EntrySwitch) Entry switch port 3 (SMF124S1_PortType_ExitSwitch) Exit switch port 4 (SMF124S1_PortType_CU) Control unit port
21	15 SMF124S1_AssocCHPID	1	binary	The associated CHPID for switch and control unit ports.

Offsets	Name	Length	Format	Description
22	16 SMF124S1_Flag1	1	binary	Flag byte 1: Bit (Name) Meaning when set 0 (SMF124S1_ValSpeed) Port speed information is valid. 1 (SMF124S1_ValSFPDP) SFP diagnostic parameters are valid. 2 (SMF124S1_ValBuff) Buffer credit information is valid. 3 (SMF124S1_ValLESB) Link error status block (LESB) information is valid. 4 (SMF124S1_ValFEC) Forward error correction (FEC) information is valid. 5 (*) Reserved. 6-7 (SMF124S1_IdSize) Port identifier size (1, 2 or 3).
23	17 SMF124S1_Flag2	1	binary	Flag byte 2: Bit (Name) Meaning when set 0 (SMF124S1_ValThresh_Temp) Temperature threshold values are valid. 1 (SMF124S1_ValThresh_Voltage) Voltage threshold values are valid. 2 (SMF124S1_ValThresh_TxBias) Transmitter laser bias current (Tx bias) threshold values are valid. 3 (SMF124S1_ValThresh_TxPower) Optical transmit power (Tx) threshold values are valid. 4 (SMF124S1_ValThresh_RxPower) Optical receive power (Rx) threshold values are valid. 5-7 (*) Reserved.

Record type 124

Offsets	Name	Length	Format	Description
24	18 SMF124S1_Flag3	1	binary	Flag byte 3: Bit (Name) Meaning when set 0 (SMF124S1_OpSpeedUnknown) The operating speed is not known to the port. 1 (SMF124S1_OpSpeedUnRecog) The operating speed is not recognized by z/OS. 2 (SMF124S1_OpSpeedNotEst) The operating speed has not been established by the port. 3 (SMF124S1_CapSpeedUnknown) The capable speed is not known to the port. 4 (SMF124S1_CapSpeedUnRecog) The capable speed is not recognized by z/OS. 5 (SMF124S1_FECActive) Forward error correction (FEC) is active for this link. (If bit is not set, FEC is not active or the state is unknown.) 6-7 (*) Reserved.
25	19 SMF124S1_Flag4	1	binary	Flag 4: Bit Meaning when set 0-7 Reserved.
26	1A SMF124S1_Flag5	1	binary	Flag 5: Bit Meaning when set 0-7 Reserved.
27	1B SMF124S1_Flag6	1	binary	Flag 6: Bit Meaning when set 0-7 Reserved.
28	1C SMF124S1_Flag7	1	binary	Flag 7: Bit Meaning when set 0-7 Reserved.
29	1D SMF124S1_Flag8	1	binary	Flag 8: Bit Meaning when set 0-7 Reserved.
30	1E SMF124S1_PortSpeed	4	binary	Port speed information. This information is valid if SMF124S1_ValSpeed is ON.
30	1E SMF124S1_OperSpeed	2	binary	Current operating speed, in gigabits per second (Gbps). If zero, see operating speed flags in SMF124S1_Flag3 for more information.
32	20 SMF124S1_CapSpeed	2	binary	Maximum capable speed, in gigabytes per second (Gbps). If zero, see capable speed flags in SMF124S1_Flag3 for more information.

Offsets	Name	Length	Format	Description
34	22 SMF124S1_SFPDP	10	binary	Optical transceiver/small form-factor pluggable (SFP) diagnostic parameters. This information is valid if SMF124S1_ValSFPDP is ON.
34	22 SMF124S1_SFP_Temp	2	binary	Transceiver temperature. This field contains a signed, two's complement value in increments of 1/256 of a degree Celsius (C). The valid range is -128°C to 128°C (127.996°C).
36	24 SMF124S1_SFP_Voltage	2	binary	Voltage. The value is in units of 100 microvolts (µV). The valid range is 0 - 6.55 volts (V).
38	26 SMF124S1_SFP_TxBias	2	binary	Transmitter laser bias current (Tx bias). The value is in units of 2 microamps (µA). The valid range is 0 - 131 milliamps (mA).
40	28 SMF124S1_SFP_TxPower	2	binary	Transmit power (Tx). The value is in units of 0.1 microwatts (µW). The valid range is 0 - 6.5 milliwatts (mW).
42	2A SMF124S1_SFP_RxPower	2	binary	Receive power (Rx). The value is in units of 0.1 microwatts (µW). The valid range is 0 - 6.5 milliwatts (mW).
44	2C SMF124S1_BuffCred	16	binary	Buffer credit and distance information. This information is valid if SMF124S1_ValBuff is ON.
44	2C SMF124S1_ThisPort_B2BCredit	4	binary	Number of buffer-to-buffer credits for this port.
48	30 SMF124S1_AttPort_B2BCredit	4	binary	Number of buffer-to-buffer credits for the attached port.
52	34 SMF124S1_RTT	4	binary	Round trip time from this port to the attached port, in nanoseconds. A value of zero means the round trip time is unknown.
56	38 SMF124S1_Est_Distance	4	binary	Estimated distance, in meters, based on the round trip time. A value of zero means the estimated distance is unknown.
60	3C SMF124S1_ErrorInfo	40	binary	Error information. See the individual fields to determine how to check for validity.
60	3C SMF124S1_LESB_LinkFailureCount	4	binary	Link failure count for this monitoring interval. This information is valid if SMF124S1_ValLESB is ON.
64	40 SMF124S1_LESB_LossOfSyncCount	4	binary	Loss-of-synchronization count for this monitoring interval. This information is valid if SMF124S1_ValLESB is ON.
68	44 SMF124S1_LESB_LossOfSignalCount	4	binary	Loss-of-signal count for this monitoring interval. This information is valid if SMF124S1_ValLESB is ON.
72	48 SMF124S1_LESB_PrimitiveSeqProtocol	4	binary	Count of primitive sequence protocol errors for this monitoring interval. This information is valid if SMF124S1_ValLESB is ON.
76	4C SMF124S1_LESB_InvalidTransWord	4	binary	Count of invalid transmission words for this monitoring interval. This information is valid if SMF124S1_ValLESB is ON.
80	50 SMF124S1_LESB_InvalidCRCCount	4	binary	Invalid CRC count for this monitoring interval. This information is valid if SMF124S1_ValLESB is ON.
84	54 SMF124S1_FEC_UnCorrected_Blks	4	binary	Number of FEC uncorrected blocks for this monitoring interval. This information is valid if SMF124S1_ValFEC is ON.
88	58 *	12	binary	Reserved.

Record type 124

Offsets	Name	Length	Format	Description
100	64 SMF124S1_Thresholds_Temp	8	binary	Transceiver temperature thresholds. Each field contains a signed, two's complement value in increments of 1/256 of a degree Celsius (C). The valid range is -128°C to 128°C (127.996°C). This information is valid when SMF124S1_ValThresh_Temp is on.
100	64 SMF124S1_Threshold_Temp_HighAlarm	2	binary	High alarm threshold.
102	66 SMF124S1_Threshold_Temp_LowAlarm	2	binary	Low alarm threshold.
104	68 SMF124S1_Threshold_Temp_HighWarn	2	binary	High warning threshold.
106	6A SMF124S1_Threshold_Temp_LowWarn	2	binary	Low warning threshold.
108	6C SMF124S1_Thresholds_Voltage	8	binary	Voltage thresholds. Each field contains a value in units of 100 microvolts (μ V). The valid range is 0 - 6.55 volts (V). This information is valid when SMF124S1_ValThresh_Voltage is ON.
108	6C SMF124S1_Threshold_Voltage_HighAlarm	2	binary	High alarm threshold.
110	6E SMF124S1_Threshold_Voltage_LowAlarm	2	binary	Low alarm threshold.
112	70 SMF124S1_Threshold_Voltage_HighWarn	2	binary	High warning threshold.
114	72 SMF124S1_Threshold_Voltage_LowWarn	2	binary	Low warning threshold.
116	74 SMF124S1_Thresholds_TxBias	8	binary	Transmitter laser bias current (Tx bias) thresholds. Each field contains a value in units of 2 microamps (μ A). The valid range is 0 - 131 milliamps (mA). This information is valid when SMF124S1_ValThresh_Bias is ON.
116	74 SMF124S1_Threshold_TxBias_HighAlarm	2	binary	High alarm threshold.
118	76 SMF124S1_Threshold_TxBias_LowAlarm	2	binary	Low alarm threshold.
120	78 SMF124S1_Threshold_TxBias_HighWarn	2	binary	High warning threshold.
122	7A SMF124S1_Threshold_TxBias_LowWarn	2	binary	Low warning threshold.
124	7C SMF124S1_Thresholds_TxPower	8	binary	Tx power thresholds. Each field contains a value in units of 0.1 microwatts (μ W). The valid range is 0 - 6.5 milliwatts (mW). This information is valid if SMF124S1_ValThresh_TxPower is ON.
124	7C SMF124S1_Threshold_TxPower_HighAlarm	2	binary	High alarm threshold.
126	7E SMF124S1_Threshold_TxPower_LowAlarm	2	binary	Low alarm threshold.
128	80 SMF124S1_Threshold_TxPower_HighWarn	2	binary	High warning threshold.
130	82 SMF124S1_Threshold_TxPower_LowWarn	2	binary	Low warning threshold.
132	84 SMF124S1_Thresholds_RxPower	8	binary	Rx power thresholds. Each field contains a value in units of 0.1 microwatts (μ W). The valid range is 0 - 6.5 milliwatts (mW). This information is valid if SMF124S1_ValThresh_RxPower is ON.
132	84 SMF124S1_Threshold_RxPower_HighAlarm	2	binary	High alarm threshold.
134	86 SMF124S1_Threshold_RxPower_LowAlarm	2	binary	Low alarm threshold.
136	88 SMF124S1_Threshold_RxPower_HighWarn	2	binary	High warning threshold.
138	8A SMF124S1_Threshold_RxPower_LowWarn	2	binary	Low warning threshold.
140	8C *	116	binary	Reserved.

Appendix. Accessibility

Accessible publications for this product are offered through IBM Knowledge Center (<http://www.ibm.com/support/knowledgecenter/SSLTBW/welcome>).

If you experience difficulty with the accessibility of any z/OS information, send a detailed message to the "Contact us" web page for z/OS (<http://www.ibm.com/systems/z/os/zos/webqs.html>) or use the following mailing address.

IBM Corporation
Attention: MHVRCFS Reader Comments
Department H6MA, Building 707
2455 South Road
Poughkeepsie, NY 12601-5400
United States

Accessibility features

Accessibility features help users who have physical disabilities such as restricted mobility or limited vision use software products successfully. The accessibility features in z/OS can help users do the following tasks:

- Run assistive technology such as screen readers and screen magnifier software.
- Operate specific or equivalent features by using the keyboard.
- Customize display attributes such as color, contrast, and font size.

Consult assistive technologies

Assistive technology products such as screen readers function with the user interfaces found in z/OS. Consult the product information for the specific assistive technology product that is used to access z/OS interfaces.

Keyboard navigation of the user interface

You can access z/OS user interfaces with TSO/E or ISPF. The following information describes how to use TSO/E and ISPF, including the use of keyboard shortcuts and function keys (PF keys). Each guide includes the default settings for the PF keys.

- *z/OS TSO/E Primer*
- *z/OS TSO/E User's Guide*
- *z/OS V2R2 ISPF User's Guide Vol I*

Dotted decimal syntax diagrams

Syntax diagrams are provided in dotted decimal format for users who access IBM Knowledge Center with a screen reader. In dotted decimal format, each syntax element is written on a separate line. If two or more syntax elements are always present together (or always absent together), they can appear on the same line because they are considered a single compound syntax element.

Each line starts with a dotted decimal number; for example, 3 or 3.1 or 3.1.1. To hear these numbers correctly, make sure that the screen reader is set to read out

punctuation. All the syntax elements that have the same dotted decimal number (for example, all the syntax elements that have the number 3.1) are mutually exclusive alternatives. If you hear the lines 3.1 USERID and 3.1 SYSTEMID, your syntax can include either USERID or SYSTEMID, but not both.

The dotted decimal numbering level denotes the level of nesting. For example, if a syntax element with dotted decimal number 3 is followed by a series of syntax elements with dotted decimal number 3.1, all the syntax elements numbered 3.1 are subordinate to the syntax element numbered 3.

Certain words and symbols are used next to the dotted decimal numbers to add information about the syntax elements. Occasionally, these words and symbols might occur at the beginning of the element itself. For ease of identification, if the word or symbol is a part of the syntax element, it is preceded by the backslash (\) character. The * symbol is placed next to a dotted decimal number to indicate that the syntax element repeats. For example, syntax element *FILE with dotted decimal number 3 is given the format 3 * FILE. Format 3* FILE indicates that syntax element FILE repeats. Format 3* * FILE indicates that syntax element * FILE repeats.

Characters such as commas, which are used to separate a string of syntax elements, are shown in the syntax just before the items they separate. These characters can appear on the same line as each item, or on a separate line with the same dotted decimal number as the relevant items. The line can also show another symbol to provide information about the syntax elements. For example, the lines 5.1*, 5.1 LASTRUN, and 5.1 DELETE mean that if you use more than one of the LASTRUN and DELETE syntax elements, the elements must be separated by a comma. If no separator is given, assume that you use a blank to separate each syntax element.

If a syntax element is preceded by the % symbol, it indicates a reference that is defined elsewhere. The string that follows the % symbol is the name of a syntax fragment rather than a literal. For example, the line 2.1 %OP1 means that you must refer to separate syntax fragment OP1.

The following symbols are used next to the dotted decimal numbers.

? indicates an optional syntax element

The question mark (?) symbol indicates an optional syntax element. A dotted decimal number followed by the question mark symbol (?) indicates that all the syntax elements with a corresponding dotted decimal number, and any subordinate syntax elements, are optional. If there is only one syntax element with a dotted decimal number, the ? symbol is displayed on the same line as the syntax element, (for example 5? NOTIFY). If there is more than one syntax element with a dotted decimal number, the ? symbol is displayed on a line by itself, followed by the syntax elements that are optional. For example, if you hear the lines 5 ?, 5 NOTIFY, and 5 UPDATE, you know that the syntax elements NOTIFY and UPDATE are optional. That is, you can choose one or none of them. The ? symbol is equivalent to a bypass line in a railroad diagram.

! indicates a default syntax element

The exclamation mark (!) symbol indicates a default syntax element. A dotted decimal number followed by the ! symbol and a syntax element indicate that the syntax element is the default option for all syntax elements that share the same dotted decimal number. Only one of the syntax elements that share the dotted decimal number can specify the ! symbol. For example, if you hear the lines 2? FILE, 2.1! (KEEP), and 2.1 (DELETE), you know that (KEEP) is the

default option for the FILE keyword. In the example, if you include the FILE keyword, but do not specify an option, the default option KEEP is applied. A default option also applies to the next higher dotted decimal number. In this example, if the FILE keyword is omitted, the default FILE(KEEP) is used. However, if you hear the lines 2? FILE, 2.1, 2.1.1! (KEEP), and 2.1.1 (DELETE), the default option KEEP applies only to the next higher dotted decimal number, 2.1 (which does not have an associated keyword), and does not apply to 2? FILE. Nothing is used if the keyword FILE is omitted.

*** indicates an optional syntax element that is repeatable**

The asterisk or glyph (*) symbol indicates a syntax element that can be repeated zero or more times. A dotted decimal number followed by the * symbol indicates that this syntax element can be used zero or more times; that is, it is optional and can be repeated. For example, if you hear the line 5.1* data area, you know that you can include one data area, more than one data area, or no data area. If you hear the lines 3* , 3 HOST, 3 STATE, you know that you can include HOST, STATE, both together, or nothing.

Notes:

1. If a dotted decimal number has an asterisk (*) next to it and there is only one item with that dotted decimal number, you can repeat that same item more than once.
2. If a dotted decimal number has an asterisk next to it and several items have that dotted decimal number, you can use more than one item from the list, but you cannot use the items more than once each. In the previous example, you can write HOST STATE, but you cannot write HOST HOST.
3. The * symbol is equivalent to a loopback line in a railroad syntax diagram.

+ indicates a syntax element that must be included

The plus (+) symbol indicates a syntax element that must be included at least once. A dotted decimal number followed by the + symbol indicates that the syntax element must be included one or more times. That is, it must be included at least once and can be repeated. For example, if you hear the line 6.1+ data area, you must include at least one data area. If you hear the lines 2+, 2 HOST, and 2 STATE, you know that you must include HOST, STATE, or both. Similar to the * symbol, the + symbol can repeat a particular item if it is the only item with that dotted decimal number. The + symbol, like the * symbol, is equivalent to a loopback line in a railroad syntax diagram.

Notices

This information was developed for products and services offered in the U.S.A. or elsewhere.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A

For license inquiries regarding double-byte character set (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

Intellectual Property Licensing
Legal and Intellectual Property Law
IBM Japan, Ltd.
19-21, Nihonbashi-Hakozakicho, Chuo-ku
Tokyo 103-8510, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

Site Counsel
IBM Corporation
2455 South Road
Poughkeepsie, NY 12601-5400
USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

All statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

COPYRIGHT LICENSE:

This information might contain sample application programs in source language, which illustrate programming techniques on various operating platforms. You may copy, modify, and distribute these sample programs in any form without payment to IBM, for the purposes of developing, using, marketing or distributing application programs conforming to the application programming interface for the operating platform for which the sample programs are written. These examples have not been thoroughly tested under all conditions. IBM, therefore, cannot guarantee or imply reliability, serviceability, or function of these programs. The sample programs are provided "AS IS", without warranty of any kind. IBM shall not be liable for any damages arising out of your use of the sample programs.

Policy for unsupported hardware

Various z/OS elements, such as DFSMS, HCD, JES2, JES3, and MVS, contain code that supports specific hardware servers or devices. In some cases, this device-related element support remains in the product even after the hardware devices pass their announced End of Service date. z/OS may continue to service element code; however, it will not provide service related to unsupported hardware devices. Software problems related to these devices will not be accepted

for service, and current service activity will cease if a problem is determined to be associated with out-of-support devices. In such cases, fixes will not be issued.

Minimum supported hardware

The minimum supported hardware for z/OS releases identified in z/OS announcements can subsequently change when service for particular servers or devices is withdrawn. Likewise, the levels of other software products supported on a particular release of z/OS are subject to the service support lifecycle of those products. Therefore, z/OS and its product publications (for example, panels, samples, messages, and product documentation) can include references to hardware and software that is no longer supported.

- For information about software support lifecycle, see: <http://www.ibm.com/software/support/systemsz/lifecycle/>
- For information about currently-supported IBM hardware, contact your IBM representative.

Trademarks

IBM, the IBM logo, and [ibm.com](http://www.ibm.com) are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available at Copyright and Trademark information (<http://www.ibm.com/legal/copytrade.shtml>).

Index

Special characters

\$E LINE(n) command
 SIGNON/start line 451
\$E LNE n command 462
 LOGON/start line 460
 SIGNOFF/stop line 455
\$E SYS command 446
\$P JES2 command 449
\$P LNE n command
 LOGOFF/stop line 462
 SIGNOFF/stop line 455
\$S JES2 command 446
\$S LINE(n) command
 SIGNON/start line 451
\$S LNE n command
 LOGON/start line 460
 SIGNOFF/stop line 455

A

access method services utility
 allocating an SMF data set 26
accessibility 953
 contact IBM 953
 features 953
accounting
 interval 71
 nonsynchronized interval 73
 started task 77
 synchronized interval 74
 TSO/E command 75
 type 30 record interval 73
 type 32 record interval 73
accounting events
 using ENFREQ macro to listen 72
activity report
 records in error 59
 summary 59
add a parameter
 SETSMF command 86
addition of devices to configuration 210
address space resource data
 RMF - record type 79-2 665
address space SRM data
 RMF - record type 79-5 670
address space state data
 RMF - record type 79-1 661
addressing SMF record fields
 IFASMFR macro 88
ADYTRNS command 751
AIX on System p
 subtypes of record type 104 888
allocation
 dynamic 171
 JES3 device 261
ALTER (access method services
 command)
 record written when issued 493, 497
analyzing the configuration
 device reporting 9

analyzing the configuration (*continued*)
 example 9
APA printing subsystem
 activity 194
APF-authorization 55
 losing authorization 47
APPC/MVS (Advanced
 Program-to-Program
 Communication/MVS)
 accounting 109
 conversation-level accounting 109,
 114
 multi-trans shell 111
 served TP 112
 server address space 112
 transaction accounting record (type
 33) 318
ASMFCL sort procedure 100
assistive technologies 953
authorization preservation 55
Automatic restart manager 751

B

BatchPipes/MVS
 statistics 771
BCPii
 Type 106 - BCPii activity 921
best practice
 designing SMF records 164
billing a user
 degradation billing 6
 efficiency billing 7
 transaction billing 7
 TSO/E billing 6
billing users
 using SMF 4
buffer options
 specifying 78
 using BUF SIZMAX parameter of
 SMFPRMxx parmlib member 78
 using BUFUSEWARN parameter of
 SMFPRMxx parmlib member 78
BUFSIZMAX
 SMF buffer options 78
BUFUSEWARN
 SMF buffer options 78

C

cache subsystem device activity
 RMF - record type 74-5 604
CANCEL operator command
 relation to allocation recovery
 record 211
 relation to step termination
 record 171
cataloged procedure
 ASMFCL sort procedure 100

changing subsystem parameter
 SMFCHSUB macro 88
channel path activity
 RMF - record type 73 565
 RMF - record type 79-12 676
Channel Path data section
 extended 573
CICS TS for z/OS
 statistics record 935
CIM server
 SMF (CIM server Audit) type 84 727
closure
 magnetic tape volume 231
 non-VSAM data set 215, 228
cold start
 JES record written 448
collecting SMF statistics
 specifying a recording interval 75
 using STATUS parameter of
 SMFPRMxx parmlib member 75
command
 access method services
 ALTER 493, 497
 DEFINE 481
 DELETE 491, 495, 497
 DISPLAY 31
 HALT EOD 31, 231, 751
 JES2
 \$E LINE(n) (SIGNON) 451
 \$E SYS 446
 \$S JES2 446
 \$S LINE(n) 451
 RESET 751
 SET DAE 751
 SET DATE 208, 751
 SET GRSRNL 751
 SET MPF 751
 SET OPT 751
 SET PFK 751
 SET SMF 751
 SET TIME 751
 SETSMF 751
 SETXCF START 751
 SETXCF STOP 751
 SWITCH 231
 SWITCH SMF 31, 751
 VARY WLM 751
common address space work
 data set
 DD DATA 276
 DD* 276
 record type 30 276
comparing records
 interval 73
 SMF and RMF 73
 using interval synchronization 73
Component Broker Performance
 statistics 943
concatenation request
 record type 40 338
 record written when issued 338

- configuration
 - ACTIVATE command 238
 - adding a device 238
 - adding devices 210
 - analyzing system 9
 - CONFIG CHP command 238
 - CONFIG CPU command 238
 - CONFIG OFFLINE,S command 238
 - CONFIG ONLINE,S command 238
 - CONFIG STOR command 238
 - CONFIG VF command 238
 - removing devices 213
 - reporting 9
- configuration record type 22 238
- contact
 - z/OS 953
- control interval (CI)
 - restriction 29
 - smf data set 29
 - VSAM data set 29
- coupling facility activity
 - RMF - record type 74-4 595
- CPU
 - time
 - collecting 137
- CPU and PR/SM activity
 - RMF - record type 70 500
- CPU clock 231
- CPU time
 - installation use 14
 - job 133
 - job step 133
 - job/step 14
 - TCB 133
 - under SRBs 134
 - variation 134
- CPUTIMER macro 133
- cross memory service provider charge
 - back
 - detail records 827
 - record 96 827
 - subtype selectivity 827
 - summary records 827
- cryptographic
 - initialization 684, 689
- Cryptographic coprocessor activity
 - RMF - record type 70 500
- CUSP (Cryptographic Unit Support Program)
 - record (type 82) 683

D

- Data
 - persistence 941
- data lost
 - record type 7 207
- data set
 - DD DATA
 - TS-step termination 326
 - DD*
 - TS-step termination 326
 - evaluating activity 12
 - installation-defined 82
 - JES2 spin 184
 - JES3 189
 - non-VSAM 215, 228, 230

- data set (*continued*)
 - preformatted with dummy record 99
 - SMF 26
- data set activity record
 - INOUT 228
 - INPUT (type 14) 215
 - OUTIN 228
 - OUTPUT 228
 - RDBACK (type 14) 215
 - record type 15 228
 - UPDAT 228
- data set name
 - specifying 69
- data set status record
 - rename (type 18) 230
 - scratch (type 17) 228
- DATE parameter
 - SMF data set dump program 50
- DB2
 - accounting 886
 - performance record 886
 - record type 100 886
 - record type 101 886
 - record type 102 886
 - statistics record 886
- DD DATA data set 326
 - job termination 176
- DD* data set 326
 - job termination 176
 - step termination 171
- deconcatenation request
 - record type 40 338
 - record written when issued 338
- default member
 - SMFPRMxx 81
- DEFINE access method services
 - command
 - record written when issued 481, 499
- DEFINE access method services utility
 - SMF data set allocation 28
 - SMF data set creation 27
- DEFINE command
 - access method services 499
- degradation billing 6
- DELETE access method services
 - command
 - record written 491, 495
 - record written when issued 499
- demount of user volumes 231
- designing SMF records 164
- DETAIL parameter 75
- determining interval time 93
- determining synchronization time 93
- device
 - adding to a configuration 238
 - adding to configuration 210
 - direct access 231
 - move offline 213, 238
 - move online 210, 238
 - recovering 210
 - SMF initialization 238
- device activity
 - RMF - record type 74-1 583
 - RMF - record type 79-9 673
- device allocation record (type 25),
 - JES3 261

- device allocation recovery record (type 10) 211
- device reporting 9
- DFSMS (data facility storage management subsystem)
 - record type 42 343
 - statistics and configuration 343
- DFSORT statistics record (Type 16) 228
- digital signatures 155
 - overview 155
 - setting up 156
 - creating keys 156
 - IFASMF DL 157
 - IFASMF DP 158
 - updating SMFPRMxx 157
 - signature records 155
- direct access volume
 - record type 19 231
- direct access volume activity
 - reporting 11
 - summarizing 11
- DISPLAY command 31
 - display status 86
- DIV (data-in-virtual)
 - access record
 - subtype 1 340
 - record type 41 340
 - resource usage information 340
 - unaccess record
 - subtype 2 340
 - VLF statistics
 - subtype 3 340
- Domino Server statistics 924
- DSPSIZMAX
 - SMF buffer options 78
- dummy record
 - SMF 64
- dump header
 - record type 2 167
- dump options 50
- dump program (IFASMF DL)
 - FLDSTATS command example 48
- dump program (IFASMF DP) 50
 - CLEAR function 55
 - FLDSTATS command example 58
 - input parameters 64
 - record written 167
 - recording by day 47
 - return codes 55
 - sample JCL 45, 56
 - RELATIVEDATE 47
 - WEEKSTART 47
 - START command example 46, 57
 - syntax errors 42, 54
- dump program exit Specifying 80
- dump trailer record (type 3) 170
- dumping an SMF data set 45, 56
- dynamic allocation 171
- dynamic APF 751
- dynamic DD
 - record type 40 338

E

- efficiency billing 7
- enclave resource data, foreign
 - record (type 97) 829

END parameter
 SMF data set dump program 50

ENFREQ macro
 accounting events signalled 72
 listening for accounting events 72

enqueue activity
 RMF - record type 77 636
 RMF - record type 79-7 672

Enterprise Storage Server link statistics
 RMF - record type 74-8 618

EOV (end-of-volume)
 for non-VSAM data set 215, 228
 records written for tape volume 235

ERBSMFR mapping macro 500

error statistics by volume (type 21) 235

evaluating data set activity 12

example
 summary activity report 59

EXCP count
 address space level 132
 DD level 131
 problem program 10

exit routine
 deciding which to use 82
 IEFACTRT 82
 IEFU29 84
 IEFU83 84
 IEFU84 84
 IEFU85 84
 IEFUAV 83
 IEFUJI 83
 IEFUJP 83
 IEFUJV 83
 IEFUSI 83
 IEFUSO 84
 IEFUTL 84
 job initiation exit 83
 job purge exit 83
 job validation exit 83
 SMF characteristics 82
 SMF dump exit 84
 SMF job/job step termination exit 82
 SMF record exit 84
 step initiation exit 83
 SYSOUT limit exit 84
 time limit exit 84
 user account validation exit 83

Extended Channel Path data section 573

external writer record (type 6) 180

F

FICON director statistics
 RMF - record type 74-7 616

file system activity
 record (type 92) 771

FLDSTATS parameter
 SMF data set dump program 50

flood statistics
 report 61

flood statistics report 61

formatting
 binary fields to time of day 102

full SMF data set 50

G

GDPS/Global Mirror 921

GENKEY function 684, 689

GRS Monitoring 735

guidelines SMF (system management facilities) 161

H

HALT command 231

HALT EOD command 751
 switching SMF data set 31

hardware
 statistics 935

header
 standard SMF record 162

hierarchical file system statistics
 RMF - record type 74-6 613

Hiperbatch
 record (type 14) 221
 record (type 64) 490

hot start
 JES2 record written 446

HTTP server
 configuration and performance 886

I

I/O activity 15

I/O configuration
 record type 8 208

I/O queuing activity
 RMF - record type 78-3 651
 RMF - record type 79-14 680

IARVSERV macro
 shared page data 299

ICSF (Integrated Cryptographic Service Facility)
 CSFSMF82 mapping macro 688
 record type 82 688

ICTCRY82 macro
 record type 82 689
 symbolically addressed 689

ICTSMF82 macro
 record type 82 689
 symbolically addressed 689

ICUCRY82 macro
 symbolically addressed record (type 82) 684

ICUSMF82 macro
 symbolically addressed record (type 82) 684

IEBPTPCH utility program 99

IEBUPDTE utility program
 adding SMFPRMxx to
 SYS1.PARMLIB 81
 running SMF data set dump
 program 57

IEEMB846 module
 IBM-supplied 76

IEESMCA mapping macro 95
 required for SMFCHSUB macro 88
 required for SMFDETAL macro 89
 required for SMFEWTM macro 90
 required for SMFEXIT macro 92
 required for SMFRTEST macro 95

IEESMCA mapping macro (*continued*)
 required for SMFSUBP macro 96

IEFACTRT
 record type 30 276
 SMF job/job step termination
 exit 276

IEFACTRT routine
 SMF job/job step termination exit 82

IEFTB722
 record constructed for step
 termination 171

IEFU29 routine
 SMF dump exit 84

IEFU83 routine
 SMF record exit 84

IEFU84 routine
 SMF record exit 84

IEFU85 routine
 SMF record exit 84

IEFUAV routine
 user account validation exit 83

IEFUJI routine
 job initiation exit 83

IEFUJP routine
 job purge exit 83

IEFUJV routine
 job validation exit 83

IEFUSI routine
 step initiation exit 83

IEFUSO routine
 SYSOUT limit exit 84

IEFUTL routine
 time limit exit 84

IFASMF DL dump program
 termination of processing 35

IFASMFDP
 record validation report 63

IFASMFDP dump program 50
 defining the use 50
 preformatting a data set 28
 termination of processing 50
 usage 28
 using 50

IFASMFMR macro
 addressing SMF record fields 88

IFAUSAGE macro 137
 using 137

IFHSTATR utility program 236

included/excluded TCB times 133

INDD parameter
 SMF data set dump program 50

initialization
 terminal input/output controller
 (TIOC) 313

initiation record
 job (type 20) 234

INOUT data set activity record 228

INPUT data set activity record (type 14) 215

installation exit routine
 addressing mode 82
 IEFACTRT 82
 IEFUAV 83
 IEFUJI 83
 IEFUJP 83
 IEFUJV 83
 IEFUSI 83

installation exit routine (*continued*)
 job initiation exit 83
 job purge exit 83
 job validation exit 83
 SMF job/job step termination exit 82
 step initiation exit 83
 user account validation exit 83

integrated catalog facility record
 alter activity (type 6) 493
 catalog 335
 deleted 491, 493
 exported, record (type 36) 335
 updated 491
 written 493
 written when inserted or deleted 477

integrity
 JES2 record 457
 JES3 record 459

interval
 accounting 71
 recording 71
 SMF global recording 71
 SMF recording 71

interval accounting
 nonsynchronized 73
 synchronized 74
 comparing interval records 73
 type 30 record 73
 type 32 record 73

interval time 93

interval value
 changing nonsynchronized 74
 changing synchronized 74

IPCS subcommand
 SMFDATA macro 33

IPL (initial program load)
 direct access volume record 231
 I/O configuration 208
 record type 0 165
 record type 19 231
 record type 8 208

IRLM long lock detection
 RMF - record type 79-15 683

J

Java
 runtime performance statistics 943

JCL example
 adding SMFPRM01 to
 SYS1.PARMLIB 81
 obtaining list of sample sort exit
 routines 99
 preformatting an SMF data set 28
 running SMFFRMT 102

JES2
 job purge record 263
 output writer 184
 record type 26 263
 record type 43 9
 record type 6 184
 remote user
 record written when signing
 on 460

JES2 command
 \$E LNEn 460, 462
 \$E LNEn (LOGOFF) 462

JES2 command (*continued*)
 \$E LNEn (LOGON) 460
 \$E LNEn (SIGNOFF) 455

JES2 output writer
 record type 6 184

JES2 record
 integrity (type 49) 457
 integrity (type 54) 463
 LOGOFF/stop line record (type
 53) 462
 LOGON/start line 460
 network integrity record (type
 56) 465
 network SIGNOFF record (type
 58) 469
 network SIGNON record (type
 55) 464
 network SYSOUT transmission record
 (type 57) 466
 record type 45 449
 record type 48 455
 record type 52 460
 record written when issued 449, 451
 SIGNOFF/stop line 455
 SIGNON/start line (type 47) 451
 spool offload (type 24) 256
 start 446
 withdrawal 449

JES2 remote user
 record written when signing off 462

JES3
 job purge record 270
 networking transmission record 467
 output writer 189
 output writer record 189
 record type 25 12
 record type 26 270
 record type 43 9
 record type 45 9
 record type 57 467
 record type 6 189

JES3 device 261

JES3 output writer record 189

JES3 record
 device allocation (type 25) 261
 integrity (type 49) 459
 SIGNOFF/stop line/LOGOFF (type
 48) 456
 SIGNON/start line (type 47) 453
 SMF (JES3 Monitoring Facility) type
 84 693
 start (type 43) 448
 stop (type 45) 450

job CPU time 133

job initiation exit 83

job initiation record (type 20) 234

job purge exit 83

job purge record
 JES2 263
 JES3 270
 record type 26 263, 270

job scheduling 10

job termination record
 for background job (type 5) 176
 for foreground job (type 35) 332

job validation exit 83

JOE (job output element)
 record written 184

JZOS batch launcher
 Java runtime performance
 statistics 943

K

key generator utility 684, 689

keyboard
 navigation 953
 PF keys 953
 shortcut keys 953

L

LASTDS parameter 31

link statistics
 RMF - record type 74-8 618

Linux on System x
 subtypes of record type 104 888

Linux on z Systems
 subtypes of record type 104 889

logoff record (type 35) 332

logon
 record 234

lost data
 minimizing 70

M

macro
 CPUTIMER 133
 TIMEUSED 133

magnetic tape volume
 error statistics record 235

mapping macro
 ERBSMFR (RMF) 500
 IAZSMF84 693
 ICTCRY82 689
 ICTSMF82 689
 ICUCRY82 684
 ICUSMF82 684
 IFASMF16 (ICF/VSAM) 335

MAXDORM parameter 31

message
 from SMF data set dump program
 (IFASMFDP) 50

modify SMF
 SET command 85

MQSeries
 accounting 941
 statistics 941

multi-trans
 shell 111

MVS/BDT file-to-file transmission record
 (type 59) 470

N

navigation
 keyboard 953

NetView
 NLDM 338
 NPM statistics 337

NetView (*continued*)
 record type 39 338
 network
 NPM Statistics 275
 SIGNOFF record 469
 SYSOUT transmission 466, 467
 termination of a session 469
 networking start command
 record written when issued 464
 NJE (network job entry)
 transaction type section (type 59) 470
 NLDM (logical data manager)
 NetView 338
 NOBUFFS
 SMF buffer options 78
 NOBUFFS parameter 32
 non-impact printing subsystem
 activity 194
 non-temporary data set
 REC parameter use in writing SMF
 record (type 17) 228
 scratching 228
 non-VSAM data set
 renaming 230
 non-VSAM data set activity record
 closing 215
 INPUT (type 14) 215
 RDBACK (type 14) 215
 nonsynchronized interval accounting 73
 Notices 957
 NOTYPE
 subtype selectivity option 70
 NPDA (NetView problem determination
 application) (type 37) 337

O

OAM
 record type 85 727
 OMVS kernel activity
 RMF - record type 74-3 591
 open VSAM component or cluster 478
 OpenMVS
 foreign enclave resource data (type
 97) 829
 operator command
 SET command 85, 86
 OUTDD parameter
 SMF data set dump program 50
 OUTIN data set activity record (type
 15) 228
 OUTPUT data set activity record (type
 15) 228
 output writer record
 JES3 189
 record type 6 189

P

page data set activity
 RMF - record type 75 627
 RMF - record type 79-11 675
 paging activity 14
 RMF - record type 71 524
 RMF - record type 79-4 670

parameter
 DETAIL 75
 LASTDS 31
 REC 228
 SUBSYS 70
 SYS 70
 PCF (Programmed Cryptographic
 Facility)
 record type 82 688
 PCI Express Based Function Activity
 RMF - record type 74-9 623
 PCIE Function Data Section
 RMF - record type 74-9 623, 625, 626
 PCIE Function Type data section
 RMF - record type 74-9 625
 PKI (Public Key Infrastructure)
 processing record (type 80) 683
 preformatting a data set 28
 preserving authorization 55
 printing subsystem
 APA activity 194
 non-impact activity 194
 profiling system resource use 14
 program language use 15
 PSF (Print Services Facility) record type
 6 194

R

RACF (Resource Access Control
 Facility) 234
 initialization record (type 81) 683
 processing record (type 80) 683
 processing record for auditing data
 sets 692
 system security maintenance 16
 RDBACK data set activity record (type
 14) 215
 RDW (record descriptor word)
 contents 162
 use 162
 record
 directing to a log stream 70
 segmenting 50
 selecting SMF 70
 record comparison
 interval 73
 SMF and RMF 73
 using interval synchronization 73
 record format
 contents 162
 use 162
 record length
 minimum for using sort 99
 record type 104
 subtypes for AIX on System p 888
 subtypes for Linux on System x 888
 subtypes for Linux on z Systems 889
 record validation report 63
 recording interval 71
 specifying 74
 using SUBSYS INTERVAL parameter
 of SMFPRMxx parmlib member 74
 using SYS INTERVAL parameter of
 SMFPRMxx parmlib member 74
 recording not available record 207
 recording status change 68
 recovery
 allocation record (type 10) 211
 reliability reporting 8
 remote user
 JES2
 record written when signing
 on 457
 JES3
 record written when signing
 on 459
 record written when signing on 460
 rename non-VSAM data set record (type
 18) 230
 replace a parameter
 SETSMF command 86
 report
 flood statistics 61
 records in error 59
 summary activity 59
 report program
 designing 102
 report type examples
 SMF data 4
 reporting reliability
 using SMF data 8
 reporting system resource 14
 reserve data
 RMF - record type 79-6 672
 RESET command 751
 Resource Delay Names section 556
 resource usage information
 record type 41 340
 restart line
 JES2 455, 460, 462
 restart SMF
 SET command 85
 RETKEY function 684, 689
 retrieval of SMF data 31
 return code
 SMFCHSUB macro 89
 SMFDETAL macro 90
 SMFEWMTM macro 91
 SMFEXIT macro 93
 SMFINTVL macro 94
 SMFRTEST macro 96
 SMFSUBP macro 97
 SMFWTM macro 98
 RMF - record type 74-10 626
 RMF - record type 74-9 623
 RMF (Resource Measurement Facility)
 Type 70 - CPU, PR/SM, and
 cryptographic activity 500
 Type 71 - paging activity 524
 Type 72-4 - storage data (goal
 mode) 557
 type 72-5 - serialization delay 559
 Type 723 - workload activity (goal
 mode) 545
 Type 73 - channel path activity 565
 Type 74-1 - device activity 583
 Type 74-10 - storage class memory
 (SCM) configuration measurement
 section 626
 Type 74-10 - Storage class memory
 (SCM) statistics 626
 Type 74-2 - XCF activity 587

RMF (Resource Measurement Facility)
(continued)

- Type 74-3 - OMVS kernel activity 591
- Type 74-4 - coupling facility activity 595
- Type 74-5 - cache subsystem device activity 604
- Type 74-6 - hierarchical file system statistics 613
- Type 74-7 - FICON director statistics 616
- Type 74-8 - Enterprise Storage Server link statistics 618
- Type 74-9 - PCI Express Based Function Activity 623
- Type 74-9 - PCIe Function Data Section 623, 625, 626
- Type 74-9 - PCIe Function Type data section 625
- Type 75 - page data set activity 627
- Type 76 - trace activity 631
- Type 77 - enqueue activity 636
- Type 78-2 - Virtual storage activity 646
- Type 78-3 - I/O queuing activity 651
- Type 79 - Monitor II snapshot data
 - Type 79-1 - address space state data 661
 - Type 79-11 - page data set activity 675
 - Type 79-12 - channel path activity 676
 - Type 79-14 - I/O queuing activity 680
 - Type 79-15 - IRLM long lock detection 683
 - Type 79-2 - address space resource data 665
 - Type 79-3 - storage/processor data 668
 - Type 79-4 - paging activity 670
 - Type 79-5 - address space SRM data 670
 - Type 79-6 - reserve data 672
 - Type 79-7 - enqueue activity 672
 - Type 79-9 - device activity 673
- RMF distributed platform performance data 886
- routine
 - user-written exit report 102

S

- scheduling jobs
 - in SMF 10
- scratch
 - non-temporary data set 228
 - temporary data set 228
- sending comments to IBM xvii
- serialization
 - logstream dump program 49
- serialization delay
 - RMF - record type 72-5 559
- service activity 15
- SET command
 - modify SMF 85

- SET command *(continued)*
 - restart SMF 85
- SET DAE command 751
- SET DATE command 751
- SET GRSRNL command 751
- SET MPF command 751
- SET OPT command 751
- SET PFK command 751
- SET SMF command 751
- SET TIME command 751
- set up 17
- SETSMF command 751
 - add a SUBPARM parameter 86
 - replace a parameter 86
- shortcut keys 953
- SID parameter
 - SMF data set dump program 50
- signature records 155, 157
 - validating 158
- signatures, digital
 - See digital signatures
- SIGNOFF
 - JES2 network record 469
- SIGNOFF/stop line record (type 48) 455
- SIGNON/start line record/LOGON, JES3 (type 47) 453
- SMF
 - data
 - collecting 137
- SMF (system management facilities)
 - billing users 4
 - blocking factors 13
 - buffers 31
 - CPU time use 14
 - creating data sets 99
 - customizing 67
 - data preservation 31
 - data report type examples 4
 - data set modification 13
 - data set names 69
 - data usage 10
 - degradation billing 6
 - design 164
 - direct access volume activity 11
 - DSNAME parameter 26, 27
 - dummy record 64
 - dump program 28, 42, 50, 54
 - dumping data 31
 - evaluating data set activity 12
 - general information 161
 - I/O activity 15
 - IFASMF DL 35
 - IFASMF DP 28, 42, 50, 54
 - installation exits 3
 - introduction 1
 - job scheduling 10
 - job throughput time 11
 - log stream dump program 35
 - LSNAME parameter 22
 - macro 87
 - multi-system data set name 26
 - multiple events 12
 - open/close activity 13
 - optional services 13
 - paging activity 14
 - process overview 1
 - profiling system resource use 14

- SMF (system management facilities)
(continued)
 - program language use 15
 - RACF 16
 - RDW 162
 - record description 1
 - record type 25 12
 - recording interval 71
 - service activity 15
 - setting up 17
 - sharing SMF data sets 27
 - logging environment 22
 - SID parameter 27
 - SMF data usage 12
 - SMF parameters 3
 - standard record header 162
 - standard SMF record
 - with subtypes 162, 163
 - without subtypes 162
 - storage use 14
 - symbols in data set name 26
 - system maintenance 16
 - system requirements 17
 - system resource reporting 14
 - system security 16
 - tailoring 67
 - termination of processing 35, 50
 - transaction billing 5
 - TSO/E billing 6
 - turnaround time 11
 - using data 4
 - using SMF macros 87
 - workload characteristics 11
 - writer routine 35
- SMF buffer
 - storage requirements 31
 - usage 31
- SMF data set
 - allocation 26
 - billing users 4
 - CI selection 29
 - creating 26
 - creation 27
 - DEFINE access method services utility 27
 - DEFINE command 26
 - full 50
 - limit 26
 - multi-system 26
 - preformatted with dummy record 28
 - preserving 31
 - primary 26
 - procedure when full 50
 - sample JCL statement
 - allocation 28
 - preformatting 28
 - switching 31
 - unique 26
 - usage 30
 - using symbols in names 26
 - using the SMFEXIT macro 92
 - writing and using 93
 - writing the SMFEXIT macro 92
- SMF data set allocation
 - space requirements 28
- SMF data set dump program
 - DATE parameter 50

SMF data set dump program (*continued*)

- END parameter 50
- INDD parameter 50
- OUTDD parameter 50
- SID parameter 50
- START parameter 50
- USER1 parameter 50
- USER2 parameter 50
- USER3 parameter 50

SMF dump exit 84

- IEFU29 45, 55

SMF dump exit routine

- IEFU29 84
- SMF dump exit 84

SMF global

- recording interval 71

SMF initialization

- configuration record type 22 238

SMF job/job step termination exit 82

SMF log stream

- obtaining record 23

SMF macros

- using 87

SMF parameter

- SMFPRMxx 67

SMF record

- sorting 99
- standard header 162
- summary 161

SMF record exit routine

- IEFU83 84
- IEFU84 84
- IEFU85 84
- SMF record exit 84

SMF record field address 88

SMF record flood

- Specifying 80

SMF record header

- with subtypes 162
- without subtypes 162

SMF recording options

- modifying 82

SMF records

- V2R1 xxiii, xxiv
- V2R2 xx

SMF START command 46, 57

SMF status

- displaying 86

SMF status change

- recording 68

SMF status record (type 23) 249

SMFCHSUB macro

- changing subsystem parameters 88
- return codes 89
- syntax 88

SMFDATA macro

- IPCS subcommand 33

SMFDETAL macro

- return codes 90
- syntax 89
- testing detail recording 89

SMFDLEXIT

- enabling exits 80
- Specifying 80

SMFDPEXIT

- Specifying 80

SMFE15 sample sort routine 99

SMFEWTM macro

- return codes 91
- syntax 90
- writing SMF data sets 90

SMFEXIT macro

- branching to SMF exits 92
- register use 93
- return codes 93
- syntax 92

SMFFRMT procedure 102

SMFINTVL macro

- determining interval time 93
- determining synchronization value 93
- return codes 94
- syntax 93

SMFPRMxx parameter

- data preservation 31
- directing SMF records to a log stream 70
- entering in SYS1.PARMLIB 81
- functions controlled 67
- LASTDS 31
- MAXDORM 31
- NOBUFFS 32
- selecting SMF records 70
- subtype selectivity 70
- using DISPLAY command 86

SMFPRMxx parmlib member

- using STATUS to collect SMF statistics 75
- using SUBSYS INTERVAL to request recording interval 74
- using SYS INTERVAL to request recording interval 74

SMFPRMxx PARMLIB member

- default parameter 81

SMFRTEST macro

- return codes 96
- syntax 95
- testing record recording 95

SMFSORT procedure 99

SMFSUBP macro

- determining subsystem parameters 96
- return codes 97
- syntax 96

SMFWTM macro

- header information 98
- return codes 98
- syntax 97
- writing SMF records 97

sort of SMF record

- sort procedure example 100
- sort/merge exit routine sample 99

specification of SMFPRMxx 67

Specifying

- SMF record flood 80
- SMFDLEXIT 80
- SMFDPEXIT 80

spin data set

- JES2 record written 184
- JES3 record written 189

spool offload data set

- JES2 record (type 24) 256

standard SMF header 162

start JES2

- record written 446

start JES3 448

start line

- JES2 446, 460
- JES3 453

start networking command

- record written when issued 464

START operator command

- SMF data set dump program (IFASMFDP) 57
- SMF log stream dump program (IFASMFDP) 46

START parameter

- SMF data set dump program 50

started task accounting 77

status change

- recording 68

STATUS parameter of SMFPRMxx parmlib member

- collecting SMF statistics 75

step initiation exit 83

step termination

- background job 171
- record type 4 171

step termination record (type 34)

- foreground job 326

stop line

- JES2 455, 462
- JES3 456
- record written when issued 455

storage class memory (SCM)

- configuration measurement section RMF - record type 74-10 626

Storage class memory (SCM) statistics

- RMF - record type 74-10 626

storage data

- RMF - record type 72-4 557

storage use 14

storage/processor data

- RMF - record type 79-3 668

SUBSYS INTERVAL parameter of SMFPRMxx parmlib member

- specifying subsystem-level recording interval 74

SUBSYS parameter

- to control started task accounting 77

subsystem

- passing data 69

subsystem parameter

- determining 96

subtype selectivity option 70

summarizing DASD volume activity 11

summary activity report 59

summary of changes xix, xx, xxi

- as updated December 2013 xxiv
- as updated March 2014 xxiii

Summary of changes xxv

SWITCH command 231

- switching SMF data set 31

SWITCH SMF command 31, 751

synchronization time 93

synchronized interval accounting 74

- comparing interval records 73

SYS INTERVAL parameter of SMFPRMxx
 parmlib member
 specifying system-level recording
 interval 74

SYS1.PARMLIB
 adding SMFPRMxx member 81

SYS1.SAMPLIB
 SMFE15 procedure 99
 SMFE35 procedure 99
 SMFFRMT 102
 SMFSORT procedure 99

SYSOUT limit exit 84

SYSOUT limit exit routine
 IEFUSO 84
 SYSOUT limit exit 84

SYSOUT transmission
 network 466, 467

system affinity 259

system logger
 accounting 125
 capacity planning 125
 IXGRPT1 program 127
 record type 88 125, 735

system logger data record (type 88) 125,
 735

system output message
 from SMF data set dump program
 (IFASMFDP) 50

system requirements 17

system resource manager (SRM)
 detail records 832
 record 99 832

system security
 RACF 16
 system maintenance 16

system status record (type 90) 751

T

task accounting
 started 77

TCP/IP
 statistics 935, 943

telecommunications access method
 (TCAM)
 withdrawn from service 313

temporary data set
 REC parameter use in writing record
 (type 17) 228
 scratching 228

terminal input/output controller (TIOC)
 initialization record (type 31) 313

testing detail recording
 SMFDETAL macro 89

testing SMF record recording
 SMFRTEST macro 95

time conversion 102

time limit exit 84

time limit exit routine
 IEFUTL 84
 time limit exit 84

time of day
 converting binary fields to 102

TIMEUSED macro 133

trace activity
 RMF - record type 76 631

trademarks 961

transaction billing 7
 developing a method for TSO/E
 commands 8
 for heavy TSO/E users 5

transactional data written by CICS TS for
 z/OS 935

TSO (time sharing option)
 logoff record (type 35) 332

TSO/E (Time Sharing Options
 Extensions)
 billing objectives 5
 command accounting 75
 record
 step termination (type 34) 325
 user work accounting record (type
 32) 314

TYPE
 subtype selectivity option 70

U

unallocation request
 record type 40 338
 record written when issued 338

UPDAT data set activity record (type
 15) 228

usage
 data
 collecting 137
 data set
 DD DATA 741
 DD* 741
 measurement 137
 collection intervals 139
 record type 89 741

usage measurement
 services
 exploiting 154
 status
 requesting 137

user account validation exit 83

user interface
 ISPF 953
 TSO/E 953

USER1 parameter
 SMF data set dump program 50

USER2 parameter
 SMF data set dump program 50

USER3 parameter
 SMF data set dump program 50

V

validation report, record 63

VARY device
 ONLINE record (type 9) 210

VARY device OFFLINE
 record type 11 213

VARY WLM command 751

vector facility time 133

Virtual storage activity
 RMF - record type 78-2 646

volume
 error statistics record (type 21) 235
 tape 235

volume (*continued*)
 VSAM (virtual storage access
 method) 483

VSAM (virtual storage access method)
 catalog entry
 defining 481
 deleting 495
 extending 481
 renaming 497

cluster
 defined, closed or deleted 474
 opening 478

cluster closing 483

component
 opening 478

component closing 483

record
 component or cluster opened
 record (type 62) 478
 component or cluster status record
 (type 64) 483
 entry defined record (type
 63) 481
 entry deleted (type 67) 495
 entry renamed record (type
 68) 497
 volume data set updated record
 (type 60) 474

volume
 space unavailable 483
 switching 483

VSAM data space defined
 deleted 499
 extended 499
 record type 69 499

VTAM tuning statistics
 record type 50 460

VTOC audit log (record type 42-27) 445

W

workload activity (goal mode)
 RMF - record type 72-3 545

workload characteristics 11

writer routine
 SMF 35

writing SMF data sets
 SMFEWTM macro 90

writing SMF records
 SMFWTM macro 97

X

XCF activity
 RMF - record type 74-2 587

Z

z/OS UNIX
 file system activity record (type
 92) 771

zEDC usage statistics 313



Product Number: 5650-ZOS

Printed in USA

SA38-0667-06

