



OS/390



Parallel Sysplex Overview: Introducing Data Sharing and Parallelism in a Sysplex

OS/390



Parallel Sysplex Overview: Introducing Data Sharing and Parallelism in a Sysplex

Note

Before using this information and the products it supports, be sure to read the general information under Appendix A, "Notices" on page 43.

Seventh Edition, September 2000

This is a major revision of GC28-1860-05.

This edition applies to Parallel Sysplex environment function that includes System/390 data sharing and parallelism. The Parallel Sysplex uses the MVS/ESA SP Version 5 or the OS/390 operating system.

Order publications through your IBM representative or the IBM branch office serving your locality. Publications are not stocked at the address below.

IBM welcomes your comments. A form for readers' comments may be provided at the back of this publication, or you may address your comments to the following address:

IBM Corporation
Department 55JA, Mail Station P384
2455 South Road
Poughkeepsie, NY 12601-5400
United States of America

FAX (United States & Canada): 1+845+432-9405

FAX (Other Countries):

Your International Access Code +1+845+432-9405

IBMLink (United States customers only): IBMUSM10(MHVRCFS)

IBM Mail Exchange: USIB6TC9 at IBMMAIL

Internet e-mail: mhvrdfs@us.ibm.com

World Wide Web: <http://www.ibm.com/s390/os390/webqs.html>

If you would like a reply, be sure to include your name, address, telephone number, or FAX number.

Make sure to include the following in your comment or note:

- Title and order number of this book
- Page number or topic related to your comment

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© **Copyright International Business Machines Corporation 1994, 2000. All rights reserved.**

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

About This Book	ix
Who Should Use This Publication	ix
Notes on Terminology	x
Notes on Product Availability	x
Determining If a Publication Is Current	x
Where to Find More Information	xi
Task Roadmap	xi
Getting Started	xii
Parallel Sysplex Tasks	xii
Getting Started Parallel Sysplex Publications	xx
Acknowledgements	xxi
Summary of Changes	xxiii
Introduction to Sysplex	1
What is a Sysplex?	1
Sysplex Hardware	3
Sysplex Software	3
Why Sysplex?	4
An Evolutionary Approach	5
Single System Uniprocessor	5
Tightly Coupled Multiprocessors	5
Loosely Coupled Configuration	6
Base Sysplex	7
Parallel Sysplex	8
Summary	9
Data Sharing in a Sysplex	11
Data Sharing	11
Data Validity	11
Multisystem Data Access	12
Using a Single Data Server	12
Partitioning Data Across Multiple Systems	13
Sharing Data Between Two Systems	14
Sharing Data Using the Coupling Facility Technology	15
The Coupling Facility Technology	16
Exploiters of the Coupling Facility	17
Other Exploiters of the Coupling Facility	18
Parallel Processing in a Sysplex	19
What is Parallel Processing?	19
Problems Solved by Parallel Processing	20
Running Work in Parallel	23
Online Transaction Processing (OLTP)	24
Software that Enables Parallelism for OLTP	24
Transaction Managers	24
Data Management Systems	27
Managing Work in a Sysplex	28
Defining Performance Goals	28
Reporting	28

Hardware that Enables Parallel Processing	29
Products in a Sysplex	31
Hardware	32
Coupling Facility	32
Coupling Facility Channels	32
System/390 Processors	32
Sysplex Timer	32
Enterprise Systems Connection (ESCON)	33
ESCON Control Units and I/O Devices	33
System Software	33
MVS/ESA or OS/390	33
JES2 or JES3	33
DFSMS	33
Networking Software	34
Virtual Telecommunications Access Method (VTAM)	34
Data Management	34
Information Management System Database Manager (IMS DB)	34
DATABASE 2 (DB2)	34
Virtual Storage Access Method (VSAM) - component of DFSMS	34
Transaction Management	34
Customer Information Control System (CICS/ESA and CICS Transaction Server)	34
Information Management System Transaction Manager (IMS TM)	35
Systems Management	35
Accounting	35
System Management Facilities (SMF) - component of MVS	35
Workload	35
CICSplex System Manager/ESA (CICSplex SM)	35
Operations Planning and Control (OPC/ESA)	35
Workload Manager (WLM) - component of MVS	35
Operations	35
System Automation for OS/390	35
Hardware Management Console	36
System Display and Search Facility (SDSF)	36
Performance	36
Resource Measurement Facility (RMF)	36
Enterprise Performance Data Manager/MVS (EPDM)	36
Service Level Reporter (SLR)	36
Security	36
Resource Access Control Facility (RACF) or the Security Server	36
Configuration	37
System Automation for OS/390	37
Hardware Configuration Definition (HCD)	37
Introduction to Sample Sysplex Configurations	39
Large Systems Data Sharing Sysplex	39
S/390 Parallel Sysplex with the 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server	40
Mixed Processor Sysplex	41
Appendix A. Notices	43
Trademarks	44

Glossary	47
Sources of Terms and Definitions	47
Explanation of Cross-References	47
Index	53

Figures

1.	Parallel Sysplex Library Books	xi
2.	Sysplex Structure	2
3.	A Uniprocessor with One MVS Image	5
4.	A Tightly Coupled Multiprocessor	6
5.	A Loosely Coupled Configuration	7
6.	A Base Sysplex	8
7.	A Parallel Sysplex	9
8.	Data Sharing with a Single Data Server	13
9.	Data Sharing with Partitioned Data	14
10.	Data Sharing Between Two Systems	15
11.	Sysplex Data Sharing Using the coupling facility	16
12.	Multiprocessing	20
13.	Workload that Exceeds Processing Capability	21
14.	Increasing Throughput for a Workload	21
15.	Processing a Lengthy Application	22
16.	Decreasing the Processing Time of a Lengthy Application	23
17.	Parallel OLTP Applications in a Single System	25
18.	Parallel OLTP Applications in a Sysplex Parallel Environment	26
19.	Products in a Sysplex	31
20.	Large Systems Sysplex Configuration	40
21.	Sysplex with an S/390 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server	41
22.	Mixed Processor Sysplex Configuration	42

About This Book

This publication is about System/390 data sharing and parallelism in a sysplex and how it can meet the needs of your computing environment.

It introduces high-level concepts and information useful for anyone who will plan for, exploit, implement, or operate a sysplex that shares data and processes work in parallel.

This publication describes:

- What a sysplex is and how it compares to existing non-sysplex computing environments
- New features that enhance sysplex function
- Work that a sysplex supports
- Products that make up a sysplex
- Various sysplex configurations and their benefits

Sysplex and Product Availability (“Roll-Out”) The sysplex is a large system computing environment that is evolving. Since the introduction of the sysplex, the coupling facility technology was developed to enhance sysplex capabilities. With a coupling facility in a sysplex, the participating MVS systems can do high performance data sharing. A sysplex with a coupling facility is called a ***Parallel Sysplex***.

Note that this publication does not differentiate between a sysplex without a coupling facility and a sysplex with a coupling facility. When you see the term *sysplex*, understand it to mean a sysplex with a coupling facility (a *Parallel Sysplex***).**

The roll-out of sysplex support across products is occurring over time, in phases. This publication discusses primarily those functions that are either available or announced. Where possible, however, functions planned for follow-on phases are included to give you an opportunity to do strategic planning. Note that information about follow-on phases represents IBM's ***intent*** and is subject to change or withdrawal.

There might be changes to the implementation or availability of new products or functions. For information about availability of hardware and software sysplex support, consult your IBM representative.

Who Should Use This Publication

This publication is intended for anyone who wants an introduction to data sharing and parallelism in a sysplex. It discusses sysplex evolution, purpose, benefits, products, and services (hardware and software). The reader can be an executive, technical consultant, information systems manager, technical planner, or system programmer.

Notes on Terminology

Please note the following regarding terminology in this publication:

- When you see the term **Parallel Sysplex**, understand it to mean a sysplex with a coupling facility, which is a **Parallel Sysplex**.
- When you see the term **MVS** in this book, understand it to mean either the MVS/ESA product or an element of OS/390.
- The first time a product is referenced in the text, its entire name is spelled out and its acronym specified. From then on, only the acronym is used. For quick reference, the glossary contains product acronyms used in this publication, and what they stand for.
- The term **system** is one that is used heavily in many publications to mean many different things. Often you must attempt to discern its exact meaning from the context in which it is used. This publication uses the term **system** to mean an **MVS system**. Here are some important definitions:

MVS system: An MVS image together with its associated hardware, which collectively are often referred to simply as a system, or MVS system.

MVS image: A single occurrence of the operating system that has the ability to process work.

- In this publication, the licensed program DB2 for MVS/ESA is referred to as **DB2**.
- In this publication, the licensed program CICS Transaction Server for OS/390 is called **CICS Transaction Server** and refers to the product that contains Customer Information Control System (CICS), CICSplex Systems Management (CICSplex SM), and others.
- The licensed program System Automation for OS/390 includes all of the function previously provided by the program products Automated Operations Control/MVS (AOC/MVS), Target System Control Facility (TSCF), and ESCON Manager.
- In the figures, the term S/390 microprocessor complex or microprocessor cluster means the **S/390 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server models**.

Notes on Product Availability

The term “follow-on phase” will be used whenever discussing function planned to be available in future phases of the roll-out of sysplex support across products. If “follow-on phase” is not specified, assume that the function is available or announced. Note that the information about follow-on phases represents IBM's **intent**, and is subject to change or withdrawal.

Determining If a Publication Is Current

As needed, IBM updates its publications with new and changed information. For a given publication, updates to the hardcopy and associated BookManager softcopy are usually available at the same time. Sometimes, however, the updates to hardcopy and softcopy are available at different times. Here's how to determine if you are looking at the most current copy of a publication:

1. At the end of a publication's order number there is a dash followed by two digits, often referred to as the dash level. A publication with a higher dash level

is more current than one with a lower dash level. For example, a dash level -01 means that the publication is more current than the previous level, -00.

2. If a hardcopy publication and a softcopy publication have the same dash level, it is possible that the softcopy publication is more current than the hardcopy publication. Check the dates shown in the Summary of Changes. The softcopy publication might have a more recently dated Summary of Changes than the hardcopy publication.
3. To compare softcopy publications, you can check the last two characters of the publication's filename (also called the book name). The higher the number, the more recent the publication. For example, E0S1P103 is more recent than E0S1P102. Also, next to the publication titles in the CD-ROM booklet and the README files, there is a change code (N, E, S, or T) that indicates whether a publication is new or changed, as follows:

N=new
E=softcopy enhancement
S=service change
T=technical change

Where to Find More Information

This publication is part of a library of Parallel Sysplex planning books. IBM strongly recommends that you read each of the books in this library before you begin planning your Parallel Sysplex. Here is the complete list of publications in the Parallel Sysplex planning library, along with their order numbers:

Figure 1. Parallel Sysplex Library Books

Publication Title	Order Number	Description
<i>OS/390 Parallel Sysplex Overview</i>	GC28-1860	Use this publication as an overview to the sysplex and coupling facility data sharing. It describes highlights and the value of the sysplex to your business.
<i>OS/390 Parallel Sysplex Application Migration</i>	GC28-1863	Use this publication to understand planning considerations for the parallel processing of applications that run on Customer Information Control System (CICS)/ESA and Information Management System (IMS)/ESA software in the Parallel Sysplex.

Task Roadmap

The following list of tasks and books can help you start to understand, plan, and implement a Parallel Sysplex. You can use it as a task roadmap to guide you through information for the Parallel Sysplex, including program product information for CICS Transaction Server (CICS TS), IMS/ESA, and DB2.

You can access the same task roadmap on the Web at the following URL:

<http://www.ibm.com/s390/pso/task.html>

Getting Started

This topic describes planning and implementing tasks for the Parallel Sysplex. Each task refers to books that you can select to obtain task specific information. If you are using the OS/390 CD Collection Kit (SK2T-6700-11 or later), select the book, and BookManager places you in the Table of Contents for that book. Under each book in the task list, you can also find the appropriate topic within the book that helps you locate specific details for the task.

Parallel Sysplex Tasks

The following tasks are included in the task roadmap:

- “Planning the Parallel Sysplex”
- “Migrating to a Parallel Sysplex” on page xiii
- “Planning for Availability” on page xiii
- “Planning Capacity” on page xiii
- “Planning for Connectivity” on page xiv
- “Planning Performance” on page xiv
- “Planning for Workloads” on page xiv
- “Planning for Security” on page xiv
- “Cloning Systems and Images” on page xv
- “Planning for the Coupling Facility” on page xv
- “Developing Naming Conventions for Data Sharing Products” on page xvi
- “Planning and Implementing Parallel Sysplex Policies” on page xvi
- “Installing the Parallel Sysplex” on page xvii
- “Planning the Network Configuration for the Parallel Sysplex” on page xviii
- “Setting up Data Sharing” on page xviii
- “Planning Day-to-Day Operations” on page xix
- “Planning Recovery” on page xx
- “Developing Applications” on page xx

Planning the Parallel Sysplex

Understanding Concepts

- *OS/390 Parallel Sysplex Overview*
 - “Introduction to Sysplex”
- *Getting the Most Out of a Parallel Sysplex*
 - “A Staged Approach to Parallel Sysplex”

Designing the Parallel Sysplex

- *OS/390 MVS Parallel Sysplex Configuration, Volume 1: Overview*
 - “High Level Design Concepts for the Parallel Sysplex”

Selecting Hardware - Overview

- *Parallel Sysplex Configuration, Volume 2: Cookbook*
 - “CPC and CF Configuration in Parallel Sysplex”
- *Parallel Sysplex Configuration, Volume 3: Connectivity*
 - “Enterprise Systems Connection (ESCON)”
 - “Channel Configuration”
 - “Sysplex Timer Considerations”

Selecting Software - Overview

- *DB2 Data Sharing: Planning and Administration*
 - "Software and Hardware Requirements"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "Hardware and Software Requirements"

Migrating to a Parallel Sysplex

Migrating to OS/390 - Overview

- *S/390 Parallel Sysplex Migration Paths*
 - "Understanding Parallel Sysplex Migration Options"
- *OS/390 Parallel Sysplex Test Report*

This document is a quarterly report written by a team of IBM S/390 testers and system programmers. The team runs a Parallel Sysplex that migrates to each release of OS/390, and does IMS, DB2, and VSAM RLS data sharing using both CICS and IMS as transaction managers. The report provides details and examples of the team's setup and migration experiences, along with hints and tips. All editions of the report are available on the team's Web site at

<http://www.s390.ibm.com/os390/support/os390tst/>

Migrating Applications to a Parallel Sysplex

- *OS/390 Parallel Sysplex Application Migration*
 - "Migrating CICS Applications"
 - "Migrating IMS Applications"
- *IMS/ESA Release Planning Guide*
 - "Migrating to an IMS V6: Features and New Enhancements"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "CQS Definition and Tailoring"

Planning for Availability

- *DB2 Data Sharing: Planning and Administration*
 - "Planning for Availability"
 - "Planning for Availability"
- *IMS/ESA Release Planning Guide*
 - "Benefits of Sysplex Data Sharing"
- *IMS/ESA Installation Volume 2: System Definition and Tailoring*
 - "Choosing the Number of Regions"

Planning Capacity

- *OS/390 Parallel Sysplex Capacity Planning*
 - "Capacity Planning in a Parallel Sysplex"

Planning for Connectivity

- *Parallel Sysplex Configuration, Volume 3: Connectivity*
 - "Connectivity in a Parallel Sysplex"

Planning Performance

Analyzing and Improving Performance - Overview

- *S/390 Parallel Sysplex Performance*
 - "Overview of Parallel Sysplex Performance"

Monitoring Performance in a Parallel Sysplex

- *RMF Performance Management Guide*
 - "Analyzing Sysplex Activity"
- *DB2 Data Sharing: Planning and Administration*
 - "Performance Monitoring and Tuning"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "Tuning for Performance"
- *IMS/ESA Release Planning Guide*
 - "Performance Considerations"
- *IMS/ESA Operations Guide*
 - "Planning for Procedure Requirements"

Planning for Workloads

- *OS/390 MVS Parallel Sysplex Configuration, Volume 1: Overview*
 - "Workloads in Parallel Sysplex"
- *OS/390 MVS Planning: Workload Management*
 - "Why Workload Management?"
 - "What Is Workload Management?"
 - "Workload Management Participants"
 - "Migrating to Workload Management"

Planning for Security

- *OS/390 SecureWay Security Server RACF Security Administrator's Guide*
 - "Organizing for RACF Implementation"
 - "Operating Considerations"
 - "Working With the RACF Database"
 - "The RACF Remote Sharing Facility (RRSF)"
- *CICS Transaction Server for OS/390 Installation Guide*
 - "Authorizing CICS regions to access MVS Resources"
- *DB2 Administration Guide*
 - "Security and Auditing"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "Using RACF with CQS"

- *IMS/ESA Release Planning Guide*
 - "Planning for Security"

Cloning Systems and Images

- *OS/390 Parallel Sysplex Application Migration*
 - "Planning the Subsystem Configuration for a Sysplex"
- *IMS/ESA Administration Guide: Transaction Manager*
 - "Part 1. Administering an IMS Transaction Manager Network"
 - "Part 2. Administering the Extended Terminal Option"
 - "Part 3. Administering Multiple Systems Coupling"
 - "Part 5. Administering IMS in a Client/Server Environment"
- *IMS/ESA Operations Guide*
 - "Making Online Changes"

Planning for the Coupling Facility

Understanding Coupling Facility Concepts and Options

- *Parallel Sysplex Configuration, Volume 2: Cookbook*
 - "A Structured View of CF Structures"

Understanding Coupling Facility Levels and Functions for Hardware and Software

- *PR/SM Planning Guide*
 - "Coupling Facility Level (CFLEVEL) Considerations"

Planning the Sizing of Structures

- *Parallel Sysplex Configuration, Volume 2: Cookbook*
 - "CF Storage"
 - "Tuning DB2 Structures"
- *DB2 Data Sharing: Planning and Administration*
 - "Estimating Storage"
- *IMS/ESA Release Planning Guide*
 - "Planning for System Definition"

Shutting down the Coupling Facility and Removing Structures

- *OS/390 MVS Setting Up a Sysplex*
 - "Guidelines for Planned Outages"
 - "Guidelines for Unplanned Outages"

|
|

Developing Naming Conventions for Data Sharing Products

- *OS/390 Parallel Sysplex Application Migration*
 - "Planning Naming Conventions for CICS and Related Subsystems"
- *DB2 Data Sharing: Planning and Administration*
 - "Planning a Naming Convention"
- *IMS/ESA Release Planning Guide*
 - "Ensuring Consistency across IMS Systems"

Planning and Implementing Parallel Sysplex Policies

Creating the SFM policy

- *OS/390 MVS Parallel Sysplex Configuration, Volume 1: Overview*
 - "Sysplex Failure Management (SFM)"
- *OS/390 MVS Setting Up a Sysplex*
 - "Controlling System Availability and Recovery through the SFM Policy"

Creating the ARM policy

- *OS/390 MVS Parallel Sysplex Configuration, Volume 1: Overview*
 - "Automatic Restart Management (ARM)"
- *OS/390 MVS Setting Up a Sysplex*
 - "Controlling Job Availability and Recovery through Automatic Restart Management"
- *CICS Recovery and Restart Guide*
 - "Automatic restart management"
- *DB2 Data Sharing: Planning and Administration*
 - "Planning for Availability"
 - "Creating the Automatic Restart Policy"

Implementing the WLM policy

- *OS/390 MVS Planning: Workload Management*
 - "Setting Up Service Definitions"
 - "Defining Service Policies"
 - "Defining Workloads"
 - "Defining Resource Groups"
 - "Defining Resource Classes"
 - "Defining Service Coefficients and Options"
 - "Defining Service Classes and Performance Goals"
 - "Defining Classification Rules"
 - "Defining Application Environments"
 - "Defining Scheduling Environments"
- *CICS Transaction Server for OS/390 Installation Guide*
 - "Implementing MVS workload management"
- *CICSplex SM Managing Workloads*
 - "Workload management views"

- "Example tasks: workload management"
- *DB2 Administration Guide*
 - "Using MVS Workload Management Velocity Goals"
 - "Using Workload Manager to Set Performance Objectives"

Creating the CFRM policy

- *OS/390 MVS Setting Up a Sysplex*
 - "Planning a Coupling Facility Policy"
- *DB2 Data Sharing: Planning and Administration*
 - "Defining Coupling Facility Structures"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "Defining MVS Policies"
- *IMS/ESA Administration Guide: System*
 - "Defining a CFRM Policy for Shared Queues"

Installing the Parallel Sysplex

Defining Data Sets

- *IMS/ESA Release Planning Guide*
 - "Ensuring Consistency across IMS Systems"
- *IMS/ESA Administration Guide: System*
 - "Administering Sysplex Data Sharing"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "Before Starting CQS"

Defining SYS1.PARMLIB

- *OS/390 MVS Setting Up a Sysplex*
 - "Planning Parmlib Members for a Sysplex"
- *DB2 Installation Guide*
 - "Installation Step 1: Define DB2 to MVS: DSNTIJMV"

Defining Signalling

- *OS/390 MVS Setting Up a Sysplex*
 - "Planning Signalling Services in a Sysplex"

Defining JES2

- *OS/390 JES2 Initialization and Tuning Guide*
 - "JES2 Initialization"

Defining JES3

- *OS/390 JES3 Initialization and Tuning Guide*
 - "Initializing JES3"

Defining Global Resource Serialization

- *OS/390 MVS Planning: Global Resource Serialization*
 - "Part 1 - Global Resource Serialization"
 - "Part 2 - Global Resource Serialization Star"
- *Parallel Sysplex Configuration, Volume 2: Cookbook*
 - "GRS Star Structures"

Defining DFSMS and the SMS Configuration

- *OS/390 DFSMSdfp Storage Administration Reference*
 - "Introducing the Storage Management Subsystem"
 - "Calculating the Size of Storage and Active Control Data Sets"
 - "Defining Storage Groups"

Planning the Network Configuration for the Parallel Sysplex

- *Parallel Sysplex Configuration, Volume 3: Connectivity*
 - "Network Connectivity for Parallel Sysplex"
- *VTAM in a Parallel Sysplex Environment*
 - "The Sysplex Networking Environment"

Setting up Data Sharing

Planning and Implementing System Logger

- *OS/390 MVS Setting Up a Sysplex*
 - "Planning for System Logger Applications"
- *Parallel Sysplex Configuration, Volume 2: Cookbook*
 - "System Logger Structures"

Planning and Implementing CICS Data Sharing

- *OS/390 Parallel Sysplex Application Migration*
 - "Migrating CICS Applications"
- *CICS Transaction Server for OS/390 Installation Guide*
 - "Defining CICS as an MVS subsystem"
 - "MVS cross-system MRO definitions"

Planning and Implementing IMS Data Sharing

- *OS/390 Parallel Sysplex Application Migration*
 - "Migrating IMS Applications"
- *IMS/ESA Installation Volume 2: System Definition and Tailoring*
 - "Defining Coupling Facility Structure Names for Sysplex Data Sharing"
- *IMS/ESA Administration Guide: System*
 - "Administering Sysplex Data Sharing"

Planning and Implementing DB2 Data Sharing

- *DB2 Data Sharing: Planning and Administration*
 - "Installing and Enabling DB2 Data Sharing"

Planning and Implementing VSAM RLS Data Sharing

- *OS/390 DFSMSdfp Storage Administration Reference*
 - "Administering VSAM Record-Level Sharing"

Planning Day-to-Day Operations

Starting and Stopping Systems

- *OS/390 MVS Setting Up a Sysplex*
 - "Adding MVS Systems to a Sysplex"
- *Removing an MVS System from a Sysplex*

This document provides overview and procedural information on both the planned and unplanned removal of an MVS system from a Parallel Sysplex.

Starting and Stopping Subsystems

- *CICS Operations and Utilities Guide*
 - "Overview of CICS Operations"
 - "Operating CICS in a Multiregion Environment"
- *DB2 Data Sharing: Planning and Administration*
 - "Starting and stopping DB2"
 - "Restarting DB2 after Termination"
- *OS/390 DFSMSdfp Storage Administration Reference*
 - "Activating Storage Management Subsystem Configurations"
- *IMS/ESA Operations Guide*
 - "Operating an IMS Subsystem"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "Starting CQS"

Managing Consoles

- *Parallel Sysplex Configuration, Volume 2: Cookbook*
 - "Consoles and Parallel Sysplex"
- *OS/390 MVS Planning: Operations*
 - "Defining Your Console Configuration"

Monitoring the Parallel Sysplex

- *RMF Report Analysis*
 - "Introducing RMF Data Gathering and Reporting"
 - "Using Monitor III Reports"

Planning Recovery

- *OS/390 Parallel Sysplex Recovery*
 - "Parallel Sysplex Recovery -- Introduction"
 - "Recovering from Subsystem Failures"
 - "Recovering from System Failures"
 - "Coupling Facility Recovery"
 - "Recovery from a Sysplex Timer Connectivity Failure"
- *DB2 Data Sharing: Planning and Administration*
 - "Backing up and Recovering Databases"
- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
 - "CQS Diagnosis"
 - "Messages and Codes"
- *IMS/ESA Diagnosis Guide and Reference*
 - "Diagnosing a CQS Related Problem"

Developing Applications

- *OS/390 Parallel Sysplex Application Considerations Presentation Guide*
 - "Why Replicate Applications?"
- *CICS Operations and Utilities Guide*
 - "CICS Migration"
- *DB2 Data Sharing: Planning and Administration*
 - "Improving the Performance of Data Sharing Applications"
 - "Improving the Performance of Read-only Queries"
- *IMS/ESA Sysplex Data Sharing: An Implementation Case Study*
 - "Introduction"

Getting Started Parallel Sysplex Publications

The following publications contain important information for planning and implementing the Parallel Sysplex. They are listed in alphabetical order.

ITSO Publications

- *Getting the Most Out of a Parallel Sysplex*
- *IMS/ESA Sysplex Data Sharing: An Implementation Case Study*
- *OS/390 Parallel Sysplex Capacity Planning*
- *OS/390 MVS Parallel Sysplex Configuration, Volume 1: Overview*
- *Parallel Sysplex Configuration, Volume 2: Cookbook*
- *Parallel Sysplex Configuration, Volume 3: Connectivity*
- *OS/390 Parallel Sysplex Application Considerations Presentation Guide*
- *S/390 Parallel Sysplex Migration Paths*
- *S/390 Parallel Sysplex Performance*
- *VTAM in a Parallel Sysplex Environment*

Hardware Publications

- *PR/SM Planning Guide*

CICS Transaction Server Publications

- *CICS Transaction Server for OS/390 Installation Guide*
- *CICS Operations and Utilities Guide*
- *CICS Recovery and Restart Guide*

CICSplex Systems Management Publications

- *CICSplex SM Managing Workloads*

DB2 Publications

- *DB2 Administration Guide*
- *DB2 Data Sharing: Planning and Administration*
- *DB2 Installation Guide*

DFSMS/MVS Publications

- *OS/390 DFSMSdfp Storage Administration Reference*

IMS/ESA Publications

- *IMS/ESA Common Queue Server (CQS) Guide and Reference*
- *IMS/ESA Installation Volume 2: System Definition and Tailoring*
- *IMS/ESA Operations Guide*
- *IMS/ESA Release Planning Guide*

OS/390 Publications

- *OS/390 JES2 Initialization and Tuning Guide*
- *OS/390 JES3 Initialization and Tuning Guide*
- *OS/390 MVS Planning: Global Resource Serialization*
- *OS/390 MVS Planning: Operations*
- *OS/390 MVS Planning: Workload Management*
- *OS/390 MVS Setting Up a Sysplex*
- *OS/390 SecureWay Security Server RACF Security Administrator's Guide*
- *RMF Performance Management Guide*
- *RMF Report Analysis*

Parallel Sysplex Planning Publications

- *OS/390 Parallel Sysplex Application Migration*
- *OS/390 Parallel Sysplex Overview*
- *OS/390 Parallel Sysplex Recovery*
- *OS/390 Parallel Sysplex Test Report*

Acknowledgements

The IBM Sysplex Information Development team would like to express its appreciation to all the people who helped make this publication possible.

Because a sysplex is made up of many types of products, presenting a high-level, cross-product view required a great deal of cooperation. Scores of people — including writers, editors, product designers, developers and testers — from many IBM sites worked together to develop and review this information. Additionally, we

worked with customers to validate the relevance of topics presented and to maintain an appropriate level of detail for the intended audience.

To everyone who contributed, our sincere thanks.

Summary of Changes

| **Summary of Changes**
| **for GC28-1860-06**
| **for OS/390 Version 2 Release 10**

| This edition contains updates for OS/390 Release 10.

| **Changed Information:** Changes have been made to the task roadmap. See “Task
| Roadmap” on page xi.

| **Deleted Information:** The following Parallel Sysplex books are no longer
| supported. Information in these books has been moved to *OS/390 MVS Setting Up*
| *a Sysplex*

- | • *OS/390 Parallel Sysplex Systems Management, GC28-1861*
- | • *OS/390 Parallel Sysplex Hardware and Software Migration, GC28-1862*

| This book includes terminology, maintenance, and editorial changes. Technical
| changes or additions to the text and illustrations are indicated by a vertical line to
| the left of the change.

| **Summary of Changes**
| **for GC28-1860-05**
| **for OS/390 Version 2 Release 8**

| This edition contains updates for OS/390 Release 8.

| **Summary of Changes**
| **for GC28-1860-04**
| **for OS/390 Version 2 Release 7**

| This edition contains updates for OS/390 Release 7 as well as maintenance and
| editorial changes.

| **New Information:** The book includes a task roadmap for Parallel Sysplex
| information. The task roadmap can guide you through information for the Parallel
| Sysplex, including program product information for CICS Transaction Server (CICS
| TS), IMS/ESA, and DB2. See “Task Roadmap” on page xi.

| **Summary of Changes**
| **for GC28-1860-03**
| **as Updated December, 1998**
| **online only for SK2T-6700-11**

| The following changes appear only in the online version of this publication. A
| vertical line (|) in the left margin indicates changes to the text and illustrations.

| This revision includes a task roadmap for Parallel Sysplex information. The task
| roadmap can guide you through information for the Parallel Sysplex, including
| program product information for CICS Transaction Server (CICS TS), IMS/ESA, and
| DB2. See “Task Roadmap” on page xi.

This revision reflects the deletion, addition, or modification of information to support miscellaneous maintenance items.

**Summary of Changes
for GC28-1860-02
OS/390 Version 2 Release 4**

This publication contains information previously presented in:

OS/390 Parallel Sysplex Overview: Introducing Data Sharing and Parallelism in a Sysplex, GC28-1860-01

This edition contains updates for OS/390 Release 4 and MVS/ESA SP Version 5 as well as maintenance and editorial changes. In addition, it contains new information for the following:

- System Automation for OS/390

Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

**Summary of Changes
for GC28-1860-01
OS/390 Release 2**

This publication contains information previously presented in:

OS/390 Parallel Sysplex Overview: Introducing Data Sharing and Parallelism in a Sysplex GC28-1860-00

This edition contains updates for OS/390 Release 2 and MVS/ESA SP Version 5 as well as maintenance and editorial changes.

Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

**Summary of Changes
for GC28-1860-00
as Updated June, 1996
online only for SK2T-6700-01**

The following changes appear only in the online version of this publication. A pair of vertical dots (:) in the left margin indicates changes to the text and illustrations.

This revision reflects the deletion, addition, or modification of information to support miscellaneous maintenance items.

**Summary of Changes
for GC28-1860-00
OS/390 Release 1**

This publication contains information previously presented in:

System/390 Sysplex Overview: Introducing Data Sharing and Parallelism in a Sysplex GC28-1208

This edition contains updates for OS/390 and MVS/ESA SP Version 5 as well as maintenance and editorial changes.

Technical changes or additions to the text and illustrations are indicated by a vertical line to the left of the change.

Introduction to Sysplex

The word **sysplex** might not be new to you. The MVS/ESA sysplex has been available since 1990 when it was announced as a platform for an evolving large system computing environment.

What's new is what a sysplex can now do for you. It's more than a platform. It has become the large system computing environment that offers you improved price/performance through cost effective processor technology and enhanced software. This technology builds on existing data processing skills and will run existing applications—an additional cost saver. A sysplex can also increase system availability, and at the same time, it increases your potential for doing more work.

In case you're not sure what a sysplex is, this chapter starts with a definition of a sysplex, and then describes the new capabilities of a sysplex and why you might be interested in it.

What is a Sysplex?

A sysplex is a collection of MVS systems that cooperate, using certain hardware and software products, to process work. A conventional large computer system also uses hardware and software products that cooperate to process work. A major difference between a sysplex and a conventional large computer system is the improved growth potential and level of availability in a sysplex. The sysplex increases the number of processing units and MVS operating systems that can cooperate, which in turn increases the amount of work that can be processed. To facilitate this cooperation, new products were created and old products were enhanced.

The following diagram shows the visible parts of a sysplex, namely the hardware. The software, which helps to enable the interaction and cooperation among the systems, is described later.

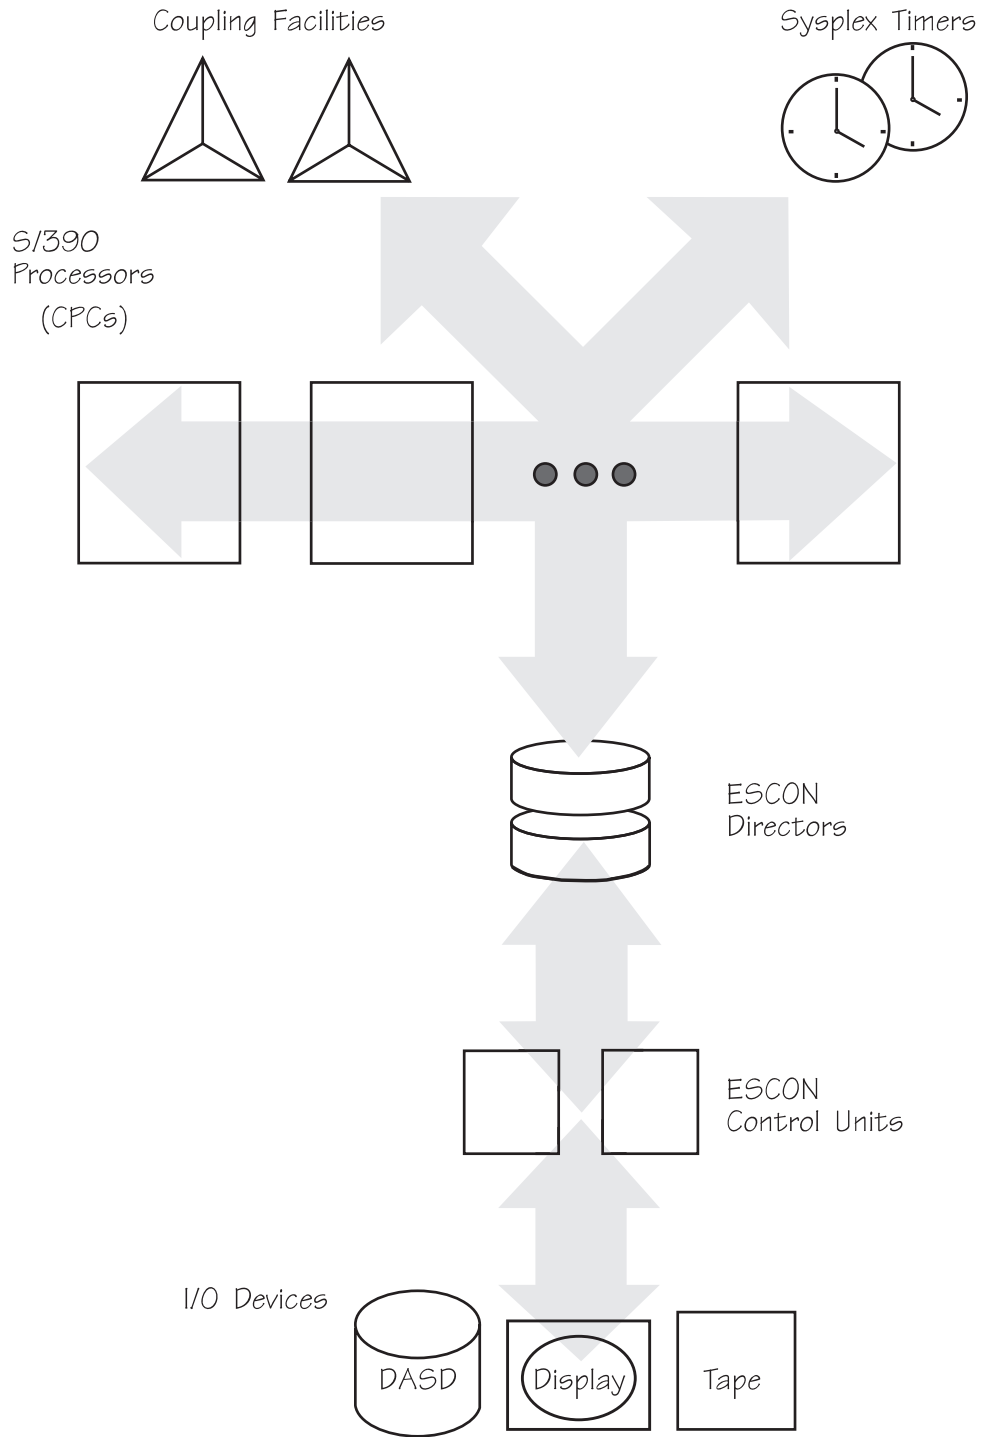


Figure 2. Sysplex Structure

Sysplex Hardware

The following types of hardware participate in a sysplex.

Coupling Facility: The coupling facility enables high performance multisystem data sharing and includes the S/390 9674 Coupling Facility. You can also define logical partitions in the S/390 9672 Parallel Sysplex Transaction Server or 9672 Parallel Sysplex Enterprise Server as coupling facilities.

Coupling Facility Channels: Coupling facility provides high speed connectivity between the coupling facility and the central processor complexes (CPCs) that use it.

Sysplex Timers: A Sysplex Timer synchronizes the time-of-day (TOD) clocks in multiple CPCs in a sysplex.

System/390 Processors: Selected models of S/390 processors can take advantage of a sysplex. These include large water-cooled processors, air-cooled processors, and the processors that take advantage of (CMOS) technology including the 9672 Parallel Transaction Server, 9672 Parallel Enterprise Server R1/R2/R3 Models.

ESCON Channels and Directors: Enterprise Systems Connection (ESCON) channels enhance data access and communication in the sysplex. The ESCON Directors add dynamic switching capability for ESCON channels.

ESCON Control Units and I/O Devices: ESCON control units and I/O devices in a sysplex provide the increased connectivity necessary among a greater number of systems.

Sysplex Software

The following software works with the hardware to enable interaction and cooperation among systems in a sysplex.

System Software: Base system software that is enhanced to support a sysplex includes the MVS operating system, JES2 and JES3, and DFSMS).

Networking Software: Virtual Telecommunications Access Method (VTAM) supports the attachment of a sysplex to a network.

Data Management Software: The data managers that support data sharing in a sysplex are Information Management System Database Manager (IMS DB), DATABASE 2 (DB2), and Virtual Storage Access Method (VSAM).

Transaction Management Software: The transaction managers that support a sysplex are Customer Information Control System (CICS/ESA and CICS Transaction Server) and Information Management System Transaction Manager (IMS TM).

Systems Management Software: A number of software products are enhanced to run in a sysplex and exploit its capabilities. The products manage accounting, workload, operations, performance, security, and configuration, and they make a sysplex easier to manage by providing a single point of control.

More information about the specific hardware and software products is available in “Products in a Sysplex” on page 31.

Why Sysplex?

Now that you've been introduced to the pieces that make up a sysplex, you might be wondering what a sysplex could do for you. If your data center is responsible for even one of the following types of work, you could benefit from a sysplex.

- Large business problems—ones that involve hundreds of end users, or deal with a very large volume of work that can be counted in the millions of transactions per day.
- Work that consists of small work units, such as online transactions, or large work units that can be subdivided into smaller work units, such as queries.
- Concurrent applications on different systems that need to directly access and update a single database without jeopardizing data integrity and security.

A sysplex shares the processing of work across MVS/ESA systems, and as a result offers benefits, such as:

- Reduced cost through:
 - Cost effective processor technology
 - Continued use of large system data processing skills without re-education
 - Protection of MVS/390 application investments
 - The ability to manage a large number of systems more easily than other comparably performing multisystem environments
- Platform for continuous availability so that applications can be available 24 hours a day, 7 days a week, 365 days a year (or close to it)
- Ability to do more work
 - Greater capacity
 - Improved ability to manage response time
 - Platform for further capacity and response time advances
- Greater flexibility
 - Ability to mix levels of hardware and software
 - Ability to dynamically add systems
 - An easy path for incremental growth
 - Varied platforms for applications, including parallel, open, and client/server

Depending on your data center's goals and needs, some of these benefits might be more attractive to you than others. Your IBM marketing representative will be able to discuss, in more detail, how a benefit can specifically apply to your situation.

An Evolutionary Approach

A sysplex is the most recent development in the evolution of IBM large systems. Large system configurations have evolved from a single system uniprocessor through tightly coupled multiprocessors, to a loosely coupled configuration, to the sysplex.

Single System Uniprocessor

A system is made up of hardware products including a central processor (CP), and software products, with the primary one being an operating system such as MVS. Other types of software—system application programs, end-user application programs, tools—run on the system. The CP is the functional hardware unit that interprets and processes program instructions. The CP and other system hardware, such as channels and storage, make up a central processor complex (CPC).

The System/390 architecture defines that a single CP process one and only one instruction from a program at a time. The MVS operating system manages the instructions to be processed and the resources required to process them. When a single copy of the MVS operating system (MVS image) manages the processing of a CPC that has a single CP, the system configuration is called a uniprocessor.

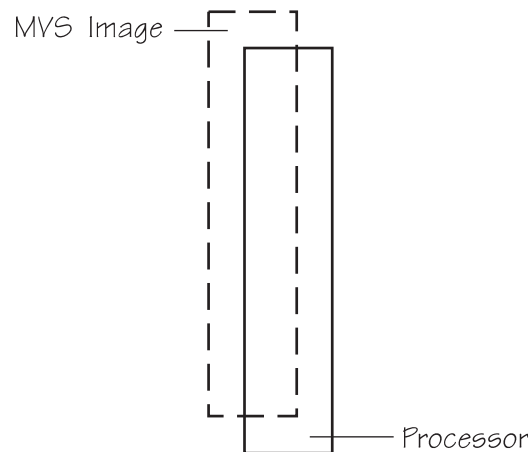


Figure 3. A Uniprocessor with One MVS Image

Summary

Capacity	Equal to the size of the largest single CP
Availability	Contains single points of failure; disruptive change
Systems Management	Easy to manage work

Tightly Coupled Multiprocessors

When you add more CPs to the central processor complex (CPC), you add the capability of processing program instructions simultaneously. When all the CPs share central storage and a single MVS image manages the processing, work is assigned to a CP that is available to do the work. If a CP fails, work can be routed to another CP. This hardware and software organization is called a tightly coupled multiprocessor.

A tightly coupled multiprocessor has more than one CP and a single MVS image sharing central storage. The CPs are managed by the single MVS image, which assigns work to them.

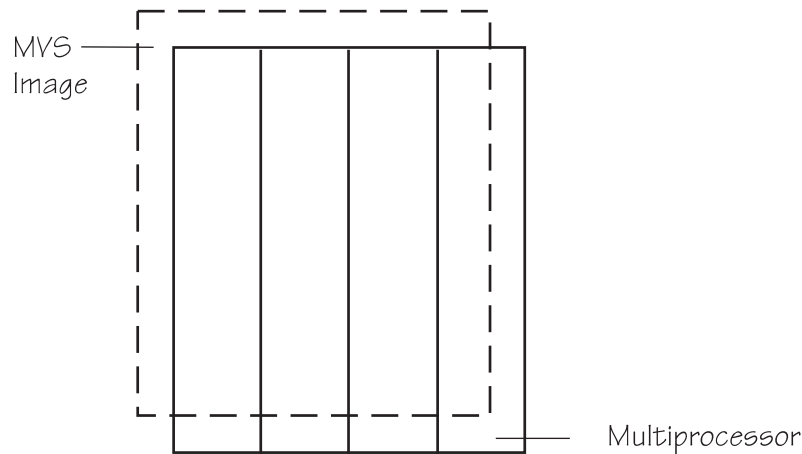


Figure 4. A Tightly Coupled Multiprocessor

Summary

Capacity	Increased over that of a uniprocessor but limited by the maximum number of CPs in the CPC
Availability	Increased over that of a uniprocessor but limited by some characteristics, including one system image, that may represent single points of failure and disruptive change
Systems Management	Easy to manage work

Loosely Coupled Configuration

A tightly coupled multiprocessor provides CP backup in case of failure. But what about software backup? Can you have more than one MVS image in a configuration?

Systems outside a sysplex can coordinate more than one MVS image with the MVS job entry subsystem components (JES2 and JES3) and global resource serialization. These components establish a means of sharing a work input queue across a number of systems to allow shared data sets, printers, and consoles. This type of system configuration is called loosely coupled.

A loosely coupled configuration has more than one CPC, possibly tightly coupled multiprocessors, sharing DASD but not central storage. The CPCs can connect by channel-to-channel communications and are managed by more than one MVS image. Work is distributed from a shared job queue to each MVS.

Although a loosely coupled configuration increases system capacity, it is not as easy to manage as either a uniprocessor or a tightly coupled multiprocessor. Each system must be managed separately, often by a human operator, who monitors product-specific messages on a set of consoles for each system.

Products and applications that need to communicate and are running on separate systems have to create their own communication mechanism. These varied communication mechanisms add to the difficulty of managing a loosely coupled configuration.

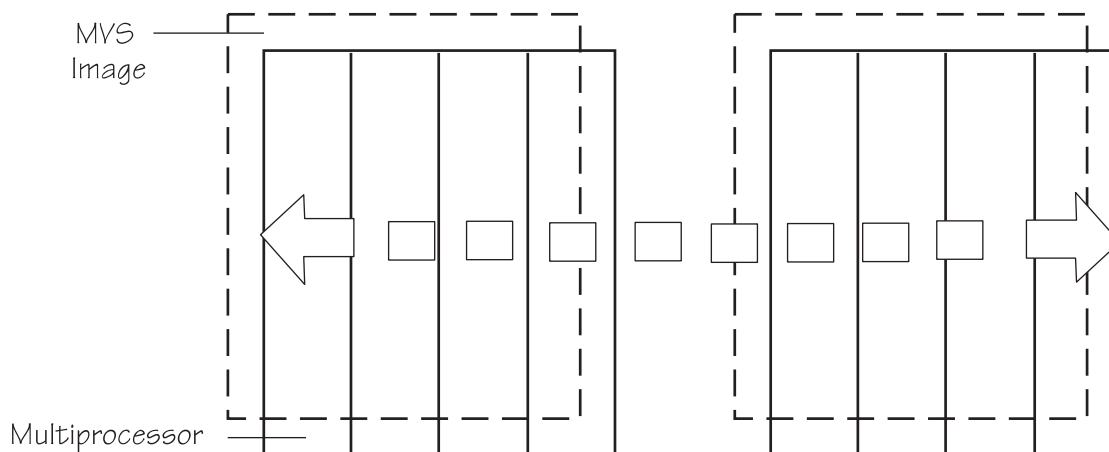


Figure 5. A Loosely Coupled Configuration

Summary

Capacity	Increased system capacity over tightly coupled multiprocessors and a uniprocessor
Availability	Increased system availability over tightly coupled multiprocessors and a uniprocessor
Systems Management	Requires additional systems management—separate MVS images communicate to share data sets, printers, and consoles

Base Sysplex

To help solve the difficulties of managing many MVS systems, IBM introduced the MVS **systems complex** or sysplex in September of 1990. The base sysplex lays the groundwork for simplified multisystem management through the cross-system coupling facility (XCF) component of MVS/ESA. XCF services allow authorized applications on one system to communicate with applications on the same system or on other systems. In a base sysplex, CPCs connect by channel-to-channel communications and a shared dataset to support the communication. When more than one CPC is involved, a Sysplex Timer synchronizes the time on all systems.

The base sysplex is similar to a loosely coupled configuration in that more than one CPC (possibly a tightly coupled multiprocessor) shares DASD and is managed by more than one MVS image. A sysplex is different from a loosely coupled configuration because through XCF, there is a standard communication mechanism for MVS system applications.

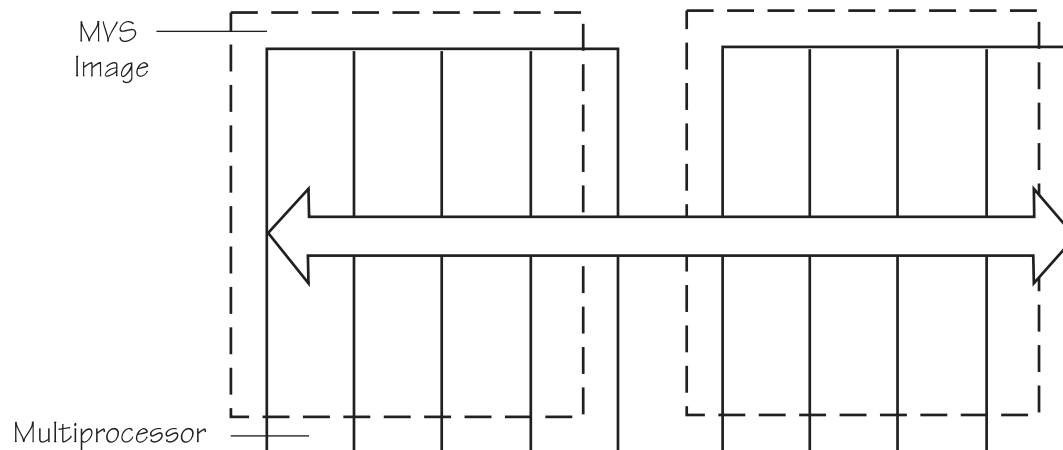


Figure 6. A Base Sysplex

Summary

Capacity

The same system capacity as loosely coupled

Availability

The same system availability as loosely coupled

Systems Management

Better and simpler systems management than loosely coupled

- Greater degree of communication and cooperation among systems
- Introduction of XCF as a common communication mechanism that provides high availability
- A more unified system image—single MVS console to manage all components

Parallel Sysplex

Since the introduction of the sysplex, IBM has developed technologies that enhance sysplex capabilities. The Parallel Sysplex supports a greater number of systems and significantly improves communication and data sharing among those systems.

High performance communication and data sharing among a large number of MVS systems could be technically difficult. But with the Parallel Sysplex, high performance data sharing through a new coupling technology (coupling facility) gives high performance multisystem data sharing capability to authorized applications, such as MVS subsystems. Use of the coupling facility by subsystems, such as Information Management System (IMS), ensures the integrity and consistency of data throughout the entire sysplex.

The capability of linking together many systems and providing multisystem data sharing makes the sysplex platform ideal for parallel processing, particularly for online transaction processing (OLTP) and decision support. More discussion about parallel processing follows in “Parallel Processing in a Sysplex” on page 19.

In short, a Parallel Sysplex builds on the base sysplex capability, and allows you to increase the number of CPCs and MVS images that can directly share work. The coupling facility enables high performance, multisystem data sharing across all the

systems. In addition, workloads can be dynamically balanced across systems with the help of new workload management functions.

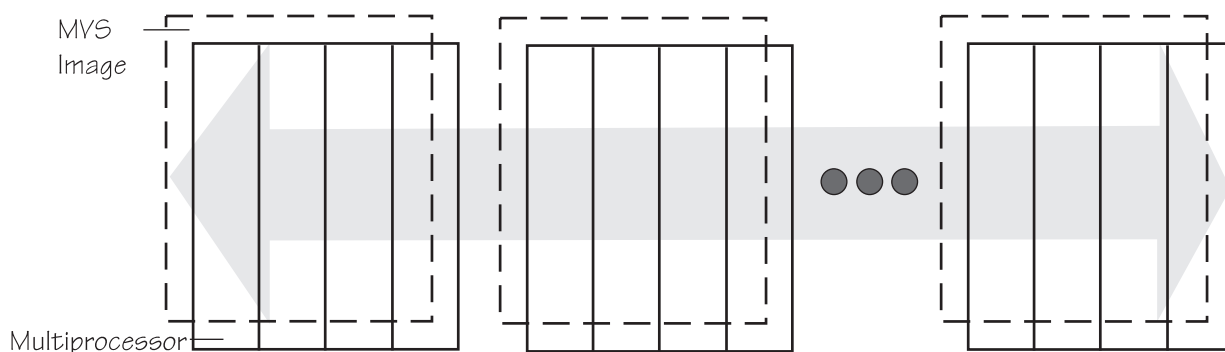


Figure 7. A Parallel Sysplex

Summary

Capacity

Increased system capacity over loosely coupled and base sysplex

Ability to add incremental capacity to match workload growth

Availability

Increased system availability over loosely coupled and base sysplex

Systems Management

Better systems management than with the base sysplex

- Multisystem data sharing capability
- Multisystem workload balancing
- Enhanced single-system image

Summary

The unique characteristics of a Parallel Sysplex can allow you to reduce your total cost of computing over prior offerings of comparable function and performance. Sysplex design characteristics mean that you can run your business continuously, even when it is growing or changing. You can dynamically add and change systems in a sysplex and configure them for no single points of failure. If your revenue depends on continuously available systems, a sysplex can protect your revenue. If you need to grow beyond the limits imposed by today's technology, a sysplex lets you go beyond those limits, and helps you avoid the complex and expensive splitting and rejoining of data centers.

The innate robustness and reliability of the MVS operating system and System/390 processors are the foundation of a sysplex. That robustness and reliability are extended to all systems in a sysplex through cross system workload balancing and data sharing using the coupling technologies. Therefore applications on multiple systems can be continuously available to end users, yet the applications are shielded behind a single-system view.

The applications that run in a sysplex are the same applications you run today. Reuse of applications and data processing skills reduce the costs of application development, re-engineering, and retraining.

Therefore, **the sysplex can reduce your overall cost of computing now and can position your data processing center for continued savings in the future.**

As You Read On...:

In this introductory chapter, you have seen how large systems have evolved into a sysplex. The sysplex itself is evolving, and the roll-out of sysplex support across software products will occur over time. For information about availability of sysplex software support, consult your IBM marketing representative.

The rest of this publication will not differentiate between the base sysplex capability and the Parallel Sysplex capability. When you see the term **sysplex**, understand it to mean the Parallel Sysplex with its enhanced capability.

Data Sharing in a Sysplex

Connecting a large number of systems together brings with it special considerations, such as how the large number of systems communicate and how they cooperate to share resources. These considerations affect the overall operation of MVS systems.

A sysplex significantly changes the way MVS systems can share data. As the number of systems increase, it is essential to have an efficient way to share data across systems. The coupling facility enables centrally accessible, high performance data sharing for authorized applications, such as subsystems and MVS components, that are running in a sysplex. These subsystems and components then transparently extend the benefits of data sharing to their applications.

Use of the coupling facility substantially improves the feasibility of connecting many MVS systems together in a sysplex to process work in parallel.

This chapter describes:

- Multisystem data sharing
- The coupling facility and its exploiters

Data Sharing

Data sharing is not new. Different applications within a system often need to access the same information, sometimes to read it and other times to update it. Sometimes several copies of the data exist and with that comes the requirement of keeping all the copies identical. If the system fails, you need a way to preserve the data with the most recent changes.

Data validity is controlled by a data management system. Within a single MVS system, the data management system keeps track of which piece of data is being accessed or changed by which application in the system. It is the data management system's responsibility to capture and preserve the most recent changes to the data, in case of system failure.

When two or more MVS systems share data, each system has its own copy of a data management system. Communication between the data management systems is essential.

Therefore, multisystem data sharing hinges on high performance communication to ensure data validity among multiple data management systems and it requires high speed data accessing methods.

Data Validity

When many applications share data, within the same MVS system or among several MVS systems, they need mechanisms to guarantee data validity. Two such mechanisms are serialization and data consistency (buffer invalidation).

Serialization is a mechanism that allows control over the access and update of data. Through serialization, only one application can access and change a given

piece of data at a time. As the number of applications increases, contention over a piece of data becomes more likely, and performance slows. One way to allow more applications on multiple systems to access more data at the same time is to allow serialization on smaller pieces of data. Generally, serialization at a lower level of granularity increases overhead, which slows performance. But, by using the coupling facility, data management systems can afford to serialize at a low level with acceptable performance.

Another requirement for maintaining data validity is a mechanism that ensures consistency among local copies of data. One such mechanism is buffer invalidation. This mechanism indicates to each of the data sharing systems whether their local data reflects the most recent changes.

Database managers need high speed serialization and data consistency mechanisms across systems. Not until data sharing based on the coupling facility has it been possible to efficiently share data using these mechanisms across more than two MVS systems.

Multisystem Data Access

Before sysplex, the options for accessing shared data across multiple copies of a data management system were:

- Using a single data server
- Partitioning data across multiple systems
- Sharing data between two systems

These three options are contrasted with accessing shared data using the coupling facility.

Using a Single Data Server

With the single data server option, one system controls data access and update. Other systems must funnel requests through the data server, and the cross system messaging that results can adversely affect performance. If the single data server fails, other systems can no longer access data.

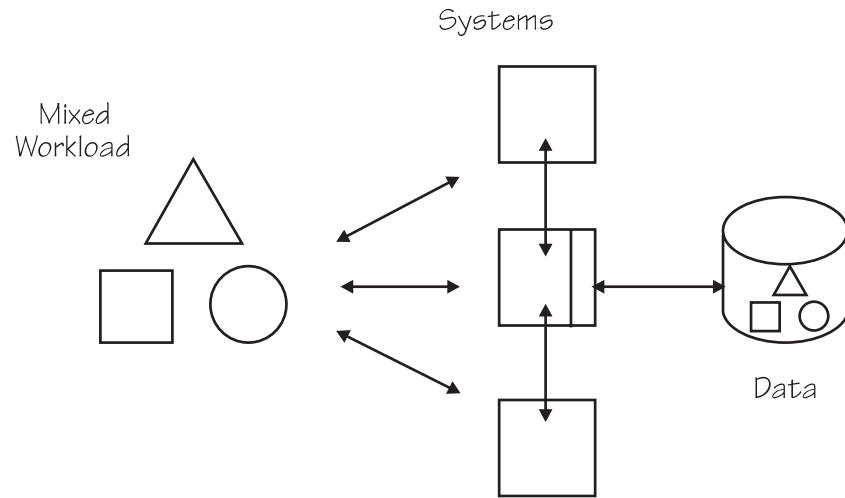


Figure 8. Data Sharing with a Single Data Server

When the data server reaches its capacity, there may be no way to expand, other than to install a larger capacity system or to go to another data sharing option.

Summary

Response Time	Limited by the capability of the single server
Throughput	Limited by the capability of the single server
Continuous Availability	Limited by the availability of the single server
Growth	Requires upgrade of server or change to a different option
Data Management	Managed as a single data management system

Partitioning Data Across Multiple Systems

Splitting the data among systems gives each data server control over a portion of data. Requests for specific data are routed to the data server that controls that data. This option gives you more capacity than a single data server, but can impose a significant systems management burden to partition the data for adequate performance.

To allow for changes in demand for data, you need to configure the size of each system to handle the peak demand for that data, which requires extra capacity. Without that extra capacity, dynamic swings in demand for a particular partition of data could make performance erratic.

If a system fails, its portion of data cannot be accessed unless there is an alternate path to the data from another system. The other system must then have enough spare capacity to assume the additional work.

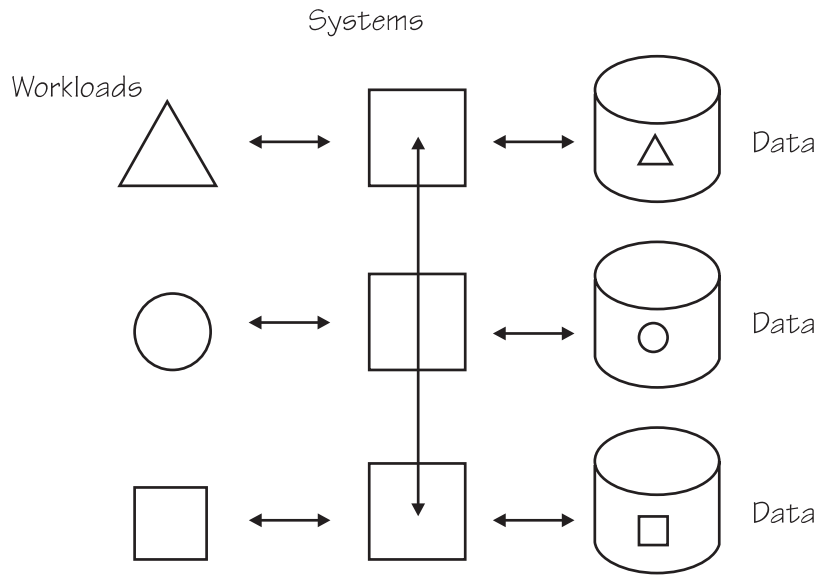


Figure 9. Data Sharing with Partitioned Data

When capacity is reached and you need to add another system, the data must be re-partitioned.

Summary

Response Time	Depends on how appropriately the data is partitioned
Throughput	Depends on the demand for data
Continuous Availability	Depends on the back-up alternate routing provisions and the capacity of the alternate system
Growth	Requires re-partitioning of the data
Data Management	Requires carefully partitioned data for adequate performance

Sharing Data Between Two Systems

Using the Information Management System Database Manager (IMS DB) without the coupling facility, you can efficiently share data between *two* different MVS systems. Whenever one of the sharing IMS DB systems needs to access the database, it sends a message to the other.

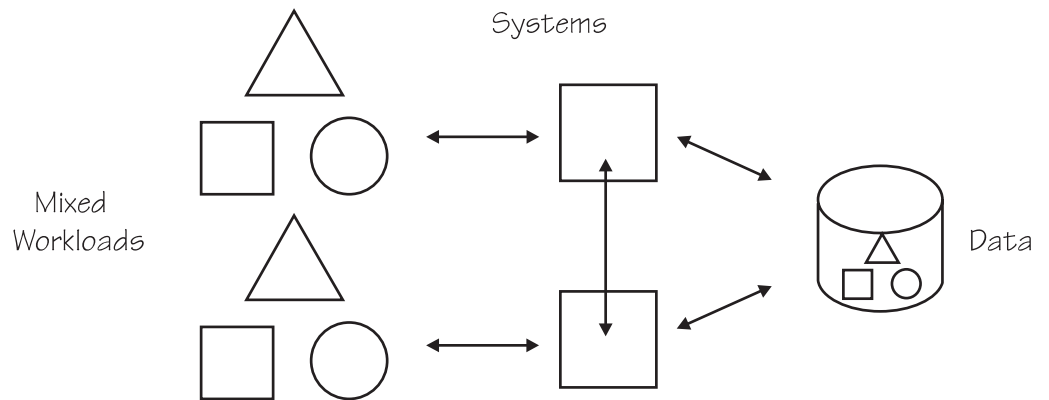


Figure 10. Data Sharing Between Two Systems

If you increase the number of IMS DB systems sharing the database to more than two, the number of messages from one sharing IMS system to the others would slow all the systems down.

Summary

Response Time	Acceptable
Throughput	Limited by the two IMS DB systems
Continuous Availability	Limited by the two IMS DB systems
Growth	Limited by the two MVS systems
Data Management	Managed as a single data management system

Sharing Data Using the Coupling Facility Technology

In contrast to the options discussed, data sharing based on the coupling facility makes it practical for you to have read/write data sharing among more than two MVS systems. The coupling facility allows data management systems to communicate so that they can directly share data. There is no single system creating a bottleneck; the data does not need to be partitioned or re-partitioned when you add another system; and there is no longer a two-system limitation.

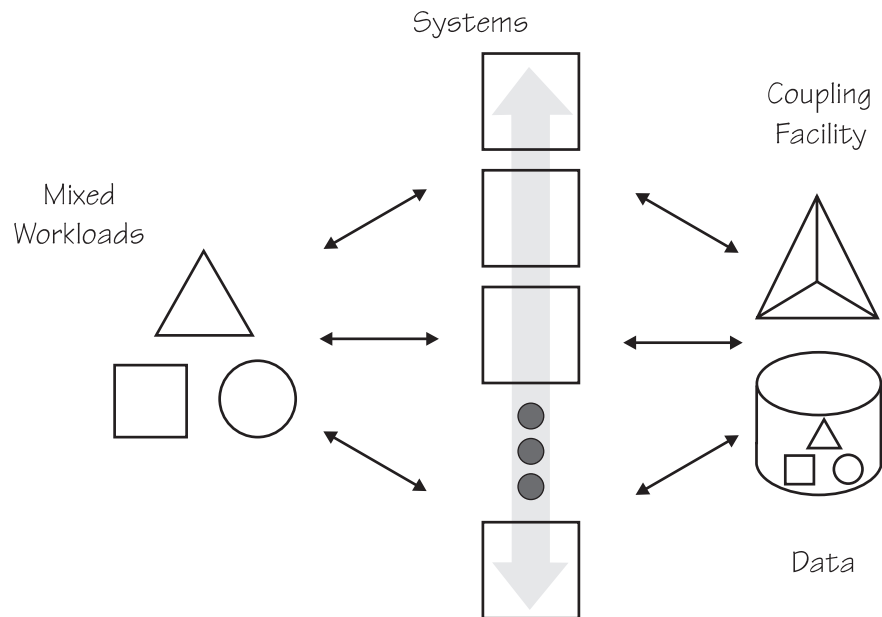


Figure 11. Sysplex Data Sharing Using the coupling facility

Summary

Response Time	Relieves poor response time due to system overload
Throughput	Increases throughput far beyond the current limits
Continuous Availability	Extends availability far beyond the current limits
Growth	Incremental expansion is not disruptive to existing systems
Data Management	Managed as a single data management system

The Coupling Facility Technology

The technology that makes high performance sysplex data sharing possible is a combination of hardware and software services available in the supporting MVS release.

A coupling facility includes the following:

- S/390 9674 Coupling Facility (standalone models)
- Logical partition of a S/390 9672 Parallel Sysplex Transaction Server or 9672 Parallel Sysplex Enterprise Server

High bandwidth fiber optic links called coupling facility channels, provide high speed connectivity between the coupling facility and systems directly connected to it.

Within the coupling facility, storage is dynamically partitioned into **structures**. MVS services manipulate data within the structures. Each of the following structures has a unique function:

- Cache structure - Supplies a mechanism called buffer invalidation to ensure consistency of cached data. The cache structure can also be used as a high-speed buffer for storing shared data with common read/write access.
- List structure - Enables authorized applications to share data that is organized in a set of lists, for implementing function such as shared work queues and shared status information.
- Lock structure - Supplies shared and exclusive locking capability for serialization of shared resources down to a very small unit of data.

Exploiters of the Coupling Facility

Authorized applications, such as subsystems and MVS components in the sysplex, can use the coupling facility services to cache data, share queues and status, and access sysplex lock structures in order to implement high performance data sharing and rapid recovery from failures. The subsystems and components transparently provide the data sharing and recovery benefits to their applications.

Some IBM data management systems that are using the coupling facility include database managers and a data access method.

Information Management System Database Manager (IMS DB): IMS DB is IBM's strategic hierarchical database manager. It is used for numerous applications that depend on its high performance, availability, and reliability. A hierarchical database has data organized in the form of a hierarchy (pyramid). Data at each level of the hierarchy is related to, and in some way dependent upon, data at the higher level of the hierarchy.

IMS database managers on different MVS systems can access data at the same time. By using the coupling facility in a sysplex, IMS DB can efficiently provide data sharing for more than two MVS systems and thereby extends the benefits of IMS DB data sharing. IMS DB uses the coupling facility to centrally keep track of when shared data is changed. IRLM is still used to manage data locking, but does not notify each IMS DB of every change. IMS DB does not need to know about changed data until it is ready to use that data.

DATABASE 2 (DB2): DB2 is IBM's strategic relational database manager. A relational database has the data organized in tables with rows and columns.

DB2 data sharing support allows multiple DB2 subsystems within a sysplex to concurrently access and update shared databases. DB2 data sharing uses the coupling facility to efficiently lock, to ensure consistency, and to buffer shared data. Similar to IMS, DB2 serializes data access across the sysplex through locking. DB2 uses coupling facility cache structures to manage the consistency of the shared data. DB2 cache structures are also used to buffer shared data within a sysplex for improved sysplex efficiency.

Virtual Storage Access Method (VSAM): VSAM, a component of DFSMS, is an access method rather than a database manager. It is an access method that gives CICS and other application programs access to data stored in VSAM-managed data sets.

DFSMS supports a new VSAM data set accessing mode called record level sharing (RLS). RLS uses the coupling facility to provide sysplex-wide data sharing for CICS and the other applications that use the new accessing mode. By controlling access to data at the record level, VSAM enables CICS application programs running in

different CICS address spaces, called CICS regions, and in different MVS images, to share VSAM data with complete integrity. The coupling facility provides the high performance data sharing capability necessary to handle the requests from multiple CICS regions.

Other Exploiters of the Coupling Facility

In addition to data management systems, there are other exploiters of the coupling facility, such as Resource Access Control Facility (RACF) or the Security Server element of OS/390, and JES2. Transaction management systems also exploit the coupling facility to enhance parallelism.

Parallel Processing in a Sysplex

Parallel processing is a technology that increases application availability. It gives you more servers for enhanced throughput; and if the enhanced throughput relieves system overload, parallel processing will visibly reduce end-user response time.

One reason for setting up a sysplex is to enable parallel processing. Special purpose parallel systems for engineering and scientific applications have been available for years. The sysplex, however, can provide parallel processing for commercial online transactions.

The sysplex brings together parallel capability on many levels—in the applications, the supporting sysplex software, and the hardware. Applications can be replicated to run in parallel on a single tightly coupled multiprocessing system. When you run parallel applications in a sysplex with subsystems that support enhanced communication across systems, you have a greater degree of parallelism. And when you add hardware to that greater degree of parallelism, hardware with the capability for modular, incremental growth—you have the broad based parallelism that is available in a sysplex.

This chapter discusses:

- A definition of parallel processing
- Running work in parallel
- Software that enables parallelism for OLTP
- Hardware that enables parallelism

What is Parallel Processing?

Parallel processing in a sysplex is the ability to simultaneously process a particular workload on multiple CPCs, each of which may have multiple CPs. A CP can generally process one unit of work at a time. Typically the more CPs in a system, as in a tightly coupled multiprocessor, the more work can be processed simultaneously. When you have multiple CPCs processing the same workload, you can significantly reduce elapsed processing time.

Parallel processing is a type of multiprocessing. For the purposes of this publication, the distinction between multiprocessing and parallel processing is in whether the same kind of work is being processed. While multiprocessing is the simultaneous processing of work, it is not necessarily the same kind of work; parallel processing in a sysplex is the simultaneous processing of one type of work, whether it is many small but distinct units of work, or a larger unit of work that is broken down to run in parallel.

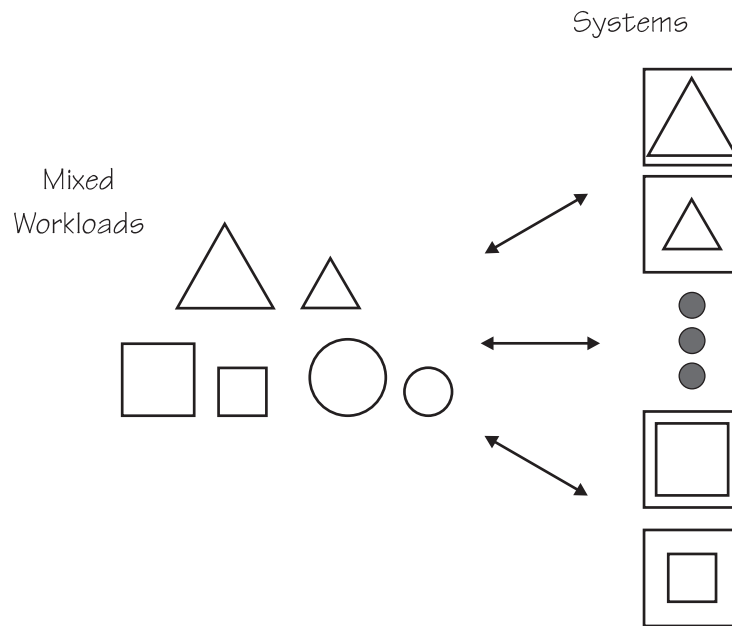


Figure 12. Multiprocessing

In a multiprocessing environment, at a particular moment in time, one CP might be running a payroll batch application, while another CP processes online transactions. The different work runs at the same time. If the payroll batch application takes hours to complete, and if the application is structured as a single task, it can only use the power of one CP. The fact that there is more than one CP available does not split up the long-running batch application. But if the batch application is structured as multiple tasks, it can be processed simultaneously on many CPs—in other words, in parallel.

Similarly, if there are more online transactions than one CP can handle, adding more CPs allows the online transactions to run in parallel.

Therefore, parallel processing is the ability to use many CPs to simultaneously process a particular workload; and by running a workload in parallel, it is possible to make a noticeable improvement in the response time for the end user.

In a sysplex, it is possible to have one workload running on many tightly coupled multiprocessors that are sharing data using the coupling facility. How many CPs you have depends on the configuration. For example, a configuration of 16 CPCs with 6 CPs per system gives you a total of 96 CPs that can process a workload in parallel.

Problems Solved by Parallel Processing

Parallel processing in a sysplex can be used for two different programming problem situations: when the number of transactions noticeably slows response time and when a long-running application takes too long to complete. Both situations can adversely affect end-user response time.

Increased Number of Transactions: When the number of incoming transactions exceeds the processing capability, transactions are delayed and response time increases. The following graphic shows how a large number of transactions can build up when they exceed the processing capability.

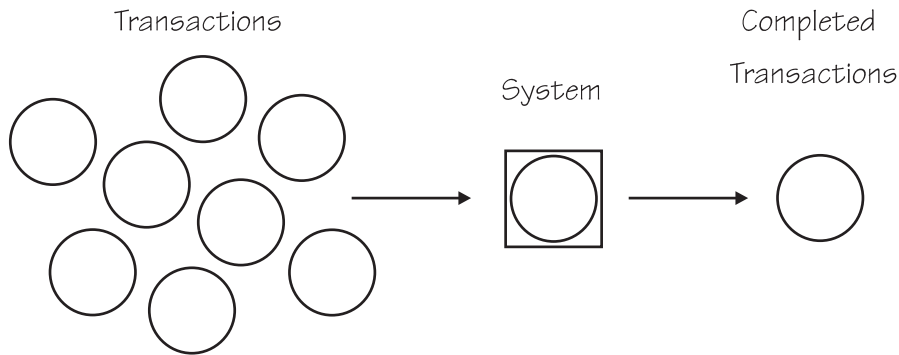


Figure 13. Workload that Exceeds Processing Capability

By adding processors and running transactions in parallel, you can reduce end-user response time by increasing throughput. The following graphic shows how adding processing capability increases throughput.

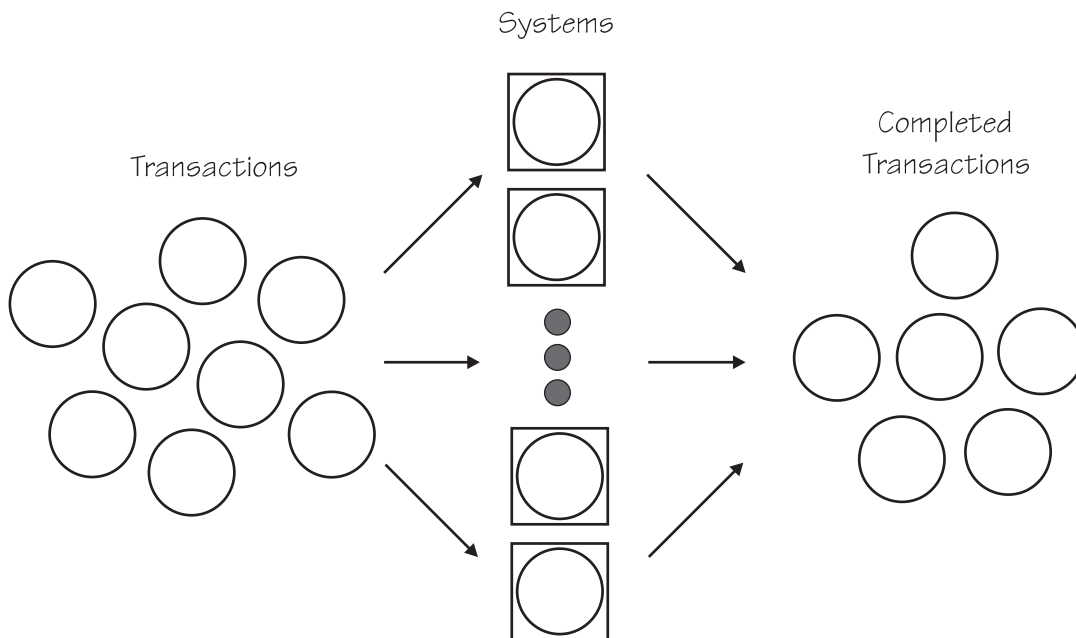


Figure 14. Increasing Throughput for a Workload

Similarly in your environment, when an increased number of transactions slows throughput, you can use a sysplex and the coupling facility to increase the number of CPs running in parallel.

Lengthy Application: To shorten the processing time of a single, long-running application, subdivide it into smaller units of work, if possible. These smaller units can then run in parallel. The following graphic shows how a lengthy application is processed one piece at a time when there is only one CP.

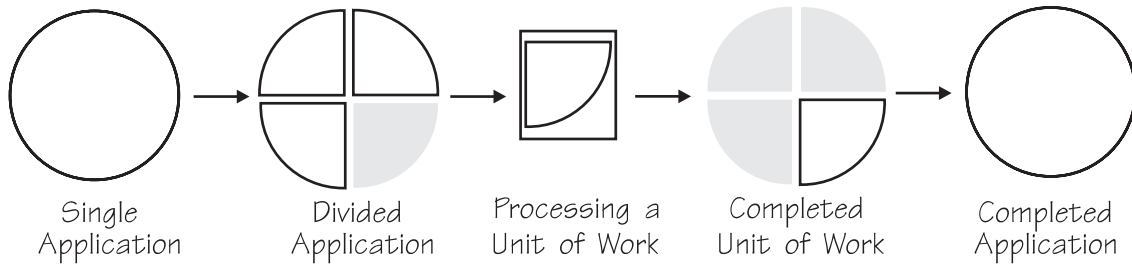


Figure 15. Processing a Lengthy Application

When the lengthy application is divided into smaller units of work and there are many parallel processors, the smaller units of work can run simultaneously and in parallel. The following graphic shows how a lengthy application can be processed in parallel by dividing it among many parallel processors.

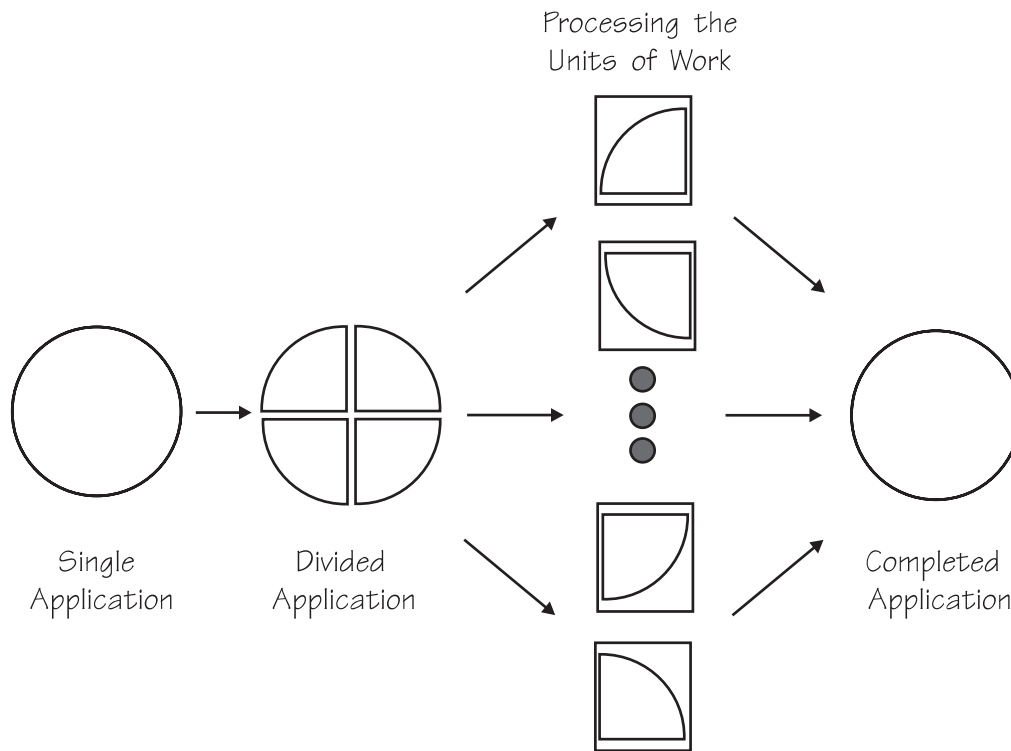


Figure 16. Decreasing the Processing Time of a Lengthy Application

You can use this same approach in a sysplex to speed up the processing of a long-running application, such as a complex query.

Running Work in Parallel

MVS is known for its strength and dependability in processing applications that solve large business problems. These are some characteristics of a business problem, each of which makes it a *large* problem:

- Volume of work, up to millions of transactions per day
- Number of end users, up to thousands
- Amount of storage required, such as terabytes of data
- Bandwidth requirements for sending data in a network, such as megabytes of data in seconds
- Stringent requirements for continuous availability (24 hours a day, 7 days a week, 365 days a year)

Some common MVS applications that deal with large business problems and can be made to run in parallel are batch, query, and online transaction processing (OLTP).

A batch workload consists of multiple job streams, which can be unrelated and can therefore run in parallel. A single job stream, however, runs in sequence and

usually cannot take advantage of parallelism. When a single job stream is lengthy, it can take considerable time to complete. IBM provides a product called Parallel Sysplex, to help you exploit parallelism in a single job stream within a single MVS image.

Queries are a diverse type of workload and usually rely on partitioned data when running in parallel. To help you process queries in parallel, IBM is offering a parallel query server. The parallel query server is a self-contained system made up of hardware, software, and database services. The system is fully installed, customized, and serviced by IBM. The parallel query server is used to process large queries in a shared relational database. For more information about the parallel query server, see your IBM marketing representative.

OLTP applications are a common MVS application type that can take advantage of parallelism. They are the focus of the following topics, because there is extensive software support for OLTP processing in a sysplex, and the number of OLTP applications are on the increase.

Online Transaction Processing (OLTP)

OLTP applications are used by banks, airlines, insurance companies, and other businesses that give online users direct access to information. The OLTP applications process units of work, called transactions. A single transaction might request a bank balance; another might update that balance to reflect a deposit.

An application can be replicated to run in parallel on a tightly coupled multiprocessor so that it can simultaneously process multiple transactions. The degree of parallelism depends on the system software, the transaction manager, and the hardware that the OLTP application runs on.

Software that Enables Parallelism for OLTP

OLTP applications use system software services provided by transaction managers and they access data controlled by data management systems. To balance the transactions dynamically across systems, MVS workload manager, a component of MVS, works with the transaction managers. This section first discusses the transaction managers and then describes workload management.

Transaction Managers

From the time the transaction manager obtains the transaction from the network until it returns the completed transaction to the network, it is responsible for:

- Sending the transaction to the appropriate application
- Converting transaction data to a form that can be used
- Reconverting results to a form that can be displayed on an output device

If the transaction manager can simultaneously process copies of an application in multiple address spaces within a single system, an OLTP application can run in parallel.

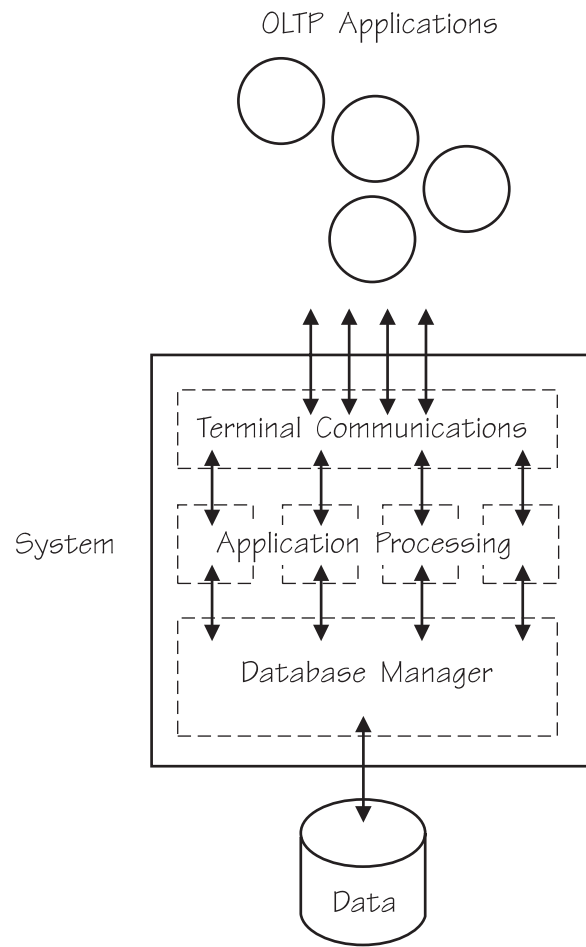


Figure 17. Parallel OLTP Applications in a Single System

If the transaction manager can take advantage of sysplex support and simultaneously process copies of an application across different MVS systems, the OLTP application can run with a greater degree of parallelism.

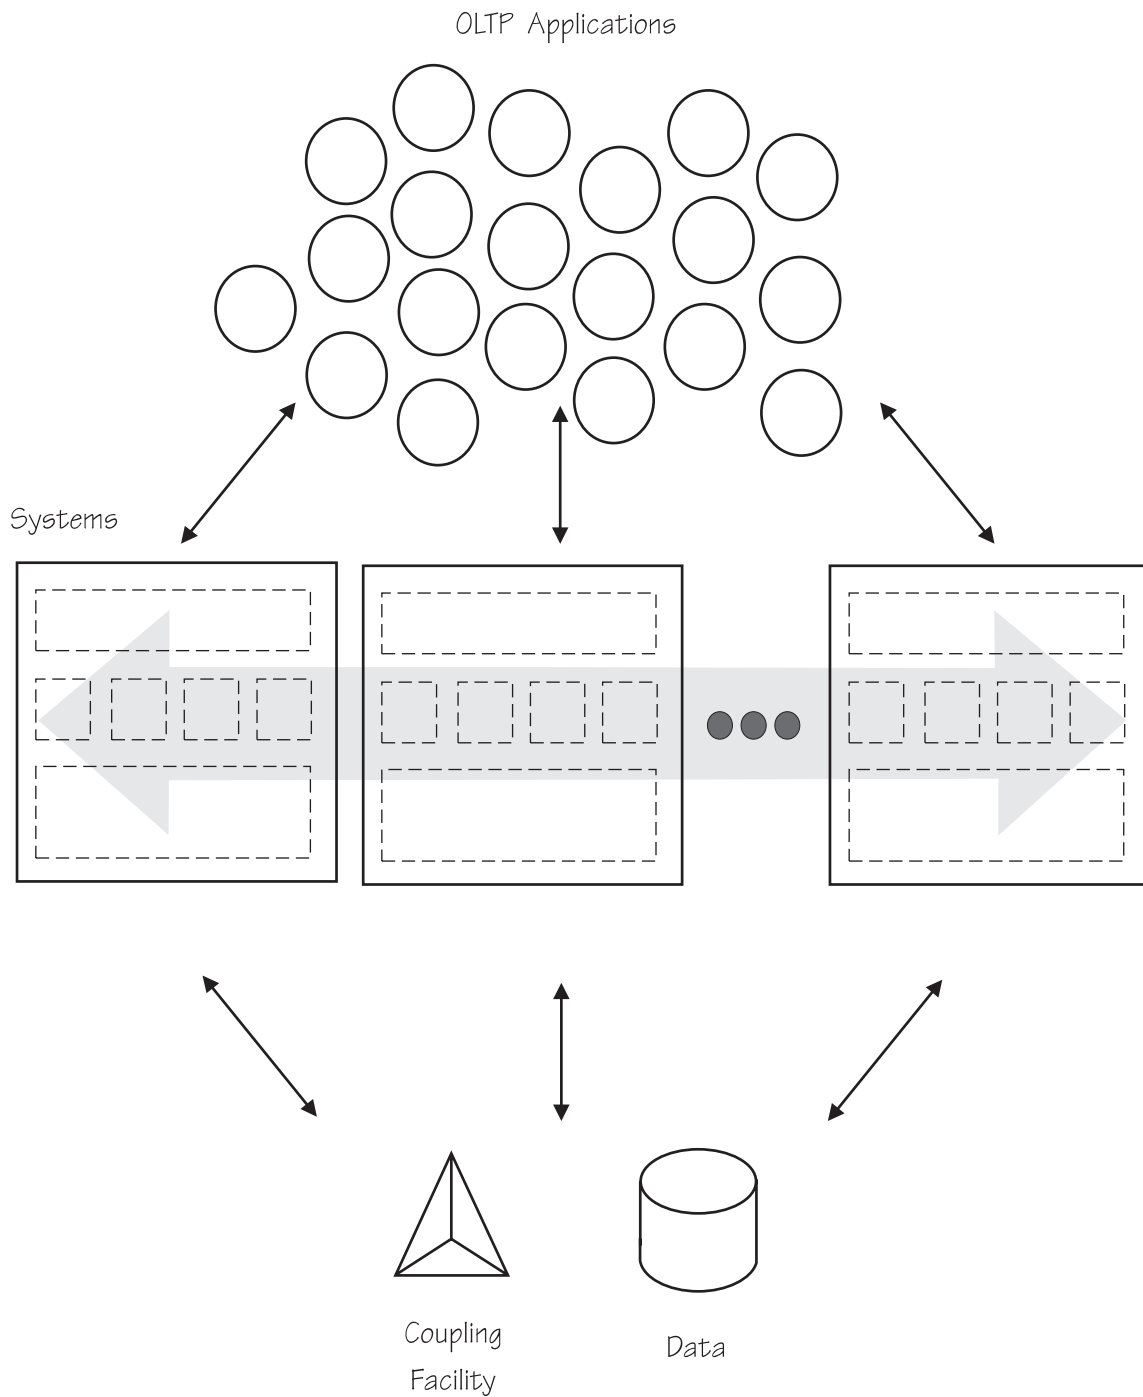


Figure 18. Parallel OLTP Applications in a Sysplex Parallel Environment

Two MVS transaction managers, which have provided parallel support in a single system, provide an additional degree of parallel support in a sysplex. The two transaction managers are Customer Information Control System (CICS) and Information Management System Transaction Manager (IMS TM).

Customer Information Control System (CICS): CICS enables online transactions entered at terminals to be processed concurrently by user-written application programs. Originally CICS ran in a single MVS address space that was responsible for terminals, applications, and files.

Using CICS multi-region operation, you can separate function into individual regions, namely terminal-owning regions (TORs), application-owning regions (AORs), and file-owning regions (FORs). These individual resource-owning regions can then be linked together and managed in what is called a CICSplex.

One of the benefits of separating the CICS functions into a number of resource-owning regions is to take advantage of multiprocessor systems, as each region (address space) can run on a different CP. You can structure a CICS environment such that the application-owning regions can process transactions in parallel.

Replicating regions and running multiple regions on multiple systems in a sysplex further increases the parallelism. The greater the number of regions, the greater the CICS availability in the event of a system failure.

Information Management System Transaction Manager (IMS TM): The IMS Transaction Manager (IMS TM) is an IBM transaction processing product that is designed to take advantage of multiprocessors. IMS TM is a multi-address space product so that one IMS TM running under one MVS can effectively use tightly coupled multiprocessors.

IMS TM can also take advantage of the sysplex. Several IMS TMs can coordinate work among themselves by using IMS's Multiple Systems Coupling (MSC) support. Through MSC, transactions entered from one IMS can be routed to another IMS for processing and the results returned to the original IMS. To the end user, the transfer of information from one IMS to another is transparent.

Transaction message traffic workloads can be balanced using MSC. IMS will continue to enhance and unify management of IMS systems and present a single-system view of IMS in a sysplex.

Data Management Systems

When an OLTP application needs to access data, the data management system controls the data access and update. Data management systems are responsible for validity of the data, providing a way to recover data in case of failure, and a way to secure data from unauthorized access.

If the data management system takes advantage of the coupling facility, the OLTP applications can avoid shipping data back and forth between systems. By using the coupling facility for data sharing and for queuing and status control, data management systems and transaction managers can perform their duties more quickly and therefore manage more systems efficiently. This increase in the number of systems that can be managed, increases the degree of parallelism even further.

The data management systems that take advantage of the coupling facility are IMS DB, DB2, and VSAM.

Managing Work in a Sysplex

Along with parallelism comes the need for simple and dynamic multisystem workload balancing. When you are in an environment with multiple systems, the set of performance issues changes. Existing mechanisms for managing system performance are complex and single-system oriented.

To reduce the complexity of managing a sysplex, MVS workload management provides dynamic sysplex-wide management of system resources. MVS workload management is the combined cooperation of various subsystems (such as CICS, IMS, and VTAM) with the MVS workload manager (WLM) component. An installation defines performance goals and a business importance to workloads through WLM. Workload management focuses on attaining these goals through dynamic resource distribution.

This type of workload management is different from the way workloads were previously managed. The new emphasis is on defining performance goals for work, and having MVS and the subsystems adapt to meet the goals.

Defining Performance Goals

An installation defines performance goals in a **service policy**. Service policies are defined through an ISPF application and they set goals for all types of MVS-managed work. An installation can create multiple service policies to adjust performance goals for different periods of time.

The scope of a service policy is the sysplex. Each service policy has a name, and can be activated by the ISPF application, an operator command, or an automation package. Only one policy can be active at a time. When it is activated, all systems in the sysplex process towards the goals defined in the policy.

Workload management coordinates and shares performance information across the sysplex. Each MVS system handles its own system resource management and dynamically matches resources to work according to the goals defined in the service policy. During processing, the system monitors how well the goals are being met and adapts accordingly as the environment changes. If there is contention for resources, each system makes the appropriate trade-offs based on the importance of the work and how well the goals are being met. This way, all systems can cooperate to protect work that is critical to your installation.

Reporting

Resource Measurement Facility (RMF) combines MVS system management facilities (SMF) data for the sysplex, and reports how well the sysplex is doing to achieve the goals defined in the service policy. In addition, execution delay information is available in SMF records that show where delays are occurring. If there is a problem, you can use this information to help adjust the performance goals, focus on specific subsystems having a problem, or make work scheduling adjustments.

Hardware that Enables Parallel Processing

Sysplex parallel processing depends on coupling facility technology and the ability to connect to it. Several models of S/390 processors are able to connect to the coupling facility including large capacity water-cooled processors and smaller capacity air-cooled processors. Coupling facilities include the S/390 9674 Coupling Facilities. In addition, processors that make use of complementary metal oxide (CMOS) technology (S/390 9672 Parallel Sysplex Transaction Servers and 9672 Parallel Sysplex Enterprise Servers) can have one or more logical partitions configured as integrated coupling facilities while other logical partitions can run as parallel transaction servers to process work.

The significance of adding CMOS processors to a sysplex is the improved price/performance and incremental growth possible by using large numbers of relatively small CPCs to process work in parallel. But, regardless of processor size, the use of new hardware technology makes sysplex parallel processing a cost effective alternative.

Products in a Sysplex

A sysplex is not a single product that you install in your data center. Rather, a sysplex is a collection of products, both hardware and software, that work together.

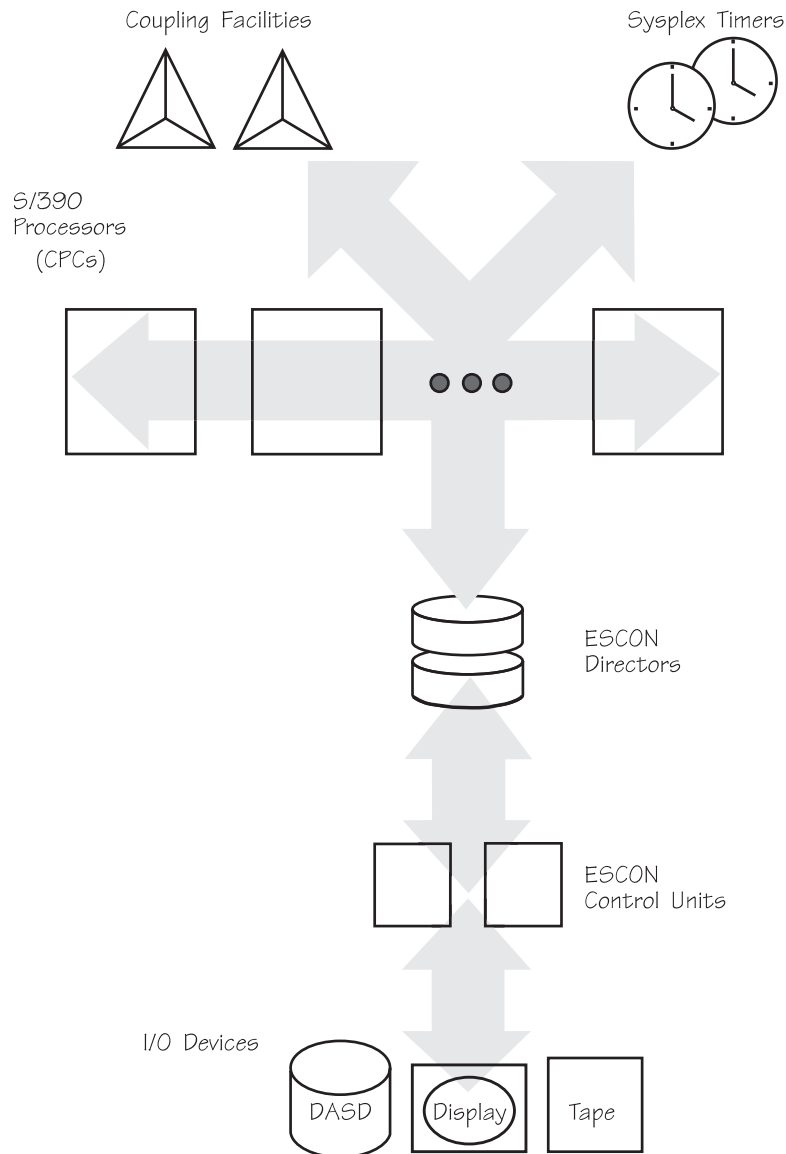


Figure 19. Products in a Sysplex

The products that work together in a sysplex can be categorized as hardware, system software, networking software, data management, transaction management, and systems management. Following are sysplex products grouped by area.

Note: A sysplex is not limited to the products described in this chapter. Additional IBM and non-IBM products might be able to run in a sysplex or exploit sysplex function. For a current list of products that can take advantage of a sysplex, see your IBM marketing representative.

Hardware

Hardware for the Parallel Sysplex includes the following.

Coupling Facility

The coupling facility is a CMOS processor (a standalone S/390 9674 Coupling Facility or a logical partition defined in the 9672 Parallel Transaction Server or the 9672 Parallel Enterprise Server). It allows high performance multisystem data sharing among certain S/390 processors.

MVS services allow authorized applications, such as subsystems and MVS components, to use the coupling facility to cache data, exchange status, and access sysplex lock structures in order to implement high performance data sharing and rapid recovery from failures.

Coupling Facility Channels

Coupling facility channels are high bandwidth fiber optic links that provide high speed connectivity between the coupling facility and the CPCs that use the coupling facility. Coupling facility channels are directly attached between the CPCs and the coupling facility.

System/390 Processors

Note: All ES/9000 processors can participate in a base sysplex, but only the following processors can link to the coupling facility.

- 9021 711-based models

The 9021 711-based models are water-cooled CPCs, which were announced in February, 1993.

- 9121 511-based models

The 9121 511-based models are air-cooled CPCs, which were announced in February, 1993.

- S/390 9672 Parallel Transaction Server and 9672 Parallel Enterprise Server

A S/390 9672 Parallel Transaction Server and 9672 Parallel Enterprise Server comes with an integrated coupling facility and flexible packaging options, and it runs as a parallel transaction server. In addition, an easy-to-use console provides cross system management capability. For a description of the console, see “Hardware Management Console” on page 36.

Sysplex Timer

The Sysplex Timer is a unit that synchronizes the time-of-day (TOD) clocks in multiple CPCs in a sysplex. The time stamp from the Sysplex Timer is a way to monitor and sequence events within the sysplex.

Enterprise Systems Connection (ESCON)

ESCON channels have a channel-to-control-unit I/O interface that uses optical cables as a transmission medium. ESCON Directors (ESCDs) add dynamic switching capability for ESCON channels, further increasing connectivity and device sharing.

ESCON I/O and the interconnect technologies become very important in a sysplex to speed access to shared data on disk or tape, and to enhance communication among systems. In addition, they offer improved availability.

ESCON Control Units and I/O Devices

To ease the management of logical paths and increase connectivity, use control units and devices that provide a higher number of logical paths, such as:

- 3990 Storage Control Model 6
- 9343 Storage Controller and 9345 Direct Access Storage Device
- I/O devices that are ESCON capable (3490E, 3172, 3174, 3745, 3746)

System Software

System software for the Parallel Sysplex includes the following.

MVS/ESA or OS/390

The MVS/ESA or OS/390 operating system for S/390 is known for its ability to handle thousands of concurrent interactive users and for its sophisticated data management, reliability, security, and auditing features in a commercial environment.

MVS enables the new coupling technology, extends system support beyond the previous limit of 8 MVS systems, and increases the number of I/O devices allowed per MVS system beyond the previous limit of 4096. It is the platform for simplified systems management of a sysplex, including configuration management, availability management, workload management, and single-image operations. Further enhancements include problem determination and recovery in a sysplex.

For information about OS/390, see *OS/390 Introduction and Release Guide*.

JES2 or JES3

These two job entry subsystem products control job queues and dispatch work in a sysplex. JES2 expands its 7-member multi-access spool (MAS) capability to a 32-member MAS. Additionally, JES2 uses the coupling facility to enhance its performance. JES3 can support a maximum of 32 members in a JES3 complex and supports ESCON CTCs or the coupling facility.

DFSMS

DFSMS enables the automatic placement, migration, backup, recall, recovery, and deletion of data for MVS. An SMS configuration can contain 32 names, but the names can be a combination of system names and system group names. DFSMS also supports the increased number of I/O devices beyond the previous limit of 4096.

Networking Software

Networking software for the Parallel Sysplex includes the following.

Virtual Telecommunications Access Method (VTAM)

VTAM monitors and controls the activation and connection of resources in a network. When VTAM is part of the sysplex, duplicate applications on different systems in a VTAM network can identify themselves by a single generic resource name. By distributing sessions among a number of duplicate resources under a single name, instead of to a uniquely named single resource, VTAM is capable of balancing the session workload.

Data Management

Data management for the Parallel Sysplex includes the following.

Information Management System Database Manager (IMS DB)

IMS DB is a database manager of hierarchical data that provides multisystem support across two MVS systems. By using the coupling facility, IMS DB extends data sharing across multiple MVS systems.

DATABASE 2 (DB2)

DB2 is a database manager of relational data. DB2 provides data sharing support that uses the coupling facility for read/write sharing of DB2 databases within a sysplex.

Virtual Storage Access Method (VSAM) - component of DFSMS

VSAM is an access method that gives application programs access to data stored in VSAM-managed data sets. DFSMS supports a new VSAM data set accessing mode called record level sharing (RLS). VSAM RLS provides sysplex data sharing and will use the coupling facility for locking and data caching.

Transaction Management

Transaction management for the Parallel Sysplex includes the following.

Customer Information Control System (CICS/ESA and CICS Transaction Server)

CICS/ESA and CICS Transaction Server are transaction managers that provide services for online transactions. Both CICS/ESA and CICS Transaction Server enhance the multiregion operation (MRO) links to provide more efficient cross system communication for CICS. They support the MVS workload manager component and VTAM generic resource as described previously. They also support sysplex data sharing for IMS DB and DB2. CICS Transaction Server provides support for record-level sharing of data for VSAM.

Information Management System Transaction Manager (IMS TM)

IMS TM is a transaction manager that provides services for online transactions in a multisystem environment. It cooperates with the MVS workload manager component for better performance.

Systems Management

Systems management software includes the following.

Accounting

System Management Facilities (SMF) - component of MVS

This component of MVS keeps records of resources used in the system. SMF record keeping expands beyond the previous 8 system limit. Also, SMF provides new records specifically for a sysplex.

Workload

CICSplex System Manager/ESA (CICSplex SM)

This product provides a single-system image for a CICSplex across a range of system management applications. These applications include dynamic workload balancing and separation in cooperation with the MVS workload manager, CICS master terminal operations, online access to CICS data and statistics, and the ability to detect exceptional events based on CICS state data for an operator or for automation purposes.

Operations Planning and Control (OPC/ESA)

OPC/ESA is a product that helps you manage your installation's batch production workload. From one system you can plan, control, and monitor all workloads. OPC/ESA has been enhanced to present a single-system image in a sysplex environment. This enhancement will give a TSO user access to the OPC/ESA dialog even when the OPC/ESA Controller and the TSO user are active on different MVS systems.

Workload Manager (WLM) - component of MVS

To manage workloads throughout a sysplex, WLM cooperates with transaction and resource managers that span systems. WLM uses customer-defined policies for performance objectives to help balance workloads.

Operations

System Automation for OS/390

System Automation for OS/390 provides system automation for subsystem start and shutdown, automation for messages, timers, system data set offload, and policy dialogs. System Automation for OS/390 also provides enterprise resource monitoring through a workstation graphical interface where the enterprise can include one or more sysplexes with coupling facilities. Where appropriate, resources are monitored at the sysplex level.

System Automation for OS/390 also eases the task of propagating automation policy to multiple systems. System Automation for OS/390 consolidates access to other products (for example, SDSF and RMF) from a single workstation.

System Automation for OS/390 also extends the control, monitoring, and automation capabilities of the NetView program to provide consolidated management for hardware (system) and software (operator) consoles in heterogeneous System/390 environments. System Automation for OS/390 supports both automated and manual operations on a sysplex.

Hardware Management Console

An enhanced hardware system console provides a single point of control for the systems in a S/390 9672 Parallel Transaction Server and 9672 Parallel Enterprise Server. Using icons and a mouse, you can operate one system, and you can perform an operation for all systems or for a user-defined group of systems.

System Display and Search Facility (SDSF)

SDSF helps you efficiently monitor and control the operation of an MVS/JES2 system. It supports the increased number of systems that can be defined in a JES2 multi-access spool and the MVS workload manager component.

Performance

Resource Measurement Facility (RMF)

RMF gathers performance data about system resources and writes SMF records 70-79. To reduce the complexity of performance management in a sysplex, RMF introduces the concept of a single system view for reporting on sysplex-wide data. It also supports the coupling facility and the MVS workload manager component.

Enterprise Performance Data Manager/MVS (EPDM)

EPDM is a system log data set post processor and reporter that reads any sequential log data set. It uses DB2 to support data summarization and reporting on new and changed data for sysplex-related SMF records. Reporting can be done online through an OS/2 dialog or through ISPF, and also in batch.

Service Level Reporter (SLR)

SLR is a system log data set post processor and reporter that reads any sequential log data set. It supports data summarization and reporting on new and changed data for sysplex-related SMF records. Reporting can be done online through ISPF and also in batch.

Security

Resource Access Control Facility (RACF) or the Security Server

RACF or the Security Server element of OS/390 provides security for the MVS system. RACF or the Security Server operates in a sysplex environment and takes advantage of the coupling facility to reduce I/O to the RACF database. It also provides additional systems management function.

Configuration

System Automation for OS/390

System Automation for OS/390 helps manage the complexities of active I/O configurations. When running on a sysplex, System Automation for OS/390 manages the sysplex as a unified system image. Using System Automation for OS/390, you can graphically view and change the connectivity between systems and I/O objects (shared and non-shared, ESCON and non-ESCON).

Hardware Configuration Definition (HCD)

HCD is the configuration management program for MVS. It replaces the MVS configuration program (MVSCP) and creates input statements to the I/O configuration program. For S/390 9672 Parallel Transaction Server and 9672 Parallel Enterprise Server models, HCD is the focal point for all the I/O configuration data set (IOCDS) management function. HCD can also define I/O for the coupling facility including the channel paths associated with the coupling facility channels.

Introduction to Sample Sysplex Configurations

In a sysplex, you can think of MVS systems and system hardware components as building blocks that you can select for specific purposes and replicate or combine in different configurations.

Following are some sample sysplex configurations. All configurations assume:

- Shared DASD with ESCON connections
- Appropriate levels of enabling software
- Possible connection to a network

Large Systems Data Sharing Sysplex

This configuration connects two large CPCs in a sysplex that uses the coupling facility to share data. The CPCs can be either 9021 711-based models, 9121 511-based models, or one of each.

Benefits: This configuration combines the inherent strengths of large systems with multisystem data sharing provided by the coupling facility. It can be used for both:

- An easy migration path for initiating and testing data sharing using the coupling facility
- A reliable production environment

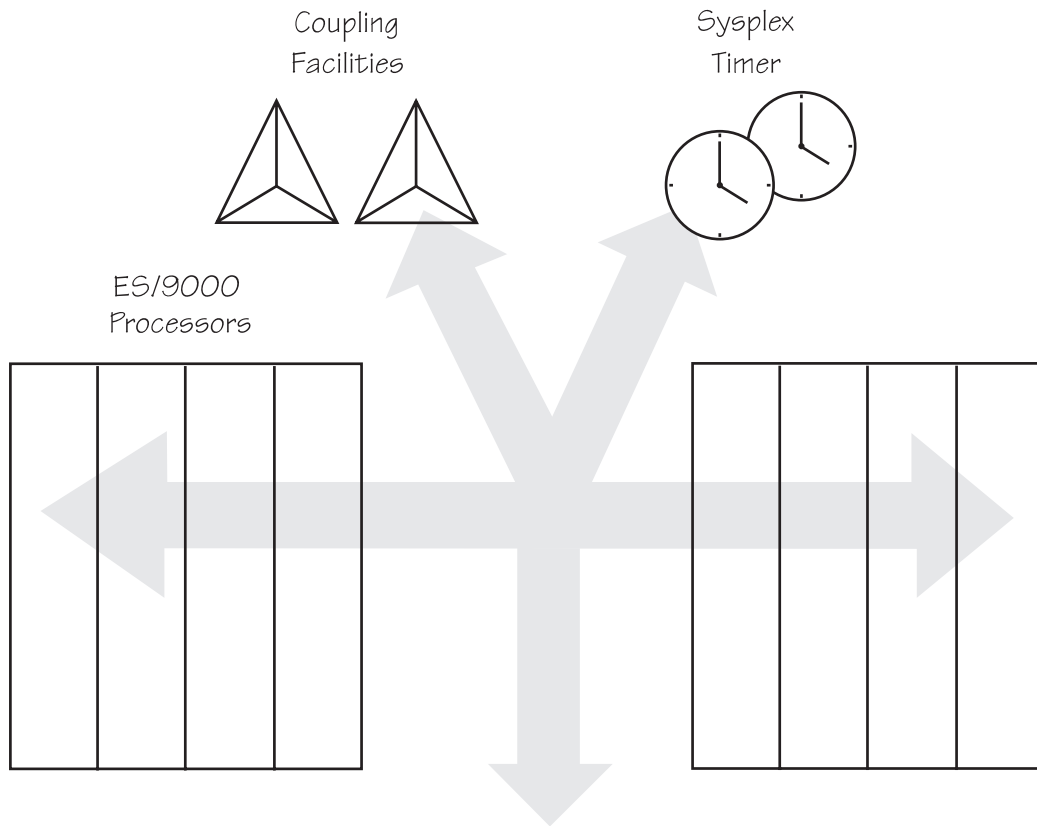


Figure 20. Large Systems Sysplex Configuration

The parts of this configuration are:

- ES/9000 large processor, such as:
 - 9021 711-based CPC
 - 9121 511-based CPC
- A standalone coupling facility (such as the 9674 Coupling Facility, with an optional second coupling facility as backup)
- A Sysplex Timer with the high availability feature

S/390 Parallel Sysplex with the 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server

This separately orderable sysplex configuration consists of an independent S/390 CMOS processor (9672 Parallel Transaction Server or 9672 Parallel Enterprise Server) with an integrated coupling facility defined in a logical partition.

Benefits: In addition to the standard sysplex benefits, such as improved price/performance, greater parallel capacity for a single workload, and environmental savings (space, power, cooling, and weight), this configuration:

- Offers the reliability of a production environment
- Allows non-disruptive incremental growth, a single CPC at a time

- Can be easily added to an existing sysplex to increase capacity

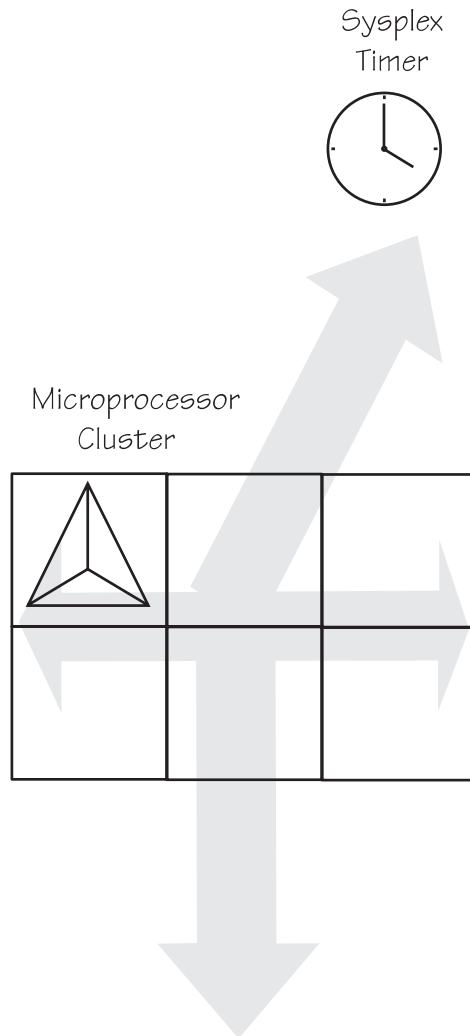


Figure 21. Sysplex with an S/390 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server

The parts of this configuration are:

- S/390 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server with an integrated coupling facility defined in a logical partition
- A Sysplex Timer

Mixed Processor Sysplex

This configuration combines a large processor and an S/390 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server in a sysplex production environment. The processors share S/390 9674 Coupling Facilities C01/C02/C03 Models.

Benefits: In addition to the standard sysplex benefits, such as improved price/performance, greater parallel capacity for a single workload, and environmental savings (space, power, cooling, and weight), this configuration:

- Offers the reliability of a production environment
- Extends sysplex data sharing across different types of processors
- Allows non-disruptive incremental growth, a single CPC at a time

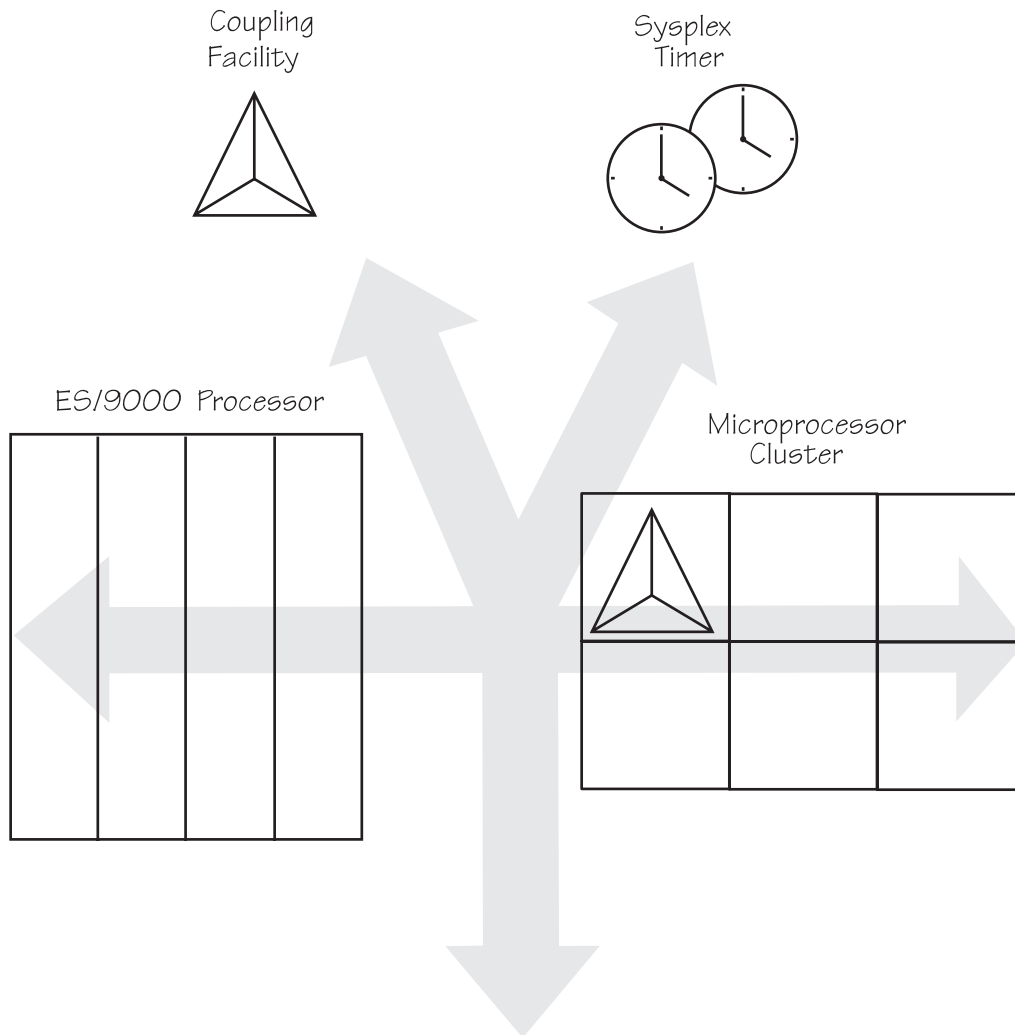


Figure 22. Mixed Processor Sysplex Configuration

The parts of this configuration are:

- ES/9000 large processor, such as:
 - 9021 711-based CPC
 - 9121 511-based CPC
- S/390 9672 Parallel Transaction Server or 9672 Parallel Enterprise Server
- A Sysplex Timer with the high availability feature
- A standalone coupling facility (such as the 9674 Coupling Facility)

Appendix A. Notices

This information was developed for products and services offered in the USA.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
USA

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation
Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law:

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation
Mail Station P300
2455 South Road
Poughkeepsie, NY 12601-5400
USA

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this information and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement, or any equivalent agreement between us.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

Trademarks

The following terms are trademarks of the IBM Corporation in the United States and/or other countries:

- Advanced Peer-to-Peer Networking
- APPN
- BookManager
- CBPDO
- CICS
- CICS/ESA
- CICSplex
- DATABASE 2
- DB2
- DFSMS
- DFSMS/MVS
- Enterprise Systems Connection Architecture
- ES/9000
- ESCON
- IBM
- IBMLink
- IMS
- IMS/ESA
- MVS/ESA
- NetView
- OPC
- OS/2
- OS/390
- Parallel Sysplex

- Processor Resource/Systems Manager
- PR/SM
- RACF
- Resource Measurement Facility
- RMF
- S/390
- SP
- Sysplex Timer
- System/390
- SystemView
- VisualLift
- VTAM

Other company, product, and service names might be trademarks or service marks of others.

Glossary

Sources of Terms and Definitions

This glossary includes terms and definitions from:

- The *IBM Dictionary of Computing* New York: McGraw-Hill, 1994.
- The *Information Technology Vocabulary* developed by Subcommittee 1, Joint Technical Committee 1, of the International Organization for Standardization and the International Electrotechnical Commission (ISO/IEC JTC1/SC1). Definitions taken from draft international standards, committee drafts, and working papers being developed by ISO/IEC JTC1/SC1 are identified by the symbol (T) after the definition, indicating that final agreement has not yet been reached among the participating National Bodies of SC1.

Explanation of Cross-References

The following cross-references are used in this glossary:

Contrast with. This refers to a term that has an opposed or substantively different meaning.

See. This refers the reader to multiple-word terms in which this term appears.

See also. This refers the reader to terms that have a related, but not synonymous, meaning.

A

ACDS. Active control data set.

ANO/MVS. Automated Network Operations.

AOC/MVS. Automated Operations Control. The licensed program System Automation for OS/390 includes all of the function previously provided by AOC/MVS.

AOR. Application-owning region

APPN. Advanced Peer-to-Peer Networking.

B

basic mode. A central processor mode that does not use logical partitioning. Contrast with *logically partitioned (LPAR) mode*.

batch message processing (BMP) program. An IMS batch processing program that has access to online

databases and message queues. BMPs run online, but like programs in a batch environment, they are started with job control language (JCL).

batch-oriented BMP program. A BMP program that has access to online databases and message queues while performing batch-type processing. A batch-oriented BMP does not access the IMS message queues for input or output. It can access online databases, GSAM databases, and MVS files for both input and output.

BMP. Batch message processing (BMP) program.

C

cache structure. A coupling facility structure that enables high-performance sharing of cached data by multisystem applications in a sysplex. Applications can use a cache structure to implement several different types of caching systems, including a store-through or a store-in cache.

cache structure services. MVS services that enable applications in a sysplex to perform operations such as the following on a coupling facility cache structure:

- Manage cache structure resources
- Store data into and retrieve data from a cache structure
- Manage accesses to shared data
- Determine when shared data has been changed
- Determine whether a local copy of shared data is valid.

CBPDO. Custom Built Product Delivery Offering.

CEC. Synonym for central processor complex (CPC).

central processor (CP). The part of the computer that contains the sequencing and processing facilities for instruction execution, initial program load, and other machine operations.

central processor complex (CPC). A physical collection of hardware that includes main storage, one or more central processors, timers, and channels.

CFRM. Coupling facility resource management.

channel-to-channel (CTC). Refers to the communication (transfer of data) between programs on opposite sides of a channel-to-channel adapter (CTCA).

channel-to-channel adapter (CTCA). An input/output device that is used by a program in one system to communicate with a program in another system.

CICS. Customer Information Control System.

CICSplex. A group of connected CICS regions.

CICSplex SM. CICSplex System Manager

CMOS. Complementary metal-oxide semiconductor.

COMMDS. Communications data set.

complementary metal-oxide semiconductor (CMOS). A technology that combines the electrical properties of positive and negative voltage requirements to use considerably less power than other types of semiconductors.

couple data set. A data set that is created through the XCF couple data set format utility and, depending on its designated type, is shared by some or all of the MVS systems in a sysplex. See also *sysplex couple data set*.

coupling facility. A special logical partition that provides high-speed caching, list processing, and locking functions in a sysplex.

coupling facility channel. A high bandwidth fiber optic channel that provides the high-speed connectivity required for data sharing between a coupling facility and the central processor complexes directly attached to it.

coupling services. In a sysplex, the functions of XCF that transfer data and status between members of a group residing on one or more MVS systems in the sysplex.

CP. Central processor.

CPC. Central processor complex.

cross-system coupling facility (XCF). XCF is a component of MVS that provides functions to support cooperation between authorized programs running within a sysplex.

CTC. Channel-to-channel.

D

DAE. Dump analysis and elimination.

DASD. Direct access storage device.

data sharing. The ability of concurrent subsystems (such as DB2 or IMS DB) or application programs to directly access and change the same data while maintaining data integrity.

DBCTL. IMS Database Control.

DBRC. Database Recovery Control.

DB2. DATABASE 2 for MVS/ESA.

DB2 data sharing group. A collection of one or more concurrent DB2 subsystems that directly access and change the same data while maintaining data integrity.

DB2 PM. DB2 Performance Monitor.

DFSMS. Data Facility Storage Management Subsystem.

dpAM. IBM SystemView Data Processing Accounting Manager/MVS.

E

EMIF. ESCON Multiple Image Facility.

Enterprise Systems Connection (ESCON). A set of products and services that provides a dynamically connected environment using optical cables as a transmission medium.

EPDM. IBM SystemView Enterprise Performance Data Manager/MVS.

ESCD. ESCON Director.

ESCM. ESCON Manager. The licensed program System Automation for OS/390 includes all of the function previously provided by ESCM.

ESCON. Enterprise Systems Connection.

ETR. External Time Reference. See also *Sysplex Timer*.

F

FOR. File-owning region.

frame. For a System/390 microprocessor cluster, a frame contains one or two central processor complexes (CPCs), support elements, and AC power distribution.

G

global resource serialization. A function that provides an MVS serialization mechanism for resources (typically data sets) across multiple MVS images.

global resource serialization complex. One or more MVS systems that use global resource serialization to serialize access to shared resources (such as data sets on shared DASD volumes).

GSAM. Generalized Sequential Access Method.

GTF. Generalized trace facility.

H

Hardware Management Console. A console used to monitor and control hardware such as the System/390 microprocessors.

HCD. Hardware Configuration Definition.

highly parallel. Refers to multiple systems operating in parallel, each of which can have multiple processors. See also *n-way*.

I

ICMF. Integrated Coupling Migration Facility.

image server. A high-capacity optical storage device or a computer that each computer and image workstation on a network can use to access and retrieve image objects that can be shared among the attached computers and image workstations.

IMS. Information Management System.

IMS DB. Information Management System Database Manager.

IMS DB data sharing group. A collection of one or more concurrent IMS DB subsystems that directly access and change the same data while maintaining data integrity.

IMS TM. Information Management System Transaction Manager.

in-doubt period. The period during which a unit of work is pending during commit processing that involves two or more subsystems. See also *in-doubt work unit*.

in-doubt work unit. In CICS/ESA and IMS/ESA, a piece of work that is pending during commit processing; if commit processing fails between the polling of subsystems and the decision to execute the commit, recovery processing must resolve the status of any work unit that is in doubt.

integrated operations workstation. A programmable workstation (PWS) from which an individual can access multiple products to perform a set of tasks, in some cases without knowing which particular product performs a specific task.

IOCDS. Input/output configuration data set.

IOCP. Input/output configuration program.

IODF. Input/output definition file.

IRLM. Internal resource lock manager.

ISPF. Interactive System Productivity Facility.

J

JES2. Job Entry Subsystem 2.

JES3. Job Entry Subsystem 3.

L

LIC. Licensed Internal Code.

list structure. A coupling facility structure that enables multisystem applications in a sysplex to share information organized as a set of lists or queues. A list structure consists of a set of lists and an optional lock table, which can be used for serializing resources in the list structure. Each list consists of a queue of list entries.

list structure services. MVS services that enable multisystem applications in a sysplex to perform operations such as the following on a coupling facility list structure:

- Read, update, create, delete, and move list entries in a list structure
- Perform serialized updates on multiple list entries in a list structure
- Monitor lists in a list structure for transitions from empty to non-empty.

lock structure. A coupling facility structure that enables applications in a sysplex to implement customized locking protocols for serialization of application-defined resources. The lock structure supports shared, exclusive, and application-defined lock states, as well as generalized contention management and recovery protocols.

lock structure services. MVS services that enable applications in a sysplex to perform operations such as the following on a coupling facility lock structure:

- Request ownership of a lock
- Change the type of ownership for a lock
- Release ownership of a lock
- Manage contention for a lock
- Recover a lock held by a failed application.

logical partition (LP). A subset of the processor hardware that is defined to support an operating system. See also *logically partitioned (LPAR) mode*.

logically partitioned (LPAR) mode. A central processor complex (CPC) power-on reset mode that enables use of the PR/SM feature and allows an operator to allocate CPC hardware resources (including central processors, central storage, expanded storage,

and channel paths) among logical partitions. Contrast with *basic mode*.

loosely coupled. A multisystem structure that requires a low degree of interaction and cooperation between multiple MVS images to process a workload. See also *tightly coupled*.

LP. Logical partition.

LPAR. Logically partitioned (mode).

M

m-image. The number (m) of MVS images in a sysplex. See also *n-way*.

massively parallel. Refers to thousands of processors in a parallel arrangement.

member. A specific function (one or more modules/routines) of a multisystem application that is defined to XCF and assigned to a group by the multisystem application. A member resides on one system in the sysplex and can use XCF services to communicate (send and receive data) with other members of the same group.

microprocessor. A processor implemented on one or a small number of chips.

mixed complex. A global resource serialization complex in which one or more of the systems in the global resource serialization complex are not part of a multisystem sysplex.

MP. Multiprocessor.

MRO. Multiregion operation.

MSC. Multiple Systems Coupling.

multi-MVS environment. An environment that supports more than one MVS image. See also *MVS image* and *sysplex*.

Multiple Systems Coupling (MSC). An IMS facility that permits geographically dispersed IMS subsystems to communicate with each other.

multiprocessing. The simultaneous execution of two or more computer programs or sequences of instructions. See also *parallel processing*.

multiprocessor (MP). A CPC that can be physically partitioned to form two operating processor complexes.

multisystem application. An application program that has various functions distributed across MVS images in a multisystem environment.

multisystem environment. An environment in which two or more MVS images reside in one or more processors, and programs on one image can communicate with programs on the other images.

multisystem sysplex. A sysplex in which two or more MVS images are allowed to be initialized as part of the sysplex. See also *single-system sysplex*.

MVS image. A single occurrence of the MVS/ESA operating system that has the ability to process work.

MVS system. An MVS image together with its associated hardware, which collectively are often referred to simply as a system, or MVS system.

MVS/ESA. Multiple Virtual Storage/ESA.

MVSCP. MVS configuration program.

N

n-way. The number (*n*) of CPs in a CPC. For example, a 6-way CPC contains six CPs.

NJE. Network job entry.

O

OLTP. Online transaction processing.

OPC/ESA. Operations Planning and Control.

operating system (OS). Software that controls the execution of programs and that may provide services such as resource allocation, scheduling, input/output control, and data management. Although operating systems are predominantly software, partial hardware implementations are possible. (T)

P

parallel processing. The simultaneous processing of units of work by many servers. The units of work can be either transactions or subdivisions of large units of work (batch). See also *highly parallel*.

Parallel Sysplex. A sysplex that uses one or more coupling facilities.

partitionable CPC. A CPC that can be divided into 2 independent CPCs. See also *physical partition*, *single-image mode*, *MP*, *side*.

physical partition. Part of a CPC that operates as a CPC in its own right, with its own copy of the operating system.

physically partitioned (PP) configuration. A system configuration that allows the processor controller to use both central processor complex (CPC) sides as individual CPCs. The A-side of the processor controller controls side 0; the B-side of the processor controller controls side 1. Contrast with *single-image (SI) configuration*.

PR/SM. Processor Resource/Systems Manager.

processor controller. Hardware that provides support and diagnostic functions for the central processors.

Processor Resource/Systems Manager (PR/SM).

The feature that allows the processor to use several MVS images simultaneously and provides logical partitioning capability. See also *LPAR*.

Q

QOR. Queue-owning region.

R

RACF. Resource Access Control Facility.

RMF. Resource Measurement Facility.

S

SCDS. Source control data set.

SDSF. System Display and Search Facility.

SEC. System Engineering Change.

serialized list structure. A coupling facility list structure with a lock table containing an array of exclusive locks whose purpose and scope are application-defined. Applications can use the lock table to serialize on parts of the list structure, or resources outside the list structure.

side. A part of a partitionable CPC that can run as a physical partition and is typically referred to as the A-side or the B-side.

single point of control. The characteristic a sysplex displays when you can accomplish a given set of tasks from a single workstation, even if you need multiple IBM and vendor products to accomplish that particular set of tasks.

single system image. The characteristic a product displays when multiple images of the product can be viewed and managed as one image.

single-image (SI) mode. A mode of operation for a multiprocessor (MP) system that allows it to function as

one CPC. By definition, a uniprocessor (UP) operates in single-image mode. Contrast with *physically partitioned (PP) configuration*.

single-MVS environment. An environment that supports one MVS image. See also *MVS image*.

single-system sysplex. A sysplex in which only one MVS system is allowed to be initialized as part of the sysplex. In a single-system sysplex, XCF provides XCF services on the system but does not provide signalling services between MVS systems. See also *multisystem sysplex*, *XCF-local mode*.

SLR. Service Level Reporter.

SMF. System management facilities.

SMP/E. System Modification Program Extended.

SMS. Storage Management Subsystem.

SMS communication data set. The primary means of communication among systems governed by a single SMS configuration. The SMS communication data set (COMMDS) is a VSAM linear data set that contains the current utilization statistics for each system-managed volume, which SMS uses to help balance space usage among systems.

SMS configuration. The SMS definitions and routines that the Storage Management Subsystem uses to manage storage.

SMS system group. All systems in a sysplex that share the same SMS configuration and communications data sets, minus any systems in the sysplex that are defined individually in the SMS configuration.

structure. A construct used by MVS to map and manage storage on a coupling facility. See *cache structure*, *list structure*, and *lock structure*.

support element. A hardware unit that provides communications, monitoring, and diagnostic functions to a central processor complex (CPC).

symmetry. The characteristic of a sysplex where all systems, or certain subsets of the systems, have the same hardware and software configurations and share the same resources.

SYSLOG. System log

sysplex. A set of MVS systems communicating and cooperating with each other through certain multisystem hardware components and software services to process customer workloads. See also *MVS system*, *Parallel Sysplex*.

sysplex couple data set. A couple data set that contains sysplex-wide data about systems, groups, and members that use XCF services. All MVS systems in a sysplex must have connectivity to the sysplex couple data set. See also *couple data set*.

Sysplex Timer. An IBM unit that synchronizes the time-of-day (TOD) clocks in multiple processors or processor sides. External Time Reference (ETR) is the MVS generic name for the IBM Sysplex Timer (9037).

system control element (SCE). Hardware that handles the transfer of data and control information associated with storage requests between the elements of the processor.

System/390 microprocessor cluster. A configuration that consists of central processor complexes (CPCs) and may have one or more coupling facilities.

T

tightly coupled. Multiple CPs that share storage and are controlled by a single copy of MVS. See also *loosely coupled*, *tightly coupled multiprocessor*.

tightly coupled multiprocessor. Any CPC with multiple CPs.

TOR. Terminal-owning region.

TSCF. Target System Control Facility. The licensed program System Automation for OS/390 includes all of the function previously provided by TSCF.

U

uniprocessor (UP). A CPC that contains one CP and is not partitionable.

UP. Uniprocessor.

V

VM. Virtual Machine.

VSAM. Virtual Storage Access Method.

VTAM. Virtual Telecommunications Access Method.

W

WLM. MVS workload management.

X

XCF. Cross-system coupling facility.

XCF PR/SM policy. In a multisystem sysplex on PR/SM, the actions that XCF takes when one MVS system in the sysplex fails. This policy provides high availability for multisystem applications in the sysplex.

XCF-local mode. The state of a system in which XCF provides limited services on one system and does not provide signalling services between MVS systems. See also *single-system sysplex*.

XRF. Extended recovery facility.

Index

Numerics

9021 511-based models 32

9021 711-based models 32

A

AOC/MVS (Automated Operations Control) 35

Automated Operations Control 35

See also AOC/MVS (Automated Operations Control)

B

batch

running in parallel 23

benefits

of a sysplex 4

C

CICS (Customer Information Control System) 34

as transaction manager for parallel OLTP 27

CICSplex SM (CICSplex System Manager/ESA) 35

CICSplex System Manager/ESA 35

See also CICSplex SM (CICSplex System Manager/ESA)

configuration

large systems data sharing 39

sysplex sample 39

using an S/390 9672 Parallel Transaction Server and
9672 Parallel Enterprise Server 40

using mixed processors 41

consistency of data 12

coupling facility

description 16

exploiters 17

multisystem data sharing 15

structures 16

technology 16

Customer Information Control System 34

See also CICS (Customer Information Control System)

D

Data Facility Storage Management Subsystem 33

See also DFSMS

data management system

for OLTP parallelism 27

data sharing

comparison to multisystem data sharing 12

data access

sharing data between two systems 14

sharing data using the coupling facility 15

data sharing (continued)

data access (continued)

using a single data server 12

using partitioned data 13

data validity

consistency 12

serialization 11

description 11

in a sysplex 11

using DB2 17

using IMS DB 17

DATABASE 2 34

See also DB2 (DATABASE 2)

DB2 (DATABASE 2) 34

exploitation of coupling facility 17

DFSMS 33

E

Enterprise Performance Data Manager 36

See also EPDM (IBM SystemView Enterprise Performance Data Manager/MVS)

Enterprise Systems Connection 33

See also ESCON (Enterprise Systems Connection)

EPDM (IBM SystemView Enterprise Performance Data Manager/MVS) 36

ES/9000 processors

9021 511-based models 32

9021 711-based models 32

ESCD (ESCON Director) 33

ESCM (ESCON Manager) 37

ESCON (Enterprise Systems Connection) 33

ESCON control units

3990 Storage Control Model 6 33

9343 Storage Controller 33

9345 Direct Access Storage Device 33

ESCON Director 33

See also ESCD (ESCON Director)

ESCON I/O devices

3172 33

3174 33

3490E 33

3745 33

3746 33

ESCON Manager 37

See also ESCM (ESCON Manager)

evolution of sysplex 5

F

follow-on phase

definition x

H

hardware

- Coupling Facility 32
- coupling facility channels 32
- ES/9000 processors 32
- ESCD (ESCON Director) 33
- ESCON 33
- ESCON control units 33
- I/O 33
- in a sysplex 3
- S/390 9672 Parallel Transaction Server and 9672 Parallel Enterprise Server 32
- S/390 processors 32
- Sysplex Timer 32

Hardware Configuration Definition 37

See also HCD (Hardware Configuration Definition)

HCD (Hardware Configuration Definition) 37

I

I/O 33

IMS DB (Information Management System Database Manager) 34

exploitation of coupling facility 17

IMS TM (Information Management System

Transaction Manager) 35

as transaction manager for parallel OLTP 27

Information Management System Database Manager 34

See also IMS DB (Information Management System Database Manager)

Information Management System Transaction Manager 35

See also IMS TM (Information Management System Transaction Manager)

J

JES2 33

JES3 33

L

loosely coupled configuration

- definition 6
- work potential 7

M

multiprocessing

- comparison to parallel processing 20
- description 20

multisystem data sharing

- partitioning data 13
- sharing data between two systems 14
- single data server 12

multisystem data sharing (continued)

- using the coupling facility 15

MVS (Multiple Virtual Storage)

- use of term x

MVS workload manager 28

See also WLM (MVS workload manager)

MVS/ESA 33

N

Notices 43

O

OLTP (online transaction processing) 24

online transaction processing

- See also* OLTP (online transaction processing)
- running in parallel 24

OPC/ESA (Operations Planning and Control) 35

Operations Planning and Control 35

See also OPC/ESA (Operations Planning and Control)

OS/390

- and MVS x
- in a sysplex 33

P

parallel processing

- comparison to multiprocessing 20
- description 19
- for a lengthy application 22
- for an increased number of transactions 21
- for batch 23
- for OLTP 24
- for queries 24
- hardware that enables 29
- potential in a sysplex 20
- running MVS workloads 23
- software that enables parallelism for OLTP 24

parallel query server 24

parallel transaction server 29, 32, 40

performance goals 28

product availability

- follow-on phase x

products in a sysplex

- hardware
 - 9021 511-based models 32
 - 9021 711-based models 32
 - coupling facility 32
 - coupling facility channels 32
 - ESCD (ESCON Director) 33
 - ESCON 33
 - ESCON control units 33
 - I/O 33
 - I/O devices 33
 - S/390 9672 Parallel Transaction Server and 9672 Parallel Enterprise Server 32

products in a sysplex *(continued)*

hardware *(continued)*

S/390 processors 32

Sysplex Timer 32

OS/390 33

software

AOC/MVS 35

CICS 34

CICSplex SM 35

DB2 34

DFSMS 33

EPDM 36

ESCM 37

HCD 37

IMS DB 34

IMS TM 35

JES2 33

JES3 33

MVS workload manager 35

MVS/ESA 33

OPC/ESA 35

OS/390 33

RACF 36

RMF 36

SDSF 36

SLR 36

SMF 35

VSAM 34

VTAM 34

Q

queries

running in parallel 24

R

RACF (Resource Access Control Facility) 36

Resource Access Control Facility 36

See also RACF (Resource Access Control Facility)

Resource Measurement Facility 36

See also RMF (Resource Measurement Facility)

RMF (Resource Measurement Facility) 36

S

**S/390 9672 Parallel Transaction Server and 9672
Parallel Enterprise Server 32**

SDSF (System Display and Search Facility) 36

serialization 11

Service Level Reporter 36

See also SLR (Service Level Reporter)

SLR (Service Level Reporter) 36

SMF (system management facilities) 35

software

AOC/MVS 35

software *(continued)*

CICS 34

CICSplex SM 35

DB2 34

DFSMS 33

EPDM 36

ESCM 37

HCD 37

IMS DB 34

IMS TM 35

in a sysplex 3

JES2 33

JES3 33

MVS workload manager 35

MVS/ESA 33

OPC/ESA 35

OS/390 33

RACF 36

RMF 36

SDSF 36

SLR 36

SMF 35

VSAM 34

VTAM 34

sysplex

announced as a platform 1

benefits 4

configurations 39

data sharing 15

definition 1

enhancements 8

evolution of 5

hardware 3, 32

origin of name 7

products 32

sample configuration

large systems data sharing 39

using an S/390 9672 Parallel Transaction Server

and 9672 Parallel Enterprise Server 40

using mixed processors 41

software 3, 33

work potential

of base sysplex 8

of Parallel Sysplex 9

Sysplex Timer 32

System Display and Search Facility 36

See also SDSF (System Display and Search Facility)

system management facilities 35

See also SMF (system management facilities)

System/390 Parallel Sysplex Offering 40

T

tightly coupled multiprocessor

definition 6

work potential 6

transaction

- description 24
- running in parallel 24

transaction manager

- CICS 27
- IMS TM 27
- support for OLTP parallelism 24

U

uniprocessor

- definition 5
- work potential 5

V

Virtual Storage Access Method 34

- See also* VSAM (Virtual Storage Access Method)

Virtual Telecommunications Access Method 34

- See also* VTAM (Virtual Telecommunications Access Method)

VSAM (Virtual Storage Access Method) 34

- exploitation of coupling facility 17

VTAM (Virtual Telecommunications Access Method) 34

W

WLM (MVS workload manager) 28, 35

- defining performance goals 28

work potential

- of a base sysplex 8
- of a loosely coupled configuration 7
- of a tightly coupled multiprocessor 6
- of a uniprocessor 5
- of an Parallel Sysplex 9
- workload management 28

workload management

- dynamic resource balancing 28
- in a sysplex 28
- reporting 28

X

XCF (cross-system coupling facility) 7

Communicating Your Comments to IBM

OS/390
Parallel Sysplex Overview:
Introducing Data Sharing and
Parallelism in a Sysplex
Publication No. GC28-1860-06

If you especially like or dislike anything about this book, please use one of the methods listed below to send your comments to IBM. Whichever method you choose, make sure you send your name, address, and telephone number if you would like a reply.

Feel free to comment on specific errors or omissions, accuracy, organization, subject matter, or completeness of this book. However, the comments you send should pertain to only the information in this manual and the way in which the information is presented. To request additional publications, or to ask questions or make comments about the functions of IBM products or systems, you should talk to your IBM representative or to your IBM authorized remarketer.

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you.

If you are mailing a readers' comment form (RCF) from a country other than the United States, you can give the RCF to the local IBM branch office or IBM representative for postage-paid mailing.

- If you prefer to send comments by mail, use the RCF at the back of this book.
- If you prefer to send comments by FAX, use this number:
1-(845)-432-9405
- If you prefer to send comments electronically, use this network ID:
mhvrcfs@us.ibm.com

Make sure to include the following in your note:

- Title and publication number of this book
- Page number or topic to which your comment applies.

Readers' Comments — We'd Like to Hear from You

OS/390

Parallel Sysplex Overview:
Introducing Data Sharing and
Parallelism in a Sysplex

Publication No. GC28-1860-06

Overall, how satisfied are you with the information in this book?

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Overall satisfaction	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

How satisfied are you that the information in this book is:

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Accurate	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Complete	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to find	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to understand	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Well organized	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Applicable to your tasks	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Please tell us how we can improve this book:

Thank you for your responses. May we contact you? Yes No

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you.

Name

Address

Company or Organization

Phone No.




Fold and Tape

Please do not staple

Fold and Tape



NO POSTAGE
NECESSARY
IF MAILED IN THE
UNITED STATES



BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation
Department 55JA, Mail Station P384
2455 South Road
Poughkeepsie, NY 12601-5400



Fold and Tape

Please do not staple

Fold and Tape



Program Number: 5647-A01



Printed in the United States of America
on recycled paper containing 10%
recovered post-consumer fiber.

GC28-1860-06

